


MILBANK[®]
ENERGY AT WORK



International Catalog

Metering Equipment

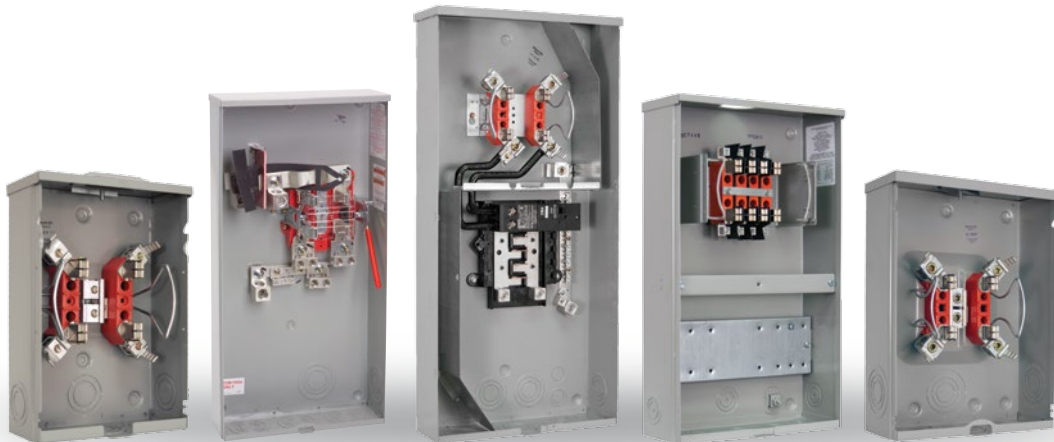

About Milbank

Energy at work since 1927

Milbank provides the tools that empower life. We enable the amazing in countless everyday ways through our thoughtfully designed products and collaborative ingenuity. More than a manufacturing company, we are an active and engaged contributor in the movement of energy. We are energy at work.

Milbank designs and builds solutions that move power for the residential, commercial, industrial, utility and transportation sectors. Milbank combines more than 85 years of expertise in electrical engineering and production with a commitment to develop and implement sustainable, integrated power solutions. A third-generation, family-owned business, Milbank is headquartered in Kansas City, Mo. For more information, please visit www.milbankworks.com.



METERING

Milbank meter sockets have set the standard for quality since 1927. With a 99.97% quality performance, thousands of active products to meet your utility's requirements and tens of millions of sockets installed across the globe, our products help keep energy at work. And with 22 stocking locations across the U.S., and our OneSERT program to help during emergency situations, our meter sockets are ready to go, wherever the job may be.



ENCLOSURES & ENCLOSED CONTROLS

When it comes to enclosures and enclosed control products, Milbank has it covered! We offer a complete line of junction boxes, telephone cabinet covers, transformer cabinets, wireways, pushbutton enclosures, consoles and thermal management products. We specialize in custom-built enclosures and are more than happy to design a solution for your specific project. Our commercial pedestals are easy to install, fast, safe and secure, and completely customizable.



GENERATORS & ENERGY MANAGEMENT

Milbank's standby and portable generators give you the peace of mind of living life uninterrupted during increasingly frequent power outages caused by severe weather, high demand and other situations. Our energy management systems give you reliable and sustainable ways to reduce both your energy costs and your impact on the environment.



Table of Contents

See back of catalog for index by catalog number

Single Position Meter Sockets

| | |
|---|-----|
| Economy socket, 4–6 terminals, ring type | 4 |
| 100–125 amps, 4 & 5 terminals, ringless & ring type | 5 |
| 200 amps, 4 & 5 terminals, ringless & ring type | 6–7 |
| 100–200 amps, 7 terminals, ringless & ring type | 8 |
| 200 amps, 7 terminals, ringless..... | 9 |
| Stainless steel meter sockets | 10 |
| 320 amps, 4 & 5 terminals, lever bypass, ringless | 11 |

Meter Mains

| | |
|---|----|
| 100–200 amps, 4 terminals, ringless..... | 12 |
| 100–200 amps, with load center, 4 terminals, ringless & ring type | 13 |
| 320 amps, 4 terminals, lever bypass, ringless..... | 14 |
| Cold squence, 4–7 terminals, ringless..... | 15 |

Multi-Position

| | |
|--|----|
| 100 amps, 5 terminals, ringless..... | 16 |
| Meter mains, 125 & 200 amps, 4 terminals, ringless | 17 |

Transformer Rated, Test Switches, Transformer Cabinets & Transockets

| | |
|---|-------|
| 20 amps, 6–15 terminals, ringless & ring type | 18–19 |
| Test switches | 20–22 |
| Transformer cabinets | 23–24 |
| 600 amp transockets, 6–14 terminals, ringless | 25 |

Pedestals

| | |
|---|----|
| 100–200 amps, meter main pedestals, 4 terminals, ringless..... | 26 |
| 100–200 amps, meter main with load center pedestals, 4 terminals, ringless..... | 27 |

Power Outlets/RV Power

| | |
|----------------------------------|----|
| Surface mount power outlets..... | 28 |
| Power outlet pedestals..... | 29 |

Miscellaneous

| | |
|---|-------|
| Terminal boxes | 30–31 |
| Commercial meter pedestals | 32–33 |
| Generators..... | 34 |
| Electric vehicle supply equipment | 35 |
| Accessories | 36–39 |
| Reference information | 40–43 |




4

ECONOMY
SOCKET

Economy Socket

4–6 Terminals | 100 Amps | Ring Type

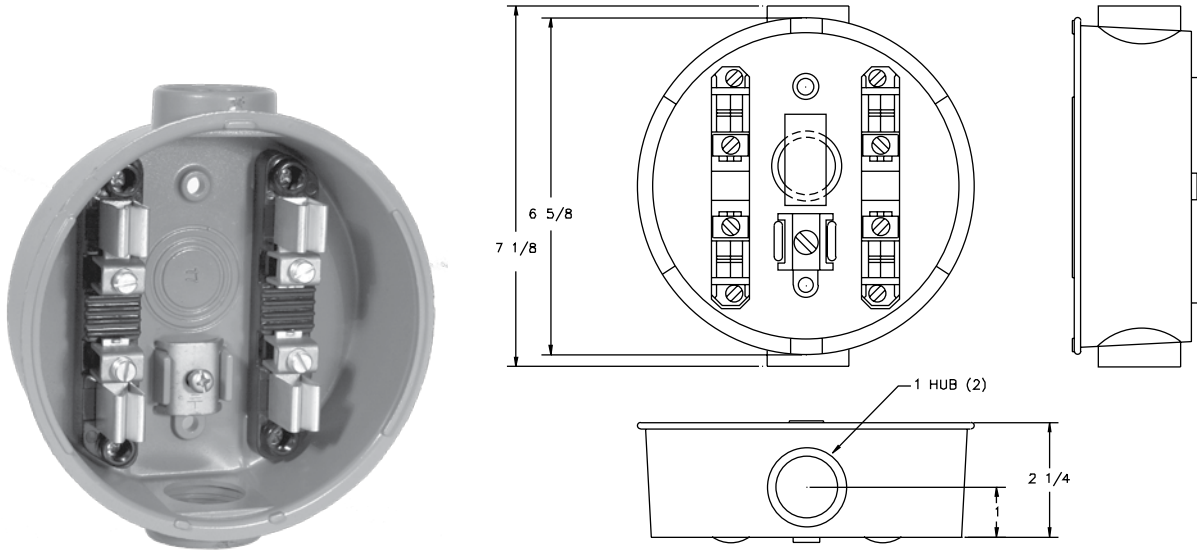

30-100 Amps | 4, 5 & 6 Terminals | Economy Cast Socket | Ring Type

| Catalog Number | Terminals | Hub Location | Hub Size | Connectors CU/AL | Quantity per Package | Knockouts |
|-----------------|-----------|--------------|----------|------------------|----------------------|-----------|
| AP2300-03 | 4 | Top & Bottom | (2) 1" | #12-#1 | 12 | ¾", 1" |
| AP2300-04 | 4 | Top & Bottom | (2) 1¼" | #12-#1 | 12 | ¾", 1" |
| AP2300-07 | 4 | Top | 1" | #12-#1 | 12 | ¾", 1" |
| AP2300-08 | 4 | Top | 1¼" | #12-#1 | 12 | ¾", 1" |
| AP2300-03-5T | 5 | Top & Bottom | (2) 1" | #12-#1 | 12 | ¾", 1" |
| AP2300-03-5T-AB | 5 | Top & Bottom | (2) 1" | #12-#1 | 12 | ¾", 1" |
| AP2300-03-6T | 6 | Top & Bottom | (2) 1" | #12-#1 | 12 | ¾", 1" |

Notes

- **Non-UL Listed:** These units are not UL tested.
- **Fifth Terminal:** AP2300-03-5T and AP2300-03-5T-AB include factory-installed fifth terminal
- **Sixth Terminal:** AP2300-03-6T includes factory-installed sixth terminal.
- **Auto-Bypass:** -AB suffix indicates installed auto-bypass feature. Consult factory for more details.
- **Sealing Rings:** These units are supplied with an **MR-2** snap action sealing ring as standard.




Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.

Single Position Sockets


100–125 Amps | Ringless & Ring Type | 600 VAC

5


100-125 AMP
SINGLE
POSITION
SOCKETS



U7487-RL-TG



U5934-XL

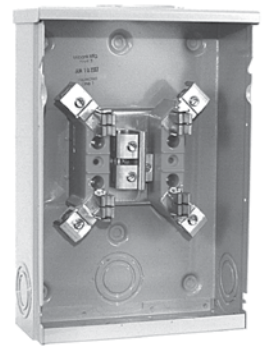

U7490-RL-TG

4 & 5 Terminals | Single Position | Ringless

| Catalog Number | Amps | Terminals | Hub | Connectors CU/AL | | Bypass | Dimensions | | | Knockouts | | | |
|-----------------------|------|-----------|------|------------------|---------|--------|--------------------------------|----|--------------------------------|-----------|-------------------------------|-------------------------------|-------------------------------|
| | | | | Line | Load | | D" | W" | H" | 1 | 2 | 3 | 4 |
| U7487-RL-TG | 125 | 4 | H.O. | #6-2/0 | #6-2/0 | None | 3 ⁵ / ₁₆ | 8 | 11 ¹ / ₂ | 2 | 1 ¹ / ₂ | 1 ¹ / ₄ | 1 ¹ / ₄ |
| U5934-XL | 100 | 4 | C.P. | #6-2/0 | #6-2/0 | None | 3 ⁵ / ₁₆ | 8 | 11 ¹ / ₂ | 2 | 1 ¹ / ₂ | 1 ¹ / ₄ | 1 ¹ / ₄ |
| U7487-RL-TG-5T | 125 | 5 | H.O. | #12-1/0 | #12-1/0 | None | 3 ⁵ / ₁₆ | 8 | 11 ¹ / ₂ | 2 | 1 ¹ / ₂ | 1 ¹ / ₄ | 1 ¹ / ₄ |

4 & 5 Terminals | Single Position | Ring Type

| Catalog Number | Amps | Terminals | Hub | Connectors CU/AL | | Bypass | Dimensions | | | Knockouts | | | |
|-----------------------|------|-----------|---------------------------------|------------------|---------|--------|--------------------------------|----|--------------------------------|-----------|-------------------------------|-------------------------------|-------------------------------|
| | | | | Line | Load | | D" | W" | H" | 1 | 2 | 3 | 4 |
| U7490-YL-TG | 125 | 4 | 1 ¹ / ₄ " | #6-2/0 | #6-2/0 | None | 3 ⁵ / ₁₆ | 8 | 11 ¹ / ₂ | 2 | 1 ¹ / ₂ | 1 ¹ / ₄ | 1 ¹ / ₄ |
| U5929-XL | 100 | 4 | C.P. | #6-2/0 | #6-2/0 | None | 3 ⁵ / ₁₆ | 8 | 11 ¹ / ₂ | 2 | 1 ¹ / ₂ | 1 ¹ / ₄ | 1 ¹ / ₄ |
| U7490-YL-TG-5T | 125 | 5 | 1 ¹ / ₄ " | #12-1/0 | #12-1/0 | None | 3 ⁵ / ₁₆ | 8 | 11 ¹ / ₂ | 2 | 1 ¹ / ₂ | 1 ¹ / ₄ | 1 ¹ / ₄ |

Notes

- **Aluminum:** These units are also available in aluminum. Consult factory for more details.
- **Fifth Terminal:** For field mounted fifth terminal on the **U7487 & U7490** order catalog number **5T8K2** to fit into round opening at the 9 o'clock position. For factory-installed fifth terminal, add **-5T** to the catalog number.
- **Hubs:** For proper hub selection see the hub suffix chart on the accessory page.
- **Connectors:** Extruded aluminum connectors are tin plated.
- **Sealing Rings:** The **U7490** unit is supplied with an **MR-2** snap action sealing ring as standard.
- **Horn Bypass:** Horn bypass is available—contact factory for details.
- **Isolated Neutral:** **U5929** and **U5934** include isolated neutral option, ideal for solar applications.

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.



6


200 AMP
SINGLE
POSITION
SOCKETS

Single Position Sockets


200 Amps | 4 & 5 Terminals | Ringless | 600 VAC



U7021-RL-TG



U7040-RL-TG



200 Amps | 4 & 5 Terminals | Single Position | Ringless

| Catalog Number | Terminals | Hub | Connectors CU/AL | | Dimensions | | | Knockouts | | |
|----------------|-----------|------|------------------|--------|------------|----|-----|-----------|------|---|
| | | | Line | Load | D" | W" | H" | 1 | 2 | 3 |
| U7021-RL-TG | 4 | H.O. | #6-350 | #6-350 | 4½ | 8 | 15½ | 2½ | ¼, ½ | ¼ |
| U7021-DL-TG | 4 | 2" | #6-350 | #6-350 | 4½ | 8 | 15½ | 2½ | ¼, ½ | ¼ |
| U7040-RL-TG | 4 | H.O. | #6-350 | #6-350 | 4½ | 11 | 14¾ | 2½ | ¼, ½ | ¼ |
| U7021-RL-TG-5T | 5 | H.O. | #6-350 | #6-350 | 4½ | 8 | 15½ | 2½ | ¼, ½ | ¼ |

Notes

- **Other Options:** These units are also available in aluminum and horn bypass. Consult factory for more details.
- **Fifth Terminal:** For field mounted fifth terminal, order catalog number **K5T** to fit into square opening at the 9 o'clock position. For factory-installed fifth terminal, add suffix **-5T** to catalog number.
- **Triplex Ground (-TG):** Factory installed.
- **Connectors:** Extruded aluminum connectors are tin plated.




Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.


Single Position Sockets

200 Amps | 4 & 5 Terminals | Ring Type | 600 VAC

7
200 AMP
SINGLE
POSITION
SOCKETS



U7017-RL-TG

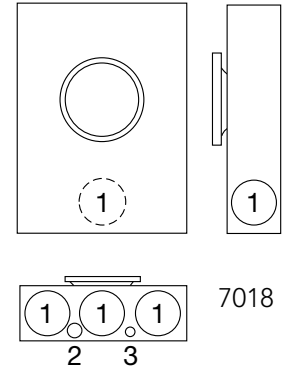

U7018-XL-TG

200 Amps | 4 & 5 Terminals | Single Position | Ring Type

| Catalog Number | Terminals | Hub | Connectors CU/AL | | Dimensions | | | Knockouts | | |
|----------------|-----------|------|------------------|--------|------------------|------------------|------------------|-----------------|-----------------------------------|-----------------|
| | | | Line | Load | D" | W" | H" | 1 | 2 | 3 |
| U7017-RL-TG | 4 | H.O. | #6-350 | #6-350 | 4 $\frac{1}{8}$ | 8 | 15 $\frac{1}{2}$ | 2 $\frac{1}{2}$ | 1 $\frac{1}{4}$, 1 $\frac{1}{2}$ | 1 $\frac{1}{4}$ |
| U7017-DL-TG | 4 | 2" | #6-350 | #6-350 | 4 $\frac{1}{8}$ | 8 | 15 $\frac{1}{2}$ | 2 $\frac{1}{2}$ | 1 $\frac{1}{4}$, 1 $\frac{1}{2}$ | 1 $\frac{1}{4}$ |
| U7018-XL-TG | 4 | C.P. | #6-350 | #6-350 | 4 $\frac{3}{16}$ | 11 $\frac{1}{8}$ | 15 $\frac{1}{2}$ | 2 $\frac{1}{2}$ | 1 $\frac{1}{4}$, 1 $\frac{1}{2}$ | 1 $\frac{1}{4}$ |
| U7017-RL-TG-5T | 5 | H.O. | #6-350 | #6-350 | 4 $\frac{1}{8}$ | 8 | 15 $\frac{1}{2}$ | 2 $\frac{1}{2}$ | 1 $\frac{1}{4}$, 1 $\frac{1}{2}$ | 1 $\frac{1}{4}$ |

Notes

- **Other Options:** These units are also available in aluminum and horn bypass. Consult factory for more details.
- **Fifth Terminal:** For field mounted fifth terminal, order catalog number **K5T** to fit into square opening at the 9 o'clock position.
- **Triplex Ground (-TG):** Factory installed.
- **Connectors:** Extruded aluminum connectors are tin plated.
- **Sealing Rings:** Units on this page are supplied with an **MR-2** snap action sealing ring as standard.

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.




8



100-200 AMP
SINGLE
POSITION
SOCKETS

Single Position Sockets


100-200 Amps | 7 Terminals | Ringless | 600 VAC

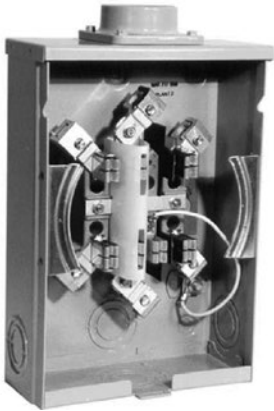


S1910-YL

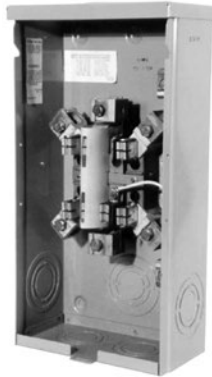


S2417-RL



S4339-RL



U3328-RXL



7 Terminals | Single Position | Ringless

| Catalog Number | Amps | Hub | Connectors CU/AL | | Bypass | Dimensions | | | Knockouts | | |
|----------------|------|--------|------------------|--------|--------|------------|----|--------|-----------|-------|-----|
| | | | Line | Load | | D" | W" | H" | 1 | 2 | 3 |
| S1910-YL | 100 | 1 1/4" | #6-2/0 | #6-2/0 | None | 3 5/16 | 8 | 11 1/2 | 2 | 1 1/2 | 1/4 |
| S2417-RL | 200 | H.O. | #6-350 | #6-350 | None | 3 5/16 | 8 | 11 1/2 | 2 | 1 1/2 | 1/4 |
| S2417-DL | 200 | 2" | #6-350 | #6-350 | None | 3 5/16 | 8 | 11 1/2 | 2 | 1 1/2 | 1/4 |

7 Terminals | Single Position | Ring Type

| Catalog Number | Amps | Hub | Connectors CU/AL | | Bypass | Dimensions | | | Knockouts | | | |
|----------------|------|------|------------------|--------|--------|------------|----|--------|-----------|----------|----------|-----|
| | | | Line | Load | | D" | W" | H" | 1 | 2 | 3 | 4 |
| S4339-RL | 100 | H.O. | #6-2/0 | #6-2/0 | None | 3 5/16 | 8 | 11 1/2 | 2 | 1 1/2 | 1/4 | — |
| S4275-DL | 200 | 2" | #6-350 | #6-350 | None | 4 1/8 | 8 | 15 1/2 | 2 1/2 | 1/4, 1/2 | 1/4 | — |
| U3328-RXL | 200 | C.P. | #6-350 | #6-350 | None | 4 7/8 | 13 | 19 | 3 | 2 1/2 | 1/4, 1/2 | 1/4 |

Notes

- **U3328-RXL:** For isolated neutral, order **K1047**.
- **Sealing Rings:** Ring type units are supplied with an **MR-2** snap action sealing ring as standard.
- **Aluminum Option:** Products on this page are available in aluminum shell construction. Contact Milbank for details.




Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.


Single Position Sockets

200 Amps | 7 Terminals | Ringless | 600 VAC


9
200 AMP
SINGLE
POSITION
SOCKETS

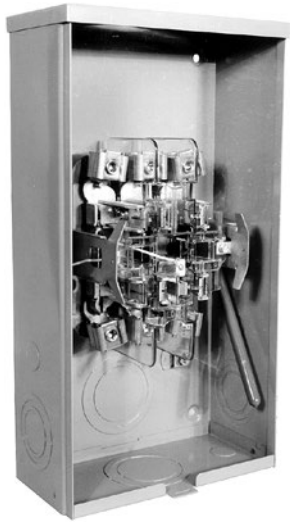

U7421-RL



U9700-RRL



200 Amps | 7 Terminals | Single Position | Ringless

| Catalog Number | Hub | Connectors CU/AL | | Bypass | Dimensions | | | Knockouts | | | |
|----------------|------|------------------|--------|--------------------|-------------------------------|----|--------------------------------|-----------|-------------------------------|---|---|
| | | Line | Load | | D" | W" | H" | 1 | 2 | 3 | 4 |
| U7420-RL | H.O. | #6-350 | #6-350 | None ¹ | 4 ⁷ / ₈ | 10 | 18 ¹ / ₂ | 3 | 2 ¹ / ₂ | ³ / ₄ | ¹ / ₄ , ¹ / ₂ |
| U7421-RL | H.O. | #6-350 | #6-350 | Lever ² | 4 ⁷ / ₈ | 10 | 18 ¹ / ₂ | 3 | 2 ¹ / ₂ | ³ / ₄ | ¹ / ₄ , ¹ / ₂ |
| U7422-RXL† | C.P. | #6-350 | #6-350 | None ¹ | 4 ⁷ / ₈ | 13 | 19 | 3 | 2 ¹ / ₂ | ¹ / ₄ , ¹ / ₂ | ¹ / ₄ |
| U7423-RXL† | C.P. | #6-350 | #6-350 | Lever ² | 4 ⁷ / ₈ | 13 | 19 | 3 | 2 ¹ / ₂ | ¹ / ₄ , ¹ / ₂ | ¹ / ₄ |
| U9700-RRL† | H.O. | #6-350 | #6-350 | Lever ³ | 4 ⁷ / ₈ | 10 | 18 ¹ / ₂ | 3 | 2 ¹ / ₂ | ³ / ₄ | ¹ / ₄ , ¹ / ₂ |
| U9701-RXL† | C.P. | #6-350 | #6-350 | Lever ³ | 4 ⁷ / ₈ | 13 | 19 | 3 | 2 ¹ / ₂ | ¹ / ₄ , ¹ / ₂ | ¹ / ₄ |

Notes

†These units have a large hub opening with reducer plate to small hub opening.

- **Bypass:** ¹ Medium duty, no bypass. ² Medium duty lever bypass, non jaw-clamping. ³ Lever supplies clamping action on meter spades and also operates bypass device.
- **Aluminum Option:** Products on this page are available in aluminum.
- **4 & 5 Terminal Option:** These units are also available in 4 & 5 terminals.

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.




Stainless Steel Products

Build to endure extreme environments



USS4701-O

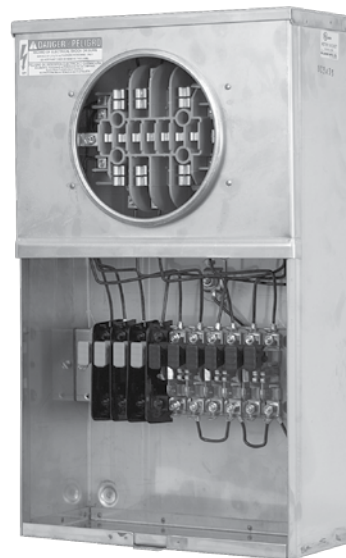

UCSS3433-O

200 Amps | Single Position | Stainless Steel | Ringless

| Catalog Number | Terminals | Hub | Connectors CU/AL | | Bypass | Dimensions | | |
|----------------|-----------|-------|------------------|--------|--------|-----------------|----|----|
| | | | Line | Load | | D" | W" | H" |
| USS3914-O | 4 | Blank | #6-350 | #6-350 | None | 4 $\frac{7}{8}$ | 13 | 19 |
| USS4801-O | 4 | Blank | #6-350 | #6-350 | Lever | 4 $\frac{7}{8}$ | 13 | 19 |
| USS4801-O-5T9 | 5 | Blank | #6-350 | #6-350 | Lever | 4 $\frac{7}{8}$ | 13 | 19 |
| USS4701-O | 7 | Blank | #6-350 | #6-350 | Lever | 4 $\frac{7}{8}$ | 13 | 19 |

Transformer Rated | With Provisions for Test Switch | Stainless Steel | Ring Type

| Catalog Number | Terminals | Hub | Connectors CU | Bypass | Dimensions | | |
|----------------|-----------|-------|---------------|--------------|-----------------|----|----|
| | | | | | D" | W" | H" |
| UCSS3436-O | 6 | Blank | #14 - 2 | Test Switch* | 5 $\frac{1}{2}$ | 12 | 20 |
| UCSS3438-O | 8 | Blank | #14 - 2 | Test Switch* | 5 $\frac{1}{2}$ | 12 | 20 |
| UCSS3433-O | 13 | Blank | #14 - 2 | Test Switch* | 5 $\frac{1}{2}$ | 12 | 20 |

Notes

- **Conduit Opening Applications:** All conduit openings have dimples provided to center location. Top conduit opening must have water-tight hub installed.
- ***Test Switch:** Test switch provisions. Test switch and wiring not included.
- **Contact Milbank for other units available in stainless steel.**



Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.


Single Position Lever Bypass

320 Amp | 4 & 5 Terminal | Ringless | 600 VAC

1 1
320 AMP
SINGLE
POSITION
LEVER BYPASS



U4363-R

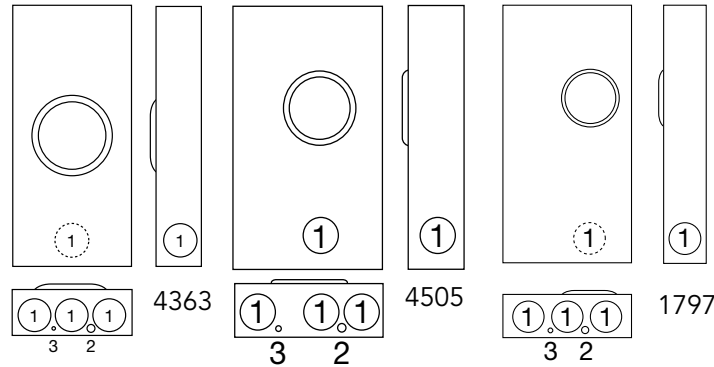

U1797-O-K2L-K3L

320 Amps | 4 & 5 Terminals | Single Position | Ringless

| Catalog Number | Terminals | Hub | Connectors CU/AL | | Bypass | Dimensions | | | Knockouts | | |
|-----------------|-----------|-------|------------------------------|----------------|--------|------------|----|--------|-----------|----------|-----|
| | | | Line | Load | | D" | W" | H" | 1 | 2 | 3 |
| U4363-R* | 4 | H.O. | 3/8" x 16 Stud | 3/8" x 16 Stud | Lever | 4 7/8 | 13 | 28 1/4 | 3 | 1/4, 1/2 | 1/4 |
| U1797-O-K2L-K3L | 4 | Blank | (1) #4-600 or (2) 1/0-250 | Twin #6-350 | Lever | 4 7/8 | 13 | 28 1/4 | 3 | 1/4, 1/2 | 1/4 |
| U4505-X | 5 | C.P. | 3/8" x 16 Stud | 3/8" x 16 Stud | Lever | 4 7/8 | 15 | 28 1/4 | 3 | 1/4, 1/2 | 1/4 |


Notes

- ***UL Listing:** This product is UL listed for parallel 250 conductors only. Use **K1450** with (2) 250 conductors.
- **Hubs:** For proper hub selection, refer to the hub suffix chart on the accessories page.
- **Connectors:** **U1797** includes lugs. **U4363** and **U4505** are supplied with 3/8"-16 hex head nuts with Belleville washers. For connector lug kits, order as extra from chart on accessories page. Separate lug kits are required for line and load.
- **Bypass:** Lever supplies clamping action on meter spades and also operates bypass device.
- **Fifth Terminal:** For field-installed fifth terminal for **U4363** and **U1797**, order **K3865**.



Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.



100-200 Amps | 4 Terminals | Ringless | 120/240 VAC

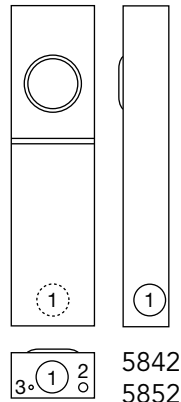

U5842-RL-100

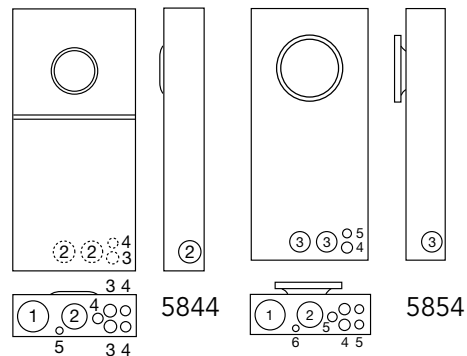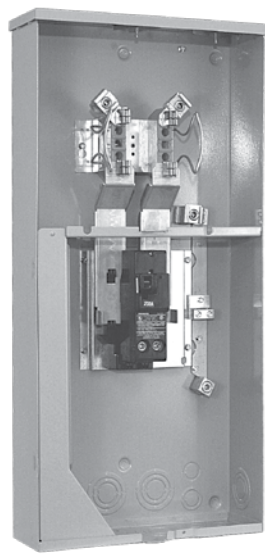

U5844-PXL-200

4 Terminals | Meter Mains | Ringless

| Catalog Number | Service | Hub | Connectors CU/AL | | Bypass | Dimensions | | | Knockouts | | | | |
|----------------|---------|------|------------------|-----------|--------|------------|----|----|-----------|------|---|------|------|
| | | | Line | Load | | D" | W" | H" | 1 | 2 | 3 | 4 | 5 |
| U5842-RL | OH | H.O. | #6-350 | —† | None | 4½ | 8 | 30 | 2½ | ¼, ½ | ¼ | — | — |
| U5842-RL-100 | OH | H.O. | #6-350 | CB - 100A | None | 4½ | 8 | 30 | 2½ | ¼, ½ | ¼ | — | — |
| U5842-PXL-200 | OH | C.P. | #6-350 | CB - 200A | None | 4½ | 8 | 30 | 2½ | ¼, ½ | ¼ | — | — |
| U5844-PXL-200 | OH/UG | C.P. | #6-350 | CB - 200A | None | 4½ | 14 | 30 | 3 | 2½ | 1 | ½, ¾ | ¼, ½ |

4 Terminals | Meter Mains | Ring Type

| Catalog Number | Service | Hub | Connectors CU/AL | | Bypass | Dimensions | | | Knockouts | | | | | |
|----------------|---------|------|------------------|-----------|--------|------------|-----|----|-----------|------|---|---|------|------|
| | | | Line | Load | | D" | W" | H" | 1 | 2 | 3 | 4 | 5 | 6 |
| U5852-RL | OH | H.O. | #6-350 | —† | None | 4½ | 8 | 30 | 2½ | ¼, ½ | ¼ | — | — | — |
| U5852-RL-100 | OH | H.O. | #6-350 | CB - 100A | None | 4½ | 8 | 30 | 2½ | ¼, ½ | ¼ | — | — | — |
| U5852-RL-200 | OH | H.O. | #6-350 | CB - 200A | None | 4½ | 14 | 30 | 2½ | ¼, ½ | ¼ | — | — | — |
| U5854-RL-200 | OH/UG | H.O. | #6-350 | CB - 200A | None | 4½ | 14¼ | 30 | 3 | 2½ | 2 | 1 | ½, ¾ | ¼, ½ |

Notes

† Breaker not included

- **AIC Rating:** All models are rated 22K AIC when using Siemens **QPH** (100A) or **QNH** (200A) breakers.
- **Hub:** -PXL versions supplied with one (1) closing plate packed inside. Order other hubs separately.
- **Fifth Terminal:** For field installable fifth terminal kit, order **K5T**.



Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.




Meter Main with Load Center

100–200 Amps | 4 Terminals | 120/240 VAC

13
100–200 AMP
METER MAIN
W/ LOAD CENTER



U5168-XTL-200

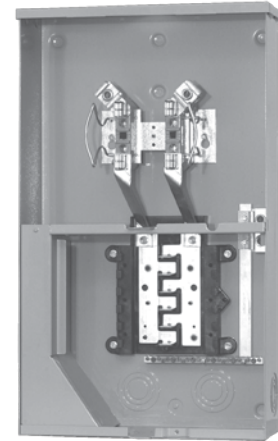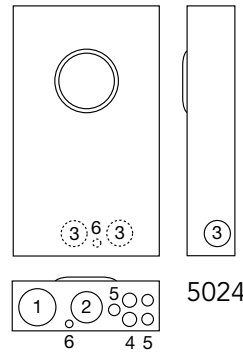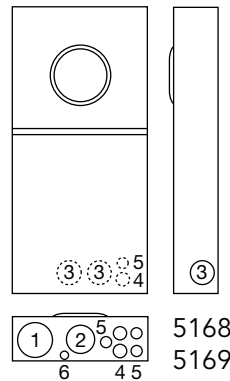

UAP5024-XL

4 Terminals | Meter Mains | Ringless

| Catalog Number | Amps | Service | Circuits | Hub | Connectors CU/AL - Line | Dimensions | | | Knockouts | | | | | |
|----------------|------|---------|----------|------|----------------------------|------------|-----|----|-----------|----|---|---|-----|-----|
| | | | | | | D" | W" | H" | 1 | 2 | 3 | 4 | 5 | 6 |
| U5168-XTL-100 | 100 | OH/UG | 10 | C.P. | #6-350 | 4½ | 14⅞ | 30 | 3 | 2½ | 2 | 1 | ½,¾ | ¼,½ |
| U5168-XTL-200 | 200 | OH/UG | 8 | C.P. | #6-350 | 4½ | 14⅞ | 30 | 3 | 2½ | 2 | 1 | ½,¾ | ¼,½ |
| UAP5024-XL | 200 | OH/UG | 12 | C.P. | #6-350 | 4½ | 14⅞ | 24 | 3 | 2½ | 2 | 1 | ½,¾ | ¼,½ |

4 Terminals | Meter Mains | Ring Type

| Catalog Number | Amps | Service | Circuits | Hub | Connectors CU/AL - Line | Dimensions | | | Knockouts | | | | | |
|----------------|------|---------|----------|------|----------------------------|------------|-----|----|-----------|----|---|---|-----|-----|
| | | | | | | D" | W" | H" | 1 | 2 | 3 | 4 | 5 | 6 |
| U5169-XTL-100 | 100 | OH/UG | 10 | C.P. | #6-350 | 4½ | 14⅞ | 30 | 3 | 2½ | 2 | 1 | ½,¾ | ¼,½ |
| U5169-XTL-200 | 200 | OH/UG | 8 | C.P. | #6-350 | 4½ | 14⅞ | 30 | 3 | 2½ | 2 | 1 | ½,¾ | ¼,½ |

Notes

- **Hubs:** For proper hub selection, refer to the hub suffix chart on the accessories page.
- **Fifth Terminal:** For field installed fifth terminal, order **K5T**.
- **Interlock Kit:** For generator auxiliary circuit breaker interlock, order **K5815** for large **QN** with small frame **Q**; order **K5820** for large frame **QN** with large frame **QN**; order **K5830** for small frame **Q** to small frame **Q**. See accessories page for details.
- **UAP5024-XL:** This unit is painted aluminum. Breaker section has provision for six double pole "plug-in" type circuit breakers. All circuit breakers will be parallel. To comply with NEC wire bending space requirements, the maximum breaker amperage is 200 amps restricted to 3/0 copper conductor.

Plug-In Breaker Compatibility Chart

| Amps | Cutler Hammer | Siemens | General Electric | Square D |
|---------|---------------------------------|---------|--------------------------------|----------|
| 150-200 | BR, BRH, HQP, QPHW, QPGF, QPHGF | QP, QPH | THQL, THHQL, THQL-GF, THHQL-GF | Homeline |
| ≤ 125 | QP / BR | QP, QPH | THQ | Homeline |

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.




14

320 AMP
LEVER BYPASS
METER MAIN


Lever Bypass Meter Mains

320 Amps | 4 Terminals | Ringless | 120/240 VAC



5890
5893

U5890-X-2/200



5891
5892
5894
5895

U5894-X-2/200

320 Amps | 4 Terminals | Meter Mains | Lever Bypass | Ringless

| Catalog Number | Service | Hub | Side Wireway | Connectors CU/AL - Line | Branch Circuits | Dimensions | | | Knockouts | | | | |
|----------------|---------|------|--------------|-------------------------|-----------------|------------|-----|----|-----------|----|---|------|---|
| | | | | | | D" | W" | H" | 1 | 2 | 3 | 4 | 5 |
| U5890-X-2/200 | OH/UG | C.P. | No | 3/8" x 16 Studs | N/A | 6 | 24½ | 35 | 4 | 2½ | ¼ | — | — |
| U5891-X-2/200 | OH/UG | C.P. | No | 3/8" x 16 Studs | 12 | 6 | 29½ | 35 | 4 | 2½ | 1 | ½, ¾ | ¼ |
| U5892-X-2/200 | OH/UG | C.P. | No | 3/8" x 16 Studs | 24 | 6 | 29½ | 35 | 4 | 2½ | 1 | ½, ¾ | ¼ |
| U5893-X-2/200 | OH/UG | C.P. | Yes | 3/8" x 16 Studs | N/A | 6 | 24½ | 35 | 4 | 2½ | ¼ | — | — |
| U5894-X-2/200 | OH/UG | C.P. | Yes | 3/8" x 16 Studs | 12 | 6 | 29½ | 35 | 4 | 2½ | 1 | ½, ¾ | ¼ |
| U5895-X-2/200 | OH/UG | C.P. | Yes | 3/8" x 16 Studs | 24 | 6 | 29½ | 35 | 4 | 2½ | 1 | ½, ¾ | ¼ |

Notes

- **Hubs:** For proper hub selection refer to the hub suffix chart on the accessory page.
- **Breakers:** All units come with two 200A main breakers.
- **Side Bussed Units:** U5893, U5894 and U5895.
- **-MLK:** Main Lug feed-through kit K3701 factory installed on U5891 and U5894.
- **Fifth Terminal:** For field mounted fifth terminal order catalog number K3865.
- **Connectors:** Socket is supplied with 3/8" - 16 hex head nuts with Belleville washers. For connector lug kits, order as extra from chart on accessories page. Separate lug kits are required for line side only.

Plug-In Breaker Compatibility Chart

| Amps | Cutler Hammer | Siemens | General Electric | Square D |
|---------|---------------------------------|---------|--------------------------------|----------|
| 150-200 | BR, BRH, HQP, QPHW, QPGF, QPHGF | QP, QPH | THQL, THHQL, THQL-GF, THHQL-GF | Homeline |
| ≤ 125 | QP / BR | QP, QPH | THQ | Homeline |



Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.

Cold Sequence Meter Mains

4, 5 & 7 Terminals | Ringless


15
COLD
SEQUENCE
METER MAINS




U5767-X-200-CB




U5787-O-200-CB

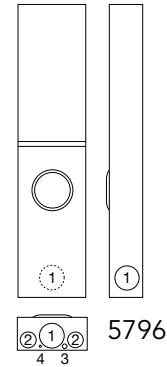


5796



5764 5767
5765



5784
5787



5797
5799

200 Amp Circuit Breaker Disconnect Ahead Of Meter Socket

| Catalog Number | Terminals | Service | Hub | Connectors CU/AL | | Bypass | Dimensions | | | Knockouts | | | |
|----------------|-----------|---------|-------|------------------|--|--------|--------------------|----|----|-----------|----|---|------|
| | | | | Line & Load | | | D" | W" | H" | 1 | 2 | 3 | 4 |
| U5764-X-200-CB | 4 | OH/UG | C.P. | #6-350 | | Lever | 4 ^{27/32} | 13 | 43 | 4 | 2½ | ¼ | — |
| U5765-X-200-CB | 5 | OH/UG | C.P. | #6-350 | | Lever | 4 ^{27/32} | 13 | 43 | 4 | 2½ | 1 | ½, ¾ |
| U5784-O-200-CB | 5 | UG | Blank | #6-350 | | Lever | 4 ^{27/32} | 26 | 28 | 4 | 2½ | ¼ | — |
| U5767-X-200-CB | 7 | OH/UG | C.P. | #6-350 | | Lever | 4 ^{27/32} | 13 | 43 | 4 | 2½ | 1 | ½, ¾ |
| U5787-O-200-CB | 7 | UG | Blank | #6-350 | | Lever | 6 | 26 | 28 | 4 | 2½ | 1 | ½, ¾ |

400 Amp (320 Amp Continuous) Circuit Breaker Disconnect Ahead Of Meter Socket

| Catalog Number | Terminals | Service | Hub | Connectors CU/AL | | Bypass | Dimensions | | | Knockouts | | | |
|----------------|-----------|---------|-------|------------------|---------|--------|------------|----|----|-----------|----|---|------|
| | | | | Line | Load | | D" | W" | H" | 1 | 2 | 3 | 4 |
| U5797-O-400-CB | 5 | UG | Blank | 3/0-500 | 3/0-500 | Lever | 6 | 26 | 36 | 4 | 2½ | 1 | ½, ¾ |
| U5796-X-400-CB | 7 | OH/UG | C.P. | 3/0-500 | 3/0-500 | Lever | 6 | 13 | 56 | 4 | 2½ | ¼ | — |
| U5799-O-400-CB | 7 | UG | Blank | 3/0-500 | 3/0-500 | Lever | 6 | 26 | 36 | 4 | 2½ | 1 | ½, ¾ |

Notes


- **Hubs:** For proper hub selection, refer to the hub suffix chart on the accessories page.

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.





Multi-Position Sockets


100 Amps | 4 Terminals | 300 VAC




U8212-RL

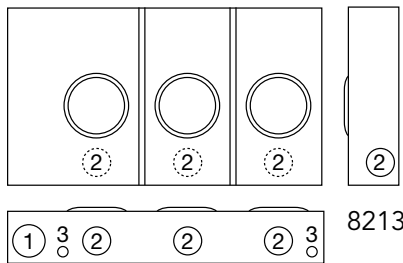


8213

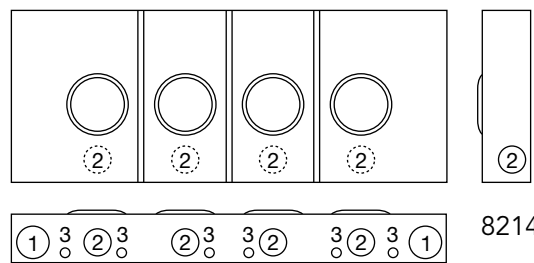

8214

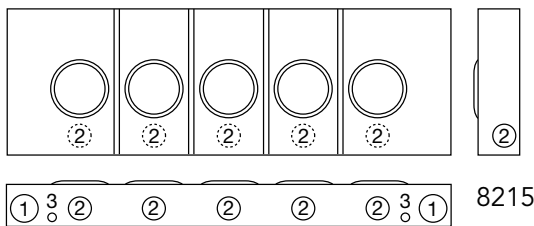

8215

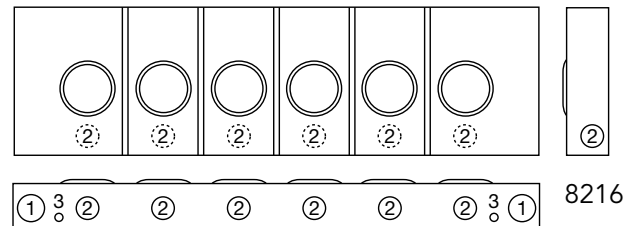

8216

100 Amps per Position | 4 Terminal | Multi-Position | Ringless

| Catalog Number | Positions | Hub | Connectors CU/AL | | Dimensions | | | Knockouts | | |
|----------------|-----------|------|------------------|--------|------------|-----|----|-----------|---|------|
| | | | Line | Load | D" | W" | H" | 1 | 2 | 3 |
| U8212-RL | 2 | H.O. | #6-350 | #6-2/0 | 4½ | 20⅝ | 16 | 2½ | 2 | ¼, ½ |
| U8213-RL | 3 | H.O. | #6-350 | #6-2/0 | 4½ | 28½ | 16 | 2½ | 2 | ¼, ½ |
| U8214-RL | 4 | H.O. | #6-350 | #6-2/0 | 4½ | 40⅞ | 16 | 2½ | 2 | ¼, ½ |
| U8215-RL | 5 | H.O. | #6-350 | #6-2/0 | 4½ | 48⅞ | 16 | 2½ | 2 | ¼, ½ |
| U8216-XL | 6 | C.P. | #6-350 | #6-2/0 | 4½ | 57⅞ | 16 | 2½ | 2 | ¼, ½ |

Notes

- **Hub:** For proper hub selection refer to the hub suffix chart on the accessory page. A hub opening is supplied at each end and the extra opening is closed with a closing plate as standard.
- **Fifth Terminal Kit:** For field mounted fifth terminal, order **5T8K2** (6 o'clock position).
- **Connectors:** Extruded aluminum connectors are tin plated.
- **200 Amp Units:** 200 amp per position units available—consult factory.



Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.

Multi-Position Meter Mains

125 & 200 Amp | 4 Terminals | Ringless | 120/240 VAC

17
125-200 AMP
MULTI-POSITION
METER MAINS



U5882-X



U5884-X

125 Amps per Position | 4 Terminal | Multi-Position Meter Mains | Ringless

| Catalog Number | Amps | Positions | Service | Hub | Connectors CU/AL | Dimensions | | | Weight (lbs.) |
|----------------|------|-----------|---------|------|------------------|------------|---------|----|---------------|
| | | | | | Line | D" | W" | H" | |
| U5902-X | 125 | 2 | OH/UG | C.P. | 3/8" x 16 Stud | 5 1/8 | 26 1/2 | 30 | 58 |
| U5903-X | 125 | 3 | OH/UG | C.P. | 3/8" x 16 Stud | 5 1/8 | 34 3/8 | 30 | 88 |
| U5904-X | 125 | 4 | OH/UG | C.P. | 3/8" x 16 Stud | 5 1/8 | 42 4/8 | 30 | 107 |
| U5905-X | 125 | 5 | OH/UG | C.P. | 3/8" x 16 Stud | 5 1/8 | 51 1/20 | 30 | 128 |
| U5906-X | 125 | 6 | OH/UG | C.P. | 3/8" x 16 Stud | 5 1/8 | 59 3/10 | 30 | 146 |

200 Amp / Position | 4 Terminal | Multi Position Meter Mains | Ringless


| Catalog Number | Amps | Positions | Service | Hub | Connectors CU/AL | Dimensions | | | Weight (lbs.) |
|----------------|------|-----------|---------|------|------------------|------------|---------|----|---------------|
| | | | | | Line | D" | W" | H" | |
| U5882-X | 200 | 2 | OH/UG | C.P. | 3/8" x 16 Stud | 5 1/8 | 26 1/2 | 30 | 58 |
| U5883-X | 200 | 3 | OH/UG | C.P. | 3/8" x 16 Stud | 5 1/8 | 34 3/8 | 30 | 88 |
| U5884-X | 200 | 4 | OH/UG | C.P. | 3/8" x 16 Stud | 5 1/8 | 42 4/8 | 30 | 107 |
| U5885-X | 200 | 5 | OH/UG | C.P. | 3/8" x 16 Stud | 5 1/8 | 51 1/20 | 30 | 128 |
| U5886-X | 200 | 6 | OH/UG | C.P. | 3/8" x 16 Stud | 5 1/8 | 59 3/10 | 30 | 146 |

Notes


- **Optional:** Factory installed breakers are available—consult factory.
- **AIC Rating:** All models are rated **22K AIC** with Siemens breakers.
- **Hub:** Units supplied with one (1) closing plate. Order hubs separately, see accessory page.
- **Fifth Terminal:** For field installed fifth terminal, order **K5T**.
- **Connectors:** Socket is supplied with 3/8" - 16 hex head nuts with Belleville washers. For connector lug kits, order as extra from chart on accessories page. Separate lug kits are required for line side only.

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.



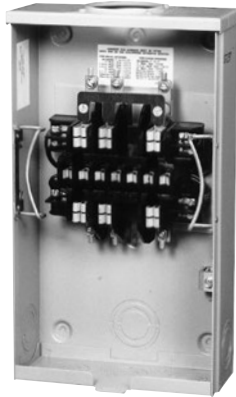

UC7237-RL

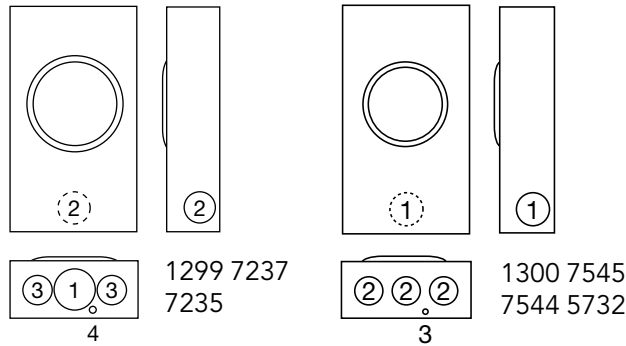

20 Amps | Ringless | Plunger Bypass | Overhead/Underground Service

| Catalog Number | Terminals | Hub | Meter Form | Connectors CU | Bypass | Dimensions | | | Knockouts | | | |
|----------------|-----------|------|----------------------|---------------|---------|--------------------------------|----|----|-----------|-------------------------------|-------------------------------|-------------------------------|
| | | | | | | D" | W" | H" | 1 | 2 | 3 | 4 |
| UC1299-RL | 6 | H.O. | 4S | #14 - #10 | Plunger | 3 ⁵ / ₁₆ | 8 | 14 | 2 | 1 ¹ / ₂ | 1 ¹ / ₄ | 1 ¹ / ₄ |
| UC7235-RL | 8 | H.O. | 5S | #14 - #10 | Plunger | 3 ⁵ / ₁₆ | 8 | 14 | 2 | 1 ¹ / ₂ | 1 ¹ / ₄ | 1 ¹ / ₄ |
| UC7237-RL | 13 | H.O. | 6, 8, 9S & (ALT) 10S | #14 - #10 | Plunger | 3 ⁵ / ₁₆ | 8 | 14 | 2 | 1 ¹ / ₂ | 1 ¹ / ₄ | 1 ¹ / ₄ |

20 Amps | Ring Type | Overhead/Underground Service

| Catalog Number | Terminals | Hub | Meter Form | Connectors CU | Bypass | Dimensions | | | Knockouts | | |
|----------------|-----------|------|----------------------|---------------|---------|--------------------------------|----|----|-------------------------------|-------------------------------|-------------------------------|
| | | | | | | D" | W" | H" | 1 | 2 | 3 |
| UC1300-XL | 6 | H.O. | 4S | #14 - #4 Max | Plunger | 3 ⁵ / ₁₆ | 8 | 14 | 1 ¹ / ₂ | 1 ¹ / ₄ | 1 ¹ / ₄ |
| UC7544-XL | 8 | H.O. | 3S | #14 - #4 Max | Plunger | 3 ⁵ / ₁₆ | 8 | 14 | 1 ¹ / ₂ | 1 ¹ / ₄ | 1 ¹ / ₄ |
| UC7545-XL | 13 | H.O. | 6, 8, 9S & (ALT) 10S | #14 - #4 Max | Plunger | 3 ⁵ / ₁₆ | 8 | 14 | 1 ¹ / ₂ | 1 ¹ / ₄ | 1 ¹ / ₄ |
| UC5732-XL | 15 | H.O. | Special | #14 - #4 Max | None | 3 ⁵ / ₁₆ | 8 | 14 | 1 ¹ / ₂ | 1 ¹ / ₄ | 1 ¹ / ₄ |

Notes

- **Hubs:** For proper hub selection, see the hub suffix chart on the accessories page.
- **Bypass:** Plunger type bypass automatically closes when meter is removed.
- **Connectors:** Units are supplied with mechanical type connectors (#4 max).




Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.

Transformer Rated

20 Amps | 6-13 Terminals | Test Switch Provision


19
20 AMP
TRANSFORMER
RATED




UC7449-XL



UC7478-YL



UC7532-RL
(shown prewired with
Milbank test switch)



- 7444
- 7445
- 7446
- 7448
- 7449
- 7478
- 7532

1 Piece Cover | Ringless | Overhead/Underground | with test switch provision*

| Catalog Number | Terminals | Hub | Meter Form | Connectors CU | Bypass | Dimensions | | | Knockouts | |
|----------------|-----------|------|---------------------|---------------|---------|-----------------|----|----|-----------------|-----------------------------------|
| | | | | | | D" | W" | H" | 1 | 2 |
| UC7478-RL | 6 | H.O. | 4S | #14 - #4 Max | None | 4 $\frac{1}{8}$ | 12 | 20 | 1 $\frac{1}{4}$ | 1 $\frac{1}{4}$, 1 $\frac{1}{2}$ |
| UC7444-RL | 8 | H.O. | 5S | #14 - #4 Max | None | 4 $\frac{1}{8}$ | 12 | 20 | 1 $\frac{1}{4}$ | 1 $\frac{1}{4}$, 1 $\frac{1}{2}$ |
| UC7445-RL | 13 | H.O. | 6, 8, 9 & (ALT) 10S | #14 - #4 Max | None | 4 $\frac{1}{8}$ | 12 | 20 | 1 $\frac{1}{4}$ | 1 $\frac{1}{4}$, 1 $\frac{1}{2}$ |
| UC5087-RL | 13 | H.O. | 6, 8, 9 & (ALT) 10S | #14 - #4 Max | Plunger | 4 $\frac{1}{8}$ | 12 | 20 | 1 $\frac{1}{4}$ | 1 $\frac{1}{4}$, 1 $\frac{1}{2}$ |

2 Piece Cover | Ringless | Overhead/Underground | with test switch provision*


| Catalog Number | Terminals | Hub | Meter Form | Connectors CU | Bypass | Dimensions | | | Knockouts | |
|----------------|-----------|------|---------------------|---------------|--------|-----------------|----|----|-----------------|-----------------------------------|
| | | | | | | D" | W" | H" | 1 | 2 |
| UC7532-RL | 6 | H.O. | 4S | #14 - #4 Max | None | 4 $\frac{1}{8}$ | 12 | 20 | 1 $\frac{1}{4}$ | 1 $\frac{1}{4}$, 1 $\frac{1}{2}$ |
| UC7448-RL | 8 | H.O. | 5S | #14 - #4 Max | None | 4 $\frac{1}{8}$ | 12 | 20 | 1 $\frac{1}{4}$ | 1 $\frac{1}{4}$, 1 $\frac{1}{2}$ |
| UC7449-RL | 13 | H.O. | 6, 8, 9 & (ALT) 10S | #14 - #4 Max | None | 4 $\frac{1}{8}$ | 12 | 20 | 1 $\frac{1}{4}$ | 1 $\frac{1}{4}$, 1 $\frac{1}{2}$ |

Notes

- **Hubs:** For proper hub selection see the hub suffix chart on the accessory page.
- **Prewiring:** If standard factory pre-wiring is required, refer to wiring diagrams in the general engineering section of this catalog. Determine appropriate diagram and send copy with order. If custom factory prewiring is required, specify on order. Be sure to include meter socket catalog number, test switch model and number, and meter form number. Please be sure to provide a copy of your wiring diagram. Catalog number will change to match wiring.
- **Connectors:** Units are supplied with mechanical type connectors (#4 max).
- ***Test Switch Cover:** Units on this page are not designed for use with test switch covers. Units are available in 5 $\frac{1}{2}$ " deep shell for test switch cover—contact factory for details. It is also possible to remove the test switch bridge and mount a test switch to the back of the enclosure.
- **Ring Type Option:** 2-piece cover units are available in ring type—contact factory for details.

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.



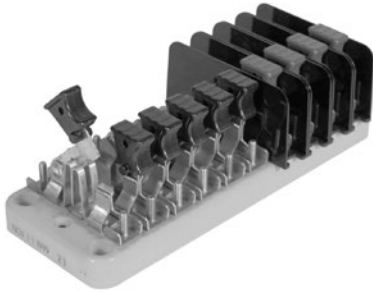

Switch Blades

Two dimples coined into one side of the switch blade ensure positive contact in corrosive, sooty environments—even after years of inactivity.

Test Switch Covers

Standard test switch covers are made from impact resistant clear thermal plastic which has excellent tracking and moisture resistant properties. If covers are required, add suffix **-WC** (with cover) to the catalog number or order separately catalog number **K3388**. Black flush mount covers are also available. Order catalog number **K3388-BLK-FL**. 10 pole base only.

Standard Cover



Test Switch Base

The base is molded from a high strength, fiberglass reinforced, thermoset polyester. This material is track resistant, flame retardant and has low water absorption qualities. Bases are available in 7 pole and 10 pole sizes.

Switch Jaws

The switch blade jaw clips are constructed from spring grade copper alloy. The material and design ensure excellent contact which prevents overheating.



Polarity Barrier

For maximum protection potential circuits are supplied with permanently mounted barriers made from high tensile strength polycarbonate.

Current Carrying Parts

Highly conductive copper and copper alloy materials are used on all current carrying parts. This ensures conductivity and deters corrosion. Spring grades are used where appropriate. Plating is available if required. Contact general offices to special order.

Flush Mount Cover (Black)



*Socket shells must be 5/8" deep
-OR-
must not have test switch bridge
mounted on back
in order to support a cover.*

Factory Installed: For cover installed add the suffix **-WC** or **-WCFL** to the catalog number of desired test switch.

Field Installed: For field installed cover order kit number **K3388** or **K3388-BLK-FL**.




The Milbank test switch is designed to meet the critical requirements of the electric utility industry. Not only do they meet EEI, ANSI C12.9, and UL standards but they combine several special features giving the Milbank test switch increased safety, durability and reliability. One such feature is our unique switch blade contact points which cut through residue that builds up after years of service. Another distinction is our polarity barrier which is designed to be flexible as well as offer exceptional insulating qualities. Our test switches are constructed from the latest materials available using modern fabricating and assembly methods.



Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.

Test Switches

4, 7 & 10 Pole

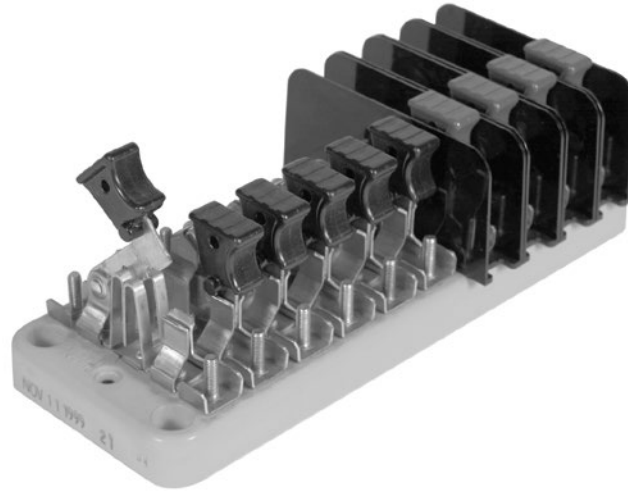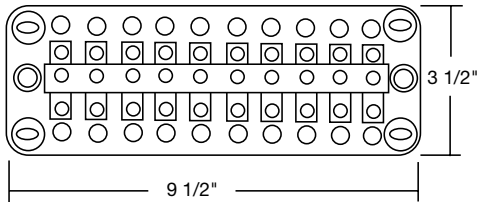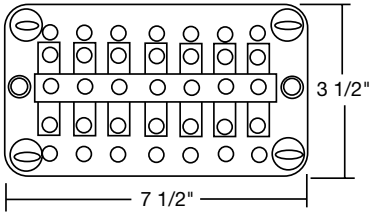

| Key | |
|-----|--|
| P | Potential Switch |
| C+ | Line side current switch with short circuit assembly |
| C | Load side current switch with test jack assembly |
| N | Neutral bar (no switch) |
| Pn | Neutral Potential Switch |
| X | Unused Position on base |
| | Insulating barrier, isolates both sides of switch |

| Catalog Number | 4-Pole | | | | | | |
|----------------|--------|----|---|---|----|----|---|
| TS04-0101 | X | P | | X | C+ | C | X |
| TS04-0104 | X | C+ | C | X | | Pn | X |

| Catalog Number | 7-Pole | | | | | | |
|----------------|--------|---|--|----|---|----|---|
| TS07-0105 | | P | | C+ | C | C+ | C |

Custom Pole Arrangements:
The key may be used to diagram your own pole arrangement. Be sure to specify base size and whether all C+ line side, current switch / shunt circuit assemblies are to be bussed together. The catalog numbers shown above are connected in line-load pairs; therefore, if bussed is required, different catalog numbers will apply.

| Catalog Number | 7-Pole on a 10-Pole Base | | | | | | | | | |
|----------------|--------------------------|---|----|---|--|----|----|---|---|----|
| TS07-0049 | | X | | X | | X | C+ | C | C | C+ |
| TS07-0106 | X | | C+ | C | | C+ | C | | X | X |

| Catalog Number | 10-Pole | | | | | | | | | |
|----------------|---------|----|----|----|----|----|----|----|----|----|
| TS10-0109 | P | | P | | C+ | C | C+ | C | C+ | C |
| TS10-0110 | | C+ | C | | C+ | C | | C+ | C | |
| TS10-0111 | P | | P | | C | C+ | C | C+ | C | C+ |
| TS10-0112 | C+ | C | C+ | C | C+ | C | | P | | Pn |
| TS10-0016 | | | | Pn | C | C+ | C | C+ | C | C+ |

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.





Customer Name: _____

Address: _____

Phone / Fax #: _____

Handle Color Key

| | | | | | | | |
|----|-------|----|--------|---|--------|-----|--------------|
| BK | Black | P | Purple | Y | Yellow | GN | Green |
| R | Red | BL | Blue | W | White | BKS | Black Stripe |
| BR | Brown | GR | Grey | O | Orange | WS | White Stripe |

TEST SWITCH BASE

The base is molded from a high strength, fiberglass reinforced, thermoset polyester. This material is track-resistant, flame-retardant and has low water absorption qualities. Bases are available in two standard sizes following NEMA mounting classifications.

Pole Position Chart

| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
|---|---|---|---|---|---|---|---|---|----|
| | | | | | | | | | |

Special Features

| Feature | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
|--------------------|---|---|---|---|---|---|---|---|---|----|
| 45° Angle Stops | | | | | | | | | | |
| Ganged Handles (C) | | | | | | | | | | |
| Bussing | | | | | | | | | | |
| Colored Handles | | | | | | | | | | |

Engineering Information: _____

Key

| | |
|----|--|
| P | Potential Switch |
| C+ | Line side current switch with short circuit assembly |
| C | Load side current switch with test jack assembly |
| N | Neutral bar (no switch) |
| Pn | Neutral Potential Switch |
| X | Unused Position on base |
| L | Insulating barrier - one side |
| □ | Insulating barrier - two sides |

Custom Pole Arrangements: The key may be used to diagram your own pole arrangement. Be sure to specify base size and whether all C+ line side, current switch / shunt circuit assemblies are to be bussed together. The catalog numbers shown above are connected in line-load pairs; therefore, if bussed is required, different catalog numbers will apply.

Number of Poles

- 4
- 7
- 10
- Other _____

Test Switch Cover (only available for 10-pole bases)

- Yes | Clear ____ Black ____
- No

Base Size

- 7-Pole
- 10-Pole



Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.

Current Transformer Cabinet

Panel Enclosure | Type 3R



Application

- For use as a current transformer cabinet or panel enclosure.
- For outdoor use to provide protection against rain, sleet and snow, or indoor use to protect against dripping water.

Construction

- Enclosure and cover manufactured from 16 or 14 gauge G90U galvanized steel.
- The doors are overlapping with no center post.
- Continuous door hinge with stainless steel hinge pins.
- Three point pad-lockable handle.
- Panel mounting studs provided for optional back panels.
- Drip shield top and seam-free sides, front and back.

Finish

- ANSI 61 gray polyester powder coating over phosphatized G90U galvanized steel.

PT Cabinets

| Catalog Number | Dimensions | | | Knockout |
|----------------|------------|----|-----|------------------|
| | D" | W" | H" | |
| PT48L | 8 | 8 | 27½ | 2½" - right side |
| PT48AL | 8 | 12 | 36 | 2½" - right side |
| PT48R | 8 | 8 | 27½ | 2½" - left side |
| PT48AR | 8 | 12 | 36 | 2½" - left side |



PT48AR*



S7860

Current Transformer Cabinets | Panel Enclosure

| Catalog Number | UPC # (7-84572) | Weight | Dimensions | | | Steel Panel Catalog # | Wood Panel Catalog # |
|----------------|--------------------|--------|------------|----|----|-----------------------|----------------------|
| | | | W" | H" | D" | | |
| 363010-CT3R | 18823 | 99 | 36 | 30 | 10 | A-36P30 | A-36P30W |
| 363016-CT3R | 16181 | 121.5 | 36 | 30 | 16 | A-36P30 | A-36P30W |
| 363610-CT3R | 17368 | 113 | 36 | 36 | 10 | A-36P36 | A-36P36W |
| 363612-CT3R | 16185 | 118 | 36 | 36 | 12 | A-36P36 | A-36P36W |
| 363616-CT3R | 18819 | 139 | 36 | 36 | 16 | A-36P36 | A-36P36W |
| 483616-CT3R | 25707 | 163 | 48 | 36 | 16 | A-48P36 | A-48P36W |
| 484812-CT3R | 16184 | 210 | 48 | 48 | 12 | A-48P48 | A-48P48W |
| 606013-CT3R | 18252 | 274 | 60 | 60 | 13 | A-60P60 | A-60P60W |

Notes

- ***PT48:** PT48L and PT48AL has mounting emboss on the right side to be mounted on left side of CT cabinet. PT48R and PT48AR have mounting emboss on left side to be mounted on right side of CT cabinet.
- **Wall or Pole Mount:** For wall or pole mount CT rack order **S7860**. This unit accomodates 3 donut style CTs. The removable cover makes wiring much easier.

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.






K4797 (studs)



K4798 (studs)



K4729 (with lugs)



K4722 (with lugs)



**CT364811-HC CT Cabinet
and K4722 CT Rack**

800 Amps | Transformer Cabinets

| Catalog Number | C.T. Racks | Dimensions | | | Front Cover | Cover Type |
|----------------|------------|------------|----|----|-------------|------------|
| | | D" | W" | H" | | |
| CT244811-SC | A | 11 | 24 | 48 | 1 Piece | Screw |
| CT304811-SC | A, B, G, H | 11 | 30 | 48 | 1 Piece | Screw |
| CT364811-SC | A, B, G, H | 11 | 36 | 48 | 1 Piece | Screw |
| CT244811-HC | A | 11 | 24 | 48 | 1 Piece | Hinge |
| CT304811-HC | A, B, G, H | 11 | 30 | 48 | 1 Piece | Hinge |
| CT364811-HC | A, B, G, H | 11 | 36 | 48 | 1 Piece | Hinge |

CT Cabinet Mounting Racks

| Code | Catalog Number | AIC Rating | Amps | Volts | Type of Service | Termination Type |
|------|----------------|------------|------|-------|-----------------|----------------------------------|
| A | K4797 | 50K | 800 | 600 | 1Ø3W or 3Ø3W | ½ - 13 studs on 1¾" centers |
| B | K4798 | 50K | 800 | 600 | 3Ø4W | ½ - 13 studs on 1¾" centers |
| G | K4729 | 50K | 800 | 600 | 1Ø3W or 3Ø3W | 6 lugs: (3) #4-600 or (6) #1-250 |
| H | K4722 | 50K | 800 | 600 | 3Ø4W | 8 lugs: (3) #4-600 or (6) #1-250 |

Notes

- **Enclosure:** These units are rated Type 3R, powder coated and constructed of galvanized steel.
- **Mounting:** ¼ - 20 welded studs for use with CT mounting rack.




Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.


Transockets

600 Amps | 6–14 Terminals | Donut or Bar Type CTs


25
600 AMP
TRANSOCKETS

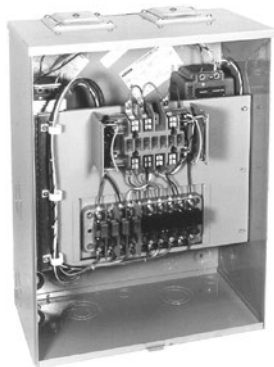

S1890-XT



S2690-XT



S2690-XT

600 Amps | 600 Volts | With PTs and Donut Type CTs | Ringless

| Catalog Number | Terminals | Hub | Meter Form | PTs Quantity & Ratio | CTs Quantity & Ratio | Dimensions | | | Knockouts | | |
|----------------|-----------|----------|------------|----------------------|----------------------|------------|----|----|-----------|---|------|
| | | | | | | D" | W" | H" | 1 | 2 | 3 |
| S1891-XT | 8 | (2) C.P. | 5S | (2) 4:1 | (2) 200/5 | 9½ | 18 | 24 | 2½ | 1 | 1¼/6 |
| S3912-XT | 13 | (2) C.P. | 6S | (2) 2.5:1 | (3) 200/5 | 9½ | 18 | 24 | 2½ | 1 | 1¼/6 |
| S1890-XT | 14 | (2) C.P. | 6S | (2) 2.5:1 | (3) 200/5 | 9½ | 18 | 24 | 2½ | 1 | 1¼/6 |

600 Amps | 600 Volts | Bar Type CTs Only | Ringless

| Catalog Number | Terminals | Hub | Meter Form | CTs Quantity & Ratio | Dimensions | | | Knockouts | | |
|----------------|-----------|----------|------------|----------------------|------------|----|----|-----------|----|---|
| | | | | | D" | W" | H" | 1 | 2 | 3 |
| S3831-XT | 6 | (2) C.P. | 4S | (2) 200/5 | 11¼ | 18 | 30 | 4 | 3½ | 1 |
| S2690-XT | 8 | (2) C.P. | 5S | (2) 200/5 | 11¼ | 18 | 30 | 4 | 3½ | 1 |
| S2674-XT | 13 | (2) C.P. | 8S | (3) 200/5 | 11¼ | 18 | 30 | 4 | 3½ | 1 |

Notes

- **Hubs:** Units are supplied with two closing plates as standard. To order hubs as extra refer to the hub suffix chart on the accessory page.
- **Prewiring:** Units supplied prewired with test switch and transformers in place. Contact factory if wiring diagram is desired.
- **Pricing:** Contact general office for pricing information.
- **Other units available - contact factory for details.**

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.



Meter Main w/ Load Center Pedestal


100–200 Amps | 4 Terminals | Ringless

27

100-200 AMP
METER MAIN
W/ LOAD CENTER
PEDESTAL



U5136-O-200S

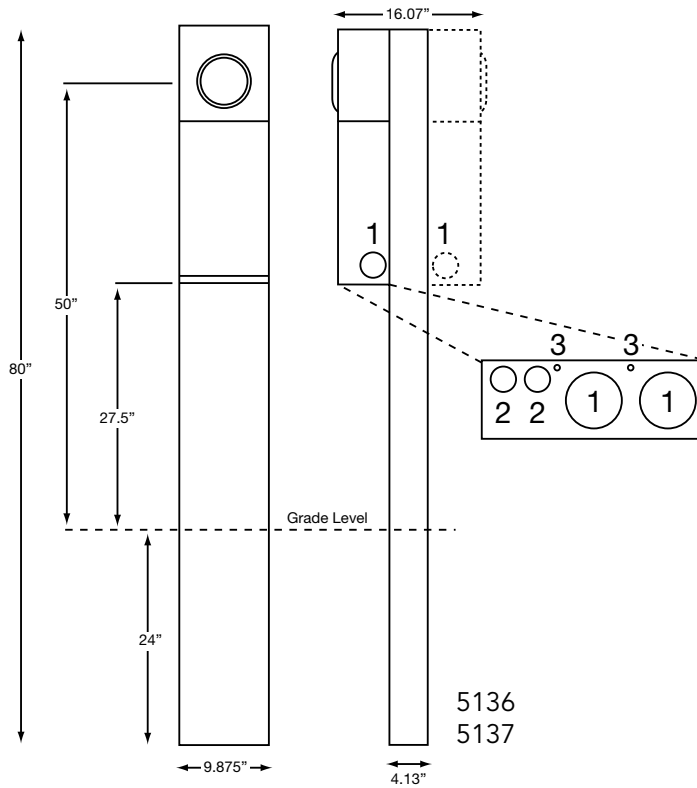

5136
5137

100-200 Amps | 4 Terminals | Meter Main Pedestal | Ringless

| Catalog Number | Service | Meter Positions | Bypass | Connectors CU/AL | | Knockouts | | |
|----------------|---------|-----------------|--------|------------------|------|-----------|----------|-----|
| | | | | Line | Load | 1 | 2 | 3 |
| U5136-O-100S | UG | Single | Horn | #6-350 | CB | 2 | 1/2, 3/4 | 1/4 |
| U5136-O-200S | UG | Single | Horn | #6-350 | CB | 2 | 1/2, 3/4 | 1/4 |
| U5137-O-200S | UG | Double | Horn | #6-350 | CB | 2 | 1/2, 3/4 | 1/4 |

Notes

- **Parallel to Series Conversion:** For field converting from parallel wired to series wired order **K5194**.
- **Fifth Terminal:** For field installed fifth terminal, order **K5T**.
- **Stabilizer Foot:** For field installed stabilizer foot, order **K5415**.
- **Application:** Designed for free standing direct burial.
- **Receptacles:** Consult factory for installed receptacle assemblies.
- **Main Breaker:** Milbank UQFP-M-(AMP).
- **Ring Type Units:** Ring type units available—contact Milbank for details.

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.




Surface Mount Power Outlet

Millennium Series | Metered & Unmetered




U5000-XL-75

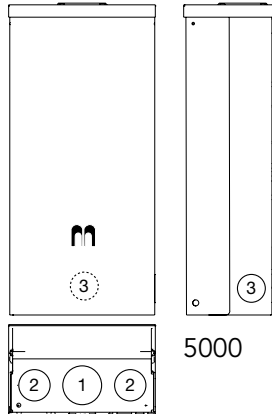

5000



U5100-XL-75

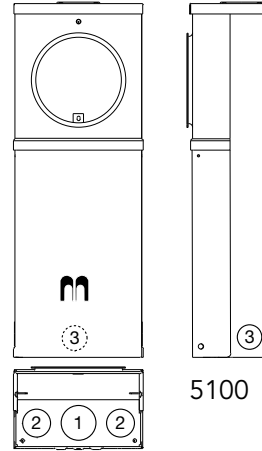

5100

125 Amps | Surface Mount Power Outlets

| Catalog Number | Metered/ Unmetered | Receptacle Configuration | Circuit Breaker Configuration | Loop Feed Line | Dimensions | | | Knockouts | | |
|----------------|-----------------------|-----------------------------|----------------------------------|-------------------|------------|----|-----|-----------|----|----|
| | | | | | D" | W" | H" | 1 | 2 | 3 |
| U5000-XL | Unmetered | — | — | (2) 1/0-#12 | 5½ | 9⅞ | 19¼ | 2 | 1½ | 1¼ |
| U5000-XL-41 | Unmetered | A | X | (2) 1/0-#12 | 5½ | 9⅞ | 19¼ | 2 | 1½ | 1¼ |
| U5000-XL-55 | Unmetered | B | Y | (2) 1/0-#12 | 5½ | 9⅞ | 19¼ | 2 | 1½ | 1¼ |
| U5000-XL-75 | Unmetered | C | Z | (2) 1/0-#12 | 5½ | 9⅞ | 19¼ | 2 | 1½ | 1¼ |
| U5100-XL | Metered | — | — | #6-250 | 5½ | 9⅞ | 25 | 2 | 1½ | 1¼ |
| U5100-XL-41 | Metered | A | X | #6-250 | 5½ | 9⅞ | 25 | 2 | 1½ | 1¼ |
| U5100-XL-55 | Metered | B | Y | #6-250 | 5½ | 9⅞ | 25 | 2 | 1½ | 1¼ |
| U5100-XL-75 | Metered | C | Z | #6-250 | 5½ | 9⅞ | 25 | 2 | 1½ | 1¼ |

Receptacle Configurations

| A | B | C |
|--------------------------|---------------------------|--------------------------------------|
| | | |
| (1) TT30R, (1) 5-20R GFI | (1) 14-50R, (1) 5-20R GFI | (1) 14-50R, (1) TT30R, (1) 5-20R GFI |

Notes

- **Other Configurations:** Additional configurations are available—contact Milbank for details.
- **Metered Units:** Metered units are ring type.

Circuit Breaker Configurations



| X | Y | Z |
|--|--|---|
| | | |
| (1) 30A, 1P, 120V (1) 20A, 1P, 120V | (1) 50A, 2P, 120/240V (1) 20A, 1P, 120V | (1) 50A, 2P, 120/240V (1) 30A, 1P, 120V (1) 20A, 1P, 120V |



Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.


Power Outlet Pedestals

Millennium Series | Metered & Unmetered



5200
5220

U5200-XL-75



5300
5320

U5300-O-75

125 Amps | Power Outlet Pedestals

| Catalog Number | Double Head Catalog Number | Receptacle Configuration | Circuit Breaker Configuration | Dimensions | | | Knockouts |
|----------------|----------------------------|--------------------------|-------------------------------|--------------------------------|-------------------------------|--------------------------------|-------------------------------|
| | | | | D" | W" | H" | |
| U5200-XL | U5220-XL | — | — | 5 ⁹ / ₁₆ | 9 ¹ / ₈ | 64 ¹ / ₂ | 1 ¹ / ₄ |
| U5200-XL-41 | U5220-XL-41 | A | X | 5 ⁹ / ₁₆ | 9 ¹ / ₈ | 64 ¹ / ₂ | 1 ¹ / ₄ |
| U5200-XL-55 | U5220-XL-55 | B | Y | 5 ⁹ / ₁₆ | 9 ¹ / ₈ | 64 ¹ / ₂ | 1 ¹ / ₄ |
| U5200-XL-75 | U5220-XL-75 | C | Z | 5 ⁹ / ₁₆ | 9 ¹ / ₈ | 64 ¹ / ₂ | 1 ¹ / ₄ |
| U5300-O | U5320-O | — | — | 5 ⁹ / ₁₆ | 9 ¹ / ₈ | 70 ¹ / ₄ | 1 ¹ / ₄ |
| U5300-O-41 | U5320-O-41 | A | X | 5 ⁹ / ₁₆ | 9 ¹ / ₈ | 70 ¹ / ₄ | 1 ¹ / ₄ |
| U5300-O-55 | U5320-O-55 | B | Y | 5 ⁹ / ₁₆ | 9 ¹ / ₈ | 70 ¹ / ₄ | 1 ¹ / ₄ |
| U5300-O-75 | U5320-O-75 | C | Z | 5 ⁹ / ₁₆ | 9 ¹ / ₈ | 70 ¹ / ₄ | 1 ¹ / ₄ |

Receptacle Configurations

| A | B | C |
|-----------------------------|------------------------------|---|
| | | |
| (1) TT30R, (1) 5-20R GFI | (1) 14-50R, (1) 5-20R GFI | (1) 14-50R, (1) TT30R, (1) 5-20R GFI |

Notes

- **Other Configurations:** Additional configurations are available—contact Milbank for details.
- **Metered Units:** Metered units are ring type.

Circuit Breaker Configurations


| X | Y | Z |
|--|--|---|
| | | |
| (1) 30A, 1P, 120V (1) 20A, 1P, 120V | (1) 50A, 2P, 120/240V (1) 20A, 1P, 120V | (1) 50A, 2P, 120/240V (1) 30A, 1P, 120V (1) 20A, 1P, 120V |

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.







U4540-XL




Shown with optional 3Ø Lug Kit



4540



4542



4544


4546

4548

4549



S9617-O

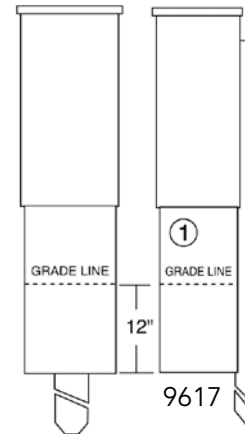

Terminal Boxes | 1Ø and 3Ø | 120/240 Volts

| Catalog Number | Amps | Phase | Volts | Hub | Connectors CU7AL | 1Ø to 3Ø Kit | Dimensions | | | Knockouts | | | |
|----------------|------|-------|---------|------|--------------------------|--------------|------------|----------|----|-----------|-------|----------|------------|
| | | | | | | | D" | W" | H" | 1 | 2 | 3 | 4 |
| U4544-XL | 100 | 1 | 120/240 | C.P. | (6) #12-1/0 | K4543 | 4 1/8 | 9 13/16 | 18 | 2 | 1 | 1/4, 1/2 | — |
| U4546-XL | 100 | 3 | 600 | C.P. | (6) #12-1/0 | N/A | 4 1/8 | 9 13/16 | 18 | 2 | 1 | 1/4, 1/2 | — |
| U4540-XL | 200 | 1 | 120/240 | C.P. | (6) #6-350 | K4539 | 4 1/8 | 14 13/16 | 23 | 2 1/2 | 2 1/2 | 1 1/4 | 1 1/4, 1/2 |
| U4542-XL | 200 | 3 | 600 | C.P. | (6) #6-350 | N/A | 4 1/8 | 14 13/16 | 23 | 2 1/2 | 2 1/2 | 1 1/4 | 1 1/4, 1/2 |
| U4548-RXL | 400 | 1 | 120/240 | C.P. | (3) #6-350 or (2) #4-600 | K4547 | 5 | 15 1/2 | 27 | 3 | 3 | 1/4, 1/2 | 1/4 |
| U4549-RXL | 400 | 3 | 600 | C.P. | (3) #6-350 or (2) #4-600 | N/A | 5 | 15 1/2 | 27 | 3 | 3 | 1/4, 1/2 | 1/4 |

Notes

- **Hub:** Standard hub opening on top with closing plate attached.
- **Features:** UL-listed pad lockable Type 3R enclosure.
- **3Ø 120/240V Application:** Field installable 3Ø lug kit converts 1Ø unit to 3Ø unit.

Secondary Service Pedestal for Underground Use

| Catalog Number | Pedestal Supplied With | Dimensions | | |
|----------------|-----------------------------------|------------|--------|----------|
| | | D" | W" | H" |
| S9617-O | (3) 6 hole 350 MCM connector bars | 10 11/32 | 10 3/8 | 45 11/16 |

Notes





- **Features:** Unit supplied with 3/8"-16 penta head bolt and pad-lockable latch.
- **Stake:** Catalog number **S9110** must be added to catalog number in order to ensure shipment of 72" stake for free standing installation (i.e. **S9617-O-S9110**).




Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.

Terminal Box

Secondary

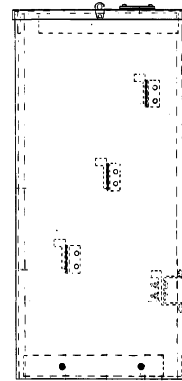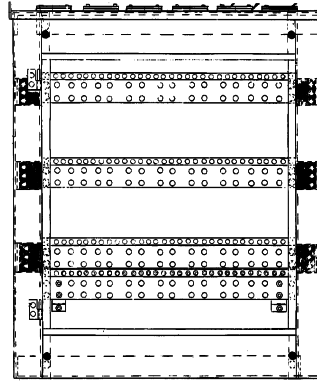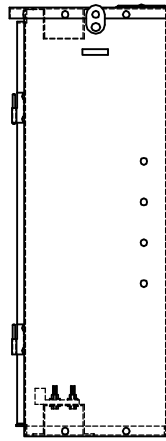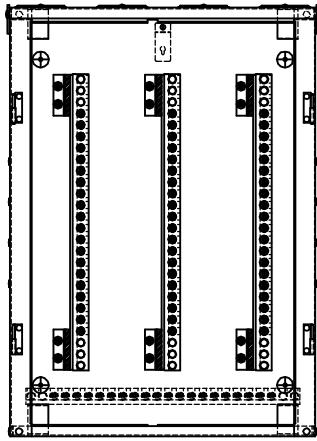

8333



1787

Terminal Boxes

| Catalog Number | Hub | Amps (End Connection) | Amps (Center Connection) | | Dimensions | | | Knockouts | |
|----------------|----------|-----------------------|--------------------------|-------|------------|----|----|-----------|------|
| | | | Each Way | Total | D" | W" | H" | 1 | 2 |
| S1787-4X | (4) C.P. | 950 | 950 | 1900 | 14 | 30 | 42 | 7/8 | 5/16 |
| S8333-6X | (6) C.P. | 1500 | 1500 | 3000 | 24 | 44 | 52 | — | — |

Notes

- **Hot Bus Support:** Hot bus support and support ear available as kit for the **S8333**. Order kit **K1822**. Kit also includes hardware to mount bus.

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.



Commercial Pedestals

Attractive | Easy to Install | Secure | Cost-Effective

Milbank Commercial Pedestals are pad-mounted, weatherproof electrical enclosures consisting of a utility pull section with optional meter socket, and a customer section containing distribution and control equipment. Milbank Commercial Pedestals are an attractive, secure, easy to install and cost-effective solution when underground remote site power distribution and control equipment is required, replacing unsightly and inefficient strut and backboard structures.



Strut and backboard



Commercial pedestal

UL-listed as Industrial Control Equipment (File E113855)

Standard Features

- Type 3R rainproof, vandal-resistant cabinet of polyurethane powder-coated steel (aluminum or stainless steel also available)
- UL-listed as enclosed industrial control equipment (UL508)
- Isolated lockable & sealable utility metering and lug landing sections
- Lockable customer section for distribution and control equipment with internal deadfront
- Print pocket inside customer section door contains wiring schematics and installation instructions
- Most load centers are UL-listed for use with various manufacturers' circuit breakers
- All stainless steel external hardware (screws, bolts, hinges, handles, hasps and sealing screws)




Ringless socket



Ring type socket



Utility lug landing



Customer interior



Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.

Commercial Pedestals

Attractive | Easy to Install | Secure | Cost-Effective

33
COMMERCIAL
PEDESTALS

Applications

These units are ideal for controlling and metering:

- Traffic signals
- Street lighting
- Irrigation and sprinkler systems
- Cell towers and telephone vaults
- Pump stations
- Temporary power for fairgrounds, swap meets, outdoor markets, portable offices, holiday lights, etc.
- Outdoor lighting for athletic fields, tennis and basketball courts, parking lots, landscaping and subdivision entrances, etc.

Available Factory-Installed Options

- Meter sockets: ring type or ringless, up to 400 amp
- Main and branch breakers or T fuses
- Distribution: copper load centers and panel boards
- Clocks, timers and relays
- Photoelectric cells and controls
- Power receptacles: pin and sleeve, twist lock or straight blade
- Contactors: definite purpose, electrical or mechanically held, IEC and mercury types
- Surge protection and lightning arrestors
- Reserve inlet generator receptacle with interlocked circuit breakers
- Motor starters and relays
- Push button controls
- Thermostat controls, fans and heating strips
- Power blocks and terminal blocks
- Steel, aluminum and plywood backboards
- Transformers
- Interlock devices for circuit breakers
- Available in steel, aluminum (unpainted, painted or anodized) or stainless steel construction with powder-coated finish available in eight standard colors or special-ordered RAL colors
- Available for applications up to 400 amp, 120V, 208V, 240V, 277V, 480V - 1Ø or 3Ø



Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.



Milbank | *Driving the Future of Power*

With over 85 years in the electrical distribution industry, Milbank is proud to offer quality home standby, portable, digital inverter and mobile & industrial generator systems.

Home Standby Generators

- Wide range of sizes for small to large luxury homes and businesses
- Liquid propane and natural gas options



Digital Inverter Generators

- Small footprint
- Lightweight
- Quiet operation
- Safe for sensitive electronics




Portable Generators

- Manual and electric start options
- EPA compliant



Transfer Switches

- Single- and three-phase options
- Whole house power management

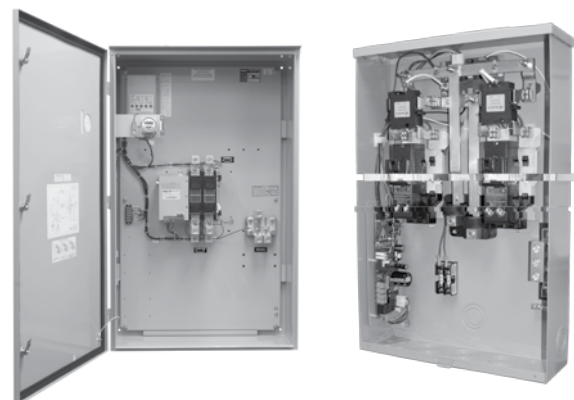

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.

Electric Vehicle Supply Equipment

Milbank | *Driving the Future of Power*

35
ELECTRIC
VEHICLE
SUPPLY
EQUIPMENT

From a wall-mounted single dock unit in a residential garage, to a citywide municipal integration, our scalable, flexible, reliable solution is designed for effectiveness in virtually any installation scenario.

Level II Models

MEVSE-RS—Residential, single wall mounted; overnight at-home charging.

MEVSE-RS Dual—Pedestal mounted with two ports; ideal for multi-family and high-traffic commercial parking lots.

MEVSE-RS+—Available in single, dual and quad configurations with the addition of programmable, smart charging capabilities; allows communication with the grid for charging when energy consumption is low; allows connectivity to GPRS.

Level III Models

DC Fast Charge — Stations feature JARI/TEPCO connectors and CHAdeMO certification; practical networking and payment options; available from 30-60kW models suitable for public and fleet usage; charges in 15-30 minutes.

Suitable EV Station Locations

- Shopping malls
- Theatres
- Municipal buildings
- Central business districts
- Entertainment districts
- Stadiums & arenas
- Rest areas
- Truck stops / travel plazas
- Camping / RV parks
- Restaurants
- Parking garages
- Public curbside parking
- Office buildings
- Single-family residences
- Multi-unit residences
- Airports
- Hotels
- Casinos
- Anywhere people park for extended periods of time





Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.





Disconnect/Out of Service Devices

Disconnect Sleeve

| | | |
|--------------------------------|--|--|
| Application | Discretely disconnects service at the meter while leaving the meter in place. |  <p>M5-144 disconnect sleeves (above) shown installed on meter blades (below)</p>  |
| Features | <p>Mylar® polyester film — flexible, durable and stable even at extreme temperatures.</p> <p>Safe, reliable and easy to install</p> <p>Standard design fits most meter blades</p> <p>High dielectric strength</p> <p>Non-hygroscopic</p> | |
| Ordering | Order M5-144 | |
| Installation Guidelines | <p>Turn off main switch or breaker before installation</p> <p>Remove meter from socket</p> <p>Place disconnect sleeve over load side blades</p> <p>Replace meter and reseal</p> <p>Do not use disconnect sleeves on lever bypass sockets.</p> | |

Plug-In Out Of Service Device



| | | |
|--------------------|--|---|
| Application | Disconnects service at the meter. |  <p>K4974 (above); meter with K4974 installed and service disconnected (below).</p>  |
| Features | <p>Meter stays in place to prevent tampering and to simplify power restoration</p> <p>Rotated meter shows that service has been disconnected</p> <p>Easily plugs into all new Milbank 200 amp blocks with square fifth terminal hole</p> | |
| Ordering | Order K4974 | |




Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.

Accessories

Hubs and Closing Plates

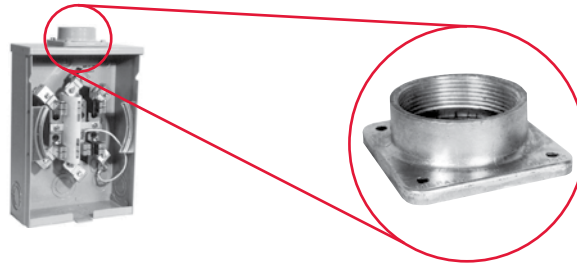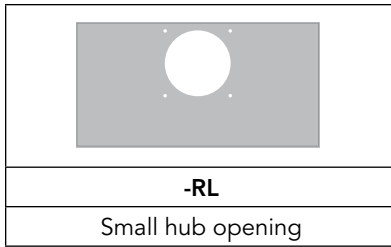

| | | | | | |
|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|
| | | | | | |
| -WL A7514 | -YL A7515 | -ZL A7516 | -DL A7517 | -EL A7518 | -XL A7551 |
| 1" hub | 1¼" hub | 1½" hub | 2" hub | 2½" hub | Small closing plate |

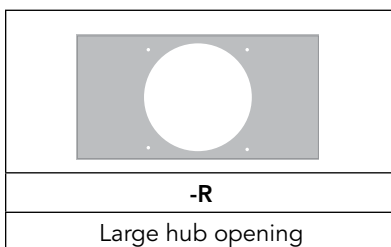

| | | | | |
|--------------------------|--------------------------|--------------------------|--------------------------|--|
| | | | | |
| -F A8110 | -G A8111 | -H A8112 | -X A9064 | -RRL S8324 |
| 3" hub | 3½" hub | 4" hub | Large closing plate | Large hub opening adapted to small hub opening |

Notes

- **Suffix:** Add to catalog number for factory installation of hub.
- **Packaging:** Individually packed units for field installation.
- **Abbreviations:** H.O. (hub opening), C.P. (closing plate).

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.



Connector Kits, Closing Covers & Sealing Rings

Connector Kits | For Use with 3/8"-16 Stud Type Units Only

| Single | | | Twin | | |
|--------|---------------|-------------------------------------|--------|---------------|----------------------|
| Suffix | Part # | (3 per set) - 1Ø | Suffix | Part # | (3 per set) - 1Ø |
| K1 | K1539 | 6-350 | K2 | K1350 | 6-350 |
| K3 | K1540 | 6-350 (non rotating) | K2L | K1350L | 6-350 (non rotating) |
| K3L | K1540L | 4-600 or (2) 1/0-250 (non rotating) | K4 | K1541 | 4-600 |
| Suffix | Part # | (4 per set) - 3Ø | Suffix | Part # | (4 per set) - 3Ø |
| K5 | K3082 | 6-350 | K6 | K3442 | 6-350 |
| K7 | K3441 | 4-600 or (2) 1/0-250 | K8 | K3083 | 4-600 |

Bypass Link



K8180 (sold in pairs)

Closing Covers

| | |
|--|--|
| | |
| Meter Closing Plate (Ring Type / Ringless) | Metal Closing Plate (For Ringless Sockets) |
| 6003 - Grey Plastic | CP-21 |
| 6116 - Clear Plastic | |




Generator Interlock

| | |
|---|--|
| | Allows only one breaker to be in the "on" position when back-feeding with a standby power generator. |
| K5815 - large QN with small frame Q | |
| K5820 - large frame QN with large frame QN | |
| K5830 - small frame Q to small frame Q | |

Sealing Rings

| | |
|---------------------------------|--|
| | |
| MR-2 - Snap Action | MR-4 - Screw Type (Stainless Steel) |
| MR2-SS - Stainless Steel | |


Fifth Terminals

| | | |
|---|---|--|
|  |  |  |
| 5T8K2 - 100-200 Amp "Plug-In" | K5T - 200 Amp (Block with Square Hole) | K3865 - Heavy Duty Jaw Clamping (K3866 without Neutral Wire) |

Triplex Ground


| |
|---|
|  |
| K1190 (For factory installed triplex ground, add suffix -TG to catalog number) |

Tap Connectors (3 per set)
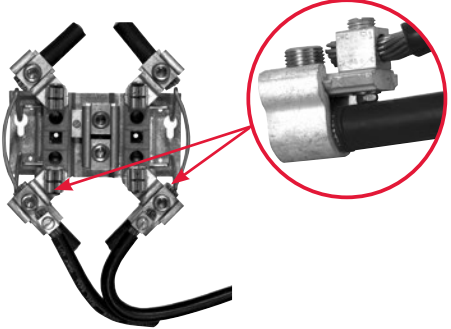
| | |
|--|--|
|  | Replaces the load or line side slide-in nut assembly on Milbank 200 amp sockets. Allows for a 100 amp tap location in addition to the #6-350 kcmil load-side connector. K5022 includes safety barrier extensions for applications over 300 VAC. Three lugs per kit. |
| K4977-INT - Internal Hex (set of 3) | |
| K4977-EXT - External Hex (set of 3) | |
| K5022-INT - Internal Hex (set of 4 w/ barrier) | |

Locknut Clearances

Clearance for Locknuts on Knockouts

|  | <i>"D" in nearest practical dimension)</i> |
|---|--|
| Knockout Size | "D" |
| 1/2 | 1 1/8 |
| 3/4 | 1 3/8 |
| 1 | 1 3/4 |
| 1 1/4 | 2 1/4 |
| 1 1/2 | 2 5/8 |
| 2 | 3 1/8 |
| 2 1/2 | 3 1/2 |
| 3 | 4 1/4 |
| 3 1/2 | 4 3/4 |
| 4 | 5 3/8 |

Knockout Actual Sizes

Conduit to Knockout Reference Chart


| Conduit Size | Milbank Knockout | Actual Size Milbank Knockout |
|--------------|------------------|------------------------------|
| 1/2 | 1/2 | 7/8 |
| 3/4 | 3/4 | 1 1/8 |
| 1 | 1 | 1 3/8 |
| 1 1/4 | 1 1/4 | 1 3/4 |
| 1 1/2 | 1 1/2 | 2 |
| 2 | 2 | 2 1/2 |
| 2 1/2 | 2 1/2 | 3 |
| 3 | 3 | 3 5/8 |
| 3 1/2 | 3 1/2 | 4 1/8 |
| 4 | 4 | 4 41/64 |

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.




Watthour Meter Forms


Standard Forms | Transformer Rated or Self-Contained




SC
2 and 3-WIRE FORMS
1S & 2S




SC
2 and 3-WIRE FORMS
1S & 2S with BYPASS




TR
2-WIRE FORM 3S
5th Term. 9 o'clock




TR
2-WIRE FORM 3S
with BYPASS




TR
2-WIRE FORM 3S
5th Term. 6 o'clock




TR
2-WIRE FORM 3S
with BYPASS




SC
2 ELEMENT
3-WIRE NETWORK
FORM 12S 5th
TERM. 9 o'clock




SC
2 ELEMENT 3-WIRE
NETWORK FORM 12S
with BYPASS
5th Term. 9 o'clock




SC
2 ELEMENT
3-WIRE NETWORK
FORM 12S 5th
TERM. 6 o'clock




SC
2 ELEMENT 3-WIRE
NETWORK FORM 12S
with BYPASS
5th Term. 6 o'clock




TR
3-WIRE FORM 4S




TR
3-WIRE FORM 4S
WITH BYPASS




SC
2 or 3 ELEMENT
3Ø4W Y or Δ
Y FORM 14S
Δ FORM 15S




SC
2 or 3 ELEMENT
3Ø4W Y or Δ
FORMS 14S & 15S
with BYPASS




TR
2 ELEMENT
3Ø4W Y or Δ
Y FORM 7S
Δ FORM 24S
with BYPASS




TR
2 ELEMENT
2Ø3W, 2Ø4W, 3Ø3W
FORM 5S




TR
2 ELEMENT 2Ø3W,
2Ø4W, 3Ø3W
FORM 5S with
BYPASS



SC
2 ELEMENT
2Ø3W, 2Ø4W, 3Ø3W
FORM 13S




SC
2 or 3 ELEMENT
2Ø3W, 2Ø4W, 3Ø3W
FORM 13S with
BYPASS




TR
2 or 3 ELEMENT
3Ø4W Y or Δ
Y FORM 9S
Δ FORM 8S


TR = TRANSFORMER RATED
SC = SELF CONTAINED



TR
2 or 3 ELEMENT
3Ø4W Y or Δ
FORMS 8S & 9S
with BYPASS



TR
2 ELEMENT
3Ø4W Y
FORM 6S



TR
2 ELEMENT
3Ø4W Y
FORM 6S
with BYPASS



Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.

Meter Forms

Reference Information

DIAGRAM A

1 \emptyset 2W with 1 P.T. & 1 C.T.
Single Stator Meter (2W1 \emptyset) - Form 35
5T Socket, Test Switch #TS04-0101




DIAGRAM B

1 \emptyset 3W with 1 C.T.
Single Stator Meter (2W1 \emptyset) - Form 35
5T Socket, Test Switch #TS04-0101

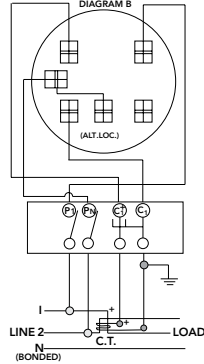


DIAGRAM C

1 \emptyset 3W with 2 C.T.'s
Single Stator Meter (3W1 \emptyset) - Form 45
6T Socket, Test Switch #TS07-0105

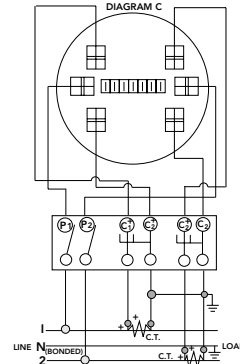


DIAGRAM D

1 \emptyset 3W or 3W Network with 2 C.T.'s
2 Stator Meter - Form 55
8T Socket, Test Switch #TS07-0105

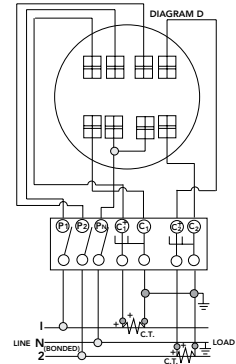


DIAGRAM E

3 \emptyset 3W "A" with 2 P.T.'s & 2 C.T.'s
2 Stator Meter - Form 55
8T Socket, Test Switch #TS07-0105

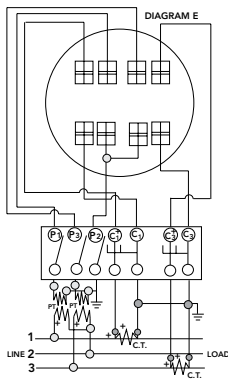


DIAGRAM F

3 \emptyset 3W "A" with 2 C.T.'s
2 Stator Meter - Form 55
8T Socket, Test Switch #TS07-0105

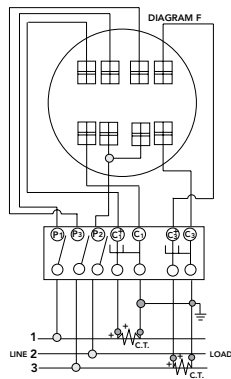


DIAGRAM G

3 \emptyset 4W "Y" with 3 C.T.'s
2 1/2 Stator Meter - Form 65
13T Socket, Test Switch #TS10-0109

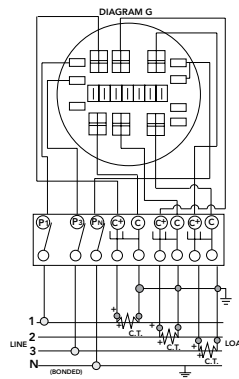


DIAGRAM H

3 \emptyset 4W "Y" with 2 P.T.'s & 3 C.T.'s
2 1/2 Stator Meter - Form 65
13T Socket, Test Switch #TS10-0109

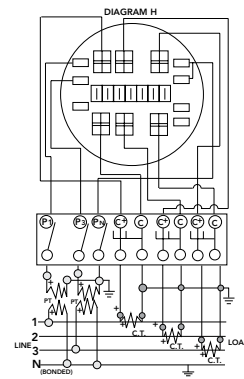


DIAGRAM I

3 \emptyset 4W "Y" or "A" with 3 C.T.'s
"Y" 3 Stator Meter - Form 95
"A" 2 Stator Meter - Form 85
13T Socket, Test Switch #TS10-0109


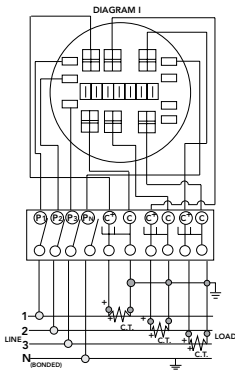


DIAGRAM J

3 \emptyset 4W "Y" with 3 P.T.'s & 3 C.T.'s
3 Stator Meter - Form 95
13T Socket, Test Switch #TS10-0109

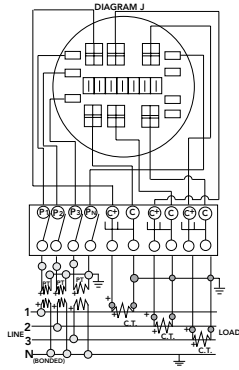

Prewiring: If standard factory prewiring is required, refer to wiring diagrams on this page. Determine appropriate diagram and send a copy with order. If custom factory prewiring is required, specify on order. Be sure to include meter socket catalog number, test switch make and catalog number, meter form number and provide a copy of your wiring diagram.

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.



Materials

Steel Quality

The meter equipment listed in this catalog is made of galvanized steel (AISI* G90) to afford the best possible weather proofing.
*American Iron and Steel Institute.

Steel Sheet

16 gauge, galvanized, sheet: 1 1/4 oz./ sq.ft. class zinc-coated. (AISI G90)
14 gauge, galvanized, sheet: 1 1/4 oz./ sq.ft. class zinc-coated.

Aluminum Extrusion

Wire-Terminals: Alloy; 6061-T6, Tin-plated for CU/AL wire.
Bus Bar: Alloy; 6101-O & 6063-O

Aluminum Sheet

3000 series aluminum sheet, H14, or 5052 series aluminum sheet, H32. Where applicable thicknesses range from .064–.125

Copper Sheet & Bus

Electrolytic copper with tin plating in most applications.

Insulating Materials

- In most units, support bases for current-carrying components are molded from fiberglass reinforced high-strength, track resistant, thermoset polyester molding compounds.
- Clear or black safety shields and polarity barriers are molded from high-strength, track resistant, polycarbonate molding compounds.
- Various sheet insulating materials, as appropriate for the application are utilized in the fabrication of flat, formed and punched component parts and barriers.

Finish

Process

Light gray state-of-the-art electrostatically applied powder paint offers a durable, non-fading finish. For further information concerning the chemical analysis of the weather resistant finish, please contact the factory.

Metal Fastners

Zinc-coated with a chromate dip.

Ratings & Compliance

Ratings & Compliance

All Milbank electrical enclosures in this catalog are rated "Type 3R Enclosure" unless specified otherwise on the product's page. All enclosures with a UL designation are constructed per the appropriate UL Standard and may be installed per the National Electric Code. UL procedure files associated with the UL Standards are listed as follows: Meter Sockets (UL 414, File E30202), Test Switches (UL 414, File E62531), Power Outlets (UL 231, File E90945), Panelboards (UL 67, File E32628) and Pullout Switches (UL 1429, File E133062). Additional standards are utilized as applicable: Meter Sockets (ANSI C12.7), Test Switches (ANSI C12.9) and Panelboards (NEMA PB-1).



Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.

Enclosure Information

Milbank Electrical Meter Enclosures Specification Note

All Milbank electrical enclosures in this catalog are rated "Type 3R Electrical Enclosure" unless specified otherwise. All enclosures with a UL designation are constructed per the appropriate UL standard and may be installed per the National Electric Code. Meter sockets are constructed per "UL 414, Meter Sockets", file #E30202 and per "ANSI C12.7-1993-Meter Sockets". All test switches are constructed per "UL 414, Meter Sockets", file #E30302 and per "ANSI C12.9-1993-Test Switches". Power outlets are constructed per "UL 231, Power Outlets", file #E90945. Panelboards are constructed per "UL 67, Panelboards", file #E32628 and "NEMA PB-1-1984-Panelboards". Pullout switches are constructed per "UL 1429, Pullout Switches", file #133062.

Definitions Pertaining to Nonhazardous Locations | Indoor Use

Type 1 Enclosure

Type 1 enclosures are intended for indoor use primarily to provide a degree of protection against limited amounts of falling dirt.

Type 12 Enclosure

Type 12 enclosures are intended for indoor use primarily to provide a degree of protection against circulating dust, falling dirt and dripping noncorrosive liquids.

Type 13 Enclosure

Type 13 enclosures are intended for indoor use primarily to provide a degree of protection against dust, spraying of water, oil and noncorrosive coolant.

Definitions Pertaining to Nonhazardous Locations | Outdoor Use

Type 3 Enclosure

Type 3 enclosures are intended for outdoor use primarily to provide a degree of protection against rain, sleet, windblown dust and damage from external ice formation.

Type 3R Enclosure

Type 3R enclosures are intended for outdoor use primarily to provide a degree of protection against rain, sleet and damage from external ice formation.

Type 4 Enclosure

Type 4 enclosures are intended for indoor or outdoor use primarily to provide a degree of protection against windblown dust and rain, splashing water, hose-directed water and damage from external ice formation.

Type 4X Enclosure

Type 4X enclosures are intended for indoor or outdoor use primarily to provide a degree of protection against corrosion, windblown dust and rain, splashing water, hose-directed water and damage from external ice formation.

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.



| | | | | | |
|----------------------|----|---------------------|----|-----------------------|----|
| 6003..... | 38 | K4722 | 24 | U1797-O-K2L-K3L | 11 |
| 6116..... | 38 | K4729 | 24 | U3328-RXL..... | 8 |
| 363010-CT3R..... | 22 | K4797 | 24 | U4363-R..... | 11 |
| 363016-CT3R..... | 22 | K4798 | 24 | U4505-X..... | 11 |
| 363610-CT3R..... | 22 | K4974 | 36 | U4540-XL..... | 30 |
| 363612-CT3R..... | 22 | K4977-EXT..... | 39 | U4542-XL..... | 30 |
| 363616-CT3R..... | 22 | K4977-INT..... | 39 | U4544-XL..... | 30 |
| 483616-CT3R..... | 22 | K5022-INT..... | 39 | U4546-XL..... | 30 |
| 484812-CT3R..... | 22 | K5815 | 38 | U4548-RXL..... | 30 |
| 5T8K2..... | 39 | K5820 | 38 | U4549-RXL..... | 30 |
| 606013-CT3R..... | 22 | K5830 | 38 | U5000-XL..... | 28 |
| A7514..... | 37 | K5T..... | 39 | U5000-XL-41..... | 28 |
| A7515..... | 37 | K8180 | 38 | U5000-XL-55..... | 28 |
| A7516..... | 37 | M5-144 | 36 | U5000-XL-75..... | 28 |
| A7517..... | 37 | MR-2..... | 38 | U5100-XL..... | 28 |
| A7518..... | 37 | MR2-SS..... | 38 | U5100-XL-41..... | 28 |
| A7551..... | 37 | MR-4..... | 38 | U5100-XL-55..... | 28 |
| A8110..... | 37 | NU8980-O..... | 26 | U5100-XL-75..... | 28 |
| A8111..... | 37 | NU8980-O-2002..... | 26 | U5136-O-100S..... | 27 |
| A8112..... | 37 | NU8980-O-SF100..... | 26 | U5136-O-200S..... | 27 |
| A9064..... | 37 | PT48AL..... | 22 | U5137-O-200S..... | 27 |
| AP2300-03..... | 4 | PT48AR..... | 22 | U5168-XTL-100..... | 13 |
| AP2300-03-5T..... | 4 | PT48L..... | 22 | U5168-XTL-200..... | 13 |
| AP2300-03-5T-AB..... | 4 | PT48R..... | 22 | U5169-XTL-100..... | 13 |
| AP2300-03-6T..... | 4 | S1787-4X..... | 31 | U5169-XTL-200..... | 13 |
| AP2300-04..... | 4 | S1890-XT..... | 25 | U5200-XL..... | 29 |
| AP2300-07..... | 4 | S1891-XT..... | 25 | U5200-XL-41..... | 29 |
| AP2300-08..... | 4 | S1910-YL..... | 8 | U5200-XL-55..... | 29 |
| CP-21..... | 38 | S2417-DL..... | 8 | U5200-XL-75..... | 29 |
| CT244811-HC..... | 24 | S2417-RL..... | 8 | U5220-XL..... | 29 |
| CT244811-SC..... | 24 | S2674-XT..... | 25 | U5220-XL-41..... | 29 |
| CT304811-HC..... | 24 | S2690-XT..... | 25 | U5220-XL-55..... | 29 |
| CT304811-SC..... | 24 | S3831-XT..... | 25 | U5220-XL-75..... | 29 |
| CT364811-HC..... | 24 | S3912-XT..... | 25 | U5300-O..... | 29 |
| CT364811-SC..... | 24 | S4275-DL..... | 8 | U5300-O-41..... | 29 |
| K1190..... | 39 | S4339-RL..... | 8 | U5300-O-55..... | 29 |
| K1350..... | 38 | S8324..... | 37 | U5300-O-75..... | 29 |
| K1350L..... | 38 | S8333-6X..... | 31 | U5320-O..... | 29 |
| K1539..... | 38 | TS04-0101..... | 21 | U5320-O-41..... | 29 |
| K1540..... | 38 | TS04-0104..... | 21 | U5320-O-55..... | 29 |
| K1540L..... | 38 | TS07-0049..... | 21 | U5320-O-75..... | 29 |
| K1541..... | 38 | TS07-0105..... | 21 | U5764-X-200-CB..... | 15 |
| K3082..... | 38 | TS07-0106..... | 21 | U5765-X-200-CB..... | 15 |
| K3083..... | 38 | TS10-0016..... | 21 | U5767-X-200-CB..... | 15 |
| K3441..... | 38 | TS10-0109..... | 21 | U5784-O-200-CB..... | 15 |
| K3442..... | 38 | TS10-0110..... | 21 | U5787-O-200-CB..... | 15 |
| K3865..... | 39 | TS10-0111..... | 21 | U5796-X-400-CB..... | 15 |
| K3866..... | 39 | TS10-0112..... | 21 | U5797-O-400-CB..... | 15 |




Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.

| | | | | | |
|---------------------|----|---------------------|----|--------------------|----|
| U5799-O-400-CB..... | 15 | U5929-XL..... | 5 | U9701-RXL..... | 9 |
| U5842-PXL-200..... | 12 | U5934-XL..... | 5 | UAP5024-XL..... | 13 |
| U5842-RL..... | 12 | U7017-DL-TG..... | 7 | UC1299-RL..... | 18 |
| U5842-RL-100..... | 12 | U7017-RL-TG..... | 7 | UC1300-XL..... | 18 |
| U5844-PXL-200..... | 12 | U7017-RL-TG-5T..... | 7 | UC5087-RL..... | 19 |
| U5852-RL..... | 12 | U7018-XL-TG..... | 7 | UC5732-XL..... | 18 |
| U5852-RL-100..... | 12 | U7021-DL-TG..... | 6 | UC7235-RL..... | 18 |
| U5852-RL-200..... | 12 | U7021-RL-TG..... | 6 | UC7237-RL..... | 18 |
| U5854-RL-200..... | 12 | U7021-RL-TG-5T..... | 6 | UC7444-RL..... | 19 |
| U5882-X..... | 17 | U7040-RL-TG..... | 6 | UC7445-RL..... | 19 |
| U5883-X..... | 17 | U7420-RL..... | 9 | UC7448-RL..... | 19 |
| U5884-X..... | 17 | U7421-RL..... | 9 | UC7449-RL..... | 19 |
| U5885-X..... | 17 | U7422-RXL..... | 9 | UC7478-RL..... | 19 |
| U5886-X..... | 17 | U7423-RXL..... | 9 | UC7532-RL..... | 19 |
| U5890-X-2/200..... | 14 | U7487-RL-TG..... | 5 | UC7544-XL..... | 18 |
| U5891-X-2/200..... | 14 | U7487-RL-TG-5T..... | 5 | UC7545-XL..... | 18 |
| U5892-X-2/200..... | 14 | U7490-YL-TG..... | 5 | UCSS3433-O..... | 10 |
| U5893-X-2/200..... | 14 | U7490-YL-TG-5T..... | 5 | UCSS3436-O..... | 10 |
| U5894-X-2/200..... | 14 | U8212-RL..... | 16 | UCSS3438-O..... | 10 |
| U5895-X-2/200..... | 14 | U8213-RL..... | 16 | USS3914-O..... | 10 |
| U5902-X..... | 17 | U8214-RL..... | 16 | USS4701-O..... | 10 |
| U5903-X..... | 17 | U8215-RL..... | 16 | USS4801-O..... | 10 |
| U5904-X..... | 17 | U8216-XL..... | 16 | USS4801-O-5T9..... | 10 |
| U5905-X..... | 17 | U8436-O..... | 26 | | |
| U5906-X..... | 17 | U9700-RRL..... | 9 | | |


Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.




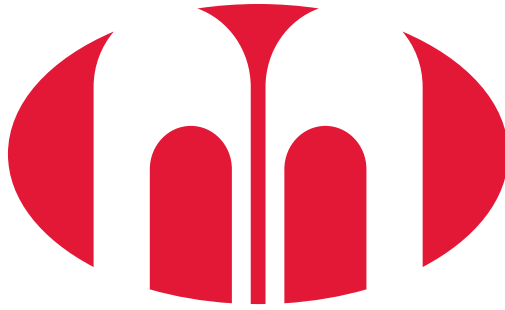

MILBANK[®]

ENERGY AT WORK

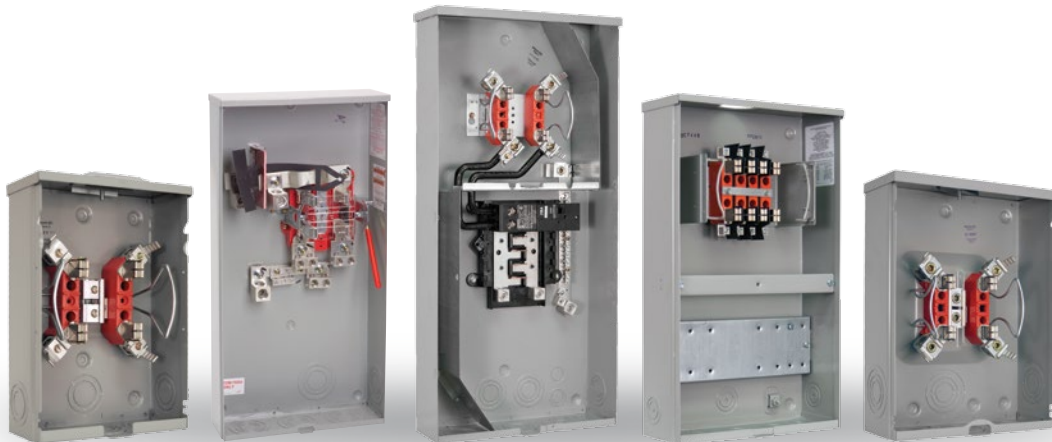

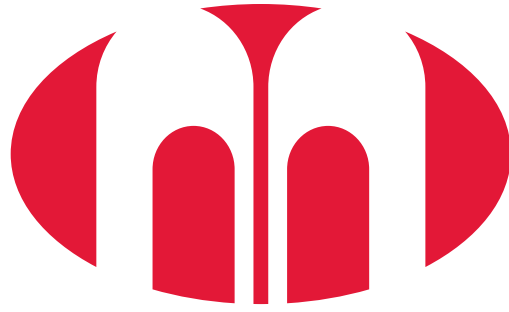


MILBANK[®]
ENERGY AT WORK



International Catalog

Metering Equipment

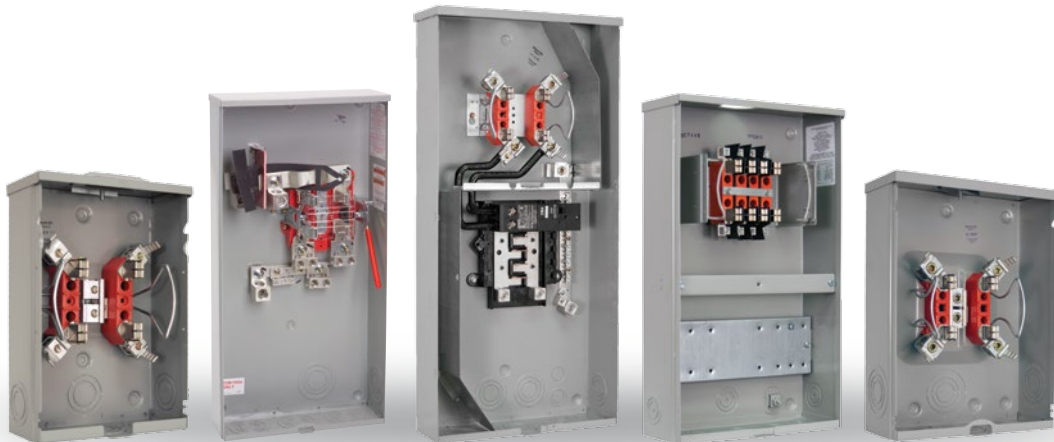

About Milbank

Energy at work since 1927

Milbank provides the tools that empower life. We enable the amazing in countless everyday ways through our thoughtfully designed products and collaborative ingenuity. More than a manufacturing company, we are an active and engaged contributor in the movement of energy. We are energy at work.

Milbank designs and builds solutions that move power for the residential, commercial, industrial, utility and transportation sectors. Milbank combines more than 85 years of expertise in electrical engineering and production with a commitment to develop and implement sustainable, integrated power solutions. A third-generation, family-owned business, Milbank is headquartered in Kansas City, Mo. For more information, please visit www.milbankworks.com.



METERING

Milbank meter sockets have set the standard for quality since 1927. With a 99.97% quality performance, thousands of active products to meet your utility's requirements and tens of millions of sockets installed across the globe, our products help keep energy at work. And with 22 stocking locations across the U.S., and our OneSERT program to help during emergency situations, our meter sockets are ready to go, wherever the job may be.



ENCLOSURES & ENCLOSED CONTROLS

When it comes to enclosures and enclosed control products, Milbank has it covered! We offer a complete line of junction boxes, telephone cabinet covers, transformer cabinets, wireways, pushbutton enclosures, consoles and thermal management products. We specialize in custom-built enclosures and are more than happy to design a solution for your specific project. Our commercial pedestals are easy to install, fast, safe and secure, and completely customizable.



GENERATORS & ENERGY MANAGEMENT

Milbank's standby and portable generators give you the peace of mind of living life uninterrupted during increasingly frequent power outages caused by severe weather, high demand and other situations. Our energy management systems give you reliable and sustainable ways to reduce both your energy costs and your impact on the environment.



Table of Contents

See back of catalog for index by catalog number

Single Position Meter Sockets

| | |
|---|-----|
| Economy socket, 4–6 terminals, ring type | 4 |
| 100–125 amps, 4 & 5 terminals, ringless & ring type | 5 |
| 200 amps, 4 & 5 terminals, ringless & ring type | 6–7 |
| 100–200 amps, 7 terminals, ringless & ring type | 8 |
| 200 amps, 7 terminals, ringless..... | 9 |
| Stainless steel meter sockets | 10 |
| 320 amps, 4 & 5 terminals, lever bypass, ringless | 11 |

Meter Mains

| | |
|---|----|
| 100–200 amps, 4 terminals, ringless..... | 12 |
| 100–200 amps, with load center, 4 terminals, ringless & ring type | 13 |
| 320 amps, 4 terminals, lever bypass, ringless..... | 14 |
| Cold squence, 4–7 terminals, ringless..... | 15 |

Multi-Position

| | |
|--|----|
| 100 amps, 5 terminals, ringless..... | 16 |
| Meter mains, 125 & 200 amps, 4 terminals, ringless | 17 |

Transformer Rated, Test Switches, Transformer Cabinets & Transockets

| | |
|---|-------|
| 20 amps, 6–15 terminals, ringless & ring type | 18–19 |
| Test switches | 20–22 |
| Transformer cabinets | 23–24 |
| 600 amp transockets, 6–14 terminals, ringless | 25 |

Pedestals

| | |
|---|----|
| 100–200 amps, meter main pedestals, 4 terminals, ringless..... | 26 |
| 100–200 amps, meter main with load center pedestals, 4 terminals, ringless..... | 27 |

Power Outlets/RV Power

| | |
|----------------------------------|----|
| Surface mount power outlets..... | 28 |
| Power outlet pedestals..... | 29 |

Miscellaneous

| | |
|---|-------|
| Terminal boxes | 30–31 |
| Commercial meter pedestals | 32–33 |
| Generators..... | 34 |
| Electric vehicle supply equipment | 35 |
| Accessories | 36–39 |
| Reference information | 40–43 |




4

ECONOMY
SOCKET

Economy Socket

4–6 Terminals | 100 Amps | Ring Type

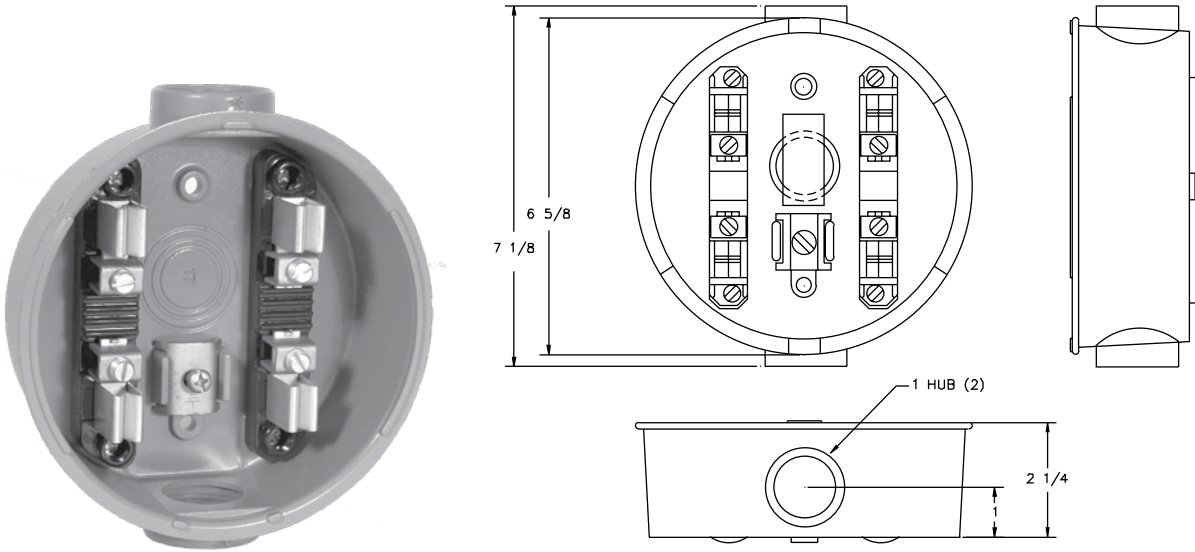

30-100 Amps | 4, 5 & 6 Terminals | Economy Cast Socket | Ring Type

| Catalog Number | Terminals | Hub Location | Hub Size | Connectors CU/AL | Quantity per Package | Knockouts |
|-----------------|-----------|--------------|----------|------------------|----------------------|-----------|
| AP2300-03 | 4 | Top & Bottom | (2) 1" | #12-#1 | 12 | ¾", 1" |
| AP2300-04 | 4 | Top & Bottom | (2) 1¼" | #12-#1 | 12 | ¾", 1" |
| AP2300-07 | 4 | Top | 1" | #12-#1 | 12 | ¾", 1" |
| AP2300-08 | 4 | Top | 1¼" | #12-#1 | 12 | ¾", 1" |
| AP2300-03-5T | 5 | Top & Bottom | (2) 1" | #12-#1 | 12 | ¾", 1" |
| AP2300-03-5T-AB | 5 | Top & Bottom | (2) 1" | #12-#1 | 12 | ¾", 1" |
| AP2300-03-6T | 6 | Top & Bottom | (2) 1" | #12-#1 | 12 | ¾", 1" |

Notes

- **Non-UL Listed:** These units are not UL tested.
- **Fifth Terminal:** AP2300-03-5T and AP2300-03-5T-AB include factory-installed fifth terminal
- **Sixth Terminal:** AP2300-03-6T includes factory-installed sixth terminal.
- **Auto-Bypass:** -AB suffix indicates installed auto-bypass feature. Consult factory for more details.
- **Sealing Rings:** These units are supplied with an **MR-2** snap action sealing ring as standard.




Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.

Single Position Sockets


100–125 Amps | Ringless & Ring Type | 600 VAC

5


100-125 AMP
SINGLE
POSITION
SOCKETS



U7487-RL-TG



U5934-XL

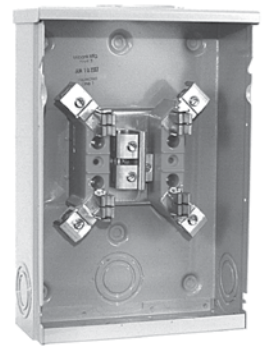

U7490-RL-TG

4 & 5 Terminals | Single Position | Ringless

| Catalog Number | Amps | Terminals | Hub | Connectors CU/AL | | Bypass | Dimensions | | | Knockouts | | | |
|-----------------------|------|-----------|------|------------------|---------|--------|--------------------------------|----|--------------------------------|-----------|-------------------------------|-------------------------------|-------------------------------|
| | | | | Line | Load | | D" | W" | H" | 1 | 2 | 3 | 4 |
| U7487-RL-TG | 125 | 4 | H.O. | #6-2/0 | #6-2/0 | None | 3 ⁵ / ₁₆ | 8 | 11 ¹ / ₂ | 2 | 1 ¹ / ₂ | 1 ¹ / ₄ | 1 ¹ / ₄ |
| U5934-XL | 100 | 4 | C.P. | #6-2/0 | #6-2/0 | None | 3 ⁵ / ₁₆ | 8 | 11 ¹ / ₂ | 2 | 1 ¹ / ₂ | 1 ¹ / ₄ | 1 ¹ / ₄ |
| U7487-RL-TG-5T | 125 | 5 | H.O. | #12-1/0 | #12-1/0 | None | 3 ⁵ / ₁₆ | 8 | 11 ¹ / ₂ | 2 | 1 ¹ / ₂ | 1 ¹ / ₄ | 1 ¹ / ₄ |

4 & 5 Terminals | Single Position | Ring Type

| Catalog Number | Amps | Terminals | Hub | Connectors CU/AL | | Bypass | Dimensions | | | Knockouts | | | |
|-----------------------|------|-----------|---------------------------------|------------------|---------|--------|--------------------------------|----|--------------------------------|-----------|-------------------------------|-------------------------------|-------------------------------|
| | | | | Line | Load | | D" | W" | H" | 1 | 2 | 3 | 4 |
| U7490-YL-TG | 125 | 4 | 1 ¹ / ₄ " | #6-2/0 | #6-2/0 | None | 3 ⁵ / ₁₆ | 8 | 11 ¹ / ₂ | 2 | 1 ¹ / ₂ | 1 ¹ / ₄ | 1 ¹ / ₄ |
| U5929-XL | 100 | 4 | C.P. | #6-2/0 | #6-2/0 | None | 3 ⁵ / ₁₆ | 8 | 11 ¹ / ₂ | 2 | 1 ¹ / ₂ | 1 ¹ / ₄ | 1 ¹ / ₄ |
| U7490-YL-TG-5T | 125 | 5 | 1 ¹ / ₄ " | #12-1/0 | #12-1/0 | None | 3 ⁵ / ₁₆ | 8 | 11 ¹ / ₂ | 2 | 1 ¹ / ₂ | 1 ¹ / ₄ | 1 ¹ / ₄ |

Notes

- **Aluminum:** These units are also available in aluminum. Consult factory for more details.
- **Fifth Terminal:** For field mounted fifth terminal on the **U7487 & U7490** order catalog number **5T8K2** to fit into round opening at the 9 o'clock position. For factory-installed fifth terminal, add **-5T** to the catalog number.
- **Hubs:** For proper hub selection see the hub suffix chart on the accessory page.
- **Connectors:** Extruded aluminum connectors are tin plated.
- **Sealing Rings:** The **U7490** unit is supplied with an **MR-2** snap action sealing ring as standard.
- **Horn Bypass:** Horn bypass is available—contact factory for details.
- **Isolated Neutral:** **U5929** and **U5934** include isolated neutral option, ideal for solar applications.

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.



6


200 AMP
SINGLE
POSITION
SOCKETS

Single Position Sockets


200 Amps | 4 & 5 Terminals | Ringless | 600 VAC



U7021-RL-TG



U7040-RL-TG



200 Amps | 4 & 5 Terminals | Single Position | Ringless

| Catalog Number | Terminals | Hub | Connectors CU/AL | | Dimensions | | | Knockouts | | |
|----------------|-----------|------|------------------|--------|------------|----|-----|-----------|------|---|
| | | | Line | Load | D" | W" | H" | 1 | 2 | 3 |
| U7021-RL-TG | 4 | H.O. | #6-350 | #6-350 | 4½ | 8 | 15½ | 2½ | ¼, ½ | ¼ |
| U7021-DL-TG | 4 | 2" | #6-350 | #6-350 | 4½ | 8 | 15½ | 2½ | ¼, ½ | ¼ |
| U7040-RL-TG | 4 | H.O. | #6-350 | #6-350 | 4½ | 11 | 14¾ | 2½ | ¼, ½ | ¼ |
| U7021-RL-TG-5T | 5 | H.O. | #6-350 | #6-350 | 4½ | 8 | 15½ | 2½ | ¼, ½ | ¼ |

Notes

- **Other Options:** These units are also available in aluminum and horn bypass. Consult factory for more details.
- **Fifth Terminal:** For field mounted fifth terminal, order catalog number **K5T** to fit into square opening at the 9 o'clock position. For factory-installed fifth terminal, add suffix **-5T** to catalog number.
- **Triplex Ground (-TG):** Factory installed.
- **Connectors:** Extruded aluminum connectors are tin plated.




Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.

Single Position Sockets


200 Amps | 4 & 5 Terminals | Ring Type | 600 VAC

7
200 AMP
SINGLE
POSITION
SOCKETS



7017

U7017-RL-TG

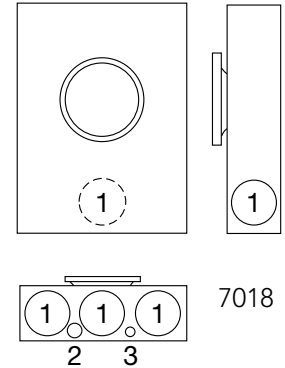

7018

U7018-XL-TG

200 Amps | 4 & 5 Terminals | Single Position | Ring Type

| Catalog Number | Terminals | Hub | Connectors CU/AL | | Dimensions | | | Knockouts | | |
|----------------|-----------|------|------------------|--------|------------------|------------------|------------------|-----------------|---------------------------------|---------------|
| | | | Line | Load | D" | W" | H" | 1 | 2 | 3 |
| U7017-RL-TG | 4 | H.O. | #6-350 | #6-350 | 4 $\frac{1}{8}$ | 8 | 15 $\frac{1}{2}$ | 2 $\frac{1}{2}$ | 1 $\frac{1}{4}$, $\frac{1}{2}$ | $\frac{1}{4}$ |
| U7017-DL-TG | 4 | 2" | #6-350 | #6-350 | 4 $\frac{1}{8}$ | 8 | 15 $\frac{1}{2}$ | 2 $\frac{1}{2}$ | 1 $\frac{1}{4}$, $\frac{1}{2}$ | $\frac{1}{4}$ |
| U7018-XL-TG | 4 | C.P. | #6-350 | #6-350 | 4 $\frac{3}{16}$ | 11 $\frac{1}{8}$ | 15 $\frac{1}{2}$ | 2 $\frac{1}{2}$ | 1 $\frac{1}{4}$, $\frac{1}{2}$ | $\frac{1}{4}$ |
| U7017-RL-TG-5T | 5 | H.O. | #6-350 | #6-350 | 4 $\frac{1}{8}$ | 8 | 15 $\frac{1}{2}$ | 2 $\frac{1}{2}$ | 1 $\frac{1}{4}$, $\frac{1}{2}$ | $\frac{1}{4}$ |

Notes

- **Other Options:** These units are also available in aluminum and horn bypass. Consult factory for more details.
- **Fifth Terminal:** For field mounted fifth terminal, order catalog number **K5T** to fit into square opening at the 9 o'clock position.
- **Triplex Ground (-TG):** Factory installed.
- **Connectors:** Extruded aluminum connectors are tin plated.
- **Sealing Rings:** Units on this page are supplied with an **MR-2** snap action sealing ring as standard.

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.




8



100-200 AMP
SINGLE
POSITION
SOCKETS

Single Position Sockets


100-200 Amps | 7 Terminals | Ringless | 600 VAC

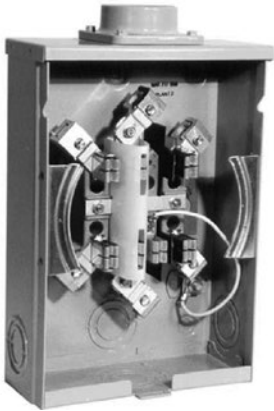


S1910-YL

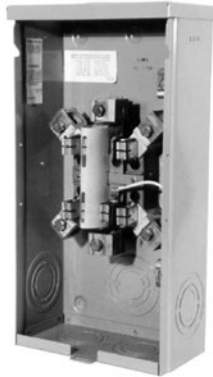


S2417-RL



S4339-RL



U3328-RXL



7 Terminals | Single Position | Ringless

| Catalog Number | Amps | Hub | Connectors CU/AL | | Bypass | Dimensions | | | Knockouts | | |
|----------------|------|--------|------------------|--------|--------|------------|----|--------|-----------|-------|-----|
| | | | Line | Load | | D" | W" | H" | 1 | 2 | 3 |
| S1910-YL | 100 | 1 1/4" | #6-2/0 | #6-2/0 | None | 3 5/16 | 8 | 11 1/2 | 2 | 1 1/2 | 1/4 |
| S2417-RL | 200 | H.O. | #6-350 | #6-350 | None | 3 5/16 | 8 | 11 1/2 | 2 | 1 1/2 | 1/4 |
| S2417-DL | 200 | 2" | #6-350 | #6-350 | None | 3 5/16 | 8 | 11 1/2 | 2 | 1 1/2 | 1/4 |

7 Terminals | Single Position | Ring Type

| Catalog Number | Amps | Hub | Connectors CU/AL | | Bypass | Dimensions | | | Knockouts | | | |
|----------------|------|------|------------------|--------|--------|------------|----|--------|-----------|----------|----------|-----|
| | | | Line | Load | | D" | W" | H" | 1 | 2 | 3 | 4 |
| S4339-RL | 100 | H.O. | #6-2/0 | #6-2/0 | None | 3 5/16 | 8 | 11 1/2 | 2 | 1 1/2 | 1/4 | — |
| S4275-DL | 200 | 2" | #6-350 | #6-350 | None | 4 1/8 | 8 | 15 1/2 | 2 1/2 | 1/4, 1/2 | 1/4 | — |
| U3328-RXL | 200 | C.P. | #6-350 | #6-350 | None | 4 7/8 | 13 | 19 | 3 | 2 1/2 | 1/4, 1/2 | 1/4 |

Notes

- **U3328-RXL:** For isolated neutral, order **K1047**.
- **Sealing Rings:** Ring type units are supplied with an **MR-2** snap action sealing ring as standard.
- **Aluminum Option:** Products on this page are available in aluminum shell construction. Contact Milbank for details.





Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.


Single Position Sockets

200 Amps | 7 Terminals | Ringless | 600 VAC

9
200 AMP
SINGLE
POSITION
SOCKETS

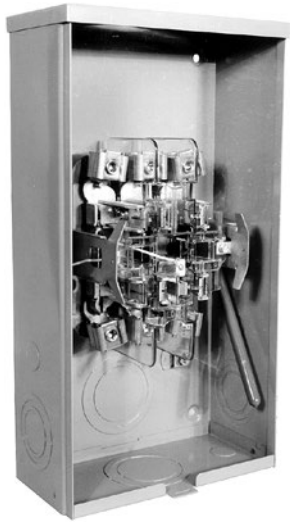

U7421-RL



U9700-RRL

200 Amps | 7 Terminals | Single Position | Ringless

| Catalog Number | Hub | Connectors CU/AL | | Bypass | Dimensions | | | Knockouts | | | |
|----------------|------|------------------|--------|--------------------|-------------------------------|----|--------------------------------|-----------|-------------------------------|---|---|
| | | Line | Load | | D" | W" | H" | 1 | 2 | 3 | 4 |
| U7420-RL | H.O. | #6-350 | #6-350 | None ¹ | 4 ⁷ / ₈ | 10 | 18 ¹ / ₂ | 3 | 2 ¹ / ₂ | ³ / ₄ | ¹ / ₄ , ¹ / ₂ |
| U7421-RL | H.O. | #6-350 | #6-350 | Lever ² | 4 ⁷ / ₈ | 10 | 18 ¹ / ₂ | 3 | 2 ¹ / ₂ | ³ / ₄ | ¹ / ₄ , ¹ / ₂ |
| U7422-RXL† | C.P. | #6-350 | #6-350 | None ¹ | 4 ⁷ / ₈ | 13 | 19 | 3 | 2 ¹ / ₂ | ¹ / ₄ , ¹ / ₂ | ¹ / ₄ |
| U7423-RXL† | C.P. | #6-350 | #6-350 | Lever ² | 4 ⁷ / ₈ | 13 | 19 | 3 | 2 ¹ / ₂ | ¹ / ₄ , ¹ / ₂ | ¹ / ₄ |
| U9700-RRL† | H.O. | #6-350 | #6-350 | Lever ³ | 4 ⁷ / ₈ | 10 | 18 ¹ / ₂ | 3 | 2 ¹ / ₂ | ³ / ₄ | ¹ / ₄ , ¹ / ₂ |
| U9701-RXL† | C.P. | #6-350 | #6-350 | Lever ³ | 4 ⁷ / ₈ | 13 | 19 | 3 | 2 ¹ / ₂ | ¹ / ₄ , ¹ / ₂ | ¹ / ₄ |

Notes

†These units have a large hub opening with reducer plate to small hub opening.

- **Bypass:** ¹ Medium duty, no bypass. ² Medium duty lever bypass, non jaw-clamping. ³ Lever supplies clamping action on meter spades and also operates bypass device.
- **Aluminum Option:** Products on this page are available in aluminum.
- **4 & 5 Terminal Option:** These units are also available in 4 & 5 terminals.

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.




Stainless Steel Products

Build to endure extreme environments



USS4701-O

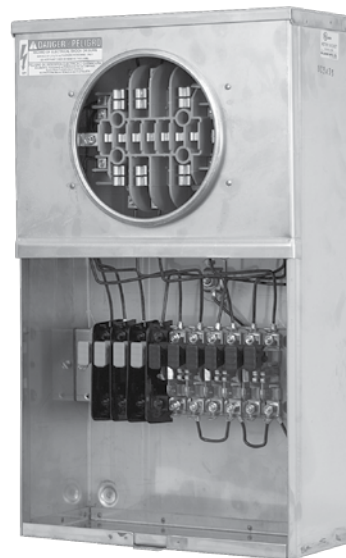

UCSS3433-O

200 Amps | Single Position | Stainless Steel | Ringless

| Catalog Number | Terminals | Hub | Connectors CU/AL | | Bypass | Dimensions | | |
|----------------|-----------|-------|------------------|--------|--------|-----------------|----|----|
| | | | Line | Load | | D" | W" | H" |
| USS3914-O | 4 | Blank | #6-350 | #6-350 | None | 4 $\frac{7}{8}$ | 13 | 19 |
| USS4801-O | 4 | Blank | #6-350 | #6-350 | Lever | 4 $\frac{7}{8}$ | 13 | 19 |
| USS4801-O-5T9 | 5 | Blank | #6-350 | #6-350 | Lever | 4 $\frac{7}{8}$ | 13 | 19 |
| USS4701-O | 7 | Blank | #6-350 | #6-350 | Lever | 4 $\frac{7}{8}$ | 13 | 19 |

Transformer Rated | With Provisions for Test Switch | Stainless Steel | Ring Type

| Catalog Number | Terminals | Hub | Connectors CU | Bypass | Dimensions | | |
|----------------|-----------|-------|---------------|--------------|-----------------|----|----|
| | | | | | D" | W" | H" |
| UCSS3436-O | 6 | Blank | #14 - 2 | Test Switch* | 5 $\frac{1}{2}$ | 12 | 20 |
| UCSS3438-O | 8 | Blank | #14 - 2 | Test Switch* | 5 $\frac{1}{2}$ | 12 | 20 |
| UCSS3433-O | 13 | Blank | #14 - 2 | Test Switch* | 5 $\frac{1}{2}$ | 12 | 20 |

Notes

- **Conduit Opening Applications:** All conduit openings have dimples provided to center location. Top conduit opening must have water-tight hub installed.
- ***Test Switch:** Test switch provisions. Test switch and wiring not included.
- **Contact Milbank for other units available in stainless steel.**



Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.


Single Position Lever Bypass

320 Amp | 4 & 5 Terminal | Ringless | 600 VAC

1 1
320 AMP
SINGLE
POSITION
LEVER BYPASS



U4363-R

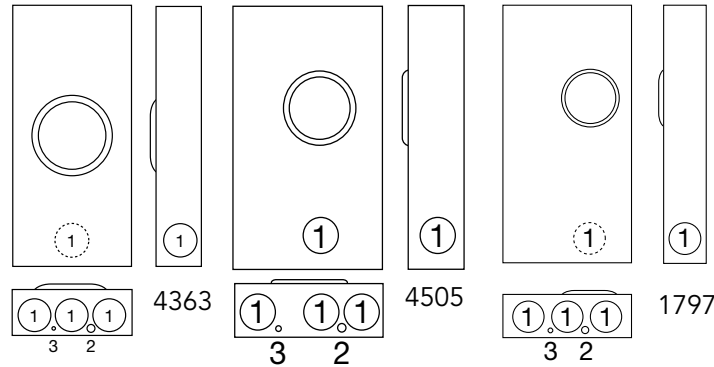

U1797-O-K2L-K3L

320 Amps | 4 & 5 Terminals | Single Position | Ringless

| Catalog Number | Terminals | Hub | Connectors CU/AL | | Bypass | Dimensions | | | Knockouts | | |
|-----------------|-----------|-------|------------------------------|----------------|--------|------------|----|--------|-----------|----------|-----|
| | | | Line | Load | | D" | W" | H" | 1 | 2 | 3 |
| U4363-R* | 4 | H.O. | 3/8" x 16 Stud | 3/8" x 16 Stud | Lever | 4 7/8 | 13 | 28 1/4 | 3 | 1/4, 1/2 | 1/4 |
| U1797-O-K2L-K3L | 4 | Blank | (1) #4-600 or (2) 1/0-250 | Twin #6-350 | Lever | 4 7/8 | 13 | 28 1/4 | 3 | 1/4, 1/2 | 1/4 |
| U4505-X | 5 | C.P. | 3/8" x 16 Stud | 3/8" x 16 Stud | Lever | 4 7/8 | 15 | 28 1/4 | 3 | 1/4, 1/2 | 1/4 |

Notes

- ***UL Listing:** This product is UL listed for parallel 250 conductors only. Use **K1450** with (2) 250 conductors.
- **Hubs:** For proper hub selection, refer to the hub suffix chart on the accessories page.
- **Connectors:** **U1797** includes lugs. **U4363** and **U4505** are supplied with 3/8"-16 hex head nuts with Belleville washers. For connector lug kits, order as extra from chart on accessories page. Separate lug kits are required for line and load.
- **Bypass:** Lever supplies clamping action on meter spades and also operates bypass device.
- **Fifth Terminal:** For field-installed fifth terminal for **U4363** and **U1797**, order **K3865**.


Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.




100-200 Amps | 4 Terminals | Ringless | 120/240 VAC




U5842-RL-100

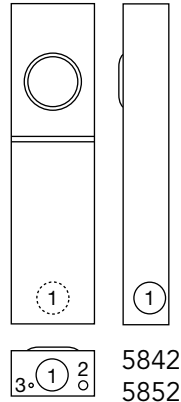

5842
5852

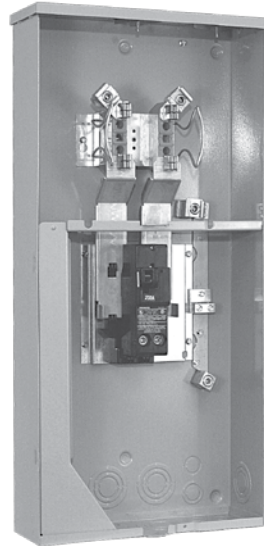

U5844-PXL-200

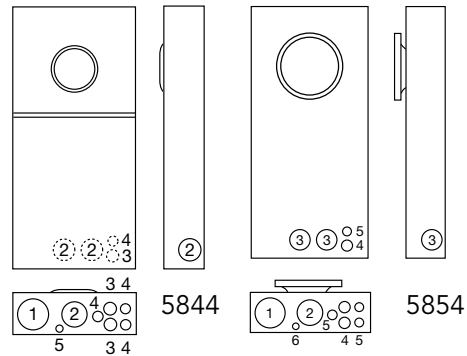

5844

5854

4 Terminals | Meter Mains | Ringless

| Catalog Number | Service | Hub | Connectors CU/AL | | Bypass | Dimensions | | | Knockouts | | | | |
|----------------|---------|------|------------------|-----------|--------|------------|----|----|-----------|------|---|------|------|
| | | | Line | Load | | D" | W" | H" | 1 | 2 | 3 | 4 | 5 |
| U5842-RL | OH | H.O. | #6-350 | —† | None | 4½ | 8 | 30 | 2½ | ¼, ½ | ¼ | — | — |
| U5842-RL-100 | OH | H.O. | #6-350 | CB - 100A | None | 4½ | 8 | 30 | 2½ | ¼, ½ | ¼ | — | — |
| U5842-PXL-200 | OH | C.P. | #6-350 | CB - 200A | None | 4½ | 8 | 30 | 2½ | ¼, ½ | ¼ | — | — |
| U5844-PXL-200 | OH/UG | C.P. | #6-350 | CB - 200A | None | 4½ | 14 | 30 | 3 | 2½ | 1 | ½, ¾ | ¼, ½ |

4 Terminals | Meter Mains | Ring Type

| Catalog Number | Service | Hub | Connectors CU/AL | | Bypass | Dimensions | | | Knockouts | | | | | |
|----------------|---------|------|------------------|-----------|--------|------------|-----|----|-----------|------|---|---|------|------|
| | | | Line | Load | | D" | W" | H" | 1 | 2 | 3 | 4 | 5 | 6 |
| U5852-RL | OH | H.O. | #6-350 | —† | None | 4½ | 8 | 30 | 2½ | ¼, ½ | ¼ | — | — | — |
| U5852-RL-100 | OH | H.O. | #6-350 | CB - 100A | None | 4½ | 8 | 30 | 2½ | ¼, ½ | ¼ | — | — | — |
| U5852-RL-200 | OH | H.O. | #6-350 | CB - 200A | None | 4½ | 14 | 30 | 2½ | ¼, ½ | ¼ | — | — | — |
| U5854-RL-200 | OH/UG | H.O. | #6-350 | CB - 200A | None | 4½ | 14¼ | 30 | 3 | 2½ | 2 | 1 | ½, ¾ | ¼, ½ |

Notes

† Breaker not included

- **AIC Rating:** All models are rated 22K AIC when using Siemens **QPH** (100A) or **QNH** (200A) breakers.
- **Hub:** -PXL versions supplied with one (1) closing plate packed inside. Order other hubs separately.
- **Fifth Terminal:** For field installable fifth terminal kit, order **K5T**.



Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.




Meter Main with Load Center

100–200 Amps | 4 Terminals | 120/240 VAC

13
100–200 AMP
METER MAIN
W/ LOAD CENTER



U5168-XTL-200

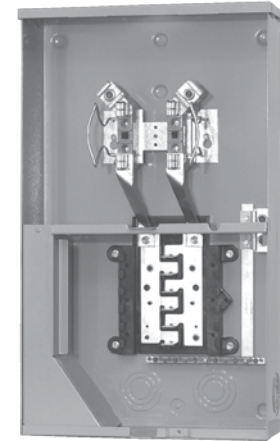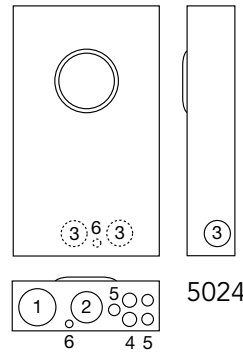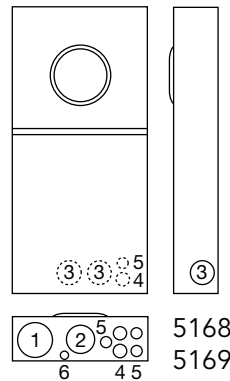

UAP5024-XL

4 Terminals | Meter Mains | Ringless

| Catalog Number | Amps | Service | Circuits | Hub | Connectors CU/AL - Line | Dimensions | | | Knockouts | | | | | |
|----------------|------|---------|----------|------|----------------------------|------------|-----|----|-----------|----|---|---|-----|-----|
| | | | | | | D" | W" | H" | 1 | 2 | 3 | 4 | 5 | 6 |
| U5168-XTL-100 | 100 | OH/UG | 10 | C.P. | #6-350 | 4½ | 14⅞ | 30 | 3 | 2½ | 2 | 1 | ½,¾ | ¼,½ |
| U5168-XTL-200 | 200 | OH/UG | 8 | C.P. | #6-350 | 4½ | 14⅞ | 30 | 3 | 2½ | 2 | 1 | ½,¾ | ¼,½ |
| UAP5024-XL | 200 | OH/UG | 12 | C.P. | #6-350 | 4½ | 14⅞ | 24 | 3 | 2½ | 2 | 1 | ½,¾ | ¼,½ |

4 Terminals | Meter Mains | Ring Type

| Catalog Number | Amps | Service | Circuits | Hub | Connectors CU/AL - Line | Dimensions | | | Knockouts | | | | | |
|----------------|------|---------|----------|------|----------------------------|------------|-----|----|-----------|----|---|---|-----|-----|
| | | | | | | D" | W" | H" | 1 | 2 | 3 | 4 | 5 | 6 |
| U5169-XTL-100 | 100 | OH/UG | 10 | C.P. | #6-350 | 4½ | 14⅞ | 30 | 3 | 2½ | 2 | 1 | ½,¾ | ¼,½ |
| U5169-XTL-200 | 200 | OH/UG | 8 | C.P. | #6-350 | 4½ | 14⅞ | 30 | 3 | 2½ | 2 | 1 | ½,¾ | ¼,½ |

Notes

- **Hubs:** For proper hub selection, refer to the hub suffix chart on the accessories page.
- **Fifth Terminal:** For field installed fifth terminal, order **K5T**.
- **Interlock Kit:** For generator auxiliary circuit breaker interlock, order **K5815** for large **QN** with small frame **Q**; order **K5820** for large frame **QN** with large frame **QN**; order **K5830** for small frame **Q** to small frame **Q**. See accessories page for details.
- **UAP5024-XL:** This unit is painted aluminum. Breaker section has provision for six double pole "plug-in" type circuit breakers. All circuit breakers will be parallel. To comply with NEC wire bending space requirements, the maximum breaker amperage is 200 amps restricted to 3/0 copper conductor.

Plug-In Breaker Compatibility Chart

| Amps | Cutler Hammer | Siemens | General Electric | Square D |
|---------|---------------------------------|---------|--------------------------------|----------|
| 150-200 | BR, BRH, HQP, QPHW, QPGF, QPHGF | QP, QPH | THQL, THHQL, THQL-GF, THHQL-GF | Homeline |
| ≤ 125 | QP / BR | QP, QPH | THQ | Homeline |

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.




14

320 AMP
LEVER BYPASS
METER MAIN


Lever Bypass Meter Mains

320 Amps | 4 Terminals | Ringless | 120/240 VAC



5890
5893

U5890-X-2/200



5891
5892
5894
5895

U5894-X-2/200

320 Amps | 4 Terminals | Meter Mains | Lever Bypass | Ringless

| Catalog Number | Service | Hub | Side Wireway | Connectors CU/AL - Line | Branch Circuits | Dimensions | | | Knockouts | | | | |
|----------------|---------|------|--------------|-------------------------|-----------------|------------|-----|----|-----------|----|---|------|---|
| | | | | | | D" | W" | H" | 1 | 2 | 3 | 4 | 5 |
| U5890-X-2/200 | OH/UG | C.P. | No | 3/8" x 16 Studs | N/A | 6 | 24½ | 35 | 4 | 2½ | ¼ | — | — |
| U5891-X-2/200 | OH/UG | C.P. | No | 3/8" x 16 Studs | 12 | 6 | 29½ | 35 | 4 | 2½ | 1 | ½, ¾ | ¼ |
| U5892-X-2/200 | OH/UG | C.P. | No | 3/8" x 16 Studs | 24 | 6 | 29½ | 35 | 4 | 2½ | 1 | ½, ¾ | ¼ |
| U5893-X-2/200 | OH/UG | C.P. | Yes | 3/8" x 16 Studs | N/A | 6 | 24½ | 35 | 4 | 2½ | ¼ | — | — |
| U5894-X-2/200 | OH/UG | C.P. | Yes | 3/8" x 16 Studs | 12 | 6 | 29½ | 35 | 4 | 2½ | 1 | ½, ¾ | ¼ |
| U5895-X-2/200 | OH/UG | C.P. | Yes | 3/8" x 16 Studs | 24 | 6 | 29½ | 35 | 4 | 2½ | 1 | ½, ¾ | ¼ |

Notes

- **Hubs:** For proper hub selection refer to the hub suffix chart on the accessory page.
- **Breakers:** All units come with two 200A main breakers.
- **Side Bussed Units:** U5893, U5894 and U5895.
- **-MLK:** Main Lug feed-through kit K3701 factory installed on U5891 and U5894.
- **Fifth Terminal:** For field mounted fifth terminal order catalog number K3865.
- **Connectors:** Socket is supplied with 3/8" - 16 hex head nuts with Belleville washers. For connector lug kits, order as extra from chart on accessories page. Separate lug kits are required for line side only.

Plug-In Breaker Compatibility Chart

| Amps | Cutler Hammer | Siemens | General Electric | Square D |
|---------|---------------------------------|---------|--------------------------------|----------|
| 150-200 | BR, BRH, HQP, QPHW, QPGF, QPHGF | QP, QPH | THQL, THHQL, THQL-GF, THHQL-GF | Homeline |
| ≤ 125 | QP / BR | QP, QPH | THQ | Homeline |



Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.

Cold Sequence Meter Mains

4, 5 & 7 Terminals | Ringless


15
COLD
SEQUENCE
METER MAINS




U5767-X-200-CB




U5787-O-200-CB

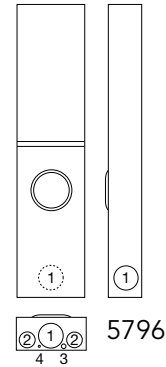


5796



5764 5767
5765



5784
5787



5797
5799

200 Amp Circuit Breaker Disconnect Ahead Of Meter Socket

| Catalog Number | Terminals | Service | Hub | Connectors CU/AL | | Bypass | Dimensions | | | Knockouts | | | |
|----------------|-----------|---------|-------|------------------|--|--------|--------------------|----|----|-----------|----|---|------|
| | | | | Line & Load | | | D" | W" | H" | 1 | 2 | 3 | 4 |
| U5764-X-200-CB | 4 | OH/UG | C.P. | #6-350 | | Lever | 4 ^{27/32} | 13 | 43 | 4 | 2½ | ¼ | — |
| U5765-X-200-CB | 5 | OH/UG | C.P. | #6-350 | | Lever | 4 ^{27/32} | 13 | 43 | 4 | 2½ | 1 | ½, ¾ |
| U5784-O-200-CB | 5 | UG | Blank | #6-350 | | Lever | 4 ^{27/32} | 26 | 28 | 4 | 2½ | ¼ | — |
| U5767-X-200-CB | 7 | OH/UG | C.P. | #6-350 | | Lever | 4 ^{27/32} | 13 | 43 | 4 | 2½ | 1 | ½, ¾ |
| U5787-O-200-CB | 7 | UG | Blank | #6-350 | | Lever | 6 | 26 | 28 | 4 | 2½ | 1 | ½, ¾ |

400 Amp (320 Amp Continuous) Circuit Breaker Disconnect Ahead Of Meter Socket

| Catalog Number | Terminals | Service | Hub | Connectors CU/AL | | Bypass | Dimensions | | | Knockouts | | | |
|----------------|-----------|---------|-------|------------------|---------|--------|------------|----|----|-----------|----|---|------|
| | | | | Line | Load | | D" | W" | H" | 1 | 2 | 3 | 4 |
| U5797-O-400-CB | 5 | UG | Blank | 3/0-500 | 3/0-500 | Lever | 6 | 26 | 36 | 4 | 2½ | 1 | ½, ¾ |
| U5796-X-400-CB | 7 | OH/UG | C.P. | 3/0-500 | 3/0-500 | Lever | 6 | 13 | 56 | 4 | 2½ | ¼ | — |
| U5799-O-400-CB | 7 | UG | Blank | 3/0-500 | 3/0-500 | Lever | 6 | 26 | 36 | 4 | 2½ | 1 | ½, ¾ |

Notes


- **Hubs:** For proper hub selection, refer to the hub suffix chart on the accessories page.

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.





Multi-Position Sockets


100 Amps | 4 Terminals | 300 VAC




U8212-RL

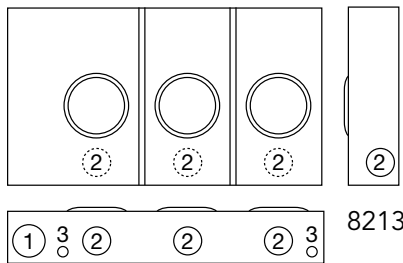


8213

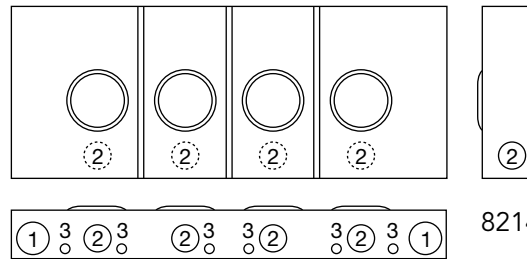

8214

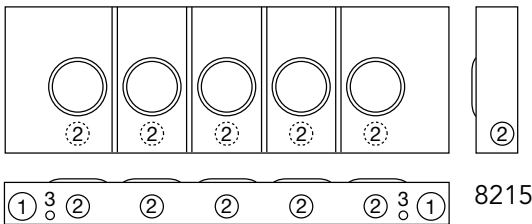

8215

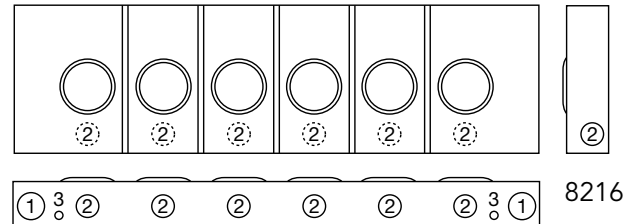

8216

100 Amps per Position | 4 Terminal | Multi-Position | Ringless

| Catalog Number | Positions | Hub | Connectors CU/AL | | Dimensions | | | Knockouts | | |
|----------------|-----------|------|------------------|--------|------------|-----|----|-----------|---|------|
| | | | Line | Load | D" | W" | H" | 1 | 2 | 3 |
| U8212-RL | 2 | H.O. | #6-350 | #6-2/0 | 4½ | 20⅝ | 16 | 2½ | 2 | ¼, ½ |
| U8213-RL | 3 | H.O. | #6-350 | #6-2/0 | 4½ | 28½ | 16 | 2½ | 2 | ¼, ½ |
| U8214-RL | 4 | H.O. | #6-350 | #6-2/0 | 4½ | 40⅞ | 16 | 2½ | 2 | ¼, ½ |
| U8215-RL | 5 | H.O. | #6-350 | #6-2/0 | 4½ | 48⅞ | 16 | 2½ | 2 | ¼, ½ |
| U8216-XL | 6 | C.P. | #6-350 | #6-2/0 | 4½ | 57⅞ | 16 | 2½ | 2 | ¼, ½ |

Notes

- **Hub:** For proper hub selection refer to the hub suffix chart on the accessory page. A hub opening is supplied at each end and the extra opening is closed with a closing plate as standard.
- **Fifth Terminal Kit:** For field mounted fifth terminal, order **5T8K2** (6 o'clock position).
- **Connectors:** Extruded aluminum connectors are tin plated.
- **200 Amp Units:** 200 amp per position units available—consult factory.



Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.

Multi-Position Meter Mains

125 & 200 Amp | 4 Terminals | Ringless | 120/240 VAC

17
125-200 AMP
MULTI-POSITION
METER MAINS



U5882-X



U5884-X

125 Amps per Position | 4 Terminal | Multi-Position Meter Mains | Ringless

| Catalog Number | Amps | Positions | Service | Hub | Connectors CU/AL | Dimensions | | | Weight (lbs.) |
|----------------|------|-----------|---------|------|------------------|------------|---------|----|---------------|
| | | | | | Line | D" | W" | H" | |
| U5902-X | 125 | 2 | OH/UG | C.P. | 3/8" x 16 Stud | 5 1/8 | 26 1/2 | 30 | 58 |
| U5903-X | 125 | 3 | OH/UG | C.P. | 3/8" x 16 Stud | 5 1/8 | 34 3/8 | 30 | 88 |
| U5904-X | 125 | 4 | OH/UG | C.P. | 3/8" x 16 Stud | 5 1/8 | 42 4/8 | 30 | 107 |
| U5905-X | 125 | 5 | OH/UG | C.P. | 3/8" x 16 Stud | 5 1/8 | 51 1/20 | 30 | 128 |
| U5906-X | 125 | 6 | OH/UG | C.P. | 3/8" x 16 Stud | 5 1/8 | 59 3/10 | 30 | 146 |

200 Amp / Position | 4 Terminal | Multi Position Meter Mains | Ringless


| Catalog Number | Amps | Positions | Service | Hub | Connectors CU/AL | Dimensions | | | Weight (lbs.) |
|----------------|------|-----------|---------|------|------------------|------------|---------|----|---------------|
| | | | | | Line | D" | W" | H" | |
| U5882-X | 200 | 2 | OH/UG | C.P. | 3/8" x 16 Stud | 5 1/8 | 26 1/2 | 30 | 58 |
| U5883-X | 200 | 3 | OH/UG | C.P. | 3/8" x 16 Stud | 5 1/8 | 34 3/8 | 30 | 88 |
| U5884-X | 200 | 4 | OH/UG | C.P. | 3/8" x 16 Stud | 5 1/8 | 42 4/8 | 30 | 107 |
| U5885-X | 200 | 5 | OH/UG | C.P. | 3/8" x 16 Stud | 5 1/8 | 51 1/20 | 30 | 128 |
| U5886-X | 200 | 6 | OH/UG | C.P. | 3/8" x 16 Stud | 5 1/8 | 59 3/10 | 30 | 146 |

Notes


- **Optional:** Factory installed breakers are available—consult factory.
- **AIC Rating:** All models are rated **22K AIC** with Siemens breakers.
- **Hub:** Units supplied with one (1) closing plate. Order hubs separately, see accessory page.
- **Fifth Terminal:** For field installed fifth terminal, order **K5T**.
- **Connectors:** Socket is supplied with 3/8" - 16 hex head nuts with Belleville washers. For connector lug kits, order as extra from chart on accessories page. Separate lug kits are required for line side only.

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.



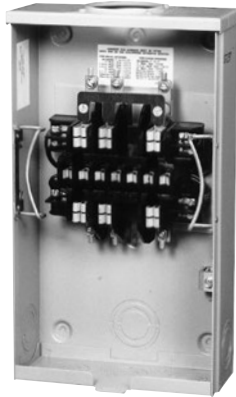

UC7237-RL

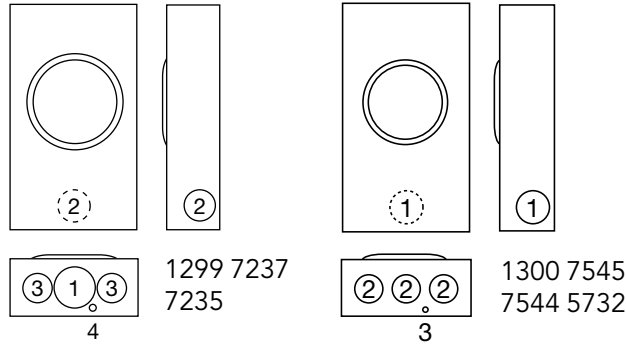

20 Amps | Ringless | Plunger Bypass | Overhead/Underground Service

| Catalog Number | Terminals | Hub | Meter Form | Connectors CU | Bypass | Dimensions | | | Knockouts | | | |
|----------------|-----------|------|----------------------|---------------|---------|--------------------------------|----|----|-----------|-------------------------------|-------------------------------|-------------------------------|
| | | | | | | D" | W" | H" | 1 | 2 | 3 | 4 |
| UC1299-RL | 6 | H.O. | 4S | #14 - #10 | Plunger | 3 ⁵ / ₁₆ | 8 | 14 | 2 | 1 ¹ / ₂ | 1 ¹ / ₄ | 1 ¹ / ₄ |
| UC7235-RL | 8 | H.O. | 5S | #14 - #10 | Plunger | 3 ⁵ / ₁₆ | 8 | 14 | 2 | 1 ¹ / ₂ | 1 ¹ / ₄ | 1 ¹ / ₄ |
| UC7237-RL | 13 | H.O. | 6, 8, 9S & (ALT) 10S | #14 - #10 | Plunger | 3 ⁵ / ₁₆ | 8 | 14 | 2 | 1 ¹ / ₂ | 1 ¹ / ₄ | 1 ¹ / ₄ |

20 Amps | Ring Type | Overhead/Underground Service

| Catalog Number | Terminals | Hub | Meter Form | Connectors CU | Bypass | Dimensions | | | Knockouts | | |
|----------------|-----------|------|----------------------|---------------|---------|--------------------------------|----|----|-------------------------------|-------------------------------|-------------------------------|
| | | | | | | D" | W" | H" | 1 | 2 | 3 |
| UC1300-XL | 6 | H.O. | 4S | #14 - #4 Max | Plunger | 3 ⁵ / ₁₆ | 8 | 14 | 1 ¹ / ₂ | 1 ¹ / ₄ | 1 ¹ / ₄ |
| UC7544-XL | 8 | H.O. | 3S | #14 - #4 Max | Plunger | 3 ⁵ / ₁₆ | 8 | 14 | 1 ¹ / ₂ | 1 ¹ / ₄ | 1 ¹ / ₄ |
| UC7545-XL | 13 | H.O. | 6, 8, 9S & (ALT) 10S | #14 - #4 Max | Plunger | 3 ⁵ / ₁₆ | 8 | 14 | 1 ¹ / ₂ | 1 ¹ / ₄ | 1 ¹ / ₄ |
| UC5732-XL | 15 | H.O. | Special | #14 - #4 Max | None | 3 ⁵ / ₁₆ | 8 | 14 | 1 ¹ / ₂ | 1 ¹ / ₄ | 1 ¹ / ₄ |

Notes

- **Hubs:** For proper hub selection, see the hub suffix chart on the accessories page.
- **Bypass:** Plunger type bypass automatically closes when meter is removed.
- **Connectors:** Units are supplied with mechanical type connectors (#4 max).




Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.

Transformer Rated

20 Amps | 6-13 Terminals | Test Switch Provision


19
20 AMP
TRANSFORMER
RATED




UC7449-XL



UC7478-YL



UC7532-RL
(shown prewired with
Milbank test switch)



- 7444
- 7445
- 7446
- 7448
- 7449
- 7478
- 7532

1 Piece Cover | Ringless | Overhead/Underground | with test switch provision*

| Catalog Number | Terminals | Hub | Meter Form | Connectors CU | Bypass | Dimensions | | | Knockouts | |
|----------------|-----------|------|---------------------|---------------|---------|-----------------|----|----|-----------------|-------------------------------|
| | | | | | | D" | W" | H" | 1 | 2 |
| UC7478-RL | 6 | H.O. | 4S | #14 - #4 Max | None | 4 $\frac{1}{8}$ | 12 | 20 | 1 $\frac{1}{4}$ | $\frac{1}{4}$, $\frac{1}{2}$ |
| UC7444-RL | 8 | H.O. | 5S | #14 - #4 Max | None | 4 $\frac{1}{8}$ | 12 | 20 | 1 $\frac{1}{4}$ | $\frac{1}{4}$, $\frac{1}{2}$ |
| UC7445-RL | 13 | H.O. | 6, 8, 9 & (ALT) 10S | #14 - #4 Max | None | 4 $\frac{1}{8}$ | 12 | 20 | 1 $\frac{1}{4}$ | $\frac{1}{4}$, $\frac{1}{2}$ |
| UC5087-RL | 13 | H.O. | 6, 8, 9 & (ALT) 10S | #14 - #4 Max | Plunger | 4 $\frac{1}{8}$ | 12 | 20 | 1 $\frac{1}{4}$ | $\frac{1}{4}$, $\frac{1}{2}$ |

2 Piece Cover | Ringless | Overhead/Underground | with test switch provision*


| Catalog Number | Terminals | Hub | Meter Form | Connectors CU | Bypass | Dimensions | | | Knockouts | |
|----------------|-----------|------|---------------------|---------------|--------|-----------------|----|----|-----------------|-------------------------------|
| | | | | | | D" | W" | H" | 1 | 2 |
| UC7532-RL | 6 | H.O. | 4S | #14 - #4 Max | None | 4 $\frac{1}{8}$ | 12 | 20 | 1 $\frac{1}{4}$ | $\frac{1}{4}$, $\frac{1}{2}$ |
| UC7448-RL | 8 | H.O. | 5S | #14 - #4 Max | None | 4 $\frac{1}{8}$ | 12 | 20 | 1 $\frac{1}{4}$ | $\frac{1}{4}$, $\frac{1}{2}$ |
| UC7449-RL | 13 | H.O. | 6, 8, 9 & (ALT) 10S | #14 - #4 Max | None | 4 $\frac{1}{8}$ | 12 | 20 | 1 $\frac{1}{4}$ | $\frac{1}{4}$, $\frac{1}{2}$ |

Notes

- **Hubs:** For proper hub selection see the hub suffix chart on the accessory page.
- **Prewiring:** If standard factory pre-wiring is required, refer to wiring diagrams in the general engineering section of this catalog. Determine appropriate diagram and send copy with order. If custom factory prewiring is required, specify on order. Be sure to include meter socket catalog number, test switch model and number, and meter form number. Please be sure to provide a copy of your wiring diagram. Catalog number will change to match wiring.
- **Connectors:** Units are supplied with mechanical type connectors (#4 max).
- ***Test Switch Cover:** Units on this page are not designed for use with test switch covers. Units are available in 5 $\frac{1}{2}$ " deep shell for test switch cover—contact factory for details. It is also possible to remove the test switch bridge and mount a test switch to the back of the enclosure.
- **Ring Type Option:** 2-piece cover units are available in ring type—contact factory for details.

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.



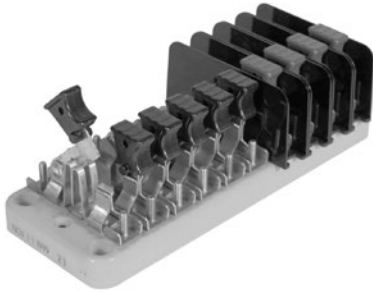

Switch Blades

Two dimples coined into one side of the switch blade ensure positive contact in corrosive, sooty environments—even after years of inactivity.

Test Switch Covers

Standard test switch covers are made from impact resistant clear thermal plastic which has excellent tracking and moisture resistant properties. If covers are required, add suffix **-WC** (with cover) to the catalog number or order separately catalog number **K3388**. Black flush mount covers are also available. Order catalog number **K3388-BLK-FL**. 10 pole base only.

Standard Cover



Test Switch Base

The base is molded from a high strength, fiberglass reinforced, thermoset polyester. This material is track resistant, flame retardant and has low water absorption qualities. Bases are available in 7 pole and 10 pole sizes.

Switch Jaws

The switch blade jaw clips are constructed from spring grade copper alloy. The material and design ensure excellent contact which prevents overheating.



Polarity Barrier

For maximum protection potential circuits are supplied with permanently mounted barriers made from high tensile strength polycarbonate.

Current Carrying Parts

Highly conductive copper and copper alloy materials are used on all current carrying parts. This ensures conductivity and deters corrosion. Spring grades are used where appropriate. Plating is available if required. Contact general offices to special order.

Flush Mount Cover (Black)



Socket shells must be 5/8" deep
-OR-
must not have test switch bridge
mounted on back
in order to support a cover.

Factory Installed: For cover installed add the suffix **-WC** or **-WCFL** to the catalog number of desired test switch.

Field Installed: For field installed cover order kit number **K3388** or **K3388-BLK-FL**.




The Milbank test switch is designed to meet the critical requirements of the electric utility industry. Not only do they meet EEI, ANSI C12.9, and UL standards but they combine several special features giving the Milbank test switch increased safety, durability and reliability. One such feature is our unique switch blade contact points which cut through residue that builds up after years of service. Another distinction is our polarity barrier which is designed to be flexible as well as offer exceptional insulating qualities. Our test switches are constructed from the latest materials available using modern fabricating and assembly methods.



Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.

Test Switches

4, 7 & 10 Pole

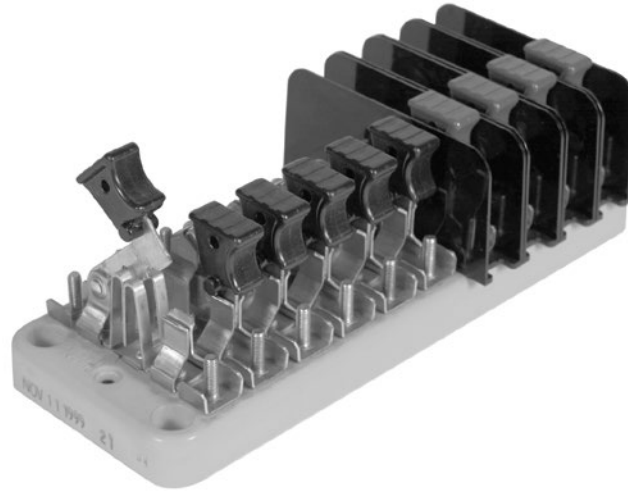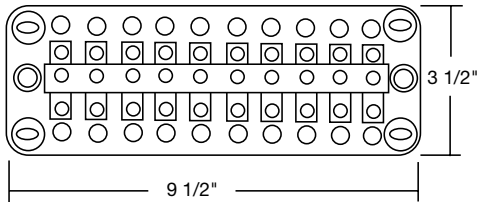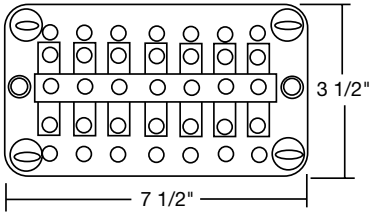

| Key | |
|-----|--|
| P | Potential Switch |
| C+ | Line side current switch with short circuit assembly |
| C | Load side current switch with test jack assembly |
| N | Neutral bar (no switch) |
| Pn | Neutral Potential Switch |
| X | Unused Position on base |
| | Insulating barrier, isolates both sides of switch |

| Catalog Number | 4-Pole | | | | | | |
|----------------|--------|----|---|---|----|----|---|
| TS04-0101 | X | P | | X | C+ | C | X |
| TS04-0104 | X | C+ | C | X | | Pn | X |

| Catalog Number | 7-Pole | | | | | | |
|----------------|--------|---|--|----|---|----|---|
| TS07-0105 | | P | | C+ | C | C+ | C |

Custom Pole Arrangements:
The key may be used to diagram your own pole arrangement. Be sure to specify base size and whether all C+ line side, current switch / shunt circuit assemblies are to be bussed together. The catalog numbers shown above are connected in line-load pairs; therefore, if bussed is required, different catalog numbers will apply.

| Catalog Number | 7-Pole on a 10-Pole Base | | | | | | | | | |
|----------------|--------------------------|---|----|---|--|----|----|---|---|----|
| TS07-0049 | | X | | X | | X | C+ | C | C | C+ |
| TS07-0106 | X | | C+ | C | | C+ | C | | X | X |

| Catalog Number | 10-Pole | | | | | | | | | |
|----------------|---------|----|----|----|----|----|----|----|----|----|
| TS10-0109 | P | | P | | C+ | C | C+ | C | C+ | C |
| TS10-0110 | | C+ | C | | C+ | C | | C+ | C | |
| TS10-0111 | P | | P | | C | C+ | C | C+ | C | C+ |
| TS10-0112 | C+ | C | C+ | C | C+ | C | | P | | Pn |
| TS10-0016 | | | | Pn | C | C+ | C | C+ | C | C+ |

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.





Customer Name: _____

Address: _____

Phone / Fax #: _____

Handle Color Key

| | | | | | | | |
|----|-------|----|--------|---|--------|-----|--------------|
| BK | Black | P | Purple | Y | Yellow | GN | Green |
| R | Red | BL | Blue | W | White | BKS | Black Stripe |
| BR | Brown | GR | Grey | O | Orange | WS | White Stripe |

TEST SWITCH BASE

The base is molded from a high strength, fiberglass reinforced, thermoset polyester. This material is track-resistant, flame-retardant and has low water absorption qualities. Bases are available in two standard sizes following NEMA mounting classifications.



Pole Position Chart

| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
|---|---|---|---|---|---|---|---|---|----|
| | | | | | | | | | |

Special Features

| Feature | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
|--------------------|---|---|---|---|---|---|---|---|---|----|
| 45° Angle Stops | | | | | | | | | | |
| Ganged Handles (C) | | | | | | | | | | |
| Bussing | | | | | | | | | | |
| Colored Handles | | | | | | | | | | |

Engineering Information: _____

| Key | |
|---|--|
| P | Potential Switch |
| C+ | Line side current switch with short circuit assembly |
| C | Load side current switch with test jack assembly |
| N | Neutral bar (no switch) |
| Pn | Neutral Potential Switch |
| X | Unused Position on base |
|  | Insulating barrier - one side |
|  | Insulating barrier - two sides |

Custom Pole Arrangements: The key may be used to diagram your own pole arrangement. Be sure to specify base size and whether all C+ line side, current switch / shunt circuit assemblies are to be bussed together. The catalog numbers shown above are connected in line-load pairs; therefore, if bussed is required, different catalog numbers will apply.

Number of Poles

- 4
- 7
- 10
- Other _____

Test Switch Cover (only available for 10-pole bases)

- Yes | Clear ____ Black ____
- No

Base Size

- 7-Pole
- 10-Pole



Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.

Current Transformer Cabinet

Panel Enclosure | Type 3R



Application

- For use as a current transformer cabinet or panel enclosure.
- For outdoor use to provide protection against rain, sleet and snow, or indoor use to protect against dripping water.

Construction

- Enclosure and cover manufactured from 16 or 14 gauge G90U galvanized steel.
- The doors are overlapping with no center post.
- Continuous door hinge with stainless steel hinge pins.
- Three point pad-lockable handle.
- Panel mounting studs provided for optional back panels.
- Drip shield top and seam-free sides, front and back.

Finish

- ANSI 61 gray polyester powder coating over phosphatized G90U galvanized steel.

PT Cabinets

| Catalog Number | Dimensions | | | Knockout |
|----------------|------------|----|-----|------------------|
| | D" | W" | H" | |
| PT48L | 8 | 8 | 27½ | 2½" - right side |
| PT48AL | 8 | 12 | 36 | 2½" - right side |
| PT48R | 8 | 8 | 27½ | 2½" - left side |
| PT48AR | 8 | 12 | 36 | 2½" - left side |



PT48AR*



S7860

Current Transformer Cabinets | Panel Enclosure

| Catalog Number | UPC # (7-84572) | Weight | Dimensions | | | Steel Panel Catalog # | Wood Panel Catalog # |
|----------------|--------------------|--------|------------|----|----|-----------------------|----------------------|
| | | | W" | H" | D" | | |
| 363010-CT3R | 18823 | 99 | 36 | 30 | 10 | A-36P30 | A-36P30W |
| 363016-CT3R | 16181 | 121.5 | 36 | 30 | 16 | A-36P30 | A-36P30W |
| 363610-CT3R | 17368 | 113 | 36 | 36 | 10 | A-36P36 | A-36P36W |
| 363612-CT3R | 16185 | 118 | 36 | 36 | 12 | A-36P36 | A-36P36W |
| 363616-CT3R | 18819 | 139 | 36 | 36 | 16 | A-36P36 | A-36P36W |
| 483616-CT3R | 25707 | 163 | 48 | 36 | 16 | A-48P36 | A-48P36W |
| 484812-CT3R | 16184 | 210 | 48 | 48 | 12 | A-48P48 | A-48P48W |
| 606013-CT3R | 18252 | 274 | 60 | 60 | 13 | A-60P60 | A-60P60W |

Notes

- ***PT48:** PT48L and PT48AL has mounting emboss on the right side to be mounted on left side of CT cabinet. PT48R and PT48AR have mounting emboss on left side to be mounted on right side of CT cabinet.
- **Wall or Pole Mount:** For wall or pole mount CT rack order **S7860**. This unit accomodates 3 donut style CTs. The removable cover makes wiring much easier.

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.






K4797 (studs)



K4798 (studs)



K4729 (with lugs)



K4722 (with lugs)



CT364811-HC CT Cabinet and K4722 CT Rack

800 Amps | Transformer Cabinets

| Catalog Number | C.T. Racks | Dimensions | | | Front Cover | Cover Type |
|----------------|------------|------------|----|----|-------------|------------|
| | | D" | W" | H" | | |
| CT244811-SC | A | 11 | 24 | 48 | 1 Piece | Screw |
| CT304811-SC | A, B, G, H | 11 | 30 | 48 | 1 Piece | Screw |
| CT364811-SC | A, B, G, H | 11 | 36 | 48 | 1 Piece | Screw |
| CT244811-HC | A | 11 | 24 | 48 | 1 Piece | Hinge |
| CT304811-HC | A, B, G, H | 11 | 30 | 48 | 1 Piece | Hinge |
| CT364811-HC | A, B, G, H | 11 | 36 | 48 | 1 Piece | Hinge |

CT Cabinet Mounting Racks

| Code | Catalog Number | AIC Rating | Amps | Volts | Type of Service | Termination Type |
|------|----------------|------------|------|-------|-----------------|----------------------------------|
| A | K4797 | 50K | 800 | 600 | 1Ø3W or 3Ø3W | ½ - 13 studs on 1¾" centers |
| B | K4798 | 50K | 800 | 600 | 3Ø4W | ½ - 13 studs on 1¾" centers |
| G | K4729 | 50K | 800 | 600 | 1Ø3W or 3Ø3W | 6 lugs: (3) #4-600 or (6) #1-250 |
| H | K4722 | 50K | 800 | 600 | 3Ø4W | 8 lugs: (3) #4-600 or (6) #1-250 |

Notes

- **Enclosure:** These units are rated Type 3R, powder coated and constructed of galvanized steel.
- **Mounting:** ¼ - 20 welded studs for use with CT mounting rack.




Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.


Transockets

600 Amps | 6–14 Terminals | Donut or Bar Type CTs


25
600 AMP
TRANSOCKETS

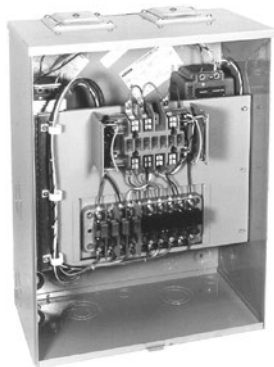

S1890-XT



S2690-XT



S2690-XT

600 Amps | 600 Volts | With PTs and Donut Type CTs | Ringless

| Catalog Number | Terminals | Hub | Meter Form | PTs Quantity & Ratio | CTs Quantity & Ratio | Dimensions | | | Knockouts | | |
|----------------|-----------|----------|------------|----------------------|----------------------|------------|----|----|-----------|---|------|
| | | | | | | D" | W" | H" | 1 | 2 | 3 |
| S1891-XT | 8 | (2) C.P. | 5S | (2) 4:1 | (2) 200/5 | 9½ | 18 | 24 | 2½ | 1 | 1¼/6 |
| S3912-XT | 13 | (2) C.P. | 6S | (2) 2.5:1 | (3) 200/5 | 9½ | 18 | 24 | 2½ | 1 | 1¼/6 |
| S1890-XT | 14 | (2) C.P. | 6S | (2) 2.5:1 | (3) 200/5 | 9½ | 18 | 24 | 2½ | 1 | 1¼/6 |

600 Amps | 600 Volts | Bar Type CTs Only | Ringless

| Catalog Number | Terminals | Hub | Meter Form | CTs Quantity & Ratio | Dimensions | | | Knockouts | | |
|----------------|-----------|----------|------------|----------------------|------------|----|----|-----------|----|---|
| | | | | | D" | W" | H" | 1 | 2 | 3 |
| S3831-XT | 6 | (2) C.P. | 4S | (2) 200/5 | 11¼ | 18 | 30 | 4 | 3½ | 1 |
| S2690-XT | 8 | (2) C.P. | 5S | (2) 200/5 | 11¼ | 18 | 30 | 4 | 3½ | 1 |
| S2674-XT | 13 | (2) C.P. | 8S | (3) 200/5 | 11¼ | 18 | 30 | 4 | 3½ | 1 |

Notes

- **Hubs:** Units are supplied with two closing plates as standard. To order hubs as extra refer to the hub suffix chart on the accessory page.
- **Prewiring:** Units supplied prewired with test switch and transformers in place. Contact factory if wiring diagram is desired.
- **Pricing:** Contact general office for pricing information.
- **Other units available - contact factory for details.**

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.



Meter Main w/ Load Center Pedestal


100–200 Amps | 4 Terminals | Ringless

27

100-200 AMP
METER MAIN
W/ LOAD CENTER
PEDESTAL



U5136-O-200S

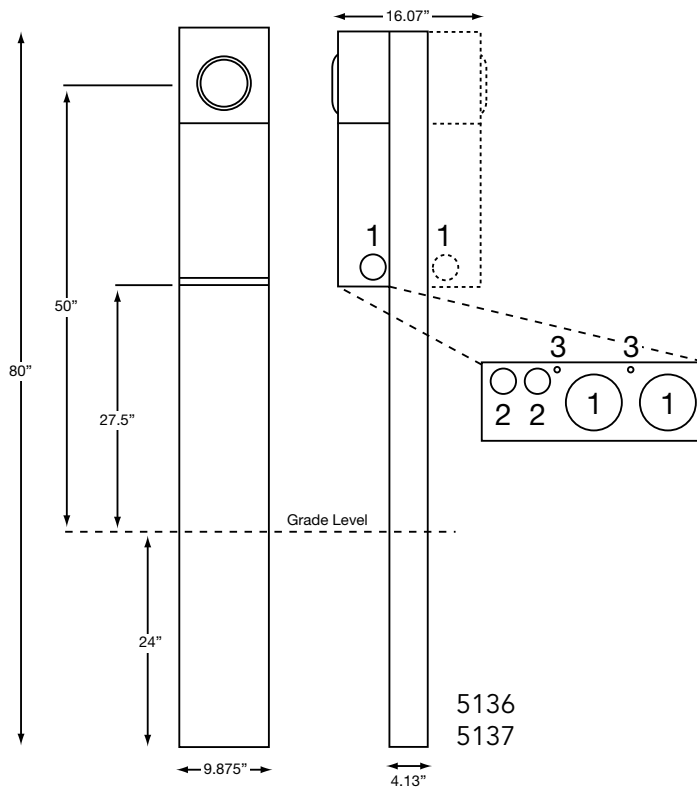

5136
5137

100-200 Amps | 4 Terminals | Meter Main Pedestal | Ringless

| Catalog Number | Service | Meter Positions | Bypass | Connectors CU/AL | | Knockouts | | |
|----------------|---------|-----------------|--------|------------------|------|-----------|----------|-----|
| | | | | Line | Load | 1 | 2 | 3 |
| U5136-O-100S | UG | Single | Horn | #6-350 | CB | 2 | 1/2, 3/4 | 1/4 |
| U5136-O-200S | UG | Single | Horn | #6-350 | CB | 2 | 1/2, 3/4 | 1/4 |
| U5137-O-200S | UG | Double | Horn | #6-350 | CB | 2 | 1/2, 3/4 | 1/4 |

Notes

- **Parallel to Series Conversion:** For field converting from parallel wired to series wired order **K5194**.
- **Fifth Terminal:** For field installed fifth terminal, order **K5T**.
- **Stabilizer Foot:** For field installed stabilizer foot, order **K5415**.
- **Application:** Designed for free standing direct burial.
- **Receptacles:** Consult factory for installed receptacle assemblies.
- **Main Breaker:** Milbank UQFP-M-(AMP).
- **Ring Type Units:** Ring type units available—contact Milbank for details.

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.




Surface Mount Power Outlet

Millennium Series | Metered & Unmetered




U5000-XL-75

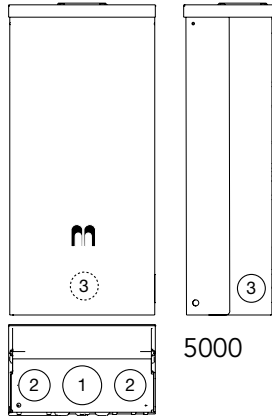

5000



U5100-XL-75

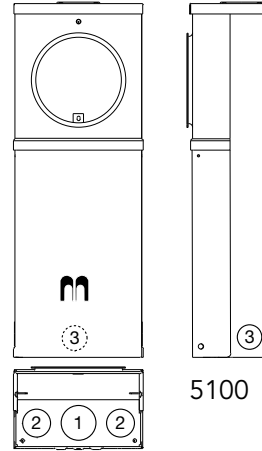

5100

125 Amps | Surface Mount Power Outlets

| Catalog Number | Metered/ Unmetered | Receptacle Configuration | Circuit Breaker Configuration | Loop Feed Line | Dimensions | | | Knockouts | | |
|----------------|-----------------------|-----------------------------|----------------------------------|-------------------|------------|----|-----|-----------|----|----|
| | | | | | D" | W" | H" | 1 | 2 | 3 |
| U5000-XL | Unmetered | — | — | (2) 1/0-#12 | 5½ | 9⅞ | 19¼ | 2 | 1½ | 1¼ |
| U5000-XL-41 | Unmetered | A | X | (2) 1/0-#12 | 5½ | 9⅞ | 19¼ | 2 | 1½ | 1¼ |
| U5000-XL-55 | Unmetered | B | Y | (2) 1/0-#12 | 5½ | 9⅞ | 19¼ | 2 | 1½ | 1¼ |
| U5000-XL-75 | Unmetered | C | Z | (2) 1/0-#12 | 5½ | 9⅞ | 19¼ | 2 | 1½ | 1¼ |
| U5100-XL | Metered | — | — | #6-250 | 5½ | 9⅞ | 25 | 2 | 1½ | 1¼ |
| U5100-XL-41 | Metered | A | X | #6-250 | 5½ | 9⅞ | 25 | 2 | 1½ | 1¼ |
| U5100-XL-55 | Metered | B | Y | #6-250 | 5½ | 9⅞ | 25 | 2 | 1½ | 1¼ |
| U5100-XL-75 | Metered | C | Z | #6-250 | 5½ | 9⅞ | 25 | 2 | 1½ | 1¼ |

Receptacle Configurations

| A | B | C |
|--------------------------|---------------------------|--------------------------------------|
| | | |
| (1) TT30R, (1) 5-20R GFI | (1) 14-50R, (1) 5-20R GFI | (1) 14-50R, (1) TT30R, (1) 5-20R GFI |

Notes

- **Other Configurations:** Additional configurations are available—contact Milbank for details.
- **Metered Units:** Metered units are ring type.

Circuit Breaker Configurations



| X | Y | Z |
|--|--|---|
| | | |
| (1) 30A, 1P, 120V (1) 20A, 1P, 120V | (1) 50A, 2P, 120/240V (1) 20A, 1P, 120V | (1) 50A, 2P, 120/240V (1) 30A, 1P, 120V (1) 20A, 1P, 120V |



Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.


Power Outlet Pedestals

Millennium Series | Metered & Unmetered



5200
5220

U5200-XL-75



5300
5320

U5300-O-75

125 Amps | Power Outlet Pedestals

| Catalog Number | Double Head Catalog Number | Receptacle Configuration | Circuit Breaker Configuration | Dimensions | | | Knockouts |
|----------------|----------------------------|--------------------------|-------------------------------|--------------------------------|-------------------------------|--------------------------------|-------------------------------|
| | | | | D" | W" | H" | 1 |
| U5200-XL | U5220-XL | — | — | 5 ⁹ / ₁₆ | 9 ¹ / ₈ | 64 ¹ / ₂ | 1 ¹ / ₄ |
| U5200-XL-41 | U5220-XL-41 | A | X | 5 ⁹ / ₁₆ | 9 ¹ / ₈ | 64 ¹ / ₂ | 1 ¹ / ₄ |
| U5200-XL-55 | U5220-XL-55 | B | Y | 5 ⁹ / ₁₆ | 9 ¹ / ₈ | 64 ¹ / ₂ | 1 ¹ / ₄ |
| U5200-XL-75 | U5220-XL-75 | C | Z | 5 ⁹ / ₁₆ | 9 ¹ / ₈ | 64 ¹ / ₂ | 1 ¹ / ₄ |
| U5300-O | U5320-O | — | — | 5 ⁹ / ₁₆ | 9 ¹ / ₈ | 70 ¹ / ₄ | 1 ¹ / ₄ |
| U5300-O-41 | U5320-O-41 | A | X | 5 ⁹ / ₁₆ | 9 ¹ / ₈ | 70 ¹ / ₄ | 1 ¹ / ₄ |
| U5300-O-55 | U5320-O-55 | B | Y | 5 ⁹ / ₁₆ | 9 ¹ / ₈ | 70 ¹ / ₄ | 1 ¹ / ₄ |
| U5300-O-75 | U5320-O-75 | C | Z | 5 ⁹ / ₁₆ | 9 ¹ / ₈ | 70 ¹ / ₄ | 1 ¹ / ₄ |

Receptacle Configurations

| A | B | C |
|-----------------------------|------------------------------|---|
| | | |
| (1) TT30R, (1) 5-20R GFI | (1) 14-50R, (1) 5-20R GFI | (1) 14-50R, (1) TT30R, (1) 5-20R GFI |

Notes

- **Other Configurations:** Additional configurations are available—contact Milbank for details.
- **Metered Units:** Metered units are ring type.

Circuit Breaker Configurations



| X | Y | Z |
|--|--|---|
| | | |
| (1) 30A, 1P, 120V (1) 20A, 1P, 120V | (1) 50A, 2P, 120/240V (1) 20A, 1P, 120V | (1) 50A, 2P, 120/240V (1) 30A, 1P, 120V (1) 20A, 1P, 120V |

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.






U4540-XL




4540
4542




4544
4546



4548
4549

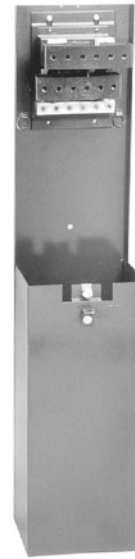

S9617-O

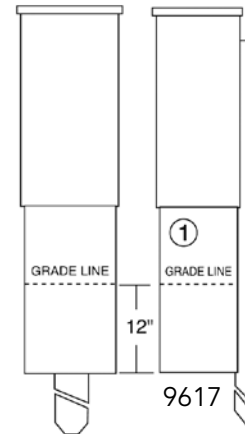

Terminal Boxes | 1Ø and 3Ø | 120/240 Volts

| Catalog Number | Amps | Phase | Volts | Hub | Connectors CU7AL | 1Ø to 3Ø Kit | Dimensions | | | Knockouts | | | |
|----------------|------|-------|---------|------|--------------------------|--------------|------------|----------|----|-----------|-------|----------|----------|
| | | | | | | | D" | W" | H" | 1 | 2 | 3 | 4 |
| U4544-XL | 100 | 1 | 120/240 | C.P. | (6) #12-1/0 | K4543 | 4 1/8 | 9 13/16 | 18 | 2 | 1 | 1/4, 1/2 | — |
| U4546-XL | 100 | 3 | 600 | C.P. | (6) #12-1/0 | N/A | 4 1/8 | 9 13/16 | 18 | 2 | 1 | 1/4, 1/2 | — |
| U4540-XL | 200 | 1 | 120/240 | C.P. | (6) #6-350 | K4539 | 4 1/8 | 14 13/16 | 23 | 2 1/2 | 2 1/2 | 1/4 | 1/4, 1/2 |
| U4542-XL | 200 | 3 | 600 | C.P. | (6) #6-350 | N/A | 4 1/8 | 14 13/16 | 23 | 2 1/2 | 2 1/2 | 1/4 | 1/4, 1/2 |
| U4548-RXL | 400 | 1 | 120/240 | C.P. | (3) #6-350 or (2) #4-600 | K4547 | 5 | 15 1/2 | 27 | 3 | 3 | 1/4, 1/2 | 1/4 |
| U4549-RXL | 400 | 3 | 600 | C.P. | (3) #6-350 or (2) #4-600 | N/A | 5 | 15 1/2 | 27 | 3 | 3 | 1/4, 1/2 | 1/4 |

Notes

- **Hub:** Standard hub opening on top with closing plate attached.
- **Features:** UL-listed pad lockable Type 3R enclosure.
- **3Ø 120/240V Application:** Field installable 3Ø lug kit converts 1Ø unit to 3Ø unit.

Secondary Service Pedestal for Underground Use

| Catalog Number | Pedestal Supplied With | Dimensions | | |
|----------------|-----------------------------------|------------|--------|----------|
| | | D" | W" | H" |
| S9617-O | (3) 6 hole 350 MCM connector bars | 10 11/32 | 10 3/8 | 45 11/16 |

Notes





- **Features:** Unit supplied with 3/8"-16 penta head bolt and pad-lockable latch.
- **Stake:** Catalog number **S9110** must be added to catalog number in order to ensure shipment of 72" stake for free standing installation (i.e. **S9617-O-S9110**).




Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.

Terminal Box

Secondary

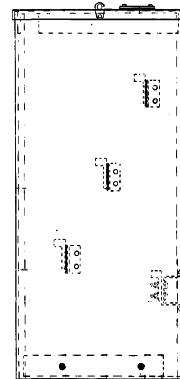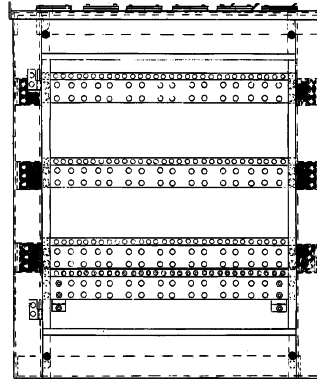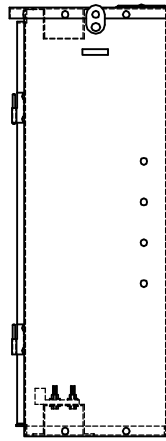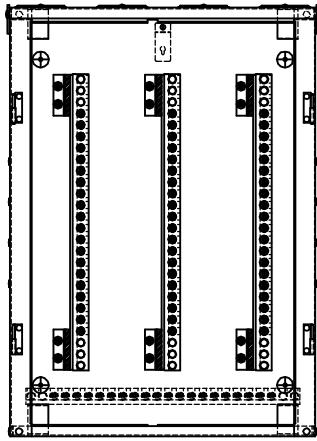

8333



1787

Terminal Boxes

| Catalog Number | Hub | Amps (End Connection) | Amps (Center Connection) | | Dimensions | | | Knockouts | |
|----------------|----------|-----------------------|--------------------------|-------|------------|----|----|-----------|------|
| | | | Each Way | Total | D" | W" | H" | 1 | 2 |
| S1787-4X | (4) C.P. | 950 | 950 | 1900 | 14 | 30 | 42 | 7/8 | 5/16 |
| S8333-6X | (6) C.P. | 1500 | 1500 | 3000 | 24 | 44 | 52 | — | — |

Notes

- **Hot Bus Support:** Hot bus support and support ear available as kit for the **S8333**. Order kit **K1822**. Kit also includes hardware to mount bus.

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.



Commercial Pedestals

Attractive | Easy to Install | Secure | Cost-Effective

Milbank Commercial Pedestals are pad-mounted, weatherproof electrical enclosures consisting of a utility pull section with optional meter socket, and a customer section containing distribution and control equipment. Milbank Commercial Pedestals are an attractive, secure, easy to install and cost-effective solution when underground remote site power distribution and control equipment is required, replacing unsightly and inefficient strut and backboard structures.



Strut and backboard



Commercial pedestal

UL-listed as Industrial Control Equipment (File E113855)

Standard Features

- Type 3R rainproof, vandal-resistant cabinet of polyurethane powder-coated steel (aluminum or stainless steel also available)
- UL-listed as enclosed industrial control equipment (UL508)
- Isolated lockable & sealable utility metering and lug landing sections
- Lockable customer section for distribution and control equipment with internal deadfront
- Print pocket inside customer section door contains wiring schematics and installation instructions
- Most load centers are UL-listed for use with various manufacturers' circuit breakers
- All stainless steel external hardware (screws, bolts, hinges, handles, hasps and sealing screws)




Ringless socket



Ring type socket



Utility lug landing



Customer interior



Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.

Commercial Pedestals

Attractive | Easy to Install | Secure | Cost-Effective

33
COMMERCIAL
PEDESTALS

Applications

These units are ideal for controlling and metering:

- Traffic signals
- Street lighting
- Irrigation and sprinkler systems
- Cell towers and telephone vaults
- Pump stations
- Temporary power for fairgrounds, swap meets, outdoor markets, portable offices, holiday lights, etc.
- Outdoor lighting for athletic fields, tennis and basketball courts, parking lots, landscaping and subdivision entrances, etc.

Available Factory-Installed Options

- Meter sockets: ring type or ringless, up to 400 amp
- Main and branch breakers or T fuses
- Distribution: copper load centers and panel boards
- Clocks, timers and relays
- Photoelectric cells and controls
- Power receptacles: pin and sleeve, twist lock or straight blade
- Contactors: definite purpose, electrical or mechanically held, IEC and mercury types
- Surge protection and lightning arrestors
- Reserve inlet generator receptacle with interlocked circuit breakers
- Motor starters and relays
- Push button controls
- Thermostat controls, fans and heating strips
- Power blocks and terminal blocks
- Steel, aluminum and plywood backboards
- Transformers
- Interlock devices for circuit breakers
- Available in steel, aluminum (unpainted, painted or anodized) or stainless steel construction with powder-coated finish available in eight standard colors or special-ordered RAL colors
- Available for applications up to 400 amp, 120V, 208V, 240V, 277V, 480V - 1Ø or 3Ø



Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.



With over 85 years in the electrical distribution industry, Milbank is proud to offer quality home standby, portable, digital inverter and mobile & industrial generator systems.

Home Standby Generators

- Wide range of sizes for small to large luxury homes and businesses
- Liquid propane and natural gas options



Digital Inverter Generators

- Small footprint
- Lightweight
- Quiet operation
- Safe for sensitive electronics




Portable Generators

- Manual and electric start options
- EPA compliant



Transfer Switches

- Single- and three-phase options
- Whole house power management

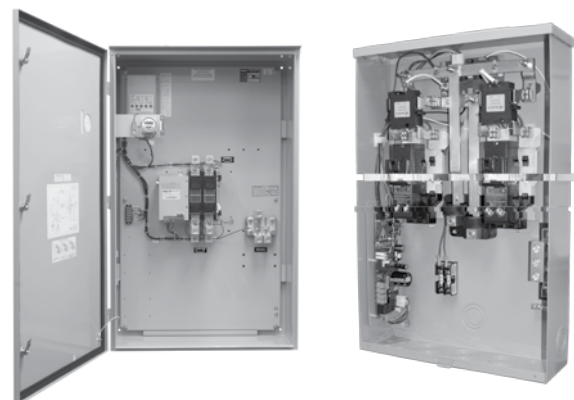

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.

Electric Vehicle Supply Equipment

Milbank | *Driving the Future of Power*

35
ELECTRIC
VEHICLE
SUPPLY
EQUIPMENT

From a wall-mounted single dock unit in a residential garage, to a citywide municipal integration, our scalable, flexible, reliable solution is designed for effectiveness in virtually any installation scenario.

Level II Models

MEVSE-RS—Residential, single wall mounted; overnight at-home charging.

MEVSE-RS Dual—Pedestal mounted with two ports; ideal for multi-family and high-traffic commercial parking lots.

MEVSE-RS+—Available in single, dual and quad configurations with the addition of programmable, smart charging capabilities; allows communication with the grid for charging when energy consumption is low; allows connectivity to GPRS.

Level III Models

DC Fast Charge — Stations feature JARI/TEPCO connectors and CHAdeMO certification; practical networking and payment options; available from 30-60kW models suitable for public and fleet usage; charges in 15-30 minutes.

Suitable EV Station Locations

- Shopping malls
- Theatres
- Municipal buildings
- Central business districts
- Entertainment districts
- Stadiums & arenas
- Rest areas
- Truck stops / travel plazas
- Camping / RV parks
- Restaurants
- Parking garages
- Public curbside parking
- Office buildings
- Single-family residences
- Multi-unit residences
- Airports
- Hotels
- Casinos
- Anywhere people park for extended periods of time





Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.





Disconnect/Out of Service Devices

Disconnect Sleeve

| | | |
|--------------------------------|--|--|
| Application | Discretely disconnects service at the meter while leaving the meter in place. |  <p>M5-144 disconnect sleeves (above) shown installed on meter blades (below)</p>  |
| Features | <p>Mylar® polyester film — flexible, durable and stable even at extreme temperatures.</p> <p>Safe, reliable and easy to install</p> <p>Standard design fits most meter blades</p> <p>High dielectric strength</p> <p>Non-hygroscopic</p> | |
| Ordering | Order M5-144 | |
| Installation Guidelines | <p>Turn off main switch or breaker before installation</p> <p>Remove meter from socket</p> <p>Place disconnect sleeve over load side blades</p> <p>Replace meter and reseal</p> <p>Do not use disconnect sleeves on lever bypass sockets.</p> | |

Plug-In Out Of Service Device



| | | |
|--------------------|--|---|
| Application | Disconnects service at the meter. |  <p>K4974 (above); meter with K4974 installed and service disconnected (below).</p>  |
| Features | <p>Meter stays in place to prevent tampering and to simplify power restoration</p> <p>Rotated meter shows that service has been disconnected</p> <p>Easily plugs into all new Milbank 200 amp blocks with square fifth terminal hole</p> | |
| Ordering | Order K4974 | |




Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.

Accessories

Hubs and Closing Plates

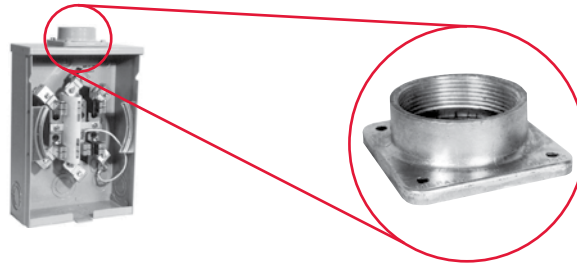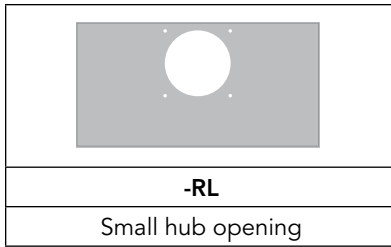

| | | | | | |
|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|
| | | | | | |
| -WL A7514 | -YL A7515 | -ZL A7516 | -DL A7517 | -EL A7518 | -XL A7551 |
| 1" hub | 1¼" hub | 1½" hub | 2" hub | 2½" hub | Small closing plate |

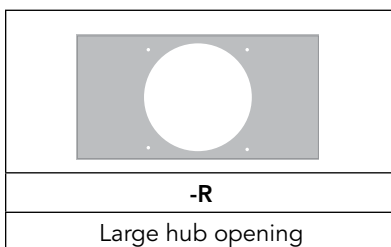

| | | | | |
|--------------------------|--------------------------|--------------------------|--------------------------|--|
| | | | | |
| -F A8110 | -G A8111 | -H A8112 | -X A9064 | -RRL S8324 |
| 3" hub | 3½" hub | 4" hub | Large closing plate | Large hub opening adapted to small hub opening |

Notes

- **Suffix:** Add to catalog number for factory installation of hub.
- **Packaging:** Individually packed units for field installation.
- **Abbreviations:** H.O. (hub opening), C.P. (closing plate).

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.



Connector Kits, Closing Covers & Sealing Rings

Connector Kits | For Use with 3/8"-16 Stud Type Units Only

| Single | | | Twin | | |
|--------|---------------|-------------------------------------|--------|---------------|----------------------|
| Suffix | Part # | (3 per set) - 1Ø | Suffix | Part # | (3 per set) - 1Ø |
| K1 | K1539 | 6-350 | K2 | K1350 | 6-350 |
| K3 | K1540 | 6-350 (non rotating) | K2L | K1350L | 6-350 (non rotating) |
| K3L | K1540L | 4-600 or (2) 1/0-250 (non rotating) | K4 | K1541 | 4-600 |
| Suffix | Part # | (4 per set) - 3Ø | Suffix | Part # | (4 per set) - 3Ø |
| K5 | K3082 | 6-350 | K6 | K3442 | 6-350 |
| K7 | K3441 | 4-600 or (2) 1/0-250 | K8 | K3083 | 4-600 |

Bypass Link



K8180 (sold in pairs)

Closing Covers

| | |
|--|--|
| | |
| Meter Closing Plate (Ring Type / Ringless) | Metal Closing Plate (For Ringless Sockets) |
| 6003 - Grey Plastic | CP-21 |
| 6116 - Clear Plastic | |




Generator Interlock

| | |
|---|--|
| | Allows only one breaker to be in the "on" position when back-feeding with a standby power generator. |
| K5815 - large QN with small frame Q | |
| K5820 - large frame QN with large frame QN | |
| K5830 - small frame Q to small frame Q | |

Sealing Rings

| | |
|---------------------------------|--|
| | |
| MR-2 - Snap Action | MR-4 - Screw Type (Stainless Steel) |
| MR2-SS - Stainless Steel | |


Fifth Terminals

| | | |
|---|---|--|
|  |  |  |
| 5T8K2 - 100-200 Amp "Plug-In" | K5T - 200 Amp (Block with Square Hole) | K3865 - Heavy Duty Jaw Clamping (K3866 without Neutral Wire) |

Triplex Ground


| |
|---|
|  |
| K1190 (For factory installed triplex ground, add suffix -TG to catalog number) |

Tap Connectors (3 per set)
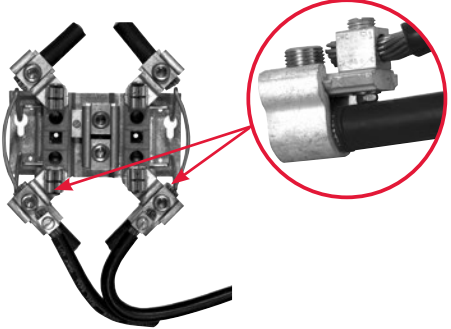
| | |
|--|--|
|  | Replaces the load or line side slide-in nut assembly on Milbank 200 amp sockets. Allows for a 100 amp tap location in addition to the #6-350 kcmil load-side connector. K5022 includes safety barrier extensions for applications over 300 VAC. Three lugs per kit. |
| K4977-INT - Internal Hex (set of 3) | |
| K4977-EXT - External Hex (set of 3) | |
| K5022-INT - Internal Hex (set of 4 w/ barrier) | |

Locknut Clearances

Clearance for Locknuts on Knockouts

|  | <i>"D" in nearest practical dimension)</i> |
|---|--|
| Knockout Size | "D" |
| 1/2 | 1 1/8 |
| 3/4 | 1 3/8 |
| 1 | 1 3/4 |
| 1 1/4 | 2 1/4 |
| 1 1/2 | 2 5/8 |
| 2 | 3 1/8 |
| 2 1/2 | 3 1/2 |
| 3 | 4 1/4 |
| 3 1/2 | 4 3/4 |
| 4 | 5 3/8 |

Knockout Actual Sizes

Conduit to Knockout Reference Chart


| Conduit Size | Milbank Knockout | Actual Size Milbank Knockout |
|--------------|------------------|------------------------------|
| 1/2 | 1/2 | 7/8 |
| 3/4 | 3/4 | 1 1/8 |
| 1 | 1 | 1 3/8 |
| 1 1/4 | 1 1/4 | 1 3/4 |
| 1 1/2 | 1 1/2 | 2 |
| 2 | 2 | 2 1/2 |
| 2 1/2 | 2 1/2 | 3 |
| 3 | 3 | 3 5/8 |
| 3 1/2 | 3 1/2 | 4 1/8 |
| 4 | 4 | 4 41/64 |

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.




Watthour Meter Forms


Standard Forms | Transformer Rated or Self-Contained




SC
2 and 3-WIRE FORMS
1S & 2S




SC
2 and 3-WIRE FORMS
1S & 2S with BYPASS




TR
2-WIRE FORM 3S
5th Term. 9 o'clock




TR
2-WIRE FORM 3S
with BYPASS




TR
2-WIRE FORM 3S
5th Term. 6 o'clock




TR
2-WIRE FORM 3S
with BYPASS




SC
2 ELEMENT
3-WIRE NETWORK
FORM 12S 5th
TERM. 9 o'clock




SC
2 ELEMENT 3-WIRE
NETWORK FORM 12S
with BYPASS
5th Term. 9 o'clock




SC
2 ELEMENT
3-WIRE NETWORK
FORM 12S 5th
TERM. 6 o'clock




SC
2 ELEMENT 3-WIRE
NETWORK FORM 12S
with BYPASS
5th Term. 6 o'clock




TR
3-WIRE FORM 4S




TR
3-WIRE FORM 4S
WITH BYPASS




SC
2 or 3 ELEMENT
3Ø4W Y or Δ
Y FORM 14S
Δ FORM 15S




SC
2 or 3 ELEMENT
3Ø4W Y or Δ
FORMS 14S & 15S
with BYPASS




TR
2 ELEMENT
3Ø4W Y or Δ
Y FORM 7S
Δ FORM 24S
with BYPASS




TR
2 ELEMENT
2Ø3W, 2Ø4W, 3Ø3W
FORM 5S




TR
2 ELEMENT 2Ø3W,
2Ø4W, 3Ø3W
FORM 5S with
BYPASS



SC
2 ELEMENT
2Ø3W, 2Ø4W, 3Ø3W
FORM 13S




SC
2 or 3 ELEMENT
2Ø3W, 2Ø4W, 3Ø3W
FORM 13S with
BYPASS




TR
2 or 3 ELEMENT
3Ø4W Y or Δ
Y FORM 9S
Δ FORM 8S


TR = TRANSFORMER RATED
SC = SELF CONTAINED



TR
2 or 3 ELEMENT
3Ø4W Y or Δ
FORMS 8S & 9S
with BYPASS



TR
2 ELEMENT
3Ø4W Y
FORM 6S



TR
2 ELEMENT
3Ø4W Y
FORM 6S
with BYPASS



Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.

Meter Forms

Reference Information

DIAGRAM A

1 \emptyset 2W with 1 P.T. & 1 C.T.
Single Stator Meter (2W1 \emptyset) - Form 35
5T Socket, Test Switch #TS04-0101




DIAGRAM B

1 \emptyset 3W with 1 C.T.
Single Stator Meter (2W1 \emptyset) - Form 35
5T Socket, Test Switch #TS04-0101

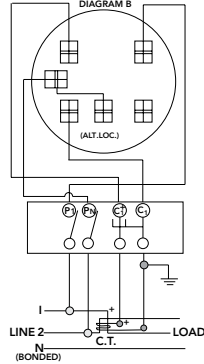


DIAGRAM C

1 \emptyset 3W with 2 C.T.'s
Single Stator Meter (3W1 \emptyset) - Form 45
6T Socket, Test Switch #TS07-0105

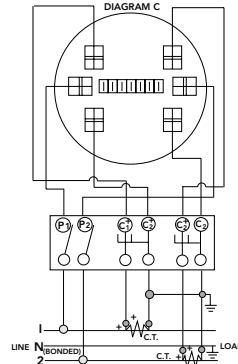


DIAGRAM D

1 \emptyset 3W or 3W Network with 2 C.T.'s
2 Stator Meter - Form 55
8T Socket, Test Switch #TS07-0105

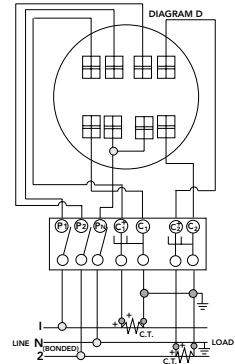


DIAGRAM E

3 \emptyset 3W "A" with 2 P.T.'s & 2 C.T.'s
2 Stator Meter - Form 55
8T Socket, Test Switch #TS07-0105

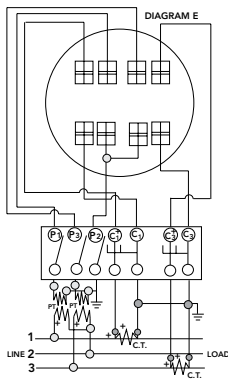


DIAGRAM F

3 \emptyset 3W "A" with 2 C.T.'s
2 Stator Meter - Form 55
8T Socket, Test Switch #TS07-0105

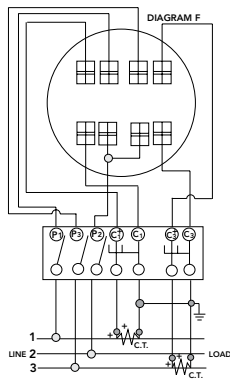


DIAGRAM G

3 \emptyset 4W "Y" with 3 C.T.'s
2 1/2 Stator Meter - Form 65
13T Socket, Test Switch #TS10-0109

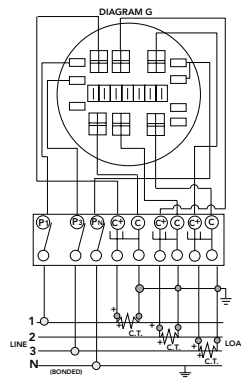


DIAGRAM H

3 \emptyset 4W "Y" with 2 P.T.'s & 3 C.T.'s
2 1/2 Stator Meter - Form 65
13T Socket, Test Switch #TS10-0109

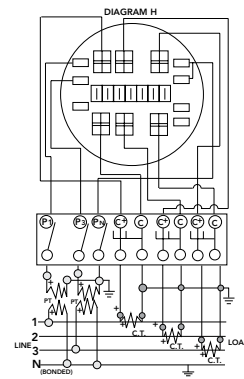


DIAGRAM I

3 \emptyset 4W "Y" or "A" with 3 C.T.'s
"Y" 3 Stator Meter - Form 95
"A" 2 Stator Meter - Form 85
13T Socket, Test Switch #TS10-0109


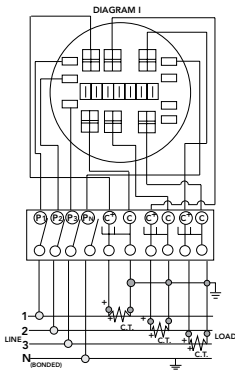


DIAGRAM J

3 \emptyset 4W "Y" with 3 P.T.'s & 3 C.T.'s
3 Stator Meter - Form 95
13T Socket, Test Switch #TS10-0109

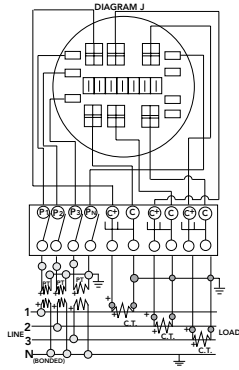

Prewiring: If standard factory prewiring is required, refer to wiring diagrams on this page. Determine appropriate diagram and send a copy with order. If custom factory prewiring is required, specify on order. Be sure to include meter socket catalog number, test switch make and catalog number, meter form number and provide a copy of your wiring diagram.

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.



Materials

Steel Quality

The meter equipment listed in this catalog is made of galvanized steel (AISI* G90) to afford the best possible weather proofing.
*American Iron and Steel Institute.

Steel Sheet

16 gauge, galvanized, sheet: 1 1/4 oz./ sq.ft. class zinc-coated. (AISI G90)
14 gauge, galvanized, sheet: 1 1/4 oz./ sq.ft. class zinc-coated.

Aluminum Extrusion

Wire-Terminals: Alloy; 6061-T6, Tin-plated for CU/AL wire.
Bus Bar: Alloy; 6101-O & 6063-O

Aluminum Sheet

3000 series aluminum sheet, H14, or 5052 series aluminum sheet, H32. Where applicable thicknesses range from .064-.125

Copper Sheet & Bus

Electrolytic copper with tin plating in most applications.

Insulating Materials

- In most units, support bases for current-carrying components are molded from fiberglass reinforced high-strength, track resistant, thermoset polyester molding compounds.
- Clear or black safety shields and polarity barriers are molded from high-strength, track resistant, polycarbonate molding compounds.
- Various sheet insulating materials, as appropriate for the application are utilized in the fabrication of flat, formed and punched component parts and barriers.

Finish

Process

Light gray state-of-the-art electrostatically applied powder paint offers a durable, non-fading finish. For further information concerning the chemical analysis of the weather resistant finish, please contact the factory.

Metal Fastners

Zinc-coated with a chromate dip.

Ratings & Compliance

Ratings & Compliance

All Milbank electrical enclosures in this catalog are rated "Type 3R Enclosure" unless specified otherwise on the product's page. All enclosures with a UL designation are constructed per the appropriate UL Standard and may be installed per the National Electric Code. UL procedure files associated with the UL Standards are listed as follows: Meter Sockets (UL 414, File E30202), Test Switches (UL 414, File E62531), Power Outlets (UL 231, File E90945), Panelboards (UL 67, File E32628) and Pullout Switches (UL 1429, File E133062). Additional standards are utilized as applicable: Meter Sockets (ANSI C12.7), Test Switches (ANSI C12.9) and Panelboards (NEMA PB-1).



Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.

Enclosure Information

Milbank Electrical Meter Enclosures Specification Note

All Milbank electrical enclosures in this catalog are rated "Type 3R Electrical Enclosure" unless specified otherwise. All enclosures with a UL designation are constructed per the appropriate UL standard and may be installed per the National Electric Code. Meter sockets are constructed per "UL 414, Meter Sockets", file #E30202 and per "ANSI C12.7-1993-Meter Sockets". All test switches are constructed per "UL 414, Meter Sockets", file #E30302 and per "ANSI C12.9-1993-Test Switches". Power outlets are constructed per "UL 231, Power Outlets", file #E90945. Panelboards are constructed per "UL 67, Panelboards", file #E32628 and "NEMA PB-1-1984-Panelboards". Pullout switches are constructed per "UL 1429, Pullout Switches", file #133062.

Definitions Pertaining to Nonhazardous Locations | Indoor Use

Type 1 Enclosure

Type 1 enclosures are intended for indoor use primarily to provide a degree of protection against limited amounts of falling dirt.

Type 12 Enclosure

Type 12 enclosures are intended for indoor use primarily to provide a degree of protection against circulating dust, falling dirt and dripping noncorrosive liquids.

Type 13 Enclosure

Type 13 enclosures are intended for indoor use primarily to provide a degree of protection against dust, spraying of water, oil and noncorrosive coolant.

Definitions Pertaining to Nonhazardous Locations | Outdoor Use

Type 3 Enclosure

Type 3 enclosures are intended for outdoor use primarily to provide a degree of protection against rain, sleet, windblown dust and damage from external ice formation.

Type 3R Enclosure

Type 3R enclosures are intended for outdoor use primarily to provide a degree of protection against rain, sleet and damage from external ice formation.

Type 4 Enclosure

Type 4 enclosures are intended for indoor or outdoor use primarily to provide a degree of protection against windblown dust and rain, splashing water, hose-directed water and damage from external ice formation.

Type 4X Enclosure

Type 4X enclosures are intended for indoor or outdoor use primarily to provide a degree of protection against corrosion, windblown dust and rain, splashing water, hose-directed water and damage from external ice formation.

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.



| | | | | | |
|----------------------|----|---------------------|----|-----------------------|----|
| 6003..... | 38 | K4722 | 24 | U1797-O-K2L-K3L | 11 |
| 6116..... | 38 | K4729 | 24 | U3328-RXL..... | 8 |
| 363010-CT3R..... | 22 | K4797 | 24 | U4363-R..... | 11 |
| 363016-CT3R..... | 22 | K4798 | 24 | U4505-X..... | 11 |
| 363610-CT3R..... | 22 | K4974 | 36 | U4540-XL..... | 30 |
| 363612-CT3R..... | 22 | K4977-EXT..... | 39 | U4542-XL..... | 30 |
| 363616-CT3R..... | 22 | K4977-INT..... | 39 | U4544-XL..... | 30 |
| 483616-CT3R..... | 22 | K5022-INT..... | 39 | U4546-XL..... | 30 |
| 484812-CT3R..... | 22 | K5815 | 38 | U4548-RXL..... | 30 |
| 5T8K2..... | 39 | K5820 | 38 | U4549-RXL..... | 30 |
| 606013-CT3R..... | 22 | K5830 | 38 | U5000-XL..... | 28 |
| A7514..... | 37 | K5T..... | 39 | U5000-XL-41..... | 28 |
| A7515..... | 37 | K8180 | 38 | U5000-XL-55..... | 28 |
| A7516..... | 37 | M5-144 | 36 | U5000-XL-75..... | 28 |
| A7517..... | 37 | MR-2..... | 38 | U5100-XL..... | 28 |
| A7518..... | 37 | MR2-SS..... | 38 | U5100-XL-41..... | 28 |
| A7551..... | 37 | MR-4..... | 38 | U5100-XL-55..... | 28 |
| A8110..... | 37 | NU8980-O..... | 26 | U5100-XL-75..... | 28 |
| A8111..... | 37 | NU8980-O-2002..... | 26 | U5136-O-100S..... | 27 |
| A8112..... | 37 | NU8980-O-SF100..... | 26 | U5136-O-200S..... | 27 |
| A9064..... | 37 | PT48AL..... | 22 | U5137-O-200S..... | 27 |
| AP2300-03..... | 4 | PT48AR..... | 22 | U5168-XTL-100..... | 13 |
| AP2300-03-5T..... | 4 | PT48L..... | 22 | U5168-XTL-200..... | 13 |
| AP2300-03-5T-AB..... | 4 | PT48R..... | 22 | U5169-XTL-100..... | 13 |
| AP2300-03-6T..... | 4 | S1787-4X..... | 31 | U5169-XTL-200..... | 13 |
| AP2300-04..... | 4 | S1890-XT..... | 25 | U5200-XL..... | 29 |
| AP2300-07..... | 4 | S1891-XT..... | 25 | U5200-XL-41..... | 29 |
| AP2300-08..... | 4 | S1910-YL..... | 8 | U5200-XL-55..... | 29 |
| CP-21..... | 38 | S2417-DL..... | 8 | U5200-XL-75..... | 29 |
| CT244811-HC..... | 24 | S2417-RL..... | 8 | U5220-XL..... | 29 |
| CT244811-SC..... | 24 | S2674-XT..... | 25 | U5220-XL-41..... | 29 |
| CT304811-HC..... | 24 | S2690-XT..... | 25 | U5220-XL-55..... | 29 |
| CT304811-SC..... | 24 | S3831-XT..... | 25 | U5220-XL-75..... | 29 |
| CT364811-HC..... | 24 | S3912-XT..... | 25 | U5300-O..... | 29 |
| CT364811-SC..... | 24 | S4275-DL..... | 8 | U5300-O-41..... | 29 |
| K1190..... | 39 | S4339-RL..... | 8 | U5300-O-55..... | 29 |
| K1350..... | 38 | S8324..... | 37 | U5300-O-75..... | 29 |
| K1350L..... | 38 | S8333-6X..... | 31 | U5320-O..... | 29 |
| K1539..... | 38 | TS04-0101..... | 21 | U5320-O-41..... | 29 |
| K1540..... | 38 | TS04-0104..... | 21 | U5320-O-55..... | 29 |
| K1540L..... | 38 | TS07-0049..... | 21 | U5320-O-75..... | 29 |
| K1541..... | 38 | TS07-0105..... | 21 | U5764-X-200-CB..... | 15 |
| K3082..... | 38 | TS07-0106..... | 21 | U5765-X-200-CB..... | 15 |
| K3083..... | 38 | TS10-0016..... | 21 | U5767-X-200-CB..... | 15 |
| K3441..... | 38 | TS10-0109..... | 21 | U5784-O-200-CB..... | 15 |
| K3442..... | 38 | TS10-0110..... | 21 | U5787-O-200-CB..... | 15 |
| K3865..... | 39 | TS10-0111..... | 21 | U5796-X-400-CB..... | 15 |
| K3866..... | 39 | TS10-0112..... | 21 | U5797-O-400-CB..... | 15 |




Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.

| | | | | | |
|---------------------|----|---------------------|----|--------------------|----|
| U5799-O-400-CB..... | 15 | U5929-XL..... | 5 | U9701-RXL..... | 9 |
| U5842-PXL-200..... | 12 | U5934-XL..... | 5 | UAP5024-XL..... | 13 |
| U5842-RL..... | 12 | U7017-DL-TG..... | 7 | UC1299-RL..... | 18 |
| U5842-RL-100..... | 12 | U7017-RL-TG..... | 7 | UC1300-XL..... | 18 |
| U5844-PXL-200..... | 12 | U7017-RL-TG-5T..... | 7 | UC5087-RL..... | 19 |
| U5852-RL..... | 12 | U7018-XL-TG..... | 7 | UC5732-XL..... | 18 |
| U5852-RL-100..... | 12 | U7021-DL-TG..... | 6 | UC7235-RL..... | 18 |
| U5852-RL-200..... | 12 | U7021-RL-TG..... | 6 | UC7237-RL..... | 18 |
| U5854-RL-200..... | 12 | U7021-RL-TG-5T..... | 6 | UC7444-RL..... | 19 |
| U5882-X..... | 17 | U7040-RL-TG..... | 6 | UC7445-RL..... | 19 |
| U5883-X..... | 17 | U7420-RL..... | 9 | UC7448-RL..... | 19 |
| U5884-X..... | 17 | U7421-RL..... | 9 | UC7449-RL..... | 19 |
| U5885-X..... | 17 | U7422-RXL..... | 9 | UC7478-RL..... | 19 |
| U5886-X..... | 17 | U7423-RXL..... | 9 | UC7532-RL..... | 19 |
| U5890-X-2/200..... | 14 | U7487-RL-TG..... | 5 | UC7544-XL..... | 18 |
| U5891-X-2/200..... | 14 | U7487-RL-TG-5T..... | 5 | UC7545-XL..... | 18 |
| U5892-X-2/200..... | 14 | U7490-YL-TG..... | 5 | UCSS3433-O..... | 10 |
| U5893-X-2/200..... | 14 | U7490-YL-TG-5T..... | 5 | UCSS3436-O..... | 10 |
| U5894-X-2/200..... | 14 | U8212-RL..... | 16 | UCSS3438-O..... | 10 |
| U5895-X-2/200..... | 14 | U8213-RL..... | 16 | USS3914-O..... | 10 |
| U5902-X..... | 17 | U8214-RL..... | 16 | USS4701-O..... | 10 |
| U5903-X..... | 17 | U8215-RL..... | 16 | USS4801-O..... | 10 |
| U5904-X..... | 17 | U8216-XL..... | 16 | USS4801-O-5T9..... | 10 |
| U5905-X..... | 17 | U8436-O..... | 26 | | |
| U5906-X..... | 17 | U9700-RRL..... | 9 | | |

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.



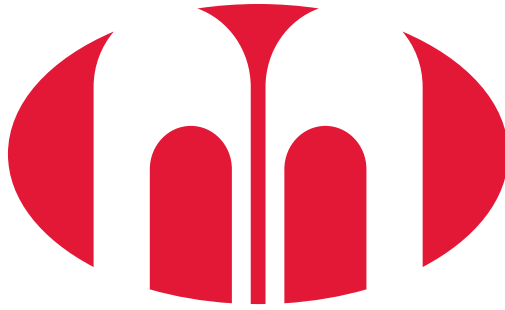

MILBANK[®]

ENERGY AT WORK

