

Miniature Circuit Breakers FAZ, FAZ-PN, FAZ-HS

SG55812



FAZ

- High-quality miniature circuit breakers for industrial applications and residential applications
- Contact position indicator red - green
- Guide for secure terminal connection
- 3-position DIN rail clip, permits removal from existing busbar system
- Comprehensive range of accessories suitable for subsequent installation
- Rated currents up to 63 A
- Tripping characteristics B, C, D, K, S, Z
- Rated breaking capacity up to 15 kA according to IEC/EN 60947-2

FAZ-PN

- Tripping characteristic B
- Rated breaking capacity up to 6 kA according to IEC/EN 60898-1
- Module width 1MU (1+N-poles)

FAZ-HS

- Tripping characteristic B
- Rated breaking capacity up to 10 kA according to IEC/EN 60898-1
- 1- and 2-poles available

FAZ Miniature Circuit Breakers (MCBs)

Characteristic B

| | Rated current I_n (A) | Rated voltage (V) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Rated voltage UL1077 (V) | Breaking capacity acc. to UL1077 (kA) | Type Designation | Article No. | Units per package |
|---------------|----------------------------|----------------------|---|--------------------------------|--|---------------------|-------------|-------------------------|
| 1-pole | | | | | | | | |
| 1 | 240/415 | 15 | 277 | 10 | | FAZ-B1/1 | 182114 | 12 |
| 1.5 | 240/415 | 15 | 277 | 10 | | FAZ-B1,5/1 | 182115 | 12 |
| 1.6 | 240/415 | 15 | 277 | 10 | | FAZ-B1,6/1 | 182116 | 12 |
| 2 | 240/415 | 15 | 277 | 10 | | FAZ-B2/1 | 182117 | 12 |
| 3 | 240/415 | 15 | 277 | 10 | | FAZ-B3/1 | 182119 | 12 |
| 3.5 | 240/415 | 15 | 277 | 10 | | FAZ-B3,5/1 | 182120 | 12 |
| 4 | 240/415 | 15 | 277 | 10 | | FAZ-B4/1 | 182121 | 12 |
| 5 | 240/415 | 15 | 277 | 10 | | FAZ-B5/1 | 182122 | 12 |
| 6 | 240/415 | 15 | 277 | 10 | | FAZ-B6/1 | 182123 | 12 |
| 8 | 240/415 | 15 | 277 | 10 | | FAZ-B8/1 | 182124 | 12 |
| 10 | 240/415 | 15 | 277 | 10 | | FAZ-B10/1 | 182125 | 12 |
| 12 | 240/415 | 15 | 277 | 10 | | FAZ-B12/1 | 182126 | 12 |
| 13 | 240/415 | 15 | 277 | 10 | | FAZ-B13/1 | 182127 | 12 |
| 15 | 240/415 | 15 | 277 | 10 | | FAZ-B15/1 | 182128 | 12 |
| 16 | 240/415 | 15 | 277 | 10 | | FAZ-B16/1 | 182129 | 12 |
| 20 | 240/415 | 15 | 277 | 10 | | FAZ-B20/1 | 182130 | 12 |
| 25 | 240/415 | 15 | 277 | 10 | | FAZ-B25/1 | 182131 | 12 |
| 32 | 240/415 | 15 | 277 | 10 | | FAZ-B32/1 | 182132 | 12 |
| 40 | 240/415 | 15 | 277 | 5 | | FAZ-B40/1 | 182133 | 12 |
| 50 | 240/415 | 15 | 277 | 5 | | FAZ-B50/1 | 182134 | 12 |
| 63 | 240/415 | 15 | 277 | 5 | | FAZ-B63/1 | 182135 | 12 |

SG53112



SG56612



| | | | | | | | | |
|-----------------|-----|----|-----|----|--|-------------|--------|---|
| 1+N-pole | | | | | | | | |
| 1 | 240 | 15 | 277 | 10 | | FAZ-B1/1N | 182136 | 6 |
| 1.5 | 240 | 15 | 277 | 10 | | FAZ-B1,5/1N | 182137 | 6 |
| 1.6 | 240 | 15 | 277 | 10 | | FAZ-B1,6/1N | 182138 | 6 |
| 2 | 240 | 15 | 277 | 10 | | FAZ-B2/1N | 182139 | 6 |
| 2.5 | 240 | 15 | 277 | 10 | | FAZ-B2,5/1N | 182140 | 6 |
| 3 | 240 | 15 | 277 | 10 | | FAZ-B3/1N | 182141 | 6 |
| 3.5 | 240 | 15 | 277 | 10 | | FAZ-B3,5/1N | 182142 | 6 |
| 4 | 240 | 15 | 277 | 10 | | FAZ-B4/1N | 182143 | 6 |
| 5 | 240 | 15 | 277 | 10 | | FAZ-B5/1N | 182144 | 6 |
| 6 | 240 | 15 | 277 | 10 | | FAZ-B6/1N | 182145 | 6 |
| 8 | 240 | 15 | 277 | 10 | | FAZ-B8/1N | 182146 | 6 |
| 10 | 240 | 15 | 277 | 10 | | FAZ-B10/1N | 182147 | 6 |
| 12 | 240 | 15 | 277 | 10 | | FAZ-B12/1N | 182148 | 6 |
| 13 | 240 | 15 | 277 | 10 | | FAZ-B13/1N | 182149 | 6 |
| 15 | 240 | 15 | 277 | 10 | | FAZ-B15/1N | 182150 | 6 |
| 16 | 240 | 15 | 277 | 10 | | FAZ-B16/1N | 182151 | 6 |
| 20 | 240 | 15 | 277 | 10 | | FAZ-B20/1N | 182152 | 6 |
| 25 | 240 | 15 | 277 | 10 | | FAZ-B25/1N | 182153 | 6 |
| 32 | 240 | 15 | 277 | 10 | | FAZ-B32/1N | 182154 | 6 |
| 40 | 240 | 15 | 277 | 5 | | FAZ-B40/1N | 182155 | 6 |
| 50 | 240 | 15 | 277 | 5 | | FAZ-B50/1N | 182156 | 6 |
| 63 | 240 | 15 | 277 | 5 | | FAZ-B63/1N | 182157 | 6 |

SG55112



| Rated current I_n (A) | Rated voltage (V) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Rated voltage UL1077 (V) | Breaking capacity acc. to UL1077 (kA) | Type Designation | Article No. | Units per package |
|----------------------------|----------------------|---|--------------------------------|--|---------------------|-------------|-------------------------|
|----------------------------|----------------------|---|--------------------------------|--|---------------------|-------------|-------------------------|

2-pole

| | | | | | | | |
|-----|-----|----|----------|----|------------|--------|---|
| 1 | 415 | 15 | 480Y/277 | 10 | FAZ-B1/2 | 182158 | 6 |
| 1.5 | 415 | 15 | 480Y/277 | 10 | FAZ-B1,5/2 | 182159 | 6 |
| 1.6 | 415 | 15 | 480Y/277 | 10 | FAZ-B1,6/2 | 182160 | 6 |
| 2 | 415 | 15 | 480Y/277 | 10 | FAZ-B2/2 | 182161 | 6 |
| 2.5 | 415 | 15 | 480Y/277 | 10 | FAZ-B2,5/2 | 182162 | 6 |
| 3 | 415 | 15 | 480Y/277 | 10 | FAZ-B3/2 | 182112 | 6 |
| 3.5 | 415 | 15 | 480Y/277 | 10 | FAZ-B3,5/2 | 182113 | 6 |
| 4 | 415 | 15 | 480Y/277 | 10 | FAZ-B4/2 | 182175 | 6 |
| 5 | 415 | 15 | 480Y/277 | 10 | FAZ-B5/2 | 182176 | 6 |
| 6 | 415 | 15 | 480Y/277 | 10 | FAZ-B6/2 | 182177 | 6 |
| 7 | 415 | 15 | 480Y/277 | 10 | FAZ-B7/2 | 182178 | 6 |
| 8 | 415 | 15 | 480Y/277 | 10 | FAZ-B8/2 | 182179 | 6 |
| 10 | 415 | 15 | 480Y/277 | 10 | FAZ-B10/2 | 182180 | 6 |
| 12 | 415 | 15 | 480Y/277 | 10 | FAZ-B12/2 | 182181 | 6 |
| 13 | 415 | 15 | 480Y/277 | 10 | FAZ-B13/2 | 182182 | 6 |
| 15 | 415 | 15 | 480Y/277 | 10 | FAZ-B15/2 | 182183 | 6 |
| 16 | 415 | 15 | 480Y/277 | 10 | FAZ-B16/2 | 182184 | 6 |
| 20 | 415 | 15 | 480Y/277 | 10 | FAZ-B20/2 | 182185 | 6 |
| 25 | 415 | 15 | 480Y/277 | 10 | FAZ-B25/2 | 182186 | 6 |
| 32 | 415 | 15 | 480Y/277 | 10 | FAZ-B32/2 | 182188 | 6 |
| 40 | 415 | 15 | 480Y/277 | 5 | FAZ-B40/2 | 182189 | 6 |
| 50 | 415 | 15 | 480Y/277 | 5 | FAZ-B50/2 | 182190 | 6 |
| 63 | 415 | 15 | 480Y/277 | 5 | FAZ-B63/2 | 182191 | 6 |

SG53412



3-pole

| | | | | | | | |
|-----|-----|----|----------|----|------------|--------|---|
| 1 | 415 | 15 | 480Y/277 | 10 | FAZ-B1/3 | 182192 | 4 |
| 1.5 | 415 | 15 | 480Y/277 | 10 | FAZ-B1,5/3 | 182193 | 4 |
| 1.6 | 415 | 15 | 480Y/277 | 10 | FAZ-B1,6/3 | 182194 | 4 |
| 2 | 415 | 15 | 480Y/277 | 10 | FAZ-B2/3 | 182195 | 4 |
| 2.5 | 415 | 15 | 480Y/277 | 10 | FAZ-B2,5/3 | 182196 | 4 |
| 3 | 415 | 15 | 480Y/277 | 10 | FAZ-B3/3 | 182197 | 4 |
| 3.5 | 415 | 15 | 480Y/277 | 10 | FAZ-B3,5/3 | 182198 | 4 |
| 4 | 415 | 15 | 480Y/277 | 10 | FAZ-B4/3 | 182199 | 4 |
| 5 | 415 | 15 | 480Y/277 | 10 | FAZ-B5/3 | 182200 | 4 |
| 6 | 415 | 15 | 480Y/277 | 10 | FAZ-B6/3 | 182201 | 4 |
| 7 | 415 | 15 | 480Y/277 | 10 | FAZ-B7/3 | 182202 | 4 |
| 8 | 415 | 15 | 480Y/277 | 10 | FAZ-B8/3 | 182203 | 4 |
| 10 | 415 | 15 | 480Y/277 | 10 | FAZ-B10/3 | 182204 | 4 |
| 12 | 415 | 15 | 480Y/277 | 10 | FAZ-B12/3 | 182205 | 4 |
| 13 | 415 | 15 | 480Y/277 | 10 | FAZ-B13/3 | 182206 | 4 |
| 15 | 415 | 15 | 480Y/277 | 10 | FAZ-B15/3 | 182207 | 4 |
| 16 | 415 | 15 | 480Y/277 | 10 | FAZ-B16/3 | 182208 | 4 |
| 20 | 415 | 15 | 480Y/277 | 10 | FAZ-B20/3 | 182209 | 4 |
| 25 | 415 | 15 | 480Y/277 | 10 | FAZ-B25/3 | 182210 | 4 |
| 32 | 415 | 15 | 480Y/277 | 10 | FAZ-B32/3 | 182212 | 4 |
| 40 | 415 | 15 | 480Y/277 | 5 | FAZ-B40/3 | 182213 | 4 |
| 50 | 415 | 15 | 480Y/277 | 5 | FAZ-B50/3 | 182214 | 4 |
| 63 | 415 | 15 | 480Y/277 | 5 | FAZ-B63/3 | 182215 | 4 |

SG55712



| Rated current I_n (A) | Rated voltage (V) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Rated voltage UL1077 (V) | Breaking capacity acc. to UL1077 (kA) | Type Designation | Article No. | Units per package |
|----------------------------|----------------------|---|--------------------------------|--|---------------------|-------------|-------------------------|
|----------------------------|----------------------|---|--------------------------------|--|---------------------|-------------|-------------------------|

3+N-pole

| | | | | | | | |
|-----|-----|----|----------|----|-------------|--------|---|
| 1 | 415 | 15 | 480Y/277 | 10 | FAZ-B1/3N | 182216 | 3 |
| 1.5 | 415 | 15 | 480Y/277 | 10 | FAZ-B1,5/3N | 182217 | 3 |
| 1.6 | 415 | 15 | 480Y/277 | 10 | FAZ-B1,6/3N | 182218 | 3 |
| 2 | 415 | 15 | 480Y/277 | 10 | FAZ-B2/3N | 182219 | 3 |
| 2.5 | 415 | 15 | 480Y/277 | 10 | FAZ-B2,5/3N | 182220 | 3 |
| 3 | 415 | 15 | 480Y/277 | 10 | FAZ-B3/3N | 182221 | 3 |
| 3.5 | 415 | 15 | 480Y/277 | 10 | FAZ-B3,5/3N | 182222 | 3 |
| 4 | 415 | 15 | 480Y/277 | 10 | FAZ-B4/3N | 182223 | 3 |
| 5 | 415 | 15 | 480Y/277 | 10 | FAZ-B5/3N | 182224 | 3 |
| 6 | 415 | 15 | 480Y/277 | 10 | FAZ-B6/3N | 182225 | 3 |
| 8 | 415 | 15 | 480Y/277 | 10 | FAZ-B8/3N | 182226 | 3 |
| 10 | 415 | 15 | 480Y/277 | 10 | FAZ-B10/3N | 182227 | 3 |
| 12 | 415 | 15 | 480Y/277 | 10 | FAZ-B12/3N | 182228 | 3 |
| 13 | 415 | 15 | 480Y/277 | 10 | FAZ-B13/3N | 182229 | 3 |
| 15 | 415 | 15 | 480Y/277 | 10 | FAZ-B15/3N | 182230 | 3 |
| 16 | 415 | 15 | 480Y/277 | 10 | FAZ-B16/3N | 182231 | 3 |
| 20 | 415 | 15 | 480Y/277 | 10 | FAZ-B20/3N | 182232 | 3 |
| 25 | 415 | 15 | 480Y/277 | 10 | FAZ-B25/3N | 182233 | 3 |
| 32 | 415 | 15 | 480Y/277 | 10 | FAZ-B32/3N | 182234 | 3 |
| 40 | 415 | 15 | 480Y/277 | 5 | FAZ-B40/3N | 182235 | 3 |
| 50 | 415 | 15 | 480Y/277 | 5 | FAZ-B50/3N | 182236 | 3 |
| 63 | 415 | 15 | 480Y/277 | 5 | FAZ-B63/3N | 182237 | 3 |

SG55812



4-pole

| | | | | | | | |
|-----|-----|----|----------|----|------------|--------|---|
| 1 | 415 | 15 | 480Y/277 | 10 | FAZ-B1/4 | 182238 | 3 |
| 1.5 | 415 | 15 | 480Y/277 | 10 | FAZ-B1,5/4 | 182239 | 3 |
| 1.6 | 415 | 15 | 480Y/277 | 10 | FAZ-B1,6/4 | 182240 | 3 |
| 2 | 415 | 15 | 480Y/277 | 10 | FAZ-B2/4 | 182241 | 3 |
| 2.5 | 415 | 15 | 480Y/277 | 10 | FAZ-B2,5/4 | 182242 | 3 |
| 3 | 415 | 15 | 480Y/277 | 10 | FAZ-B3/4 | 182243 | 3 |
| 3.5 | 415 | 15 | 480Y/277 | 10 | FAZ-B3,5/4 | 182244 | 3 |
| 4 | 415 | 15 | 480Y/277 | 10 | FAZ-B4/4 | 182245 | 3 |
| 5 | 415 | 15 | 480Y/277 | 10 | FAZ-B5/4 | 182246 | 3 |
| 6 | 415 | 15 | 480Y/277 | 10 | FAZ-B6/4 | 182247 | 3 |
| 7 | 415 | 15 | 480Y/277 | 10 | FAZ-B7/4 | 182248 | 3 |
| 8 | 415 | 15 | 480Y/277 | 10 | FAZ-B8/4 | 182249 | 3 |
| 10 | 415 | 15 | 480Y/277 | 10 | FAZ-B10/4 | 182250 | 3 |
| 12 | 415 | 15 | 480Y/277 | 10 | FAZ-B12/4 | 182251 | 3 |
| 13 | 415 | 15 | 480Y/277 | 10 | FAZ-B13/4 | 182252 | 3 |
| 15 | 415 | 15 | 480Y/277 | 10 | FAZ-B15/4 | 182253 | 3 |
| 16 | 415 | 15 | 480Y/277 | 10 | FAZ-B16/4 | 182254 | 3 |
| 20 | 415 | 15 | 480Y/277 | 10 | FAZ-B20/4 | 182255 | 3 |
| 25 | 415 | 15 | 480Y/277 | 10 | FAZ-B25/4 | 182256 | 3 |
| 32 | 415 | 15 | 480Y/277 | 10 | FAZ-B32/4 | 182257 | 3 |
| 40 | 415 | 15 | 480Y/277 | 5 | FAZ-B40/4 | 182258 | 3 |
| 50 | 415 | 15 | 480Y/277 | 5 | FAZ-B50/4 | 182259 | 3 |
| 63 | 415 | 15 | 480Y/277 | 5 | FAZ-B63/4 | 182260 | 3 |

FAZ Miniature Circuit Breakers (MCBs)

Characteristic C

| Rated current I_n (A) | Rated voltage (V) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Rated voltage UL1077 (V) | Breaking capacity acc. to UL1077 (kA) | Type Designation | Article No. | Units per package |
|----------------------------|----------------------|---|--------------------------------|--|---------------------|-------------|-------------------------|
| 1-pole | | | | | | | |
| 0.16 | 240/415 | 15 | 277 | 5 | FAZ-C0,16/1 | 182261 | 12 |
| 0.25 | 240/415 | 15 | 277 | 5 | FAZ-C0,25/1 | 182262 | 12 |
| 0.5 | 240/415 | 15 | 277 | 10 | FAZ-C0,5/1 | 182263 | 12 |
| 0.75 | 240/415 | 15 | 277 | 10 | FAZ-C0,75/1 | 182264 | 12 |
| 1 | 240/415 | 15 | 277 | 10 | FAZ-C1/1 | 182265 | 12 |
| 1.5 | 240/415 | 15 | 277 | 10 | FAZ-C1,5/1 | 182266 | 12 |
| 1.6 | 240/415 | 15 | 277 | 10 | FAZ-C1,6/1 | 182267 | 12 |
| 2 | 240/415 | 15 | 277 | 10 | FAZ-C2/1 | 182268 | 12 |
| 2.5 | 240/415 | 15 | 277 | 10 | FAZ-C2,5/1 | 182269 | 12 |
| 3 | 240/415 | 15 | 277 | 10 | FAZ-C3/1 | 182270 | 12 |
| 3.5 | 240/415 | 15 | 277 | 10 | FAZ-C3,5/1 | 182271 | 12 |
| 4 | 240/415 | 15 | 277 | 10 | FAZ-C4/1 | 182272 | 12 |
| 5 | 240/415 | 15 | 277 | 10 | FAZ-C5/1 | 182273 | 12 |
| 6 | 240/415 | 15 | 277 | 10 | FAZ-C6/1 | 182274 | 12 |
| 8 | 240/415 | 15 | 277 | 10 | FAZ-C8/1 | 182275 | 12 |
| 10 | 240/415 | 15 | 277 | 10 | FAZ-C10/1 | 182276 | 12 |
| 12 | 240/415 | 15 | 277 | 10 | FAZ-C12/1 | 182277 | 12 |
| 13 | 240/415 | 15 | 277 | 10 | FAZ-C13/1 | 182278 | 12 |
| 15 | 240/415 | 15 | 277 | 10 | FAZ-C15/1 | 182279 | 12 |
| 16 | 240/415 | 15 | 277 | 10 | FAZ-C16/1 | 182280 | 12 |
| 20 | 240/415 | 15 | 277 | 10 | FAZ-C20/1 | 182281 | 12 |
| 25 | 240/415 | 15 | 277 | 10 | FAZ-C25/1 | 182282 | 12 |
| 32 | 240/415 | 15 | 277 | 10 | FAZ-C32/1 | 182283 | 12 |
| 40 | 240/415 | 15 | 277 | 5 | FAZ-C40/1 | 182284 | 12 |
| 50 | 240/415 | 15 | 277 | 5 | FAZ-C50/1 | 182285 | 12 |
| 63 | 240/415 | 15 | 277 | 5 | FAZ-C63/1 | 182286 | 12 |

SG53112



SG55612



1+N-pole

| | | | | | | | |
|------|-----|----|-----|----|--------------|--------|---|
| 0.16 | 240 | 15 | 277 | 5 | FAZ-C0,16/1N | 182287 | 6 |
| 0.25 | 240 | 15 | 277 | 5 | FAZ-C0,25/1N | 182288 | 6 |
| 0.5 | 240 | 15 | 277 | 10 | FAZ-C0,5/1N | 182289 | 6 |
| 0.75 | 240 | 15 | 277 | 10 | FAZ-C0,75/1N | 182290 | 6 |
| 1 | 240 | 15 | 277 | 10 | FAZ-C1/1N | 182291 | 6 |
| 1.5 | 240 | 15 | 277 | 10 | FAZ-C1,5/1N | 182292 | 6 |
| 1.6 | 240 | 15 | 277 | 10 | FAZ-C1,6/1N | 182293 | 6 |
| 2 | 240 | 15 | 277 | 10 | FAZ-C2/1N | 182294 | 6 |
| 2.5 | 240 | 15 | 277 | 10 | FAZ-C2,5/1N | 182295 | 6 |
| 3 | 240 | 15 | 277 | 10 | FAZ-C3/1N | 182296 | 6 |
| 3.5 | 240 | 15 | 277 | 10 | FAZ-C3,5/1N | 182297 | 6 |
| 4 | 240 | 15 | 277 | 10 | FAZ-C4/1N | 182298 | 6 |
| 5 | 240 | 15 | 277 | 10 | FAZ-C5/1N | 182299 | 6 |
| 6 | 240 | 15 | 277 | 10 | FAZ-C6/1N | 182300 | 6 |
| 8 | 240 | 15 | 277 | 10 | FAZ-C8/1N | 182301 | 6 |
| 10 | 240 | 15 | 277 | 10 | FAZ-C10/1N | 182302 | 6 |
| 12 | 240 | 15 | 277 | 10 | FAZ-C12/1N | 182303 | 6 |
| 13 | 240 | 15 | 277 | 10 | FAZ-C13/1N | 182304 | 6 |
| 15 | 240 | 15 | 277 | 10 | FAZ-C15/1N | 182305 | 6 |
| 16 | 240 | 15 | 277 | 10 | FAZ-C16/1N | 182306 | 6 |
| 20 | 240 | 15 | 277 | 10 | FAZ-C20/1N | 182307 | 6 |
| 25 | 240 | 15 | 277 | 10 | FAZ-C25/1N | 182308 | 6 |
| 32 | 240 | 15 | 277 | 10 | FAZ-C32/1N | 182309 | 6 |
| 40 | 240 | 15 | 277 | 5 | FAZ-C40/1N | 182310 | 6 |
| 50 | 240 | 15 | 277 | 5 | FAZ-C50/1N | 182311 | 6 |
| 63 | 240 | 15 | 277 | 5 | FAZ-C63/1N | 182312 | 6 |

SG55112



| Rated current I_n (A) | Rated voltage (V) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Rated voltage UL1077 (V) | Breaking capacity acc. to UL1077 (kA) | Type Designation | Article No. | Units per package |
|----------------------------|----------------------|---|--------------------------------|--|---------------------|-------------|-------------------------|
|----------------------------|----------------------|---|--------------------------------|--|---------------------|-------------|-------------------------|

2-pole

| | | | | | | | |
|------|-----|----|----------|----|-------------|--------|---|
| 0.16 | 415 | 15 | 480Y/277 | 5 | FAZ-C0,16/2 | 182313 | 6 |
| 0.25 | 415 | 15 | 480Y/277 | 5 | FAZ-C0,25/2 | 182314 | 6 |
| 0.5 | 415 | 15 | 480Y/277 | 10 | FAZ-C0,5/2 | 182315 | 6 |
| 0.75 | 415 | 15 | 480Y/277 | 10 | FAZ-C0,75/2 | 182316 | 6 |
| 1 | 415 | 15 | 480Y/277 | 10 | FAZ-C1/2 | 182317 | 6 |
| 1.5 | 415 | 15 | 480Y/277 | 10 | FAZ-C1,5/2 | 182318 | 6 |
| 1.6 | 415 | 15 | 480Y/277 | 10 | FAZ-C1,6/2 | 182319 | 6 |
| 2 | 415 | 15 | 480Y/277 | 10 | FAZ-C2/2 | 182320 | 6 |
| 2.5 | 415 | 15 | 480Y/277 | 10 | FAZ-C2,5/2 | 182321 | 6 |
| 3 | 415 | 15 | 480Y/277 | 10 | FAZ-C3/2 | 182322 | 6 |
| 3.5 | 415 | 15 | 480Y/277 | 10 | FAZ-C3,5/2 | 182323 | 6 |
| 4 | 415 | 15 | 480Y/277 | 10 | FAZ-C4/2 | 182324 | 6 |
| 5 | 415 | 15 | 480Y/277 | 10 | FAZ-C5/2 | 182325 | 6 |
| 6 | 415 | 15 | 480Y/277 | 10 | FAZ-C6/2 | 182326 | 6 |
| 7 | 415 | 15 | 480Y/277 | 10 | FAZ-C7/2 | 182327 | 6 |
| 8 | 415 | 15 | 480Y/277 | 10 | FAZ-C8/2 | 182328 | 6 |
| 10 | 415 | 15 | 480Y/277 | 10 | FAZ-C10/2 | 182329 | 6 |
| 12 | 415 | 15 | 480Y/277 | 10 | FAZ-C12/2 | 182330 | 6 |
| 13 | 415 | 15 | 480Y/277 | 10 | FAZ-C13/2 | 182331 | 6 |
| 15 | 415 | 15 | 480Y/277 | 10 | FAZ-C15/2 | 182332 | 6 |
| 16 | 415 | 15 | 480Y/277 | 10 | FAZ-C16/2 | 182333 | 6 |
| 20 | 415 | 15 | 480Y/277 | 10 | FAZ-C20/2 | 182334 | 6 |
| 25 | 415 | 15 | 480Y/277 | 10 | FAZ-C25/2 | 182335 | 6 |
| 30 | 415 | 15 | 480Y/277 | 10 | FAZ-C30/2 | 182336 | 6 |
| 32 | 415 | 15 | 480Y/277 | 10 | FAZ-C32/2 | 182337 | 6 |
| 40 | 415 | 15 | 480Y/277 | 5 | FAZ-C40/2 | 182338 | 6 |
| 50 | 415 | 15 | 480Y/277 | 5 | FAZ-C50/2 | 182339 | 6 |
| 63 | 415 | 15 | 480Y/277 | 5 | FAZ-C63/2 | 182340 | 6 |

SG53412



3-pole

| | | | | | | | |
|------|-----|----|----------|----|-------------|--------|---|
| 0.16 | 415 | 15 | 480Y/277 | 5 | FAZ-C0,16/3 | 182341 | 4 |
| 0.25 | 415 | 15 | 480Y/277 | 5 | FAZ-C0,25/3 | 182342 | 4 |
| 0.5 | 415 | 15 | 480Y/277 | 10 | FAZ-C0,5/3 | 182163 | 4 |
| 0.75 | 415 | 15 | 480Y/277 | 10 | FAZ-C0,75/3 | 182164 | 4 |
| 1 | 415 | 15 | 480Y/277 | 10 | FAZ-C1/3 | 182165 | 4 |
| 1.5 | 415 | 15 | 480Y/277 | 10 | FAZ-C1,5/3 | 182166 | 4 |
| 1.6 | 415 | 15 | 480Y/277 | 10 | FAZ-C1,6/3 | 182167 | 4 |
| 2 | 415 | 15 | 480Y/277 | 10 | FAZ-C2/3 | 182168 | 4 |
| 2.5 | 415 | 15 | 480Y/277 | 10 | FAZ-C2,5/3 | 182169 | 4 |
| 3 | 415 | 15 | 480Y/277 | 10 | FAZ-C3/3 | 182170 | 4 |
| 3.5 | 415 | 15 | 480Y/277 | 10 | FAZ-C3,5/3 | 182171 | 4 |
| 4 | 415 | 15 | 480Y/277 | 10 | FAZ-C4/3 | 182172 | 4 |
| 5 | 415 | 15 | 480Y/277 | 10 | FAZ-C5/3 | 182173 | 4 |
| 6 | 415 | 15 | 480Y/277 | 10 | FAZ-C6/3 | 182174 | 4 |
| 7 | 415 | 15 | 480Y/277 | 10 | FAZ-C7/3 | 181651 | 4 |
| 8 | 415 | 15 | 480Y/277 | 10 | FAZ-C8/3 | 181652 | 4 |
| 10 | 415 | 15 | 480Y/277 | 10 | FAZ-C10/3 | 181653 | 4 |
| 12 | 415 | 15 | 480Y/277 | 10 | FAZ-C12/3 | 181654 | 4 |
| 13 | 415 | 15 | 480Y/277 | 10 | FAZ-C13/3 | 181655 | 4 |
| 15 | 415 | 15 | 480Y/277 | 10 | FAZ-C15/3 | 181656 | 4 |
| 16 | 415 | 15 | 480Y/277 | 10 | FAZ-C16/3 | 181657 | 4 |
| 20 | 415 | 15 | 480Y/277 | 10 | FAZ-C20/3 | 181658 | 4 |
| 25 | 415 | 15 | 480Y/277 | 10 | FAZ-C25/3 | 181659 | 4 |
| 30 | 415 | 15 | 480Y/277 | 10 | FAZ-C30/3 | 181660 | 4 |
| 32 | 415 | 15 | 480Y/277 | 10 | FAZ-C32/3 | 181661 | 4 |
| 40 | 415 | 15 | 480Y/277 | 5 | FAZ-C40/3 | 181662 | 4 |
| 50 | 415 | 15 | 480Y/277 | 5 | FAZ-C50/3 | 181663 | 4 |
| 63 | 415 | 15 | 480Y/277 | 5 | FAZ-C63/3 | 181664 | 4 |

SG55712



| Rated current I_n (A) | Rated voltage (V) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Rated voltage UL1077 (V) | Breaking capacity acc. to UL1077 (kA) | Type Designation | Article No. | Units per package |
|----------------------------|----------------------|---|--------------------------------|--|---------------------|-------------|-------------------------|
|----------------------------|----------------------|---|--------------------------------|--|---------------------|-------------|-------------------------|

3+N-pole

| | | | | | | | |
|------|-----|----|----------|----|--------------|--------|---|
| 0.16 | 415 | 15 | 480Y/277 | 5 | FAZ-C0,16/3N | 181665 | 3 |
| 0.25 | 415 | 15 | 480Y/277 | 5 | FAZ-C0,25/3N | 181666 | 3 |
| 0.5 | 415 | 15 | 480Y/277 | 10 | FAZ-C0,5/3N | 181667 | 3 |
| 0.75 | 415 | 15 | 480Y/277 | 10 | FAZ-C0,75/3N | 181668 | 3 |
| 1 | 415 | 15 | 480Y/277 | 10 | FAZ-C1/3N | 181669 | 3 |
| 1.5 | 415 | 15 | 480Y/277 | 10 | FAZ-C1,5/3N | 181670 | 3 |
| 1.6 | 415 | 15 | 480Y/277 | 10 | FAZ-C1,6/3N | 181671 | 3 |
| 2 | 415 | 15 | 480Y/277 | 10 | FAZ-C2/3N | 181672 | 3 |
| 2.5 | 415 | 15 | 480Y/277 | 10 | FAZ-C2,5/3N | 181673 | 3 |
| 3 | 415 | 15 | 480Y/277 | 10 | FAZ-C3/3N | 181674 | 3 |
| 3.5 | 415 | 15 | 480Y/277 | 10 | FAZ-C3,5/3N | 181675 | 3 |
| 4 | 415 | 15 | 480Y/277 | 10 | FAZ-C4/3N | 181676 | 3 |
| 5 | 415 | 15 | 480Y/277 | 10 | FAZ-C5/3N | 181677 | 3 |
| 6 | 415 | 15 | 480Y/277 | 10 | FAZ-C6/3N | 181678 | 3 |
| 8 | 415 | 15 | 480Y/277 | 10 | FAZ-C8/3N | 181679 | 3 |
| 10 | 415 | 15 | 480Y/277 | 10 | FAZ-C10/3N | 181680 | 3 |
| 12 | 415 | 15 | 480Y/277 | 10 | FAZ-C12/3N | 181681 | 3 |
| 13 | 415 | 15 | 480Y/277 | 10 | FAZ-C13/3N | 181682 | 3 |
| 15 | 415 | 15 | 480Y/277 | 10 | FAZ-C15/3N | 181683 | 3 |
| 16 | 415 | 15 | 480Y/277 | 10 | FAZ-C16/3N | 181684 | 3 |
| 20 | 415 | 15 | 480Y/277 | 10 | FAZ-C20/3N | 181685 | 3 |
| 25 | 415 | 15 | 480Y/277 | 10 | FAZ-C25/3N | 181686 | 3 |
| 32 | 415 | 15 | 480Y/277 | 10 | FAZ-C32/3N | 181687 | 3 |
| 40 | 415 | 15 | 480Y/277 | 5 | FAZ-C40/3N | 181688 | 3 |
| 50 | 415 | 15 | 480Y/277 | 5 | FAZ-C50/3N | 181689 | 3 |
| 63 | 415 | 15 | 480Y/277 | 5 | FAZ-C63/3N | 181690 | 3 |

SG55812



4-pole

| | | | | | | | |
|------|-----|----|----------|----|-------------|--------|---|
| 0.16 | 415 | 15 | 480Y/277 | 5 | FAZ-C0,16/4 | 181691 | 3 |
| 0.25 | 415 | 15 | 480Y/277 | 5 | FAZ-C0,25/4 | 181692 | 3 |
| 0.5 | 415 | 15 | 480Y/277 | 10 | FAZ-C0,5/4 | 181693 | 3 |
| 0.75 | 415 | 15 | 480Y/277 | 10 | FAZ-C0,75/4 | 181694 | 3 |
| 1 | 415 | 15 | 480Y/277 | 10 | FAZ-C1/4 | 181695 | 3 |
| 1.5 | 415 | 15 | 480Y/277 | 10 | FAZ-C1,5/4 | 181696 | 3 |
| 1.6 | 415 | 15 | 480Y/277 | 10 | FAZ-C1,6/4 | 181697 | 3 |
| 2 | 415 | 15 | 480Y/277 | 10 | FAZ-C2/4 | 181698 | 3 |
| 2.5 | 415 | 15 | 480Y/277 | 10 | FAZ-C2,5/4 | 181699 | 3 |
| 3 | 415 | 15 | 480Y/277 | 10 | FAZ-C3/4 | 181700 | 3 |
| 3.5 | 415 | 15 | 480Y/277 | 10 | FAZ-C3,5/4 | 181701 | 3 |
| 4 | 415 | 15 | 480Y/277 | 10 | FAZ-C4/4 | 181702 | 3 |
| 5 | 415 | 15 | 480Y/277 | 10 | FAZ-C5/4 | 181703 | 3 |
| 6 | 415 | 15 | 480Y/277 | 10 | FAZ-C6/4 | 181704 | 3 |
| 7 | 415 | 15 | 480Y/277 | 10 | FAZ-C7/4 | 181705 | 3 |
| 8 | 415 | 15 | 480Y/277 | 10 | FAZ-C8/4 | 181706 | 3 |
| 10 | 415 | 15 | 480Y/277 | 10 | FAZ-C10/4 | 181707 | 3 |
| 12 | 415 | 15 | 480Y/277 | 10 | FAZ-C12/4 | 181708 | 3 |
| 13 | 415 | 15 | 480Y/277 | 10 | FAZ-C13/4 | 181709 | 3 |
| 15 | 415 | 15 | 480Y/277 | 10 | FAZ-C15/4 | 181710 | 3 |
| 16 | 415 | 15 | 480Y/277 | 10 | FAZ-C16/4 | 181711 | 3 |
| 20 | 415 | 15 | 480Y/277 | 10 | FAZ-C20/4 | 181712 | 3 |
| 25 | 415 | 15 | 480Y/277 | 10 | FAZ-C25/4 | 181713 | 3 |
| 32 | 415 | 15 | 480Y/277 | 10 | FAZ-C32/4 | 181714 | 3 |
| 40 | 415 | 15 | 480Y/277 | 5 | FAZ-C40/4 | 181715 | 3 |
| 50 | 415 | 15 | 480Y/277 | 5 | FAZ-C50/4 | 181716 | 3 |
| 63 | 415 | 15 | 480Y/277 | 5 | FAZ-C63/4 | 181717 | 3 |

FAZ Miniature Circuit Breakers (MCBs)

Characteristic D

| | Rated current I_n (A) | Rated voltage (V) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Rated voltage UL1077 (V) | Breaking capacity acc. to UL1077 (kA) | Type Designation | Article No. | Units per package |
|---------------|----------------------------|----------------------|---|--------------------------------|--|---------------------|-------------|-------------------------|
| 1-pole | | | | | | | | |
| 0.5 | 240/415 | 15 | 277 | 5 | | FAZ-D0,5/1 | 181718 | 12 |
| 1 | 240/415 | 15 | 277 | 5 | | FAZ-D1/1 | 181719 | 12 |
| 1.5 | 240/415 | 15 | 277 | 5 | | FAZ-D1,5/1 | 181720 | 12 |
| 1.6 | 240/415 | 15 | 277 | 5 | | FAZ-D1,6/1 | 181721 | 12 |
| 2 | 240/415 | 15 | 277 | 5 | | FAZ-D2/1 | 181722 | 12 |
| 2.5 | 240/415 | 15 | 277 | 5 | | FAZ-D2,5/1 | 181723 | 12 |
| 3 | 240/415 | 15 | 277 | 5 | | FAZ-D3/1 | 181724 | 12 |
| 3.5 | 240/415 | 15 | 277 | 5 | | FAZ-D3,5/1 | 181725 | 12 |
| 4 | 240/415 | 15 | 277 | 5 | | FAZ-D4/1 | 181726 | 12 |
| 5 | 240/415 | 15 | 277 | 5 | | FAZ-D5/1 | 181727 | 12 |
| 6 | 240/415 | 15 | 277 | 5 | | FAZ-D6/1 | 181728 | 12 |
| 8 | 240/415 | 15 | 277 | 5 | | FAZ-D8/1 | 181729 | 12 |
| 10 | 240/415 | 15 | 277 | 5 | | FAZ-D10/1 | 181730 | 12 |
| 12 | 240/415 | 15 | 277 | 5 | | FAZ-D12/1 | 181731 | 12 |
| 13 | 240/415 | 15 | 277 | 5 | | FAZ-D13/1 | 181732 | 12 |
| 15 | 240/415 | 15 | 277 | 5 | | FAZ-D15/1 | 181733 | 12 |
| 16 | 240/415 | 15 | 277 | 5 | | FAZ-D16/1 | 181734 | 12 |
| 20 | 240/415 | 15 | 277 | 5 | | FAZ-D20/1 | 181735 | 12 |
| 25 | 240/415 | 15 | 277 | 5 | | FAZ-D25/1 | 181736 | 12 |
| 32 | 240/415 | 15 | 277 | 5 | | FAZ-D32/1 | 181737 | 12 |
| 40 | 240/415 | 15 | 277 | 5 | | FAZ-D40/1 | 181738 | 12 |
| 50 | 240/415 | 10 | - | - | | FAZ-D50/1 | 181739 | 12 |
| 63 | 240/415 | 10 | - | - | | FAZ-D63/1 | 181740 | 12 |

SG53112



SG55612



1+N-pole

| | | | | | | | | |
|-----|-----|----|-----|---|--|-------------|--------|---|
| 0.5 | 240 | 15 | 277 | 5 | | FAZ-D0,5/1N | 181741 | 6 |
| 1 | 240 | 15 | 277 | 5 | | FAZ-D1/1N | 181742 | 6 |
| 1.5 | 240 | 15 | 277 | 5 | | FAZ-D1,5/1N | 181743 | 6 |
| 1.6 | 240 | 15 | 277 | 5 | | FAZ-D1,6/1N | 181744 | 6 |
| 2 | 240 | 15 | 277 | 5 | | FAZ-D2/1N | 181745 | 6 |
| 2.5 | 240 | 15 | 277 | 5 | | FAZ-D2,5/1N | 181746 | 6 |
| 3 | 240 | 15 | 277 | 5 | | FAZ-D3/1N | 181747 | 6 |
| 3.5 | 240 | 15 | 277 | 5 | | FAZ-D3,5/1N | 181748 | 6 |
| 4 | 240 | 15 | 277 | 5 | | FAZ-D4/1N | 181749 | 6 |
| 5 | 240 | 15 | 277 | 5 | | FAZ-D5/1N | 181750 | 6 |
| 6 | 240 | 15 | 277 | 5 | | FAZ-D6/1N | 181751 | 6 |
| 8 | 240 | 15 | 277 | 5 | | FAZ-D8/1N | 181752 | 6 |
| 10 | 240 | 15 | 277 | 5 | | FAZ-D10/1N | 181753 | 6 |
| 12 | 240 | 15 | 277 | 5 | | FAZ-D12/1N | 181754 | 6 |
| 13 | 240 | 15 | 277 | 5 | | FAZ-D13/1N | 181755 | 6 |
| 15 | 240 | 15 | 277 | 5 | | FAZ-D15/1N | 181756 | 6 |
| 16 | 240 | 15 | 277 | 5 | | FAZ-D16/1N | 181757 | 6 |
| 20 | 240 | 15 | 277 | 5 | | FAZ-D20/1N | 181758 | 6 |
| 25 | 240 | 15 | 277 | 5 | | FAZ-D25/1N | 181759 | 6 |
| 32 | 240 | 15 | 277 | 5 | | FAZ-D32/1N | 181760 | 6 |
| 40 | 240 | 15 | 277 | 5 | | FAZ-D40/1N | 181761 | 6 |
| 50 | 240 | 10 | - | - | | FAZ-D50/1N | 181762 | 6 |
| 63 | 240 | 10 | - | - | | FAZ-D63/1N | 181763 | 6 |

SG55112



| Rated current I_n (A) | Rated voltage (V) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Rated voltage UL1077 (V) | Breaking capacity acc. to UL1077 (kA) | Type Designation | Article No. | Units per package |
|----------------------------|----------------------|---|--------------------------------|--|---------------------|-------------|-------------------------|
|----------------------------|----------------------|---|--------------------------------|--|---------------------|-------------|-------------------------|

2-pole

| | | | | | | | |
|-----|-----|----|----------|---|------------|--------|---|
| 0.5 | 415 | 15 | 480Y/277 | 5 | FAZ-D0,5/2 | 181764 | 6 |
| 1 | 415 | 15 | 480Y/277 | 5 | FAZ-D1/2 | 181765 | 6 |
| 1.5 | 415 | 15 | 480Y/277 | 5 | FAZ-D1,5/2 | 181766 | 6 |
| 1.6 | 415 | 15 | 480Y/277 | 5 | FAZ-D1,6/2 | 181767 | 6 |
| 2 | 415 | 15 | 480Y/277 | 5 | FAZ-D2/2 | 181768 | 6 |
| 2.5 | 415 | 15 | 480Y/277 | 5 | FAZ-D2,5/2 | 181769 | 6 |
| 3 | 415 | 15 | 480Y/277 | 5 | FAZ-D3/2 | 181770 | 6 |
| 3.5 | 415 | 15 | 480Y/277 | 5 | FAZ-D3,5/2 | 181771 | 6 |
| 4 | 415 | 15 | 480Y/277 | 5 | FAZ-D4/2 | 181772 | 6 |
| 5 | 415 | 15 | 480Y/277 | 5 | FAZ-D5/2 | 181773 | 6 |
| 6 | 415 | 15 | 480Y/277 | 5 | FAZ-D6/2 | 181774 | 6 |
| 7 | 415 | 15 | 480Y/277 | 5 | FAZ-D7/2 | 181775 | 6 |
| 8 | 415 | 15 | 480Y/277 | 5 | FAZ-D8/2 | 181776 | 6 |
| 10 | 415 | 15 | 480Y/277 | 5 | FAZ-D10/2 | 181777 | 6 |
| 12 | 415 | 15 | 480Y/277 | 5 | FAZ-D12/2 | 181778 | 6 |
| 13 | 415 | 15 | 480Y/277 | 5 | FAZ-D13/2 | 181779 | 6 |
| 15 | 415 | 15 | 480Y/277 | 5 | FAZ-D15/2 | 181780 | 6 |
| 16 | 415 | 15 | 480Y/277 | 5 | FAZ-D16/2 | 181781 | 6 |
| 20 | 415 | 15 | 480Y/277 | 5 | FAZ-D20/2 | 181782 | 6 |
| 25 | 415 | 15 | 480Y/277 | 5 | FAZ-D25/2 | 181783 | 6 |
| 32 | 415 | 15 | 480Y/277 | 5 | FAZ-D32/2 | 181785 | 6 |
| 40 | 415 | 15 | 480Y/277 | 5 | FAZ-D40/2 | 181786 | 6 |
| 50 | 415 | 10 | - | - | FAZ-D50/2 | 181787 | 6 |
| 63 | 415 | 10 | - | - | FAZ-D63/2 | 181788 | 6 |

SG53412



3-pole

| | | | | | | | |
|-----|-----|----|----------|---|------------|--------|---|
| 0.5 | 415 | 15 | 480Y/277 | 5 | FAZ-D0,5/3 | 181789 | 4 |
| 1 | 415 | 15 | 480Y/277 | 5 | FAZ-D1/3 | 181790 | 4 |
| 1.5 | 415 | 15 | 480Y/277 | 5 | FAZ-D1,5/3 | 181791 | 4 |
| 1.6 | 415 | 15 | 480Y/277 | 5 | FAZ-D1,6/3 | 181792 | 4 |
| 2 | 415 | 15 | 480Y/277 | 5 | FAZ-D2/3 | 181793 | 4 |
| 2.5 | 415 | 15 | 480Y/277 | 5 | FAZ-D2,5/3 | 181794 | 4 |
| 3 | 415 | 15 | 480Y/277 | 5 | FAZ-D3/3 | 181795 | 4 |
| 3.5 | 415 | 15 | 480Y/277 | 5 | FAZ-D3,5/3 | 181796 | 4 |
| 4 | 415 | 15 | 480Y/277 | 5 | FAZ-D4/3 | 181797 | 4 |
| 5 | 415 | 15 | 480Y/277 | 5 | FAZ-D5/3 | 181798 | 4 |
| 6 | 415 | 15 | 480Y/277 | 5 | FAZ-D6/3 | 181799 | 4 |
| 7 | 415 | 15 | 480Y/277 | 5 | FAZ-D7/3 | 181800 | 4 |
| 8 | 415 | 15 | 480Y/277 | 5 | FAZ-D8/3 | 181801 | 4 |
| 10 | 415 | 15 | 480Y/277 | 5 | FAZ-D10/3 | 181802 | 4 |
| 12 | 415 | 15 | 480Y/277 | 5 | FAZ-D12/3 | 181803 | 4 |
| 13 | 415 | 15 | 480Y/277 | 5 | FAZ-D13/3 | 181804 | 4 |
| 15 | 415 | 15 | 480Y/277 | 5 | FAZ-D15/3 | 181805 | 4 |
| 16 | 415 | 15 | 480Y/277 | 5 | FAZ-D16/3 | 181806 | 4 |
| 20 | 415 | 15 | 480Y/277 | 5 | FAZ-D20/3 | 181807 | 4 |
| 25 | 415 | 15 | 480Y/277 | 5 | FAZ-D25/3 | 181808 | 4 |
| 30 | 415 | 15 | 480Y/277 | 5 | FAZ-D30/3 | 181809 | 4 |
| 32 | 415 | 15 | 480Y/277 | 5 | FAZ-D32/3 | 181810 | 4 |
| 40 | 415 | 10 | 480Y/277 | 5 | FAZ-D40/3 | 181811 | 4 |
| 50 | 415 | 10 | - | - | FAZ-D50/3 | 181812 | 4 |
| 63 | 415 | 10 | - | - | FAZ-D63/3 | 181813 | 4 |

SG55712



| Rated current I_n (A) | Rated voltage (V) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Rated voltage UL1077 (V) | Breaking capacity acc. to UL1077 (kA) | Type Designation | Article No. | Units per package |
|----------------------------|----------------------|---|--------------------------------|--|---------------------|-------------|-------------------------|
|----------------------------|----------------------|---|--------------------------------|--|---------------------|-------------|-------------------------|

3+N-pole

| | | | | | | | |
|-----|-----|----|----------|---|-------------|--------|---|
| 0.5 | 415 | 15 | 480Y/277 | 5 | FAZ-D0,5/3N | 181814 | 3 |
| 1 | 415 | 15 | 480Y/277 | 5 | FAZ-D1/3N | 181815 | 3 |
| 1.5 | 415 | 15 | 480Y/277 | 5 | FAZ-D1,5/3N | 181816 | 3 |
| 1.6 | 415 | 15 | 480Y/277 | 5 | FAZ-D1,6/3N | 181817 | 3 |
| 2 | 415 | 15 | 480Y/277 | 5 | FAZ-D2/3N | 181818 | 3 |
| 2.5 | 415 | 15 | 480Y/277 | 5 | FAZ-D2,5/3N | 181819 | 3 |
| 3 | 415 | 15 | 480Y/277 | 5 | FAZ-D3/3N | 181820 | 3 |
| 3.5 | 415 | 15 | 480Y/277 | 5 | FAZ-D3,5/3N | 181821 | 3 |
| 4 | 415 | 15 | 480Y/277 | 5 | FAZ-D4/3N | 181822 | 3 |
| 5 | 415 | 15 | 480Y/277 | 5 | FAZ-D5/3N | 181823 | 3 |
| 6 | 415 | 15 | 480Y/277 | 5 | FAZ-D6/3N | 181824 | 3 |
| 8 | 415 | 15 | 480Y/277 | 5 | FAZ-D8/3N | 181825 | 3 |
| 10 | 415 | 15 | 480Y/277 | 5 | FAZ-D10/3N | 181826 | 3 |
| 12 | 415 | 15 | 480Y/277 | 5 | FAZ-D12/3N | 181827 | 3 |
| 13 | 415 | 15 | 480Y/277 | 5 | FAZ-D13/3N | 181828 | 3 |
| 15 | 415 | 15 | 480Y/277 | 5 | FAZ-D15/3N | 181829 | 3 |
| 16 | 415 | 15 | 480Y/277 | 5 | FAZ-D16/3N | 181830 | 3 |
| 20 | 415 | 15 | 480Y/277 | 5 | FAZ-D20/3N | 181639 | 3 |
| 25 | 415 | 15 | 480Y/277 | 5 | FAZ-D25/3N | 181640 | 3 |
| 32 | 415 | 15 | 480Y/277 | 5 | FAZ-D32/3N | 181641 | 3 |
| 40 | 415 | 15 | 480Y/277 | 5 | FAZ-D40/3N | 181642 | 3 |
| 50 | 415 | 10 | - | - | FAZ-D50/3N | 181643 | 3 |
| 63 | 415 | 10 | - | - | FAZ-D63/3N | 181644 | 3 |

SG55812



4-pole

| | | | | | | | |
|-----|-----|----|----------|---|------------|--------|---|
| 0.5 | 415 | 15 | 480Y/277 | 5 | FAZ-D0,5/4 | 181645 | 3 |
| 1 | 415 | 15 | 480Y/277 | 5 | FAZ-D1/4 | 181646 | 3 |
| 1.5 | 415 | 15 | 480Y/277 | 5 | FAZ-D1,5/4 | 181647 | 3 |
| 1.6 | 415 | 15 | 480Y/277 | 5 | FAZ-D1,6/4 | 181648 | 3 |
| 2 | 415 | 15 | 480Y/277 | 5 | FAZ-D2/4 | 181649 | 3 |
| 2.5 | 415 | 15 | 480Y/277 | 5 | FAZ-D2,5/4 | 181650 | 3 |
| 3 | 415 | 15 | 480Y/277 | 5 | FAZ-D3/4 | 181843 | 3 |
| 3.5 | 415 | 15 | 480Y/277 | 5 | FAZ-D3,5/4 | 181844 | 3 |
| 4 | 415 | 15 | 480Y/277 | 5 | FAZ-D4/4 | 181845 | 3 |
| 5 | 415 | 15 | 480Y/277 | 5 | FAZ-D5/4 | 181846 | 3 |
| 6 | 415 | 15 | 480Y/277 | 5 | FAZ-D6/4 | 181847 | 3 |
| 7 | 415 | 15 | 480Y/277 | 5 | FAZ-D7/4 | 181848 | 3 |
| 8 | 415 | 15 | 480Y/277 | 5 | FAZ-D8/4 | 181849 | 3 |
| 10 | 415 | 15 | 480Y/277 | 5 | FAZ-D10/4 | 181850 | 3 |
| 12 | 415 | 15 | 480Y/277 | 5 | FAZ-D12/4 | 181851 | 3 |
| 13 | 415 | 15 | 480Y/277 | 5 | FAZ-D13/4 | 181852 | 3 |
| 15 | 415 | 15 | 480Y/277 | 5 | FAZ-D15/4 | 181853 | 3 |
| 16 | 415 | 15 | 480Y/277 | 5 | FAZ-D16/4 | 181854 | 3 |
| 20 | 415 | 15 | 480Y/277 | 5 | FAZ-D20/4 | 181855 | 3 |
| 25 | 415 | 15 | 480Y/277 | 5 | FAZ-D25/4 | 181856 | 3 |
| 32 | 415 | 15 | 480Y/277 | 5 | FAZ-D32/4 | 181857 | 3 |
| 40 | 415 | 10 | 480Y/277 | 5 | FAZ-D40/4 | 181858 | 3 |
| 50 | 415 | 10 | - | - | FAZ-D50/4 | 181859 | 3 |
| 63 | 415 | 10 | - | - | FAZ-D63/4 | 181860 | 3 |

FAZ Miniature Circuit Breakers (MCBs)

Characteristic K

| | Rated current I_n (A) | Rated voltage (V) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Rated voltage UL1077 (V) | Breaking capacity acc. to UL1077 (kA) | Type Designation | Article No. | Units per package |
|---------------|----------------------------|----------------------|---|--------------------------------|--|---------------------|-------------|-------------------------|
| 1-pole | | | | | | | | |
| 0.5 | 240/415 | 15 | 277 | 5 | | FAZ-K0,5/1 | 278589 | 12/120 |
| 1 | 240/415 | 15 | 277 | 5 | | FAZ-K1/1 | 278590 | 12/120 |
| 1.6 | 240/415 | 15 | 277 | 5 | | FAZ-K1,6/1 | 278591 | 12/120 |
| 2 | 240/415 | 15 | 277 | 5 | | FAZ-K2/1 | 278592 | 12/120 |
| 3 | 240/415 | 15 | 277 | 5 | | FAZ-K3/1 | 278593 | 12/120 |
| 4 | 240/415 | 15 | 277 | 5 | | FAZ-K4/1 | 278594 | 12/120 |
| 6 | 240/415 | 15 | 277 | 5 | | FAZ-K6/1 | 278595 | 12/120 |
| 8 | 240/415 | 15 | 277 | 5 | | FAZ-K8/1 | 278596 | 12/120 |
| 10 | 240/415 | 15 | 277 | 5 | | FAZ-K10/1 | 278597 | 12/120 |
| 13 | 240/415 | 15 | 277 | 5 | | FAZ-K13/1 | 278598 | 12/120 |
| 16 | 240/415 | 15 | 277 | 5 | | FAZ-K16/1 | 278599 | 12/120 |
| 20 | 240/415 | 15 | 277 | 5 | | FAZ-K20/1 | 278600 | 12/120 |
| 25 | 240/415 | 15 | 277 | 5 | | FAZ-K25/1 | 278601 | 12/120 |
| 32 | 240/415 | 15 | 277 | 5 | | FAZ-K32/1 | 278602 | 12/120 |
| 40 | 240/415 | 15 | 277 | 5 | | FAZ-K40/1 | 278603 | 12/120 |
| 50 | 240/415 | 15 | 277 | 5 | | FAZ-K50/1 | 278604 | 12/120 |
| 63 | 240/415 | 15 | 277 | 5 | | FAZ-K63/1 | 278605 | 12/120 |

SG53112



SG55612



| | | | | | | | | |
|-----------------|-----|----|-----|---|--|-------------|--------|------|
| 1+N-pole | | | | | | | | |
| 0.5 | 240 | 15 | 277 | 5 | | FAZ-K0,5/1N | 278702 | 1/60 |
| 1 | 240 | 15 | 277 | 5 | | FAZ-K1/1N | 278703 | 1/60 |
| 1.6 | 240 | 15 | 277 | 5 | | FAZ-K1,6/1N | 278704 | 1/60 |
| 2 | 240 | 15 | 277 | 5 | | FAZ-K2/1N | 278705 | 1/60 |
| 3 | 240 | 15 | 277 | 5 | | FAZ-K3/1N | 278706 | 1/60 |
| 4 | 240 | 15 | 277 | 5 | | FAZ-K4/1N | 278707 | 1/60 |
| 6 | 240 | 15 | 277 | 5 | | FAZ-K6/1N | 278708 | 1/60 |
| 8 | 240 | 15 | 277 | 5 | | FAZ-K8/1N | 278709 | 1/60 |
| 10 | 240 | 15 | 277 | 5 | | FAZ-K10/1N | 278710 | 1/60 |
| 13 | 240 | 15 | 277 | 5 | | FAZ-K13/1N | 278711 | 1/60 |
| 16 | 240 | 15 | 277 | 5 | | FAZ-K16/1N | 278712 | 1/60 |
| 20 | 240 | 15 | 277 | 5 | | FAZ-K20/1N | 278713 | 1/60 |
| 25 | 240 | 15 | 277 | 5 | | FAZ-K25/1N | 278714 | 1/60 |
| 32 | 240 | 15 | 277 | 5 | | FAZ-K32/1N | 278715 | 1/60 |
| 40 | 240 | 15 | 277 | 5 | | FAZ-K40/1N | 278716 | 1/60 |
| 50 | 240 | 15 | 277 | 5 | | FAZ-K50/1N | 278717 | 1/60 |
| 63 | 240 | 15 | 277 | 5 | | FAZ-K63/1N | 278718 | 1/60 |

SG55112



| Rated current I_n (A) | Rated voltage (V) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Rated voltage UL1077 (V) | Breaking capacity acc. to UL1077 (kA) | Type Designation | Article No. | Units per package |
|----------------------------|----------------------|---|--------------------------------|--|---------------------|-------------|-------------------------|
|----------------------------|----------------------|---|--------------------------------|--|---------------------|-------------|-------------------------|

2-pole

| | | | | | | | |
|-----|-----|----|----------|---|------------|--------|------|
| 0.5 | 415 | 15 | 480Y/277 | 5 | FAZ-K0,5/2 | 278788 | 1/60 |
| 1 | 415 | 15 | 480Y/277 | 5 | FAZ-K1/2 | 278789 | 1/60 |
| 1.6 | 415 | 15 | 480Y/277 | 5 | FAZ-K1,6/2 | 278790 | 1/60 |
| 2 | 415 | 15 | 480Y/277 | 5 | FAZ-K2/2 | 278791 | 1/60 |
| 3 | 415 | 15 | 480Y/277 | 5 | FAZ-K3/2 | 278792 | 1/60 |
| 4 | 415 | 15 | 480Y/277 | 5 | FAZ-K4/2 | 278793 | 1/60 |
| 6 | 415 | 15 | 480Y/277 | 5 | FAZ-K6/2 | 278794 | 1/60 |
| 8 | 415 | 15 | 480Y/277 | 5 | FAZ-K8/2 | 278795 | 1/60 |
| 10 | 415 | 15 | 480Y/277 | 5 | FAZ-K10/2 | 278796 | 1/60 |
| 13 | 415 | 15 | 480Y/277 | 5 | FAZ-K13/2 | 278797 | 1/60 |
| 16 | 415 | 15 | 480Y/277 | 5 | FAZ-K16/2 | 278798 | 1/60 |
| 20 | 415 | 15 | 480Y/277 | 5 | FAZ-K20/2 | 278799 | 1/60 |
| 25 | 415 | 15 | 480Y/277 | 5 | FAZ-K25/2 | 278800 | 1/60 |
| 32 | 415 | 15 | 480Y/277 | 5 | FAZ-K32/2 | 278801 | 1/60 |
| 40 | 415 | 15 | 480Y/277 | 5 | FAZ-K40/2 | 278802 | 1/60 |
| 50 | 415 | 15 | 480Y/277 | 5 | FAZ-K50/2 | 278803 | 1/60 |
| 63 | 415 | 15 | 480Y/277 | 5 | FAZ-K63/2 | 278804 | 1/60 |

SG53412



3-pole

| | | | | | | | |
|-----|-----|----|----------|---|------------|--------|------|
| 0.5 | 415 | 15 | 480Y/277 | 5 | FAZ-K0,5/3 | 278901 | 1/40 |
| 1 | 415 | 15 | 480Y/277 | 5 | FAZ-K1/3 | 278902 | 1/40 |
| 1.6 | 415 | 15 | 480Y/277 | 5 | FAZ-K1,6/3 | 278903 | 1/40 |
| 2 | 415 | 15 | 480Y/277 | 5 | FAZ-K2/3 | 278904 | 1/40 |
| 3 | 415 | 15 | 480Y/277 | 5 | FAZ-K3/3 | 278905 | 1/40 |
| 4 | 415 | 15 | 480Y/277 | 5 | FAZ-K4/3 | 278906 | 1/40 |
| 6 | 415 | 15 | 480Y/277 | 5 | FAZ-K6/3 | 278907 | 1/40 |
| 8 | 415 | 15 | 480Y/277 | 5 | FAZ-K8/3 | 278908 | 1/40 |
| 10 | 415 | 15 | 480Y/277 | 5 | FAZ-K10/3 | 278909 | 1/40 |
| 13 | 415 | 15 | 480Y/277 | 5 | FAZ-K13/3 | 278910 | 1/40 |
| 16 | 415 | 15 | 480Y/277 | 5 | FAZ-K16/3 | 278911 | 1/40 |
| 20 | 415 | 15 | 480Y/277 | 5 | FAZ-K20/3 | 278912 | 1/40 |
| 25 | 415 | 15 | 480Y/277 | 5 | FAZ-K25/3 | 278913 | 1/40 |
| 32 | 415 | 15 | 480Y/277 | 5 | FAZ-K32/3 | 278914 | 1/40 |
| 40 | 415 | 15 | 480Y/277 | 5 | FAZ-K40/3 | 278915 | 1/40 |
| 50 | 415 | 15 | 480Y/277 | 5 | FAZ-K50/3 | 278916 | 1/40 |
| 63 | 415 | 15 | 480Y/277 | 5 | FAZ-K63/3 | 278917 | 1/40 |

| Rated current I_n (A) | Rated voltage (V) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Rated voltage UL1077 (V) | Breaking capacity acc. to UL1077 (kA) | Type Designation | Article No. | Units per package |
|----------------------------|----------------------|---|--------------------------------|--|---------------------|-------------|-------------------------|
|----------------------------|----------------------|---|--------------------------------|--|---------------------|-------------|-------------------------|

SG55712



3+N-pole

| | | | | | | | |
|-----|-----|----|----------|---|-------------|--------|------|
| 0.5 | 415 | 15 | 480Y/277 | 5 | FAZ-K0,5/3N | 279003 | 1/30 |
| 1 | 415 | 15 | 480Y/277 | 5 | FAZ-K1/3N | 279004 | 1/30 |
| 1.6 | 415 | 15 | 480Y/277 | 5 | FAZ-K1,6/3N | 279005 | 1/30 |
| 2 | 415 | 15 | 480Y/277 | 5 | FAZ-K2/3N | 279006 | 1/30 |
| 3 | 415 | 15 | 480Y/277 | 5 | FAZ-K3/3N | 279007 | 1/30 |
| 4 | 415 | 15 | 480Y/277 | 5 | FAZ-K4/3N | 279008 | 1/30 |
| 6 | 415 | 15 | 480Y/277 | 5 | FAZ-K6/3N | 279009 | 1/30 |
| 8 | 415 | 15 | 480Y/277 | 5 | FAZ-K8/3N | 279010 | 1/30 |
| 10 | 415 | 15 | 480Y/277 | 5 | FAZ-K10/3N | 279011 | 1/30 |
| 13 | 415 | 15 | 480Y/277 | 5 | FAZ-K13/3N | 279012 | 1/30 |
| 16 | 415 | 15 | 480Y/277 | 5 | FAZ-K16/3N | 279013 | 1/30 |
| 20 | 415 | 15 | 480Y/277 | 5 | FAZ-K20/3N | 279014 | 1/30 |
| 25 | 415 | 15 | 480Y/277 | 5 | FAZ-K25/3N | 279015 | 1/30 |
| 32 | 415 | 15 | 480Y/277 | 5 | FAZ-K32/3N | 279016 | 1/30 |
| 40 | 415 | 15 | 480Y/277 | 5 | FAZ-K40/3N | 279017 | 1/30 |
| 50 | 415 | 15 | 480Y/277 | 5 | FAZ-K50/3N | 279018 | 1/30 |
| 63 | 415 | 15 | 480Y/277 | 5 | FAZ-K63/3N | 279019 | 1/30 |

SG55812



4-pole

| | | | | | | | |
|-----|-----|----|----------|---|------------|--------|------|
| 0.5 | 415 | 15 | 480Y/277 | 5 | FAZ-K0,5/4 | 279089 | 1/30 |
| 1 | 415 | 15 | 480Y/277 | 5 | FAZ-K1/4 | 279090 | 1/30 |
| 1.6 | 415 | 15 | 480Y/277 | 5 | FAZ-K1,6/4 | 279091 | 1/30 |
| 2 | 415 | 15 | 480Y/277 | 5 | FAZ-K2/4 | 279092 | 1/30 |
| 3 | 415 | 15 | 480Y/277 | 5 | FAZ-K3/4 | 279093 | 1/30 |
| 4 | 415 | 15 | 480Y/277 | 5 | FAZ-K4/4 | 279094 | 1/30 |
| 6 | 415 | 15 | 480Y/277 | 5 | FAZ-K6/4 | 279095 | 1/30 |
| 8 | 415 | 15 | 480Y/277 | 5 | FAZ-K8/4 | 279096 | 1/30 |
| 10 | 415 | 15 | 480Y/277 | 5 | FAZ-K10/4 | 279097 | 1/30 |
| 13 | 415 | 15 | 480Y/277 | 5 | FAZ-K13/4 | 279098 | 1/30 |
| 16 | 415 | 15 | 480Y/277 | 5 | FAZ-K16/4 | 279099 | 1/30 |
| 20 | 415 | 15 | 480Y/277 | 5 | FAZ-K20/4 | 279100 | 1/30 |
| 25 | 415 | 15 | 480Y/277 | 5 | FAZ-K25/4 | 279101 | 1/30 |
| 32 | 415 | 15 | 480Y/277 | 5 | FAZ-K32/4 | 279102 | 1/30 |
| 40 | 415 | 15 | 480Y/277 | 5 | FAZ-K40/4 | 279103 | 1/30 |
| 50 | 415 | 15 | 480Y/277 | 5 | FAZ-K50/4 | 279104 | 1/30 |
| 63 | 415 | 15 | 480Y/277 | 5 | FAZ-K63/4 | 279105 | 1/30 |

FAZ Miniature Circuit Breakers (MCBs)

Characteristic S

| | Rated current I_n (A) | Rated voltage (V) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Rated voltage UL1077 (V) | Breaking capacity acc. to UL1077 (kA) | Type Designation | Article No. | Units per package |
|---------------|----------------------------|----------------------|---|--------------------------------|--|---------------------|-------------|-------------------------|
| 1-pole | | | | | | | | |
| | 1 | 240/415 | 10 | 277 | 5 | FAZ-S1/1 | 181861 | 12 |
| | 2 | 240/415 | 10 | 277 | 5 | FAZ-S2/1 | 181862 | 12 |
| | 3 | 240/415 | 10 | 277 | 5 | FAZ-S3/1 | 181863 | 12 |
| | 4 | 240/415 | 10 | 277 | 5 | FAZ-S4/1 | 181864 | 12 |
| | 6 | 240/415 | 10 | 277 | 5 | FAZ-S6/1 | 181865 | 12 |
| | 10 | 240/415 | 10 | 277 | 5 | FAZ-S10/1 | 181866 | 12 |
| | 16 | 240/415 | 10 | 277 | 5 | FAZ-S16/1 | 181867 | 12 |
| | 20 | 240/415 | 10 | 277 | 5 | FAZ-S20/1 | 181868 | 12 |
| | 25 | 240/415 | 10 | 277 | 5 | FAZ-S25/1 | 181869 | 12 |
| | 32 | 240/415 | 10 | 277 | 5 | FAZ-S32/1 | 181870 | 12 |
| | 40 | 240/415 | 10 | 277 | 5 | FAZ-S40/1 | 181871 | 12 |

SG53112



SG55112



| | | | | | | | | |
|---------------|----|-----|----|----------|---|-----------|--------|---|
| 2-pole | | | | | | | | |
| | 1 | 415 | 10 | 480Y/277 | 5 | FAZ-S1/2 | 181872 | 6 |
| | 2 | 415 | 10 | 480Y/277 | 5 | FAZ-S2/2 | 181873 | 6 |
| | 3 | 415 | 10 | 480Y/277 | 5 | FAZ-S3/2 | 181874 | 6 |
| | 4 | 415 | 10 | 480Y/277 | 5 | FAZ-S4/2 | 181875 | 6 |
| | 6 | 415 | 10 | 480Y/277 | 5 | FAZ-S6/2 | 181876 | 6 |
| | 10 | 415 | 10 | 480Y/277 | 5 | FAZ-S10/2 | 181877 | 6 |
| | 16 | 415 | 10 | 480Y/277 | 5 | FAZ-S16/2 | 181878 | 6 |
| | 20 | 415 | 10 | 480Y/277 | 5 | FAZ-S20/2 | 181879 | 6 |
| | 25 | 415 | 10 | 480Y/277 | 5 | FAZ-S25/2 | 181880 | 6 |
| | 32 | 415 | 10 | 480Y/277 | 5 | FAZ-S32/2 | 181881 | 6 |
| | 40 | 415 | 10 | 480Y/277 | 5 | FAZ-S40/2 | 181882 | 6 |

FAZ Miniature Circuit Breakers (MCBs)

Characteristic Z

| Rated current I_n (A) | Rated voltage (V) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Rated voltage UL1077 (V) | Breaking capacity acc. to UL1077 (kA) | Type Designation | Article No. | Units per package |
|----------------------------|----------------------|---|--------------------------------|--|---------------------|-------------|-------------------------|
| 1-pole | | | | | | | |
| 0,5 | 240/415 | 15 | 277 | 5 | FAZ-Z0,5/1 | 278617 | 12/120 |
| 1 | 240/415 | 15 | 277 | 5 | FAZ-Z1/1 | 278618 | 12/120 |
| 1.6 | 240/415 | 15 | 277 | 5 | FAZ-Z1,6/1 | 278619 | 12/120 |
| 2 | 240/415 | 15 | 277 | 5 | FAZ-Z2/1 | 278620 | 12/120 |
| 3 | 240/415 | 15 | 277 | 5 | FAZ-Z3/1 | 278621 | 12/120 |
| 4 | 240/415 | 15 | 277 | 5 | FAZ-Z4/1 | 278622 | 12/120 |
| 6 | 240/415 | 15 | 277 | 5 | FAZ-Z6/1 | 278623 | 12/120 |
| 8 | 240/415 | 15 | 277 | 5 | FAZ-Z8/1 | 278624 | 12/120 |
| 10 | 240/415 | 15 | 277 | 5 | FAZ-Z10/1 | 278625 | 12/120 |
| 13 | 240/415 | 15 | 277 | 5 | FAZ-Z13/1 | 106020 | 12/120 |
| 16 | 240/415 | 15 | 277 | 5 | FAZ-Z16/1 | 278626 | 12/120 |
| 20 | 240/415 | 15 | 277 | 5 | FAZ-Z20/1 | 278627 | 12/120 |
| 25 | 240/415 | 15 | 277 | 5 | FAZ-Z25/1 | 278628 | 12/120 |
| 32 | 240/415 | 15 | 277 | 5 | FAZ-Z32/1 | 278629 | 12/120 |
| 40 | 240/415 | 15 | 277 | 5 | FAZ-Z40/1 | 278630 | 12/120 |
| 50 | 240/415 | 15 | 277 | 5 | FAZ-Z50/1 | 278631 | 12/120 |
| 63 | 240/415 | 15 | 277 | 5 | FAZ-Z63/1 | 278632 | 12/120 |

SG53112



SG55112



| | | | | | | | |
|---------------|-----|----|----------|---|------------|--------|------|
| 2-pole | | | | | | | |
| 0,5 | 415 | 15 | 480Y/277 | 5 | FAZ-Z0,5/2 | 278816 | 1/60 |
| 1 | 415 | 15 | 480Y/277 | 5 | FAZ-Z1/2 | 278817 | 1/60 |
| 1.6 | 415 | 15 | 480Y/277 | 5 | FAZ-Z1,6/2 | 278818 | 1/60 |
| 2 | 415 | 15 | 480Y/277 | 5 | FAZ-Z2/2 | 278819 | 1/60 |
| 3 | 415 | 15 | 480Y/277 | 5 | FAZ-Z3/2 | 278820 | 1/60 |
| 4 | 415 | 15 | 480Y/277 | 5 | FAZ-Z4/2 | 278821 | 1/60 |
| 6 | 415 | 15 | 480Y/277 | 5 | FAZ-Z6/2 | 278822 | 1/60 |
| 8 | 415 | 15 | 480Y/277 | 5 | FAZ-Z8/2 | 278823 | 1/60 |
| 10 | 415 | 15 | 480Y/277 | 5 | FAZ-Z10/2 | 278824 | 1/60 |
| 13 | 415 | 15 | 480Y/277 | 5 | FAZ-Z13/2 | 106021 | 1/60 |
| 16 | 415 | 15 | 480Y/277 | 5 | FAZ-Z16/2 | 278825 | 1/60 |
| 20 | 415 | 15 | 480Y/277 | 5 | FAZ-Z20/2 | 278826 | 1/60 |
| 25 | 415 | 15 | 480Y/277 | 5 | FAZ-Z25/2 | 278827 | 1/60 |
| 32 | 415 | 15 | 480Y/277 | 5 | FAZ-Z32/2 | 278828 | 1/60 |
| 40 | 415 | 15 | 480Y/277 | 5 | FAZ-Z40/2 | 278829 | 1/60 |
| 50 | 415 | 15 | 480Y/277 | 5 | FAZ-Z50/2 | 278830 | 1/60 |
| 63 | 415 | 15 | 480Y/277 | 5 | FAZ-Z63/2 | 278831 | 1/60 |

SG53412



3-pole

| Rated current I_n (A) | Rated voltage (V) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Rated voltage UL1077 (V) | Breaking capacity acc. to UL1077 (kA) | Type Designation | Article No. | Units per package |
|----------------------------|----------------------|---|--------------------------------|--|---------------------|-------------|-------------------------|
| 0.5 | 415 | 15 | 480Y/277 | 5 | FAZ-Z0,5/3 | 278918 | 1/40 |
| 1 | 415 | 15 | 480Y/277 | 5 | FAZ-Z1/3 | 278919 | 1/40 |
| 1.6 | 415 | 15 | 480Y/277 | 5 | FAZ-Z1,6/3 | 278920 | 1/40 |
| 2 | 415 | 15 | 480Y/277 | 5 | FAZ-Z2/3 | 278921 | 1/40 |
| 3 | 415 | 15 | 480Y/277 | 5 | FAZ-Z3/3 | 278922 | 1/40 |
| 4 | 415 | 15 | 480Y/277 | 5 | FAZ-Z4/3 | 278923 | 1/40 |
| 6 | 415 | 15 | 480Y/277 | 5 | FAZ-Z6/3 | 278924 | 1/40 |
| 8 | 415 | 15 | 480Y/277 | 5 | FAZ-Z8/3 | 278925 | 1/40 |
| 10 | 415 | 15 | 480Y/277 | 5 | FAZ-Z10/3 | 278926 | 1/40 |
| 13 | 415 | 15 | 480Y/277 | 5 | FAZ-Z13/3 | 106022 | 1/40 |
| 16 | 415 | 15 | 480Y/277 | 5 | FAZ-Z16/3 | 278927 | 1/40 |
| 20 | 415 | 15 | 480Y/277 | 5 | FAZ-Z20/3 | 278928 | 1/40 |
| 25 | 415 | 15 | 480Y/277 | 5 | FAZ-Z25/3 | 278929 | 1/40 |
| 32 | 415 | 15 | 480Y/277 | 5 | FAZ-Z32/3 | 278930 | 1/40 |
| 40 | 415 | 15 | 480Y/277 | 5 | FAZ-Z40/3 | 278931 | 1/40 |
| 50 | 415 | 15 | 480Y/277 | 5 | FAZ-Z50/3 | 278932 | 1/40 |
| 63 | 415 | 15 | 480Y/277 | 5 | FAZ-Z63/3 | 278933 | 1/40 |

SG55812



4-pole

| Rated current I_n (A) | Rated voltage (V) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Rated voltage UL1077 (V) | Breaking capacity acc. to UL1077 (kA) | Type Designation | Article No. | Units per package |
|----------------------------|----------------------|---|--------------------------------|--|---------------------|-------------|-------------------------|
| 0.5 | 415 | 15 | 480Y/277 | 5 | FAZ-Z0,5/4 | 279106 | 1/60 |
| 1 | 415 | 15 | 480Y/277 | 5 | FAZ-Z1/4 | 279107 | 1/60 |
| 1.6 | 415 | 15 | 480Y/277 | 5 | FAZ-Z1,6/4 | 279108 | 1/60 |
| 2 | 415 | 15 | 480Y/277 | 5 | FAZ-Z2/4 | 279109 | 1/60 |
| 3 | 415 | 15 | 480Y/277 | 5 | FAZ-Z3/4 | 279110 | 1/60 |
| 4 | 415 | 15 | 480Y/277 | 5 | FAZ-Z4/4 | 279111 | 1/60 |
| 6 | 415 | 15 | 480Y/277 | 5 | FAZ-Z6/4 | 279112 | 1/60 |
| 8 | 415 | 15 | 480Y/277 | 5 | FAZ-Z8/4 | 279113 | 1/60 |
| 10 | 415 | 15 | 480Y/277 | 5 | FAZ-Z10/4 | 279114 | 1/60 |
| 13 | 415 | 15 | 480Y/277 | 5 | FAZ-Z13/4 | 106023 | 1/60 |
| 16 | 415 | 15 | 480Y/277 | 5 | FAZ-Z16/4 | 279115 | 1/60 |
| 20 | 415 | 15 | 480Y/277 | 5 | FAZ-Z20/4 | 279116 | 1/60 |
| 25 | 415 | 15 | 480Y/277 | 5 | FAZ-Z25/4 | 279117 | 1/60 |
| 32 | 415 | 15 | 480Y/277 | 5 | FAZ-Z32/4 | 279118 | 1/60 |
| 40 | 415 | 15 | 480Y/277 | 5 | FAZ-Z40/4 | 279119 | 1/60 |
| 50 | 415 | 15 | 480Y/277 | 5 | FAZ-Z50/4 | 279120 | 1/60 |
| 63 | 415 | 15 | 480Y/277 | 5 | FAZ-Z63/4 | 279121 | 1/60 |

FAZ-PN Miniature Circuit Breakers (MCBs)

Characteristic B

| Rated current I_n (A) | Rated voltage (V) | Breaking capacity acc. to IEC/EN 60898-1 (kA) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Type Designation | Article No. | Units per package |
|----------------------------|----------------------|---|---|---------------------|-------------|-------------------------|
| 1+N-pole (1MU) | | | | | | |
| 6 | 240 | 6 | 10 | FAZ-PN-B6/1N | 279146 | 12/120 |
| 10 | 240 | 6 | 10 | FAZ-PN-B10/1N | 279147 | 12/120 |
| 13 | 240 | 6 | 10 | FAZ-PN-B13/1N | 279148 | 12/120 |
| 16 | 240 | 6 | 10 | FAZ-PN-B16/1N | 279149 | 12/120 |
| 20 | 240 | 6 | 10 | FAZ-PN-B20/1N | 279150 | 12/120 |
| 25 | 240 | 6 | 10 | FAZ-PN-B25/1N | 279151 | 12/120 |
| 32 | 240 | 6 | 10 | FAZ-PN-B32/1N | 279152 | 12/120 |
| 40 | 240 | 6 | 10 | FAZ-PN-B40/1N | 279153 | 12/120 |

SG54212



FAZ-PN Miniature Circuit Breakers (MCBs)

Characteristic C



| Rated current I_n (A) | Rated voltage (V) | Breaking capacity acc. to IEC/EN 60898-1 (kA) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Type Designation | Article No. | Units per package |
|----------------------------|----------------------|---|---|---------------------|-------------|-------------------------|
| 1+N-pole (1MU) | | | | | | |
| 2 | 240 | 6 | 10 | FAZ-PN-C2/1N | 279154 | 12/120 |
| 4 | 240 | 6 | 10 | FAZ-PN-C4/1N | 279155 | 12/120 |
| 6 | 240 | 6 | 10 | FAZ-PN-C6/1N | 279156 | 12/120 |
| 10 | 240 | 6 | 10 | FAZ-PN-C10/1N | 279157 | 12/120 |
| 13 | 240 | 6 | 10 | FAZ-PN-C13/1N | 279158 | 12/120 |
| 16 | 240 | 6 | 10 | FAZ-PN-C16/1N | 279159 | 12/120 |
| 20 | 240 | 6 | 10 | FAZ-PN-C20/1N | 279160 | 12/120 |
| 25 | 240 | 6 | 10 | FAZ-PN-C25/1N | 279161 | 12/120 |
| 32 | 240 | 6 | 10 | FAZ-PN-C32/1N | 279162 | 12/120 |
| 40 | 240 | 6 | 10 | FAZ-PN-C40/1N | 279163 | 12/120 |

SG54212



FAZ-...-HS Miniature Circuit Breakers (MCBs)

Characteristic B

| | Rated current I_n (A) | Rated voltage (V) | Breaking capacity acc. to IEC/EN 60898-1 (kA) | Type Designation | Article No. | Units per package |
|--|----------------------------|----------------------|---|---------------------|-------------|-------------------------|
| 1-pole | | | | | | |
|  wa_sg00114 | 4 | 240 | 10 | FAZ-B4/1-HS | 279274 | 12/120 |
| 2-pole | | | | | | |
|  SG55512 | 4 | 240 | 10 | FAZ-B4/2-HS | 279275 | 1/60 |

FAZ Miniature Circuit Breakers

Accessories:

| | | |
|---|--------------|------------------------|
| Auxiliary switch for subsequent installation | ZP-IHK | 286052 |
| Auxiliary switch for subsequent installation | ZP-WHK | 286053 |
| Tripping signal contact for subsequent installation | ZP-NHK | 248437 |
| Shunt trip release | ZP-ASA | 248438, 248439 |
| Undervoltage release | Z-USA | 258288, 248289, 248290 |
| | Z-USD | 248292, 248291 |
| Switching interlock | Z-IS/SPE-1TE | 274418 |
| Terminal cover | | |
| 1-pole | Z7-AK-1TE | 750754200 |
| 2-pole | Z-CV/SD-2P | 221954800 |
| 3-pole | Z-CV/SD-3P | 221954900 |
| 4-pole | Z-CV/SD-4P | 221953900 |

Specifications FAZ

Technical data


| | B Curve | C Curve | D Curve |
|---|--|---|---|
| Electrical | | | |
| Approvals | UR (UL 1077), CSA (CSA 22.2 No. 235), CE, CB (Not for D50 and D63) | | |
| Standards | IEC/EN 60947-2 | | |
| Short-circuit trip response | 3–5 I_n | 5–10 I_n | 10–20 I_n |
| Supplementary Protectors—UL/CSA | | | |
| Current range | 1–63A | 0.5–63A | 0.5–40A |
| Maximum voltage ratings—UL/CSA | | | |
| Single-pole | 277 Vac 48 Vdc | 277 Vac 48 Vdc | 277 Vac 48 Vdc |
| Two-, three-pole | 480Y/277 Vac | 480Y/277 Vac | 480Y/277 Vac |
| Two poles in series | 96 Vdc | 96 Vdc | 96 Vdc |
| Thermal tripping characteristics | | | |
| Single-pole | < 1 hour @ 1.35 x I_n @ 40°C | < 1 hour @ 1.35 x I_n @ 40°C | < 1 hour @ 1.35 x I_n @ 40°C |
| Multi-pole | < 1 hour @ 1.45 x I_n @ 40°C | < 1 hour @ 1.45 x I_n @ 40°C | < 1 hour @ 1.45 x I_n @ 40°C |
| Short-circuit ratings (at max. voltage) | | | |
| Single-pole | 10 kA (5 kA for 40–63A device) | 10 kA (5 kA for 40–63A device) | 5 kA |
| Two-, three-pole | 10 kA (5 kA for 40–63A device) | 10 kA (5 kA for 40–63A device) | 5 kA |
| Single-pole | 10 kA @ 48 Vdc | 10 kA @ 48 Vdc | 10 kA @ 48 Vdc |
| Two poles in series | 10 kA @ 96 Vdc | 10 kA @ 96 Vdc | 10 kA @ 96 Vdc |
| Miniature Circuit Breaker—IEC | | | |
| Current range | 1–63A | 0.5–63A | 0.5–63A |
| Maximum voltage ratings—IEC 60947-2 | | | |
| Single-pole | 230 Vac 60 Vdc | 230 Vac 60 Vdc | 230 Vac 60 Vdc |
| Two-, three-pole | 230/400 Vac | 230/400 Vac | 230/400 Vac |
| Maximum Voltage Ratings—IEC 60898 | | | |
| Single-pole | 240 Vac | 240 Vac | 240 Vac |
| Two-, three-pole | 240/415 Vac | 240/415 Vac | 240/415 Vac |
| Thermal tripping characteristics | | | |
| | > 1 hour @ 1.05 x I_n @ 40°C < 1 hour @ 1.3 x I_n @ 40°C | > 1 hour @ 1.05 x I_n @ 40°C < 1 hour @ 1.3 x I_n @ 40°C | > 1 hour @ 1.05 x I_n @ 40°C < 1 hour @ 1.3 x I_n @ 40°C |
| Interrupt ratings (at max. voltage) | | | |
| IEC 60947-2 | 15 kA | 15 kA | 15 kA (type D50 and D63: 10kA) |
| IEC 60898 | 10 kA | 10 kA | 10 kA (type D50 and D63: 6kA) |
| Operational switching capacity | 7.5 kA | 7.5 kA | 7.5 kA (type D50 and D63: 6kA) |
| Max. back-up fuse [gL/gG] | 125A | 125A | 125A |
| Rated impulse withstand— U_{imp} | 4000 Vac | 4000 Vac | 4000 Vac |
| Rated insulation voltage— U_i | 440 Vac | 440 Vac | 440 Vac |
| Environmental/General | | | |
| Selectivity class | 3 | 3 | 3 |
| Lifespan (operations) | > 10000 (1 operation = ON/OFF) | > 10000 (1 operation = ON/OFF) | > 10000 (1 operation = ON/OFF) |
| Shock (IEC 68-2-22) | 10g–120 ms | 10g–120 ms | 10g–120 ms |
| Operating temperature range | -40 to +75°C | -40 to +75°C | -40 to +75°C |
| Mechanical | | | |
| Standard front dimension | | | |
| Device height | 80 mm | 80 mm | 80 mm |
| Terminal protection | Finger and back-of-hand proof | Finger and back-of-hand proof | Finger and back-of-hand proof |
| Mounting width per pole | 17.5 mm | 17.5 mm | 17.5 mm |
| Mounting | IEC/EN 60715 top-hat rail | IEC/EN 60715 top-hat rail | IEC/EN 60715 top-hat rail |
| Degree of protection | IP20 | IP20 | IP20 |
| Terminals top and bottom | Twin-purpose terminals | Twin-purpose terminals | Twin-purpose terminals |
| Supply connection | Line or load side | Line or load side | Line or load side |
| Terminal capacity [mm ²] | 1 x 25 / 2 x 10 | 1 x 25 / 2 x 10 | 1 x 25 / 2 x 10 |
| Torque | 2.4 Nm | 2.4 Nm | 2.4 Nm |
| Thickness of busbar material | 0.8–2 mm | 0.8–2 mm | 0.8–2 mm |
| Mounting position | As required | As required | As required |

Specifications FAZ

Technical Data (continued)


| | K Curve | S Curve | Z Curve |
|--|---|---|---|
| Electrical | | | |
| Approvals | UR (UL 1077), CE | UR (UL 1077), CSA (CSA 22.2 No. 235) for 1-16 A, CE, CB | UR (UL 1077), CE |
| Standards | IEC/EN 60947-2 | | |
| Short-circuit trip response | 8–12 I_n | 13–17 I_n | 2–3 I_n |
| Supplementary Protectors—UL/CSA | | | |
| Current range | 0.5–63A | 0.5–40A | 1–63A |
| Maximum voltage ratings—UL/CSA | | | |
| Single-pole, single-pole + neutral | 277 Vac 48 Vdc | 277 Vac 48 Vdc | 277 Vac 48 Vdc |
| Two-, three-, four-pole and three-pole + neutral | 480Y/277 Vac | 480Y/277 Vac | 480Y/277 Vac |
| Two poles in series | 96 Vdc | 96 Vdc | 96 Vdc |
| Thermal tripping characteristics | | | |
| Single-pole | < 1 hour @ 1.35 x I_n @ 40°C | < 1 hour @ 1.35 x I_n @ 40°C | < 1 hour @ 1.35 x I_n @ 40°C |
| Multi-pole | < 1 hour @ 1.45 x I_n @ 40°C | < 1 hour @ 1.45 x I_n @ 40°C | < 1 hour @ 1.45 x I_n @ 40°C |
| Short-circuit ratings (at max. voltage) | | | |
| Single-pole | 5 kA @ 277 Vac | 5 kA @ 277 Vac | 5 kA @ 277 Vac |
| Single-pole + neutral | 5 kA @ 277 Vac | 5 kA @ 277 Vac | 5 kA @ 277 Vac |
| Two-, three-, four-pole | 5 kA @ 480Y/277 Vac | 5 kA @ 480Y/277 Vac | 5 kA @ 480Y/277 Vac |
| Miniature Circuit Breaker—IEC | | | |
| Current range | 0.5–63A | 0.5–40A | 1–63A |
| Maximum voltage ratings—IEC 60947-2 | | | |
| Single-pole, single-pole + neutral | 240 Vac | 240 Vac | 240 Vac |
| Single-pole | 60 Vdc | 60 Vdc | 60 Vdc |
| Two-, three-, four-pole, three-pole + neutral | 240/415 Vac | 240/415 Vac | 240/415 Vac |
| Thermal tripping characteristics | | | |
| | > 1 hour @ 1.05 x I_n @ 30°C < 1 hour @ 1.3 x I_n @ 30°C | > 1 hour @ 1.05 x I_n @ 30°C < 1 hour @ 1.3 x I_n @ 30°C | > 1 hour @ 1.05 x I_n @ 30°C < 1 hour @ 1.3 x I_n @ 30°C |
| Interrupt ratings (at max. voltage) | | | |
| IEC 60947-2 | 15 kA | 10 kA | 10 kA |
| Operational switching capacity | 7.5 kA | 7.5 kA | 7.5 kA |
| Max. back-up fuse [gL/gG] | 125A | 125A | 125A |
| Rated impulse withstand— U_{imp} | 4000 Vac | 4000 Vac | 4000 Vac |
| Rated insulation voltage— U_i | 440 Vac | 440 Vac | 440 Vac |
| Environmental/General | | | |
| Selectivity class | 3 | 3 | 3 |
| Lifespan (operations) | > 10000 (1 operation = ON/OFF) | > 10000 (1 operation = ON/OFF) | > 10000 (1 operation = ON/OFF) |
| Shock (IEC 68-2-22) | 10g–120 ms | 10g–120 ms | 10g–120 ms |
| Operating temperature range | -40°C to +75°C | -40°C to +75°C | -40°C to +75°C |
| Mechanical | | | |
| Standard front dimension | | | |
| Device height | 80 mm | 80 mm | 80 mm |
| Terminal protection | Finger and back-of-hand proof | Finger and back-of-hand proof | Finger and back-of-hand proof |
| Mounting width per pole | 17.5 mm | 17.5 mm | 17.5 mm |
| Mounting | | | |
| Degree of protection | IP20 | IP20 | IP20 |
| Terminals top and bottom | Twin-purpose terminals | Twin-purpose terminals | Twin-purpose terminals |
| Supply connection | Line or load side | Line or load side | Line or load side |
| Terminal capacity [mm ²] | 1 x 25 / 2 x 10 | 1 x 25 / 2 x 10 | 1 x 25 / 2 x 10 |
| Torque | 2.4 Nm | 2.4 Nm | 2.4 Nm |
| Thickness of busbar material | 0.8–2 mm | 0.8–2 mm | 0.8–2 mm |
| Mounting position | As required | As required | As required |

Connection diagram

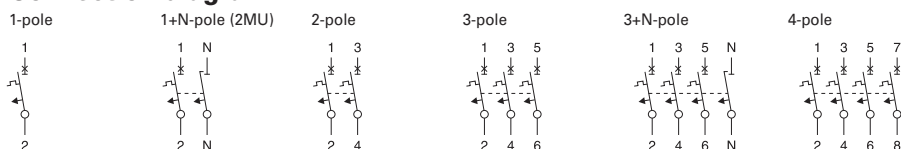


Tripping Characteristic FAZ


Characteristics B, C and D - IEC/EN60898-1

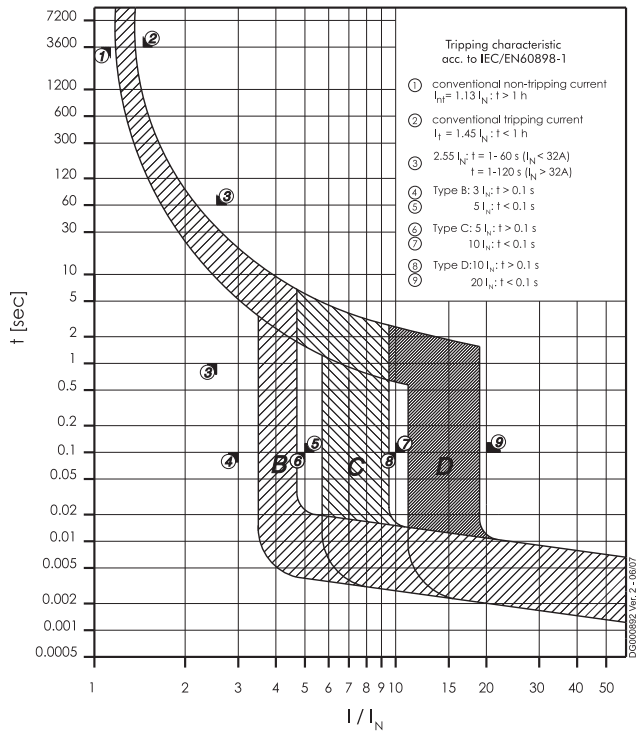


Characteristic K - IEC/EN 60947-2

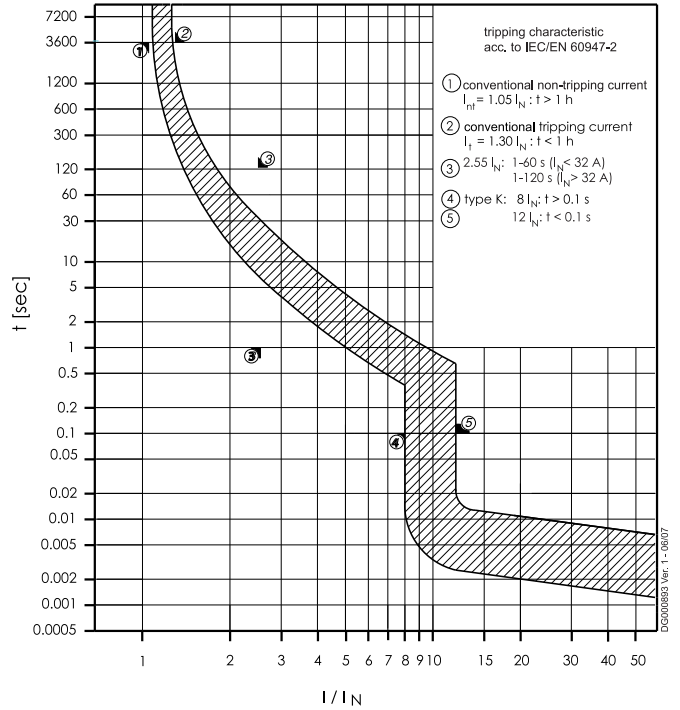

Characteristic S - IEC/EN 60947-2

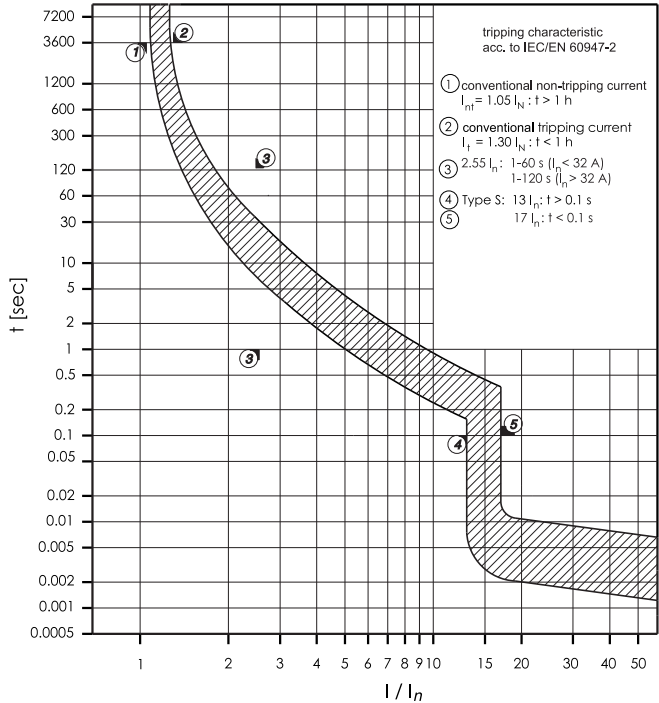


Characteristic S - UL1077

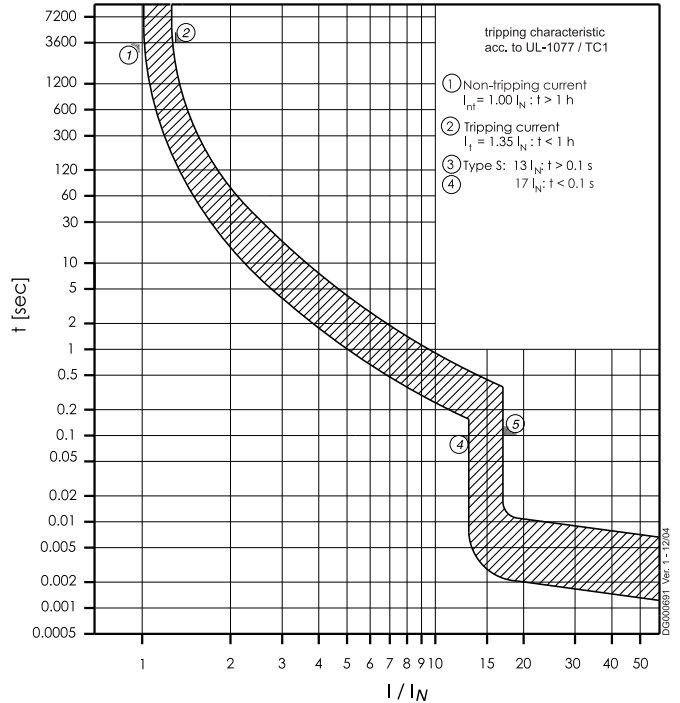


Tripping Characteristic FAZ

Characteristic Z - IEC/EN 60947-2

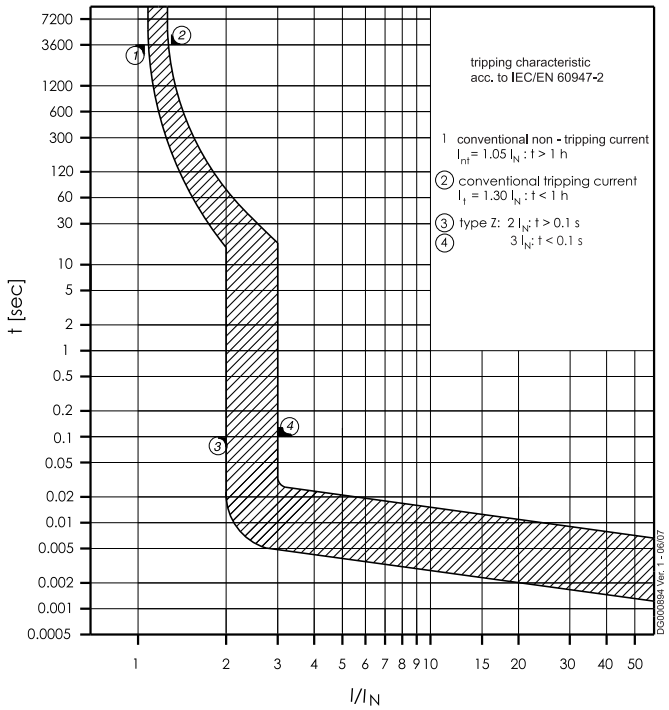

Characteristic Z - UL1077

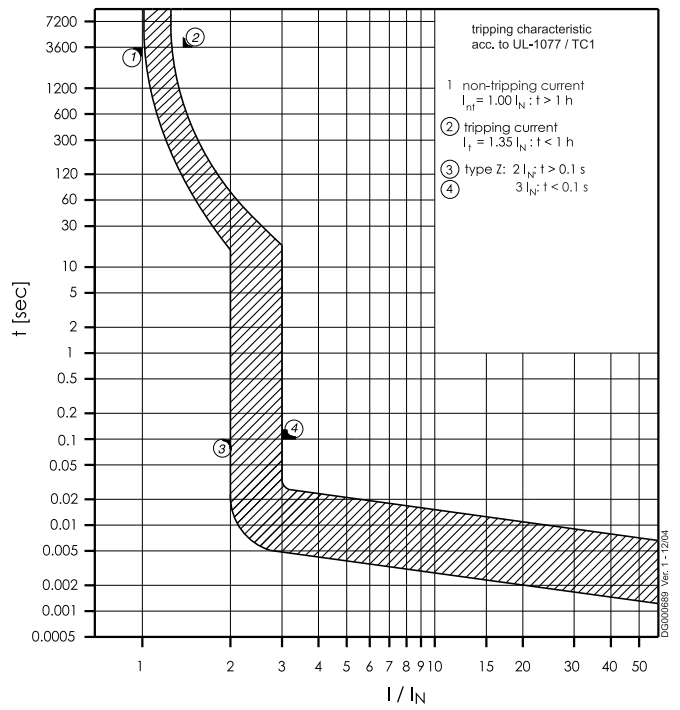

Internal Resistance FAZ

Type B

At room temperature (single pole)

| In [A] | Z* [mΩ] | R [mΩ] |
|--------|---------|--------|
| 1 | 1120 | 1102 |
| 1.5 | 922 | 912 |
| 1.6 | 922 | 912 |
| 2 | 335 | 333 |
| 2.5 | 234 | 230 |
| 3 | 211 | 208 |
| 3.5 | 184 | 180 |
| 4 | 87.7 | 87.2 |
| 5 | 73.5 | 72.8 |
| 6 | 46.8 | 46.3 |
| 8 | 30.5 | 30.4 |
| 10 | 17.5 | 17.4 |
| 12 | 16.9 | 16.8 |
| 13 | 13.4 | 13.3 |
| 15 | 8.0 | 7.9 |
| 16 | 8.0 | 7.9 |
| 20 | 7.2 | 7.1 |
| 25 | 5.0 | 4.9 |
| 32 | 3.7 | 3.7 |
| 40 | 2.6 | 2.5 |
| 50 | 2.1 | 2.1 |
| 63 | 2.0 | 2.0 |

* 50Hz

Type C

At room temperature (single pole)

| In [A] | Z* [mΩ] | R [mΩ] |
|--------|---------|--------|
| 0.16 | 68500 | 68300 |
| 0.25 | 27500 | 27400 |
| 0.5 | 4680 | 4670 |
| 0.75 | 2280 | 2250 |
| 1 | 1120 | 1100 |
| 1.5 | 589 | 587 |
| 1.6 | 589 | 587 |
| 2 | 335 | 333 |
| 2.5 | 234 | 230 |
| 3 | 131 | 130 |
| 3.5 | 143 | 141 |
| 4 | 87.7 | 87.2 |
| 5 | 73.5 | 72.8 |
| 6 | 39.3 | 39.1 |
| 8 | 30.5 | 30.4 |
| 10 | 14.1 | 14.0 |
| 12 | 13.5 | 13.4 |
| 13 | 13.4 | 13.3 |
| 15 | 8.0 | 7.9 |
| 16 | 8.0 | 7.9 |
| 20 | 7.2 | 7.1 |
| 25 | 5.0 | 4.9 |
| 32 | 3.7 | 3.7 |
| 40 | 2.6 | 2.5 |
| 50 | 2.1 | 2.1 |
| 63 | 2.0 | 2.0 |

* 50Hz

Type D

At room temperature (single pole)

| In [A] | Z* [mΩ] | R [mΩ] |
|--------|---------|--------|
| 0.5 | 4680 | 4670 |
| 1 | 772 | 770 |
| 1.5 | 512 | 508 |
| 1.6 | 512 | 508 |
| 2 | 250 | 249 |
| 2.5 | 153 | 153 |
| 3 | 131 | 130 |
| 3.5 | 143 | 141 |
| 4 | 87.7 | 87.2 |
| 5 | 65.4 | 65.1 |
| 6 | 39.3 | 39.1 |
| 8 | 19.5 | 19.5 |
| 10 | 14.1 | 14.0 |
| 12 | 11.3 | 11.2 |
| 13 | 10.1 | 10.1 |
| 15 | 8.0 | 7.9 |
| 16 | 8.0 | 7.9 |
| 20 | 4.9 | 4.9 |
| 25 | 3.9 | 3.8 |
| 32 | 3.5 | 3.4 |
| 40 | 2.7 | 2.6 |

* 50Hz

Fault Loop Impedance FAZ

Max. allowed value for the Fault Loop Impedance Z_s
(acc. to DIN VDE 0100, part 410)

$$U_0 = 230 \text{ V}$$

| Tripping time I_n/A | Type B | | Type C | | Type D | |
|--------------------------|------------------------|----------------------|------------------------|----------------------|------------------------|----------------------|
| | 0,4s $Z_s (\Omega)$ | 5s $Z_s (\Omega)$ | 0,4s $Z_s (\Omega)$ | 5s $Z_s (\Omega)$ | 0,4s $Z_s (\Omega)$ | 5s $Z_s (\Omega)$ |
| 1 | 40,4 | 40,4 | 24,3 | 40,4 | 12,4 | 40,4 |
| 1.5 | 26,9 | 26,9 | 16,2 | 26,9 | 8,3 | 26,9 |
| 2 | 20,2 | 20,2 | 12,2 | 20,2 | 6,2 | 20,2 |
| 2.5 | 16,1 | 16,1 | 9,7 | 16,1 | 5,0 | 16,1 |
| 3 | 13,5 | 13,5 | 8,1 | 13,5 | 4,1 | 13,5 |
| 3.5 | 11,5 | 11,5 | 7,0 | 11,5 | 3,6 | 11,5 |
| 4 | 10,1 | 10,1 | 6,1 | 10,1 | 3,1 | 10,1 |
| 5 | 8,1 | 8,1 | 4,9 | 8,1 | 2,5 | 8,1 |
| 6 | 6,7 | 6,7 | 4,1 | 6,7 | 2,1 | 6,7 |
| 8 | 5,0 | 5,0 | 3,0 | 5,0 | 1,6 | 5,0 |
| 10 | 4,0 | 4,0 | 2,4 | 4,0 | 1,2 | 4,0 |
| 12 | 3,4 | 3,4 | 2,0 | 3,4 | 1,0 | 3,4 |
| 13 | 3,1 | 3,1 | 1,9 | 3,1 | 1,0 | 3,1 |
| 15 | 2,7 | 2,7 | 1,6 | 2,7 | 0,8 | 2,7 |
| 16 | 2,5 | 2,5 | 1,5 | 2,5 | 0,8 | 2,5 |
| 20 | 2,0 | 2,0 | 1,2 | 2,0 | 0,6 | 2,0 |
| 25 | 1,6 | 1,6 | 1,0 | 1,6 | 0,5 | 1,6 |
| 32 | 1,3 | 1,3 | 0,8 | 1,3 | 0,4 | 1,3 |
| 40 | 1,0 | 1,0 | 0,6 | 1,0 | 0,3 | 1,0 |
| 50 | 0,8 | 0,8 | 0,5 | 0,8 | 0,2 | 0,8 |
| 63 | 0,6 | 0,6 | 0,4 | 0,6 | 0,2 | 0,6 |

$$Z_s = R_{M.C.B.} + R_{Loop}$$

Data/factors taken from the time-current characteristic FAZ

For other rated voltages U_0 :

$$U_0 = 240 \text{ V: } Z_s * 1,04 \text{ applies}$$

$$U_0 = 127 \text{ V: } Z_s * 0,55 \text{ applies}$$

Power Loss at I_n FAZ

Type B

| I_n [A] | 1p P [W] | 1pN P [W] | 2p P [W] | 3p P [W] | 3pN* P [W] |
|-----------|-------------|--------------|-------------|-------------|---------------|
| 1 | 1.6 | 1.7 | 3.1 | 4.7 | 4.8 |
| 1.5 | 2.3 | 2.5 | 4.6 | 6.9 | 7.2 |
| 1.6 | 2.5 | 2.7 | 4.9 | 7.4 | 7.6 |
| 2 | 1.4 | 1.5 | 2.8 | 4.1 | 4.3 |
| 2.5 | 1.5 | 1.7 | 3.1 | 4.6 | 4.7 |
| 3 | 2.5 | 2.7 | 5.0 | 7.6 | 7.8 |
| 3.5 | 2.5 | 2.8 | 5.1 | 7.8 | 8.0 |
| 4 | 1.4 | 1.6 | 2.9 | 4.4 | 4.5 |
| 5 | 1.9 | 2.1 | 3.8 | 5.8 | 6.0 |
| 6 | 1.8 | 2.0 | 3.6 | 5.5 | 5.6 |
| 8 | 2.1 | 2.3 | 4.1 | 6.3 | 6.5 |
| 10 | 1.9 | 2.1 | 3.9 | 5.9 | 6.1 |
| 12 | 2.8 | 3.2 | 5.9 | 8.7 | 9.0 |
| 13 | 2.5 | 2.9 | 5.3 | 7.8 | 8.1 |
| 15 | 2.1 | 2.4 | 4.4 | 6.5 | 6.7 |
| 16 | 2.2 | 2.6 | 4.7 | 6.9 | 7.2 |
| 20 | 3.2 | 3.6 | 6.6 | 9.8 | 10.1 |
| 25 | 3.0 | 3.5 | 6.4 | 9.4 | 9.7 |
| 32 | 3.7 | 4.4 | 8.1 | 12.1 | 12.5 |
| 40 | 3.4 | 4.1 | 7.5 | 11.2 | 11.5 |
| 50 | 4.5 | 5.4 | 9.9 | 14.9 | 15.3 |
| 63 | 5.2 | 6.3 | 11.5 | 17.2 | 17.7 |

*symmetrical load

Type C

| I_n [A] | 1p P [W] | 1pN P [W] | 2p P [W] | 3p P [W] | 3pN* P [W] |
|-----------|-------------|--------------|-------------|-------------|---------------|
| 0.16 | 2.2 | 2.4 | 4.4 | 6.7 | 6.9 |
| 0.25 | 2.0 | 2.2 | 4.0 | 6.1 | 6.3 |
| 0.5 | 1.2 | 1.3 | 2.4 | 3.5 | 3.7 |
| 0.75 | 1.3 | 1.4 | 2.6 | 3.9 | 4.1 |
| 1 | 1.6 | 1.7 | 3.1 | 4.7 | 4.8 |
| 1.5 | 1.5 | 1.6 | 2.9 | 4.4 | 4.6 |
| 1.6 | 1.6 | 1.7 | 3.1 | 4.7 | 4.9 |
| 2 | 1.4 | 1.5 | 2.8 | 4.1 | 4.3 |
| 2.5 | 1.5 | 1.7 | 3.1 | 4.6 | 4.7 |
| 3 | 1.2 | 1.3 | 2.4 | 3.6 | 3.7 |
| 3.5 | 1.3 | 1.4 | 2.6 | 3.9 | 4.0 |
| 4 | 1.4 | 1.6 | 2.9 | 4.4 | 4.5 |
| 5 | 1.9 | 2.1 | 3.8 | 5.8 | 6.0 |
| 6 | 1.5 | 1.6 | 2.9 | 4.4 | 4.6 |
| 8 | 2.1 | 2.3 | 4.1 | 6.3 | 6.5 |
| 10 | 1.5 | 1.7 | 3.0 | 4.6 | 4.7 |
| 12 | 2.1 | 2.4 | 4.4 | 6.5 | 6.8 |
| 13 | 2.5 | 2.9 | 5.3 | 7.8 | 8.1 |
| 15 | 2.1 | 2.4 | 4.4 | 6.5 | 6.7 |
| 16 | 2.2 | 2.6 | 4.7 | 6.9 | 7.2 |
| 20 | 3.2 | 3.6 | 6.6 | 9.8 | 10.1 |
| 25 | 3.0 | 3.5 | 6.4 | 9.4 | 9.7 |
| 32 | 3.7 | 4.4 | 8.1 | 12.1 | 12.5 |
| 40 | 3.4 | 4.1 | 7.5 | 11.2 | 11.5 |
| 50 | 4.5 | 5.4 | 9.9 | 14.9 | 15.3 |
| 63 | 5.2 | 6.3 | 11.5 | 17.2 | 17.7 |

*symmetrical load

Type D

| I_n [A] | 1p P [W] | 1pN P [W] | 2p P [W] | 3p P [W] | 3pN* P [W] |
|-----------|-------------|--------------|-------------|-------------|---------------|
| 0.5 | 1.2 | 1.3 | 2.4 | 3.5 | 3.7 |
| 1 | 0.8 | 0.9 | 1.6 | 2.4 | 2.5 |
| 1.5 | 1.2 | 1.3 | 2.3 | 3.5 | 3.6 |
| 1.6 | 1.3 | 1.4 | 2.5 | 3.8 | 3.9 |
| 2 | 1.0 | 1.1 | 2.0 | 3.0 | 3.1 |
| 2.5 | 1.0 | 1.1 | 1.9 | 2.9 | 3.0 |
| 3 | 1.2 | 1.3 | 2.4 | 3.6 | 3.7 |
| 3.5 | 1.3 | 1.4 | 2.6 | 3.9 | 4.0 |
| 4 | 1.4 | 1.6 | 2.9 | 4.4 | 4.5 |
| 5 | 1.7 | 1.8 | 3.3 | 5.1 | 5.3 |
| 6 | 1.5 | 1.6 | 2.9 | 4.4 | 4.6 |
| 8 | 1.3 | 1.5 | 2.6 | 4.0 | 4.2 |
| 10 | 1.5 | 1.7 | 3.0 | 4.6 | 4.7 |
| 12 | 1.7 | 2.0 | 3.6 | 5.3 | 5.4 |
| 13 | 1.9 | 2.2 | 4.0 | 5.9 | 6.1 |
| 15 | 2.1 | 2.4 | 4.4 | 6.5 | 6.7 |
| 16 | 2.2 | 2.6 | 4.7 | 6.9 | 7.2 |
| 20 | 2.0 | 2.2 | 4.1 | 6.1 | 6.2 |
| 25 | 2.5 | 2.9 | 5.2 | 7.7 | 7.9 |
| 32 | 3.4 | 4.0 | 7.4 | 11.1 | 11.4 |
| 40 | 3.2 | 3.8 | 7.0 | 10.4 | 10.7 |

*symmetrical load


Influence of Ambient Temperature FAZ

On Load Carrying Capacity (temperature derating)


| I _N [A] | Ambient temperature T [°C] | | | | | | | | | | | | | | | | |
|--------------------|----------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| | -40 | -30 | -20 | -10 | 0 | 10 | 20 | 30 | 35 | 40 | 45 | 50 | 55 | 60 | 65 | 70 | 75 |
| 0.16 | 0.2 | 0.2 | 0.19 | 0.19 | 0.18 | 0.17 | 0.17 | 0.16 | 0.16 | 0.15 | 0.15 | 0.15 | 0.14 | 0.14 | 0.14 | 0.14 | 0.13 |
| 0.25 | 0.32 | 0.31 | 0.3 | 0.29 | 0.28 | 0.27 | 0.26 | 0.25 | 0.25 | 0.24 | 0.24 | 0.23 | 0.23 | 0.22 | 0.22 | 0.21 | 0.21 |
| 0.5 | 0.64 | 0.62 | 0.6 | 0.58 | 0.56 | 0.54 | 0.52 | 0.5 | 0.49 | 0.48 | 0.47 | 0.46 | 0.45 | 0.44 | 0.43 | 0.42 | 0.41 |
| 0.75 | 0.96 | 0.93 | 0.9 | 0.87 | 0.84 | 0.81 | 0.78 | 0.75 | 0.74 | 0.73 | 0.71 | 0.69 | 0.68 | 0.66 | 0.65 | 0.64 | 0.62 |
| 1 | 1.3 | 1.2 | 1.2 | 1.2 | 1.1 | 1.1 | 1 | 1 | 0.99 | 0.97 | 0.95 | 0.93 | 0.9 | 0.89 | 0.87 | 0.85 | 0.83 |
| 1.5 | 1.9 | 1.9 | 1.8 | 1.7 | 1.7 | 1.6 | 1.6 | 1.5 | 1.5 | 1.5 | 1.4 | 1.4 | 1.4 | 1.3 | 1.3 | 1.3 | 1.2 |
| 1.6 | 2 | 2 | 1.9 | 1.9 | 1.8 | 1.7 | 1.7 | 1.6 | 1.6 | 1.5 | 1.5 | 1.5 | 1.4 | 1.4 | 1.4 | 1.4 | 1.3 |
| 2 | 2.6 | 2.5 | 2.4 | 2.3 | 2.2 | 2.2 | 2.1 | 2 | 2 | 1.9 | 1.9 | 1.9 | 1.8 | 1.8 | 1.7 | 1.7 | 1.7 |
| 2.5 | 3.2 | 3.1 | 3 | 2.9 | 2.8 | 2.7 | 2.6 | 2.5 | 2.5 | 2.4 | 2.4 | 2.3 | 2.3 | 2.2 | 2.2 | 2.1 | 2.1 |
| 3 | 3.8 | 3.7 | 3.6 | 3.5 | 3.4 | 3.3 | 3.1 | 3 | 3 | 2.9 | 2.8 | 2.8 | 2.7 | 2.7 | 2.6 | 2.5 | 2.5 |
| 3.5 | 4.5 | 4.4 | 4.2 | 4.1 | 3.9 | 3.8 | 3.7 | 3.5 | 3.4 | 3.4 | 3.3 | 3.2 | 3.2 | 3.1 | 3 | 3 | 2.9 |
| 4 | 5.1 | 5 | 4.8 | 4.7 | 4.5 | 4.3 | 4.2 | 4 | 3.9 | 3.9 | 3.8 | 3.7 | 3.6 | 3.5 | 3.5 | 3.4 | 3.3 |
| 5 | 6.4 | 6.2 | 6 | 5.8 | 5.6 | 5.4 | 5.2 | 5 | 4.9 | 4.8 | 4.7 | 4.6 | 4.5 | 4.4 | 4.3 | 4.2 | 4.1 |
| 6 | 7.7 | 7.5 | 7.2 | 7 | 6.7 | 6.5 | 6.3 | 6 | 5.9 | 5.8 | 5.7 | 5.6 | 5.4 | 5.3 | 5.2 | 5.1 | 5 |
| 8 | 10.2 | 9.9 | 9.6 | 9.3 | 9 | 8.7 | 8.4 | 8 | 7.9 | 7.7 | 7.6 | 7.4 | 7.2 | 7.1 | 6.9 | 6.8 | 6.6 |
| 10 | 13 | 12 | 12 | 12 | 11 | 11 | 10 | 10 | 9.9 | 9.7 | 9.5 | 9.3 | 9 | 8.9 | 8.7 | 8.5 | 8.3 |
| 12 | 15 | 15 | 14 | 14 | 13 | 13 | 13 | 12 | 12 | 12 | 11 | 11 | 11 | 11 | 10 | 10 | 10 |
| 13 | 17 | 16 | 16 | 15 | 15 | 14 | 14 | 13 | 13 | 13 | 12 | 12 | 12 | 12 | 11 | 11 | 11 |
| 15 | 19 | 19 | 18 | 17 | 17 | 16 | 16 | 15 | 15 | 15 | 14 | 14 | 14 | 13 | 13 | 13 | 12 |
| 16 | 20 | 20 | 19 | 19 | 18 | 17 | 17 | 16 | 16 | 15 | 15 | 15 | 14 | 14 | 14 | 14 | 13 |
| 20 | 26 | 25 | 24 | 23 | 22 | 22 | 21 | 20 | 20 | 19 | 19 | 19 | 18 | 18 | 17 | 17 | 17 |
| 25 | 32 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 25 | 24 | 24 | 23 | 23 | 22 | 22 | 21 | 21 |
| 32 | 41 | 40 | 38 | 37 | 36 | 35 | 33 | 32 | 32 | 31 | 30 | 30 | 29 | 28 | 28 | 27 | 26 |
| 40 | 51 | 50 | 48 | 47 | 45 | 43 | 42 | 40 | 39 | 39 | 38 | 37 | 36 | 35 | 35 | 34 | 33 |
| 50 | 64 | 62 | 60 | 58 | 56 | 54 | 52 | 50 | 49 | 48 | 47 | 46 | 45 | 44 | 43 | 42 | 41 |
| 63 | 81 | 78 | 76 | 73 | 71 | 68 | 66 | 63 | 62 | 61 | 60 | 58 | 57 | 56 | 55 | 53 | 52 |

Maximum Let-Through Energy FAZ


Type B (IEC/EN60947-2)

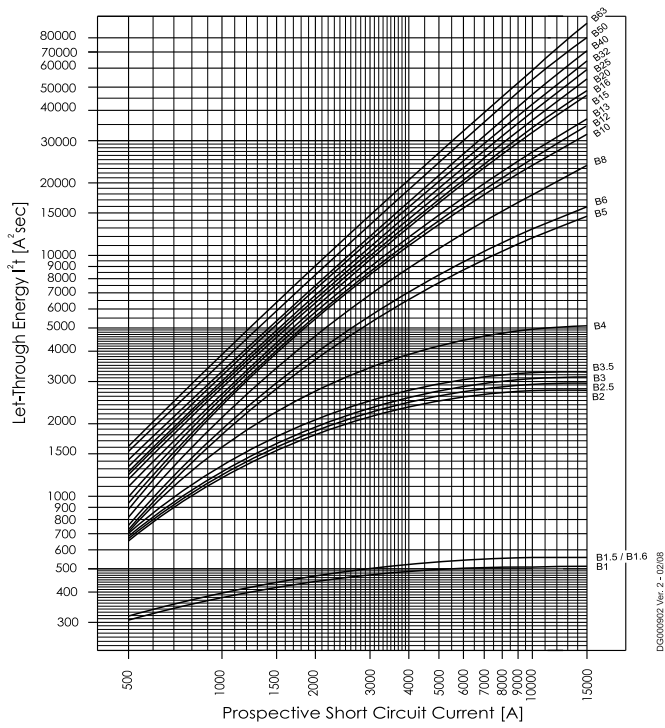


Type C (IEC/EN60947-2)

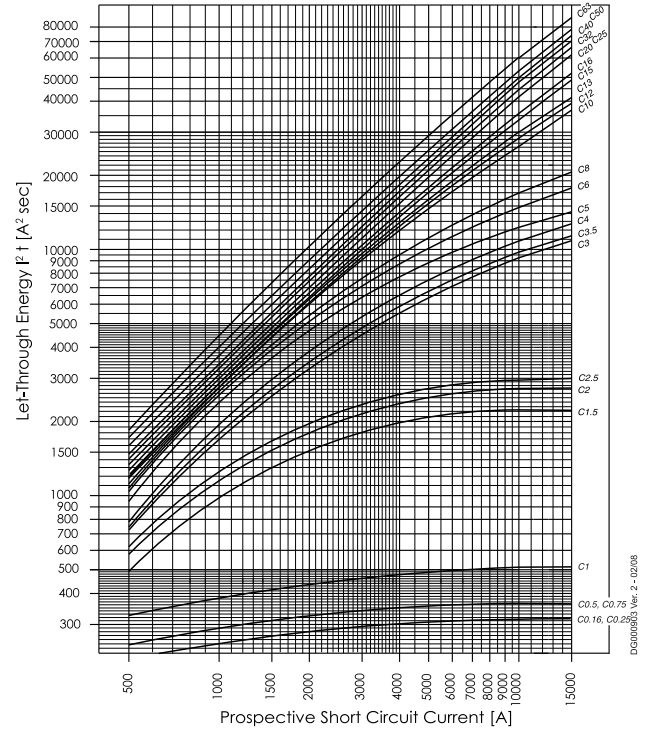

Type D (IEC/EN60947-2)

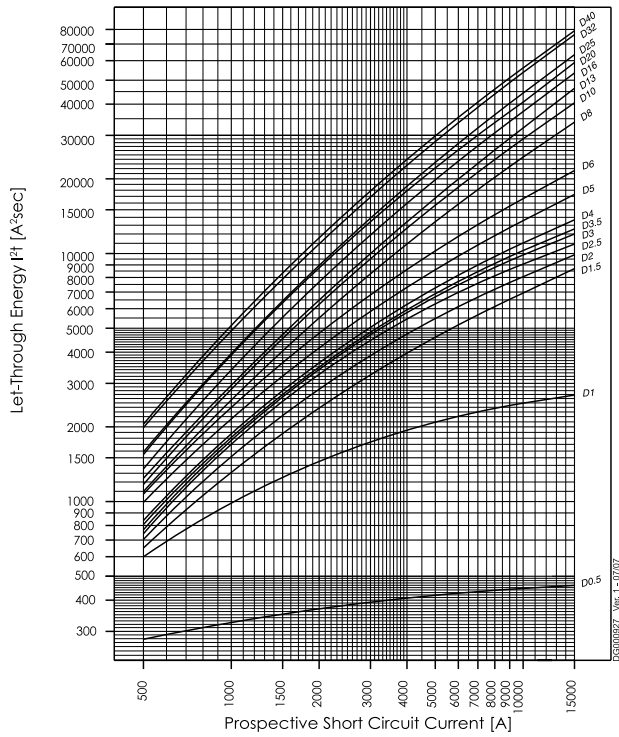


Type K

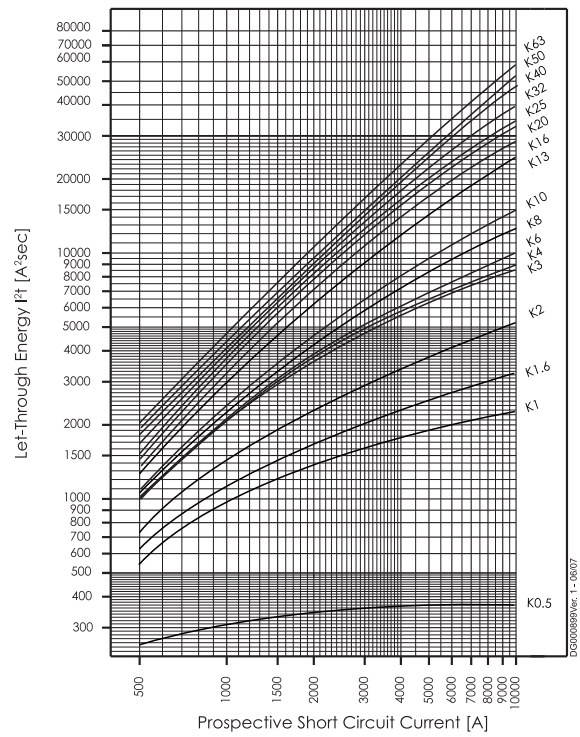


Maximum Let-Through Energy FAZ


Type S

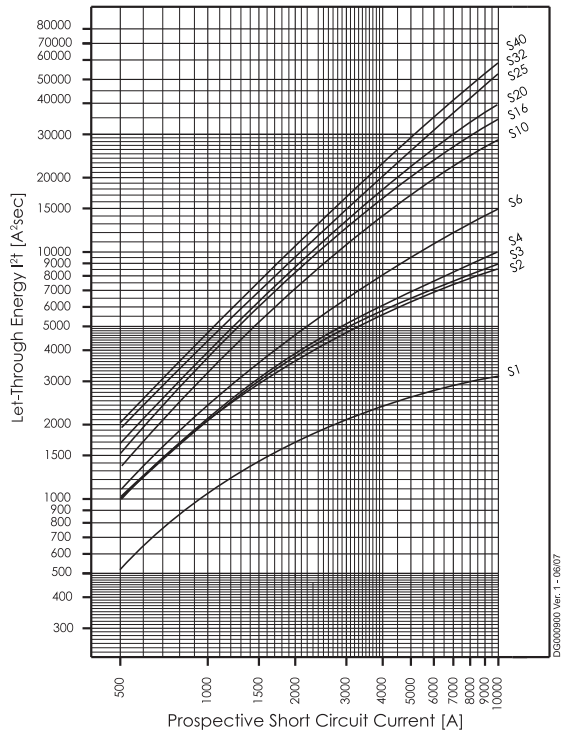

Type Z

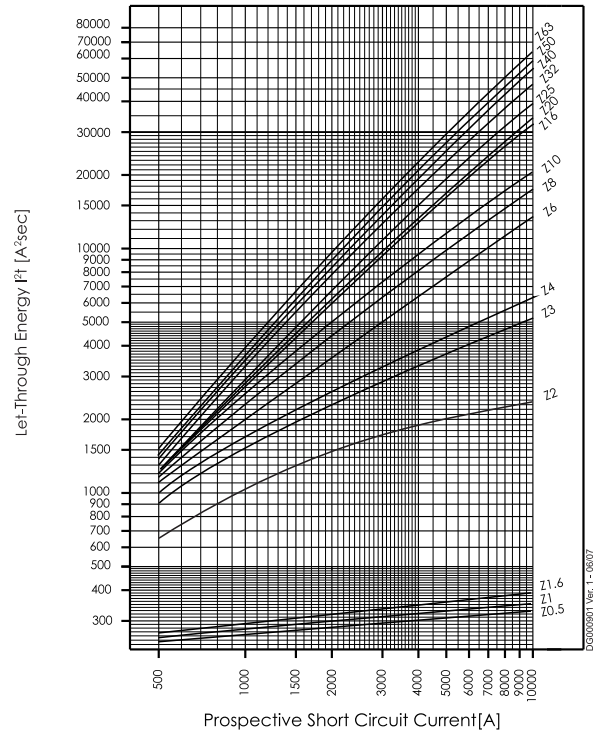


Type FAZ...-HS

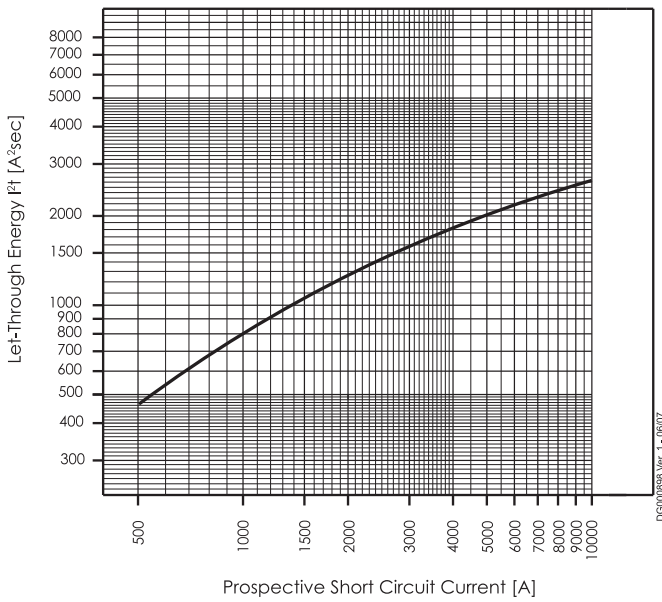


Maximum Let-Through Current FAZ


Type B (IEC/EN60898)

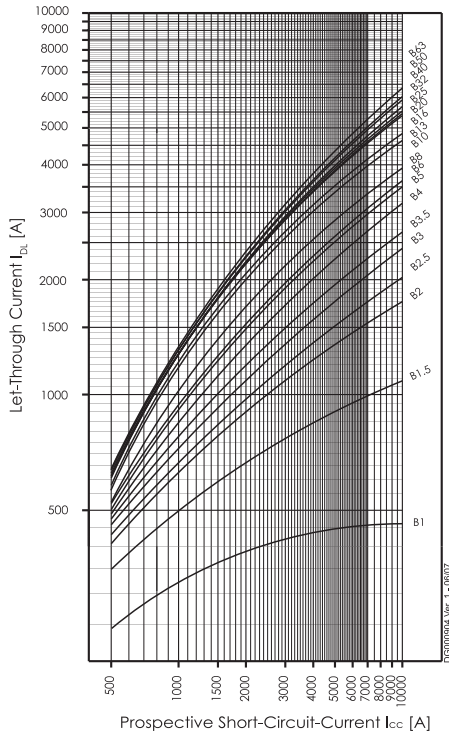


Type C (IEC/EN60898)

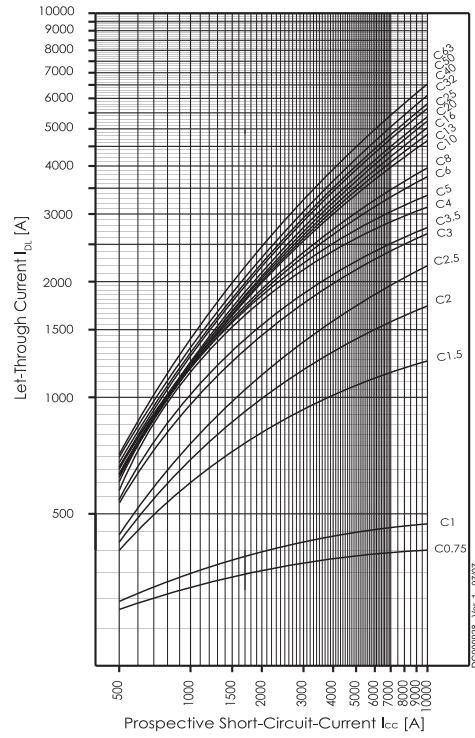

Type D (IEC/EN60898)

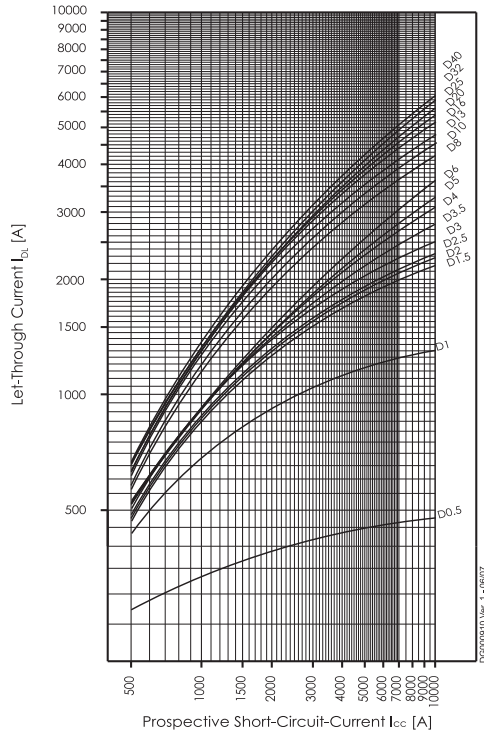

Type K

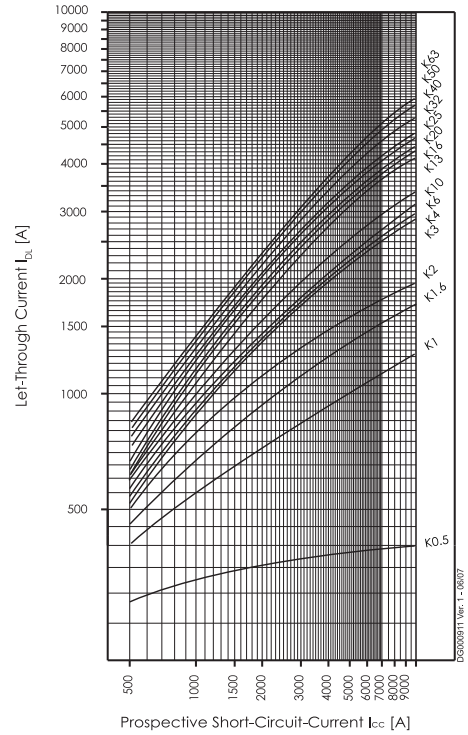

Short Circuit Selectivity FAZ

In case of short circuit, there is selectivity between the miniature circuit breakers FAZ and the upstream protection devices up to the specified values of the selectivity limit current I_s [kA] (i. e. in case of short-circuit currents I_{ks} under I_s , only the MCB will trip, in case of short circuit currents above this value both protective devices will respond).

*) basically in accordance with EN 60898-1 D.5.2.b

FAZ towards NH-00 Fuses

Short circuit selectivity **characteristic B** towards fuse link **NH-00***)

| FAZ | NH-00 gL/gG | | | | | | | | | | | |
|-----------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| I_n [A] | 16 | 20 | 25 | 32 | 35 | 40 | 50 | 63 | 80 | 100 | 125 | 160 |
| 1.0 | 0.9 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 1.5 | 0.8 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 2.0 | <0.5 ¹⁾ | 0.5 | 1.0 | 2.5 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 2.5 | <0.5 ¹⁾ | 0.5 | 1.0 | 2.3 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 3.0 | <0.5 ¹⁾ | 0.5 | 0.9 | 2.1 | 8.0 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 3.5 | <0.5 ¹⁾ | 0.5 | 0.9 | 1.8 | 5.5 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 4 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.8 | 1.3 | 2.3 | 4.3 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 5 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.7 | 1.1 | 1.6 | 2.2 | 3.6 | 4.8 | 8.9 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 6 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.7 | 1.1 | 1.5 | 2.0 | 3.3 | 4.3 | 7.6 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 8 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.6 | 1.0 | 1.3 | 1.7 | 2.6 | 3.3 | 5.2 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 10 | | <0.5 ¹⁾ | 0.6 | 0.9 | 1.2 | 1.5 | 2.2 | 2.7 | 4.0 | 9.0 | 10.0 ²⁾ | 10.0 ²⁾ |
| 13 | | <0.5 ¹⁾ | 0.6 | 0.8 | 1.1 | 1.4 | 2.1 | 2.6 | 3.8 | 7.9 | 10.0 ²⁾ | 10.0 ²⁾ |
| 16 | | | 0.5 | 0.7 | 1.0 | 1.3 | 1.9 | 2.4 | 3.4 | 6.4 | 9.3 | 10.0 ²⁾ |
| 20 | | | | 0.7 | 1.0 | 1.3 | 1.9 | 2.4 | 3.3 | 6.0 | 8.7 | 10.0 ²⁾ |
| 25 | | | | 0.7 | 1.0 | 1.3 | 1.8 | 2.3 | 3.2 | 5.7 | 8.0 | 10.0 ²⁾ |
| 32 | | | | | 0.9 | 1.2 | 1.7 | 2.2 | 3.1 | 5.4 | 7.6 | 10.0 ²⁾ |
| 40 | | | | | | | | 2.1 | 3.0 | 5.1 | 7.2 | 10.0 ²⁾ |
| 50 | | | | | | | | 1.9 | 2.8 | 4.7 | 6.6 | 9.5 |
| 63 | | | | | | | | | | 4.4 | 6.3 | 8.6 |

Short circuit selectivity **characteristic C** towards fuse link **NH-00***)

| FAZ | NH-00 gL/gG | | | | | | | | | | | |
|-----------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| I_n [A] | 16 | 20 | 25 | 32 | 35 | 40 | 50 | 63 | 80 | 100 | 125 | 160 |
| 0.75 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 1.0 | 0.9 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 1.5 | <0.5 ¹⁾ | 0.6 | 1.3 | 4.2 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 2.0 | <0.5 ¹⁾ | 0.6 | 1.0 | 2.5 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 2.5 | <0.5 ¹⁾ | 0.5 | 1.0 | 2.1 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 3.0 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.7 | 1.2 | 1.8 | 2.6 | 4.7 | 6.6 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 3.5 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.7 | 1.1 | 1.7 | 2.4 | 4.2 | 6.0 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 4 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.7 | 1.0 | 1.5 | 2.1 | 3.6 | 5.0 | 10.0 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 5 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.6 | 0.8 | 1.2 | 1.7 | 2.8 | 3.8 | 8.7 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 6 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.5 | 0.8 | 1.2 | 1.5 | 2.5 | 3.3 | 5.7 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 8 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.5 | 0.8 | 1.1 | 1.5 | 2.3 | 2.9 | 4.9 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 10 | | | 0.5 | 0.7 | 1.0 | 1.4 | 2.0 | 2.5 | 3.8 | 8.0 | 10.0 ²⁾ | 10.0 ²⁾ |
| 13 | | | | | 1.0 | 1.3 | 1.9 | 2.4 | 3.6 | 7.0 | 10.0 ²⁾ | 10.0 ²⁾ |
| 16 | | | | | 1.0 | 1.3 | 1.8 | 2.3 | 3.3 | 6.0 | 8.8 | 10.0 ²⁾ |
| 20 | | | | | 1.0 | 1.2 | 1.7 | 2.2 | 3.2 | 5.5 | 7.7 | 10.0 ²⁾ |
| 25 | | | | | | | 1.6 | 2.1 | 3.0 | 5.2 | 7.3 | 10.0 ²⁾ |
| 32 | | | | | | | | 2.1 | 2.9 | 5.0 | 7.0 | 10.0 ²⁾ |
| 40 | | | | | | | | | 2.8 | 4.8 | 6.7 | 10.0 |
| 50 | | | | | | | | | | 4.5 | 6.3 | 9.5 |
| 63 | | | | | | | | | | | 5.9 | 8.4 |

Short circuit selectivity **characteristic D** towards fuse link **NH-00***)

| FAZ | NH-00 gL/gG | | | | | | | | | | | |
|-----------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| I_n [A] | 16 | 20 | 25 | 32 | 35 | 40 | 50 | 63 | 80 | 100 | 125 | 160 |
| 0.5 | 2.1 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 1.0 | <0.5 ¹⁾ | 0.6 | 1.4 | 4.3 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 1.5 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.9 | 1.6 | 2.7 | 4.0 | 8.0 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 2.0 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.8 | 1.3 | 2.1 | 3.1 | 6.0 | 8.6 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 2.5 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.7 | 1.2 | 1.8 | 2.6 | 4.8 | 6.9 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 3.0 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.7 | 1.1 | 1.7 | 2.4 | 4.3 | 6.0 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 3.5 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.7 | 1.1 | 1.7 | 2.4 | 4.2 | 5.6 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 4 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.7 | 1.0 | 1.6 | 2.2 | 3.8 | 5.2 | 10.0 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 5 | | <0.5 ¹⁾ | 0.6 | 0.9 | 1.4 | 1.9 | 3.2 | 4.1 | 7.1 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 6 | | <0.5 ¹⁾ | 0.5 | 0.8 | 1.2 | 1.6 | 2.6 | 3.3 | 5.5 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 8 | | | 0.5 | 0.8 | 1.1 | 1.5 | 2.2 | 2.7 | 4.1 | 8.7 | 10.0 ²⁾ | 10.0 ²⁾ |
| 10 | | | 0.5 | 0.7 | 1.0 | 1.3 | 1.9 | 2.5 | 3.6 | 7.2 | 10.0 ²⁾ | 10.0 ²⁾ |
| 13 | | | | | 1.0 | 1.3 | 1.9 | 2.3 | 3.4 | 6.5 | 9.5 | 10.0 ²⁾ |
| 16 | | | | | | 1.1 | 1.6 | 2.0 | 3.0 | 5.5 | 8.0 | 10.0 ²⁾ |
| 20 | | | | | | | 1.4 | 1.8 | 2.8 | 5.0 | 7.5 | 10.0 ²⁾ |
| 25 | | | | | | | | 1.8 | 2.7 | 4.8 | 7.0 | 10.0 ²⁾ |
| 32 | | | | | | | | | 2.4 | 4.1 | 6.2 | 9.3 |
| 40 | | | | | | | | | | 4.0 | 6.0 | 9.0 |

¹⁾ Selectivity limit current I_s under 0.5 kA

²⁾ Selectivity limit current I_s = rated breaking capacity I_{cn} of the MCB

Shaded fields: no selectivity

FAZ towards D01-D03 fuse link

Short circuit selectivity **characteristic B** towards fuse link **D01-D03***)

| FAZ | D01-D03 gL/gG | | | | | | | | | |
|-----|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| | I _n [A] | 10 | 16 | 20 | 25 | 35 | 50 | 63 | 80 | 100 |
| 1.0 | <0.5 ¹⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 1.5 | <0.5 ¹⁾ | 4.1 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 2.0 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.6 | 1.0 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 2.5 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.6 | 1.0 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 3.0 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.5 | 1.0 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 3.5 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.5 | 0.9 | 7.0 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 4 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.5 | 0.9 | 2.5 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 5 | | <0.5 ¹⁾ | 0.5 | 0.8 | 1.7 | 4.0 | 7.0 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 6 | | <0.5 ¹⁾ | 0.5 | 0.8 | 1.6 | 3.6 | 6.0 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 8 | | | 0.5 | 0.8 | 1.4 | 2.8 | 4.3 | 8.2 | 10.0 ²⁾ | 10.0 ²⁾ |
| 10 | | | 0.5 | 0.7 | 1.3 | 2.4 | 3.4 | 6.0 | 10.0 ²⁾ | 10.0 ²⁾ |
| 13 | | | <0.5 ¹⁾ | 0.7 | 1.2 | 2.3 | 3.2 | 5.3 | 10.0 ²⁾ | 10.0 ²⁾ |
| 16 | | | | 0.6 | 1.1 | 2.2 | 2.9 | 4.6 | 10.0 | 10.0 |
| 20 | | | | | 1.1 | 2.1 | 2.8 | 4.4 | 9.3 | 9.3 |
| 25 | | | | | 1.1 | 2.0 | 2.7 | 4.2 | 8.7 | 8.7 |
| 32 | | | | | | 2.0 | 2.6 | 4.0 | 8.0 | 8.0 |
| 40 | | | | | | | 2.5 | 3.8 | 7.5 | 7.5 |
| 50 | | | | | | | 2.3 | 3.4 | 6.7 | 6.7 |
| 63 | | | | | | | | | 6.2 | 6.2 |

Short circuit selectivity **characteristic C** towards fuse link **D01-D03***)

| FAZ | D01-D03 gL/gG | | | | | | | | | |
|------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| | I _n [A] | 10 | 16 | 20 | 25 | 35 | 50 | 63 | 80 | 100 |
| 0.75 | <0.5 ¹⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 1.0 | <0.5 ¹⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 1.5 | <0.5 ¹⁾ | 0.5 | 0.6 | 0.9 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 2.0 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.5 | 0.7 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 2.5 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.5 | 0.7 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 3.0 | <0.5 ¹⁾ | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.6 | 1.9 | 5.2 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 3.5 | <0.5 ¹⁾ | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.6 | 1.8 | 4.7 | 9.5 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 4 | <0.5 ¹⁾ | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.6 | 1.6 | 4.0 | 7.6 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 5 | | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.5 | 1.3 | 3.1 | 5.7 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 6 | | <0.5 ¹⁾ | <0.5 ¹⁾ | <0.5 ¹⁾ | 1.2 | 2.7 | 4.5 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 8 | | <0.5 ¹⁾ | <0.5 ¹⁾ | <0.5 ¹⁾ | 1.2 | 2.5 | 4.0 | 8.6 | 10.0 ²⁾ | 10.0 ²⁾ |
| 10 | | | <0.5 ¹⁾ | <0.5 ¹⁾ | 1.2 | 2.3 | 3.1 | 5.4 | 10.0 ²⁾ | 10.0 ²⁾ |
| 13 | | | | | 1.1 | 2.2 | 3.0 | 4.9 | 10.0 ²⁾ | 10.0 ²⁾ |
| 16 | | | | | 1.1 | 2.1 | 2.8 | 4.4 | 9.5 | 9.5 |
| 20 | | | | | 1.0 | 2.0 | 2.6 | 4.0 | 8.3 | 8.3 |
| 25 | | | | | | 1.9 | 2.5 | 3.8 | 7.8 | 7.8 |
| 32 | | | | | | | 2.5 | 3.7 | 7.3 | 7.3 |
| 40 | | | | | | | | 3.5 | 7.0 | 7.0 |
| 50 | | | | | | | | | 6.5 | 6.5 |
| 63 | | | | | | | | | | 6.2 |

Short circuit selectivity **characteristic D** towards fuse link **D01-D03***)

| FAZ | D01-D03 gL/gG | | | | | | | | | |
|-----|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| | I _n [A] | 10 | 16 | 20 | 25 | 35 | 50 | 63 | 80 | 100 |
| 0.5 | <0.5 ¹⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 1.0 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.7 | 1.3 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 1.5 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.6 | 0.9 | 2.8 | 9.0 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 2.0 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.6 | 0.8 | 2.2 | 6.7 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 2.5 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.5 | 0.7 | 1.9 | 5.4 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 3.0 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.5 | 0.7 | 1.8 | 4.8 | 9.3 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 3.5 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.5 | 0.7 | 1.7 | 4.7 | 8.6 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 4 | | <0.5 ¹⁾ | 0.5 | 0.7 | 1.7 | 4.6 | 7.7 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 5 | | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.6 | 1.5 | 3.5 | 5.8 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 6 | | | <0.5 ¹⁾ | 0.5 | 1.3 | 2.9 | 4.5 | 9.0 | 10.0 ²⁾ | 10.0 ²⁾ |
| 8 | | | <0.5 ¹⁾ | 0.5 | 1.2 | 2.4 | 3.5 | 6.0 | 10.0 ²⁾ | 10.0 ²⁾ |
| 10 | | | | 0.5 | 1.1 | 2.2 | 3.0 | 5.0 | 10.0 ²⁾ | 10.0 ²⁾ |
| 13 | | | | | 1.1 | 2.1 | 2.9 | 4.6 | 10.0 ²⁾ | 10.0 ²⁾ |
| 16 | | | | | | 1.9 | 2.6 | 3.9 | 9.0 | 9.0 |
| 20 | | | | | | 1.7 | 2.3 | 3.5 | 8.0 | 8.0 |
| 25 | | | | | | | 2.2 | 3.4 | 7.5 | 7.5 |
| 32 | | | | | | | | 2.9 | 6.0 | 6.0 |
| 40 | | | | | | | | | 5.7 | 5.7 |

¹⁾ Selectivity limit current I_s under 0.5 kA

²⁾ Selectivity limit current I_s = rated breaking capacity I_{cn} of the MCB

Shaded fields: no selectivity

FAZ towards DII-DIV fuse link

Short circuit selectivity **characteristic B** towards fuse link **DII-DIV***)

| FAZ | DII-DIV gL/gG | | | | | | | | |
|-----------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| I_n [A] | 10 | 16 | 20 | 25 | 35 | 50 | 63 | 80 | 100 |
| 1.0 | <0.5 ¹⁾ | 1.2 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 1.5 | <0.5 ¹⁾ | 1.0 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 2.0 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.8 | 1.6 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 2.5 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.8 | 1.5 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 3.0 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.8 | 1.4 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 3.5 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.7 | 1.3 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 4 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.6 | 1.0 | 3.6 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 5 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.6 | 0.9 | 2.0 | 3.5 | 8.5 | 10.0 ²⁾ | 10.0 ²⁾ |
| 6 | | <0.5 ¹⁾ | 0.6 | 0.9 | 1.8 | 3.2 | 7.4 | 10.0 ²⁾ | 10.0 ²⁾ |
| 8 | | <0.5 ¹⁾ | 0.5 | 0.8 | 1.6 | 2.6 | 5.2 | 8.3 | 10.0 ²⁾ |
| 10 | | | 0.5 | 0.8 | 1.4 | 2.2 | 3.9 | 6.0 | 10.0 ²⁾ |
| 13 | | | 0.5 | 0.7 | 1.3 | 2.0 | 3.6 | 5.4 | 10.0 ²⁾ |
| 16 | | | | 0.6 | 1.2 | 1.9 | 3.2 | 4.6 | 8.4 |
| 20 | | | | | 1.2 | 1.8 | 3.1 | 4.4 | 7.8 |
| 25 | | | | | 1.2 | 1.8 | 3.0 | 4.2 | 7.3 |
| 32 | | | | | | 1.7 | 2.8 | 3.9 | 6.8 |
| 40 | | | | | | | 2.7 | 3.8 | 6.5 |
| 50 | | | | | | | 2.5 | 3.5 | 5.7 |
| 63 | | | | | | | | | 5.3 |

Short circuit selectivity **characteristic C** towards fuse link **DII-DIV***)

| FAZ | DII-DIV gL/gG | | | | | | | | |
|-----------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| I_n [A] | 10 | 16 | 20 | 25 | 35 | 50 | 63 | 80 | 100 |
| 0.75 | 1.0 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 1.0 | <0.5 ¹⁾ | 1.2 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 1.5 | <0.5 ¹⁾ | <0.5 ¹⁾ | 1.0 | 2.2 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 2.0 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.8 | 1.6 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 2.5 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.8 | 1.4 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 3.0 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.8 | 0.9 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 3.5 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.6 | 0.9 | 2.2 | 4.5 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 4 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.6 | 0.8 | 1.8 | 3.6 | 9.7 | 10.0 ²⁾ | 10.0 ²⁾ |
| 5 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.6 | 0.7 | 1.5 | 2.7 | 7.3 | 10.0 ²⁾ | 10.0 ²⁾ |
| 6 | | <0.5 ¹⁾ | 0.5 | 0.6 | 1.4 | 2.4 | 5.5 | 10.0 ²⁾ | 10.0 ²⁾ |
| 8 | | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.6 | 1.3 | 2.2 | 4.7 | 8.7 | 10.0 ²⁾ |
| 10 | | | <0.5 ¹⁾ | 0.6 | 1.3 | 2.0 | 3.6 | 5.4 | 10.0 ²⁾ |
| 13 | | | | | 1.3 | 1.9 | 3.3 | 5.0 | 9.4 |
| 16 | | | | | 1.2 | 1.8 | 3.2 | 4.4 | 8.0 |
| 20 | | | | | 1.2 | 1.8 | 3.1 | 4.1 | 7.0 |
| 25 | | | | | | 1.7 | 2.8 | 3.8 | 6.5 |
| 32 | | | | | | | 2.7 | 3.7 | 6.2 |
| 40 | | | | | | | | 3.5 | 5.9 |
| 50 | | | | | | | | | 5.5 |
| 63 | | | | | | | | | |

Short circuit selectivity **characteristic D** towards fuse link **DII-DIV***)

| FAZ | DII-DIV gL/gG | | | | | | | | |
|-----------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| I_n [A] | 10 | 16 | 20 | 25 | 35 | 50 | 63 | 80 | 100 |
| 0.5 | 0.5 | 3.0 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 1.0 | <0.5 ¹⁾ | <0.5 ¹⁾ | 1.0 | 2.4 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 1.5 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.7 | 1.2 | 3.5 | 7.7 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 2.0 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.6 | 1.0 | 2.8 | 5.8 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 2.5 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.6 | 1.4 | 2.3 | 4.6 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 3.0 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.6 | 0.9 | 2.3 | 4.3 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 3.5 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.6 | 0.9 | 2.1 | 4.0 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 4 | | <0.5 ¹⁾ | 0.6 | 0.9 | 2.0 | 3.8 | 9.5 | 10.0 ²⁾ | 10.0 ²⁾ |
| 5 | | <0.5 ¹⁾ | 0.5 | 0.7 | 1.7 | 3.1 | 7.0 | 10.0 ²⁾ | 10.0 ²⁾ |
| 6 | | | 0.5 | 0.7 | 1.5 | 2.6 | 5.3 | 9.1 | 10.0 ²⁾ |
| 8 | | | <0.5 ¹⁾ | 0.7 | 1.4 | 2.2 | 3.9 | 6.0 | 10.0 ²⁾ |
| 10 | | | | 0.7 | 1.2 | 1.9 | 3.4 | 5.0 | 9.5 |
| 13 | | | | | 1.2 | 1.8 | 3.2 | 4.6 | 8.6 |
| 16 | | | | | | 1.6 | 2.7 | 4.0 | 7.4 |
| 20 | | | | | | 1.5 | 2.5 | 3.5 | 6.7 |
| 25 | | | | | | | 2.4 | 3.4 | 6.2 |
| 32 | | | | | | | | 2.8 | 5.0 |
| 40 | | | | | | | | | 4.8 |

¹⁾ Selectivity limit current I_s under 0.5 kA

²⁾ Selectivity limit current I_s = rated breaking capacity I_{cn} of the MCB

Shaded fields: no selectivity

FAZ-B and NZM 1/2

Selectivity-limit current I_g [kA] for selectivity between FAZ-B and NZM (overload and short-circuit release unit NZM at max. value).

| I_n [A] | NZM...1-A... | | | | | | NZM...2-A... | | | | | | | | |
|--------------|-------------------------------|-----------|-----------|-----------|------------|------------|---|-----------|-----------|-----------|------------|------------|------------|------------|------------|
| | $I_{cu} = 25 (50) \text{ kA}$ | | | | | | $I_{cu} = 25 (50)(100)(150) \text{ kA}$ | | | | | | | | |
| FAZ-B | 40 | 50 | 63 | 80 | 100 | 125 | 40 | 50 | 63 | 80 | 100 | 125 | 160 | 200 | 250 |
| 1 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 |
| 2 | 2 | 15 | 15 | 15 | 15 | 15 | 3 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 |
| 3 | 1.2 | 2 | 3 | 3 | 10 | 15 | 1.5 | 1.5 | 3 | 5 | 15 | 15 | 15 | 15 | 15 |
| 4 | 1.2 | 2 | 3 | 3 | 8 | 15 | 1.2 | 1.5 | 3 | 4 | 15 | 15 | 15 | 15 | 15 |
| 6 | 1.2 | 2 | 2.5 | 3 | 5 | 10 | 1.2 | 1.5 | 2.5 | 3 | 15 | 15 | 15 | 15 | 15 |
| 10 | 1.2 | 1.5 | 2 | 2 | 4 | 10 | 1 | 1.5 | 2.5 | 3 | 10 | 10 | 10 | 10 | 10 |
| 13 | 1 | 1.5 | 2 | 2 | 4 | 10 | 1 | 1.2 | 2 | 3 | 10 | 10 | 10 | 10 | 10 |
| 16 | 1 | 1.2 | 1.5 | 2 | 3 | 8 | 1 | 1.2 | 1.5 | 2.5 | 10 | 10 | 10 | 10 | 10 |
| 20 | 0.8 | 1.2 | 1.5 | 1.5 | 3 | 8 | 1 | 1.2 | 1.5 | 1.5 | 10 | 10 | 10 | 10 | 10 |
| 25 | 0.7 | 1.2 | 1.5 | 1.5 | 3 | 7 | 0.8 | 1 | 1.5 | 2 | 10 | 10 | 10 | 10 | 10 |
| 32 | - | 1.2 | 1 | 1.5 | 2 | 6 | - | 1 | 1.5 | 2 | 8 | 8 | 8 | 8 | 10 |
| 40 | - | - | 1 | 1.5 | 2 | 5 | - | - | 1.2 | 1.5 | 7 | 7 | 7 | 7 | 10 |
| 50 | - | - | - | 1.2 | 1.5 | 4 | - | - | - | 1.5 | 6 | 6 | 6 | 6 | 10 |
| 63 | - | - | - | - | 1.5 | 3 | - | - | - | - | 6 | 6 | 6 | 6 | 10 |

FAZ-C and NZM 1/2

Selectivity-limit current I_g [kA] for selectivity between FAZ-C and NZM (overload and short-circuit release unit NZM at max. value).

| I_n [A] | NZM...1-A... | | | | | | NZM...2-A... | | | | | | | | |
|--------------|-------------------------------|-----------|-----------|-----------|------------|------------|---|-----------|-----------|-----------|------------|------------|------------|------------|------------|
| | $I_{cu} = 25 (50) \text{ kA}$ | | | | | | $I_{cu} = 25 (50)(100)(150) \text{ kA}$ | | | | | | | | |
| FAZ-C | 40 | 50 | 63 | 80 | 100 | 125 | 40 | 50 | 63 | 80 | 100 | 125 | 160 | 200 | 250 |
| 0.5 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 |
| 1 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 |
| 2 | 2 | 15 | 15 | 15 | 15 | 15 | 3 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 |
| 3 | 1.2 | 2 | 3 | 3 | 10 | 15 | 1.5 | 1.5 | 3 | 5 | 15 | 15 | 15 | 15 | 15 |
| 4 | 1.2 | 2 | 3 | 3 | 8 | 15 | 1.2 | 1.5 | 3 | 4 | 15 | 15 | 15 | 15 | 15 |
| 6 | 1.2 | 2 | 2.5 | 3 | 5 | 10 | 1.2 | 1.5 | 2.5 | 3 | 15 | 15 | 15 | 15 | 15 |
| 10 | 1.2 | 1.5 | 2 | 2 | 4 | 10 | 1 | 1.5 | 2.5 | 3 | 10 | 10 | 10 | 10 | 10 |
| 13 | 1 | 1.5 | 2 | 2 | 4 | 10 | 1 | 1.2 | 2 | 3 | 10 | 10 | 10 | 10 | 10 |
| 16 | 1 | 1.2 | 1.5 | 2 | 3 | 8 | 1 | 1.2 | 1.5 | 2.5 | 10 | 10 | 10 | 10 | 10 |
| 20 | 0.8 | 1.2 | 1.5 | 1.5 | 3 | 8 | 1 | 1.2 | 1.5 | 1.5 | 10 | 10 | 10 | 10 | 10 |
| 25 | 0.7 | 1.2 | 1.5 | 1.5 | 3 | 7 | 0.8 | 1 | 1.5 | 2 | 10 | 10 | 10 | 10 | 10 |
| 32 | - | 1.2 | 1 | 1.5 | 2 | 6 | - | 1 | 1.5 | 2 | 8 | 8 | 8 | 8 | 10 |
| 40 | - | - | 1 | 1.5 | 2 | 5 | - | - | 1.2 | 1.5 | 7 | 7 | 7 | 7 | 10 |
| 50 | - | - | - | 1.2 | 1.5 | 4 | - | - | - | 1.5 | 6 | 6 | 6 | 6 | 10 |
| 63 | - | - | - | - | 1.5 | 3 | - | - | - | - | 6 | 6 | 6 | 6 | 10 |

FAZ-D and NZM 1/2

Selectivity-limit current I_s [kA] for selectivity between FAZ-D and NZM (overload and short-circuit release unit NZM at max. value).

| I_n [A] | NZM...1-A... | | | | | | NZM...2-A... | | | | | | | | |
|--------------|-------------------------------|-----------|-----------|-----------|------------|------------|---|-----------|-----------|-----------|------------|------------|------------|------------|------------|
| | $I_{cu} = 25 (50) \text{ kA}$ | | | | | | $I_{cu} = 25 (50)(100)(150) \text{ kA}$ | | | | | | | | |
| FAZ-D | 40 | 50 | 63 | 80 | 100 | 125 | 40 | 50 | 63 | 80 | 100 | 125 | 160 | 200 | 250 |
| 0.5 | 9 | 15 | 15 | 15 | 15 | 15 | 9 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 |
| 1 | 0.5 | 0.7 | 1.1 | 1.9 | 4.2 | 15 | 0.5 | 0.7 | 1.1 | 1.9 | 4.2 | 15 | 15 | 15 | 15 |
| 1.5 | 0.3 | 0.6 | 0.8 | 1.1 | 1.6 | 2.6 | 0.3 | 0.6 | 0.8 | 1.1 | 1.6 | 2.6 | 5 | 15 | 15 |
| 2 | 0.3 | 0.5 | 0.75 | 0.95 | 1.4 | 2.4 | 0.3 | 0.5 | 0.75 | 0.95 | 1.4 | 2.4 | 4.5 | 10 | 15 |
| 2.5 | 0.3 | 0.5 | 0.75 | 0.95 | 1.3 | 2.3 | 0.3 | 0.5 | 0.75 | 0.95 | 1.3 | 2.3 | 4.2 | 9 | 15 |
| 3 | 0.3 | 0.5 | 0.7 | 0.9 | 1.3 | 2.1 | 0.3 | 0.5 | 0.7 | 0.9 | 1.3 | 2.1 | 3.6 | 7 | 15 |
| 3.5 | 0.3 | 0.5 | 0.7 | 0.9 | 1.3 | 2 | 0.3 | 0.5 | 0.7 | 0.9 | 1.3 | 2 | 3.3 | 5.6 | 10 |
| 4 | 0.3 | 0.5 | 0.7 | 0.9 | 1.3 | 1.9 | 0.3 | 0.5 | 0.7 | 0.9 | 1.3 | 1.9 | 3 | 4.7 | 8 |
| 5 | 0.3 | 0.5 | 0.7 | 0.9 | 1.3 | 1.9 | 0.3 | 0.5 | 0.7 | 0.9 | 1.3 | 1.9 | 3 | 4.4 | 7 |
| 6 | 0.3 | 0.5 | 0.6 | 0.9 | 1.3 | 1.8 | 0.3 | 0.5 | 0.6 | 0.9 | 1.3 | 1.8 | 2.8 | 4 | 6 |
| 8 | 0.3 | 0.3 | 0.6 | 0.75 | 1 | 1.3 | 0.3 | 0.3 | 0.6 | 0.75 | 1 | 1.3 | 1.8 | 2.7 | 4 |
| 10 | 0.3 | 0.3 | 0.6 | 0.75 | 0.95 | 1.2 | 0.3 | 0.3 | 0.6 | 0.75 | 0.95 | 1.2 | 1.7 | 2.4 | 3.6 |
| 13 | 0.3 | 0.3 | 0.5 | 0.7 | 0.9 | 1.1 | 0.3 | 0.3 | 0.5 | 0.7 | 0.9 | 1.1 | 1.6 | 2.2 | 3.2 |
| 16 | - | 0.3 | 0.5 | 0.65 | 0.8 | 1.1 | - | 0.3 | 0.5 | 0.65 | 0.8 | 1.1 | 1.5 | 2.1 | 3 |
| 20 | - | - | 0.5 | 0.65 | 0.8 | 1.1 | - | - | 0.5 | 0.65 | 0.8 | 1.1 | 1.4 | 2.1 | 3 |
| 25 | - | - | 0.5 | 0.65 | 0.8 | 1.1 | - | - | 0.5 | 0.65 | 0.8 | 1.1 | 1.4 | 1.9 | 2.7 |
| 32 | - | - | - | - | 0.8 | 1.1 | - | - | - | - | 0.8 | 1.1 | 1.4 | 1.9 | 2.7 |
| 40 | - | - | - | - | - | 1 | - | - | - | - | - | 1 | 1.4 | 1.8 | 2.6 |

Back-up Protection FAZ

The up-stream protective devices will protect the down-stream FAZ up to the short-circuit current specified.

FAZ/C and AZ/C

| I_n [A] | AZ/C | | | | | | | | |
|-----------|-----------|----|----|----|----|----|----|-----|-------|
| | I_n [A] | | | | | | | | |
| FAZ/C | 20 | 25 | 32 | 40 | 50 | 63 | 80 | 100 | 125 |
| 1 | 25 | 25 | 25 | 25 | 25 | 25 | 20 | 20 | 15 kA |
| 2 | 25 | 25 | 25 | 25 | 25 | 25 | 20 | 20 | 15 kA |
| 4 | 25 | 25 | 25 | 25 | 25 | 25 | 20 | 20 | 15 kA |
| 6 | 25 | 25 | 25 | 25 | 25 | 25 | 20 | 20 | 15 kA |
| 10 | 25 | 25 | 25 | 25 | 25 | 25 | 20 | 20 | 15 kA |
| 13 | 25 | 25 | 25 | 25 | 25 | 25 | 20 | 20 | 15 kA |
| 16 | 25 | 25 | 25 | 25 | 25 | 25 | 20 | 20 | 15 kA |
| 20 | 1) | 25 | 25 | 25 | 25 | 25 | 20 | 20 | 15 kA |
| 25 | 1) | 1) | 25 | 25 | 25 | 25 | 20 | 20 | 15 kA |
| 32 | 1) | 1) | 1) | 25 | 25 | 25 | 20 | 20 | - |
| 40 | 1) | 1) | 1) | 1) | 25 | 25 | 20 | 20 | - |
| 50 | 1) | 1) | 1) | 1) | 1) | 25 | 20 | 20 | - |
| 63 | 1) | 1) | 1) | 1) | 1) | 1) | - | - | - |

1) I_n (AZ) \leq I_n (FAZ)

FAZ and CL-PKZ0

Back-up tests acc. to EN/IEC 60947-2, App. A: $U = 1.05 U_e$, (O - t - CO)

| I_n [A] | FAZ- I_n /1(2,3,4)/B(C) + CL-PKZ0 $U_e = 230/400$ V |
|-----------|--|
| 0.16 | 65 kA |
| 0.25 | 65 kA |
| 0.5 | 65 kA |
| 0.75 | 65 kA |
| 1 | 65 kA |
| 1.5 | 65 kA |
| 2 | 65 kA |
| 2.5 | 65 kA |
| 3 | 65 kA |
| 3.5 | 65 kA |
| 4 | 65 kA |
| 5 | 45 kA |
| 6 | 45 kA |
| 8 | 45 kA |
| 10 | 45 kA |
| 12 | 45 kA |
| 13 | 45 kA |
| 15 | 45 kA |
| 16 | 45 kA |
| 20 | 45 kA |
| 25 | 45 kA |
| 32 | 45 kA |
| 40 | 25 kA |
| 50 | 25 kA |
| 63 | 25 kA |

FAZ and NZM7

| I_n [A] | FAZ- I_n /1(2,3,4)/B(C) + NZM7-40(...100) $U_e = 230/400$ V |
|-----------|--|
| 0.16 | 25 kA |
| 0.25 | 25 kA |
| 0.5 | 25 kA |
| 0.75 | 25 kA |
| 1 | 25 kA |
| 1.5 | 25 kA |
| 2 | 25 kA |
| 2.5 | 25 kA |
| 3 | 25 kA |
| 3.5 | 25 kA |
| 4 | 25 kA |
| 5 | 20 kA |
| 6 | 20 kA |
| 8 | 20 kA |
| 10 | 20 kA |
| 12 | 20 kA |
| 13 | 20 kA |
| 15 | 20 kA |
| 16 | 20 kA |
| 20 | 18 kA |
| 25 | 18 kA |
| 32 | 18 kA |
| 40 | 18 kA |
| 50 | 15 kA |
| 63 | 15 kA |

FAZ and NZMB1

$U_e = 230/400\text{ V}$: I_{cu} (FAZ) = 15 kA

$U_e = 230/400\text{ V}$: I_{cu} (NZMB1) = 25 kA

Back-up test acc. EN/IEC 60947-2, app. A: $U = 1.05U_e$, (O - t - CO)

(Settings NZMB1: I_r , I_{rm} at max. volumes)

| I_n [A] | FAZ-$I_n/1(2,3,4)/B(C)$ + NZMB1 $U_e = 230/400\text{ V}$ |
|-----------|---|
| 0.16 | 25 kA |
| 0.25 | 25 kA |
| 0.5 | 25 kA |
| 0.75 | 25 kA |
| 1 | 25 kA |
| 1.5 | 25 kA |
| 2 | 25 kA |
| 2.5 | 25 kA |
| 3 | 25 kA |
| 3.5 | 25 kA |
| 4 | 25 kA |
| 5 | 25 kA |
| 6 | 25 kA |
| 8 | 25 kA |
| 10 | 25 kA |
| 12 | 25 kA |
| 13 | 25 kA |
| 15 | 25 kA |
| 16 | 25 kA |
| 20 | 20 kA |
| 25 | 20 kA |
| 32 | 20 kA |
| 40 | 20 kA |
| 50 | 15 kA |
| 63 | 15 kA |

FAZ and NZMN1

$U_e = 230/400\text{ V}$: I_{cu} (FAZ) = 15 kA

$U_e = 230/400\text{ V}$: I_{cu} (NZMN1) = 25 kA

Back-up test acc. EN/IEC 60947-2, app. A: $U = 1.05U_e$, (O - t - CO)

(Settings NZM at max. values)

| I_n [A] | FAZ-$I_n/1(2,3,4)/B(C)$ + NZMN1 $U_e = 230/400\text{ V}$ |
|-----------|---|
| 0.16 | 25 kA |
| 0.25 | 25 kA |
| 0.5 | 25 kA |
| 0.75 | 25 kA |
| 1 | 25 kA |
| 1.5 | 25 kA |
| 2 | 25 kA |
| 2.5 | 25 kA |
| 3 | 25 kA |
| 3.5 | 25 kA |
| 4 | 25 kA |
| 5 | 25 kA |
| 6 | 25 kA |
| 8 | 25 kA |
| 10 | 25 kA |
| 12 | 25 kA |
| 13 | 25 kA |
| 15 | 25 kA |
| 16 | 25 kA |
| 20 | 20 kA |
| 25 | 20 kA |
| 32 | 20 kA |
| 40 | 20 kA |
| 50 | 15 kA |
| 63 | 15 kA |

FAZ and NZMB2

$U_e = 230/400\text{ V}$: I_{cu} (FAZ) = 15 kA
 $U_e = 230/400\text{ V}$: I_{cu} (NZMB2) = 25 kA
 $U_e = 133/230\text{ V}$: I_{cu} (FAZ) = 20 kA
 $U_e = 133/230\text{ V}$: I_{cu} (NZMB2) = 30 kA
 Back-up test acc. EN/IEC 60947-2, app. A: $U = 1.05U_e$, (O - t - CO)
 (Settings NZM at max. values)

| I_n [A] | FAZ-$I_n/1(2,3,4)/B(C)$ + NZMB2 | |
|-----------|---|--------------------------|
| | $U_e = 230/400\text{ V}$ | $U_e = 133/230\text{ V}$ |
| 0.16 | 25 kA | 30 kA |
| 0.25 | 25 kA | 30 kA |
| 0.5 | 25 kA | 30 kA |
| 0.75 | 25 kA | 30 kA |
| 1 | 25 kA | 30 kA |
| 1.5 | 25 kA | 30 kA |
| 2 | 25 kA | 30 kA |
| 2.5 | 25 kA | 30 kA |
| 3 | 25 kA | 30 kA |
| 3.5 | 25 kA | 30 kA |
| 4 | 25 kA | 30 kA |
| 5 | 25 kA | 25 kA |
| 6 | 25 kA | 25 kA |
| 8 | 25 kA | 25 kA |
| 10 | 25 kA | 25 kA |
| 12 | 20 kA | 25 kA |
| 13 | 20 kA | 25 kA |
| 15 | 20 kA | 25 kA |
| 16 | 20 kA | 25 kA |
| 20 | 20 kA | 25 kA |
| 25 | 20 kA | 25 kA |
| 32 | 20 kA | 25 kA |
| 40 | 15 kA | 20 kA |
| 50 | 15 kA | 20 kA |
| 63 | 15 kA | 20 kA |

FAZ and NZMN2

$U_e = 230/400\text{ V}$: I_{cu} (FAZ) = 15 kA
 $U_e = 230/400\text{ V}$: I_{cu} (NZMN2) = 50 kA
 $U_e = 133/230\text{ V}$: I_{cu} (FAZ) = 20 kA
 $U_e = 133/230\text{ V}$: I_{cu} (NZMN2) = 85 kA
 Back-up test acc. EN/IEC 60947-2, app. A: $U = 1.05U_e$, (O - t - CO)
 (Settings NZM at max. values)

| I_n [A] | FAZ-$I_n/1(2,3,4)/B(C)$ + NZMN2 | |
|-----------|---|--------------------------|
| | $U_e = 230/400\text{ V}$ | $U_e = 133/230\text{ V}$ |
| 0.16 | 50 kA | 85 kA |
| 0.25 | 50 kA | 85 kA |
| 0.5 | 50 kA | 85 kA |
| 0.75 | 50 kA | 85 kA |
| 1 | 50 kA | 85 kA |
| 1.5 | 50 kA | 85 kA |
| 2 | 50 kA | 85 kA |
| 2.5 | 50 kA | 85 kA |
| 3 | 50 kA | 85 kA |
| 3.5 | 50 kA | 85 kA |
| 4 | 50 kA | 85 kA |
| 5 | 50 kA | 80 kA |
| 6 | 50 kA | 80 kA |
| 8 | 50 kA | 80 kA |
| 10 | 50 kA | 80 kA |
| 12 | 30 kA | 60 kA |
| 13 | 30 kA | 60 kA |
| 15 | 30 kA | 60 kA |
| 16 | 30 kA | 60 kA |
| 20 | 30 kA | 60 kA |
| 25 | 30 kA | 60 kA |
| 32 | 30 kA | 60 kA |
| 40 | 20 kA | 40 kA |
| 50 | 20 kA | 40 kA |
| 63 | 20 kA | 40 kA |

FAZ and NZMH2

$U_e = 230/400\text{ V}$: I_{cu} (FAZ) = 15 kA
 $U_e = 230/400\text{ V}$: I_{cu} (NZMH2) = 150 kA
 $U_e = 133/230\text{ V}$: I_{cu} (FAZ) = 20 kA
 $U_e = 133/230\text{ V}$: I_{cu} (NZMH2) = 150 kA
 Back-up test acc. EN/IEC 60947-2, app. A: $U = 1.05U_e$, (O - t - CO)
 (Settings NZM at max. values)

| I_n [A] | FAZ-$I_n/1(2,3,4)/B(C)$ + NZMH2 | |
|-----------|---|--------------------------|
| | $U_e = 230/400\text{ V}$ | $U_e = 133/230\text{ V}$ |
| 0.16 | 50 kA | 85 kA |
| 0.25 | 50 kA | 85 kA |
| 0.5 | 50 kA | 85 kA |
| 0.75 | 50 kA | 85 kA |
| 1 | 50 kA | 85 kA |
| 1.5 | 50 kA | 85 kA |
| 2 | 50 kA | 85 kA |
| 2.5 | 50 kA | 85 kA |
| 3 | 50 kA | 85 kA |
| 3.5 | 50 kA | 85 kA |
| 4 | 50 kA | 85 kA |
| 5 | 50 kA | 80 kA |
| 6 | 50 kA | 80 kA |
| 8 | 50 kA | 80 kA |
| 10 | 50 kA | 80 kA |
| 12 | 30 kA | 60 kA |
| 13 | 30 kA | 60 kA |
| 15 | 30 kA | 60 kA |
| 16 | 30 kA | 60 kA |
| 20 | 30 kA | 60 kA |
| 25 | 30 kA | 60 kA |
| 32 | 30 kA | 60 kA |
| 40 | 20 kA | 40 kA |
| 50 | 20 kA | 40 kA |
| 63 | 20 kA | 40 kA |

FAZ and NZML2

$U_e = 230/400\text{ V}$: I_{cu} (FAZ) = 15 kA
 $U_e = 230/400\text{ V}$: I_{cu} (NZML2) = 150 kA
 $U_e = 133/230\text{ V}$: I_{cu} (FAZ) = 20 kA
 $U_e = 133/230\text{ V}$: I_{cu} (NZML2) = 150 kA
 Back-up test acc. EN/IEC 60947-2, app. A: $U = 1.05U_e$, (O - t - CO)
 (Settings NZM at max. values)

| I_n [A] | FAZ-$I_n/1(2,3,4)/B(C)$ + NZML2 | |
|-----------|---|--------------------------|
| | $U_e = 230/400\text{ V}$ | $U_e = 133/230\text{ V}$ |
| 0.16 | 50 kA | 85 kA |
| 0.25 | 50 kA | 85 kA |
| 0.5 | 50 kA | 85 kA |
| 0.75 | 50 kA | 85 kA |
| 1 | 50 kA | 85 kA |
| 1.5 | 50 kA | 85 kA |
| 2 | 50 kA | 85 kA |
| 2.5 | 50 kA | 85 kA |
| 3 | 50 kA | 85 kA |
| 3.5 | 50 kA | 85 kA |
| 4 | 50 kA | 85 kA |
| 5 | 50 kA | 80 kA |
| 6 | 50 kA | 80 kA |
| 8 | 50 kA | 80 kA |
| 10 | 50 kA | 80 kA |
| 12 | 30 kA | 60 kA |
| 13 | 30 kA | 60 kA |
| 15 | 30 kA | 60 kA |
| 16 | 30 kA | 60 kA |
| 20 | 30 kA | 60 kA |
| 25 | 30 kA | 60 kA |
| 32 | 30 kA | 60 kA |
| 40 | 20 kA | 40 kA |
| 50 | 20 kA | 40 kA |
| 63 | 20 kA | 40 kA |

FAZ and NH


$U_e = 230\text{ V}$: I_{cu} (FAZ) = 15 (10) kA (acc. to IEC/EN 60947)

$U_e = 500\text{ V}$: I_{cu} (NH00 125 A gL / gG) = 120kA

| I_n [A] | FAZ-I_n/B,(C),(D)... + NH00 125 A gL/gG IT-system U = 230 V |
|-----------|---|
| 0.5 | 50 kA |
| 1 | 50 kA |
| 2 | 50 kA |
| 3 | 50 kA |
| 4 | 50 kA |
| 6 | 50 kA |
| 10 | 50 kA |
| 13 | 50 kA |
| 16 | 50 kA |
| 20 | 50 kA |
| 25 | 50 kA |
| 32 | 50 kA |
| 40 | 50 kA |
| 50 | 50 kA |
| 63 | 50 kA |

Overload Selectivity FAZ

FAZ-B(C)(D) to FAZ-B



Upstream side FAZ, Characteristic B
Downstream side FAZ, Characteristic B, C, D

x ... Selectivity range (i.e. only the downstream switch drops in case $I < I_g$)


| Upstream side → | | FAZ Characteristic B | | | | | | | | | | | | |
|---|----|----------------------|------|----|----|----|------|----|----|------|-----|-----|-----|-------|
| Type B rated current I_n [A] | | 2 | 3 | 4 | 6 | 10 | 13 | 16 | 20 | 25 | 32 | 40 | 50 | 63 |
| Selectivity limiting current I_g [A] | | 7 | 10.5 | 14 | 21 | 35 | 45.5 | 56 | 70 | 87.5 | 112 | 140 | 175 | 220.5 |
| Downstream side FAZ Characteristic B | 2 | | x | x | x | x | x | x | x | x | x | x | x | x |
| | 3 | | | x | x | x | x | x | x | x | x | x | x | x |
| | 4 | | | | x | x | x | x | x | x | x | x | x | x |
| | 6 | | | | | x | x | x | x | x | x | x | x | x |
| | 10 | | | | | | x | x | x | x | x | x | x | x |
| | 13 | | | | | | | x | x | x | x | x | x | x |
| | 16 | | | | | | | | x | x | x | x | x | x |
| | 20 | | | | | | | | | x | x | x | x | x |
| | 25 | | | | | | | | | | x | x | x | x |
| | 32 | | | | | | | | | | | x | x | x |
| | 40 | | | | | | | | | | | | x | x |
| | 50 | | | | | | | | | | | | | x |
| | 63 | | | | | | | | | | | | | |

| Upstream side → | | FAZ Characteristic B | | | | | | | | | | | | | | |
|---|-----|----------------------|------|----|----|----|------|----|----|------|-----|-----|-----|-------|---|---|
| Type B rated current I_n [A] | | 2 | 3 | 4 | 6 | 10 | 13 | 16 | 20 | 25 | 32 | 40 | 50 | 63 | | |
| Selectivity limiting current I_g [A] | | 7 | 10.5 | 14 | 21 | 35 | 45.5 | 56 | 70 | 87.5 | 112 | 140 | 175 | 220.5 | | |
| Downstream side FAZ Characteristic C | 0.5 | x | x | x | x | x | x | x | x | x | x | x | x | x | | |
| | 1 | x | x | x | x | x | x | x | x | x | x | x | x | x | | |
| | 2 | | | x | x | x | x | x | x | x | x | x | x | x | | |
| | 3 | | | | x | x | x | x | x | x | x | x | x | x | | |
| | 4 | | | | | x | x | x | x | x | x | x | x | x | | |
| | 6 | | | | | | x | x | x | x | x | x | x | x | | |
| | 8 | | | | | | | x | x | x | x | x | x | x | | |
| | 10 | | | | | | | | x | x | x | x | x | x | | |
| | 13 | | | | | | | | | x | x | x | x | x | | |
| | 16 | | | | | | | | | | x | x | x | x | | |
| | 20 | | | | | | | | | | | x | x | x | | |
| | 25 | | | | | | | | | | | | x | x | | |
| | 32 | | | | | | | | | | | | | x | | |
| | 40 | | | | | | | | | | | | | | x | |
| | 50 | | | | | | | | | | | | | | | x |
| 63 | | | | | | | | | | | | | | | | x |

| Upstream side → | | FAZ Characteristic B | | | | | | | | | | | | | | |
|---|----|----------------------|------|----|----|----|------|----|----|------|-----|-----|-----|-------|---|---|
| Type B rated current I_n [A] | | 2 | 3 | 4 | 6 | 10 | 13 | 16 | 20 | 25 | 32 | 40 | 50 | 63 | | |
| Selectivity limiting current I_g [A] | | 7 | 10.5 | 14 | 21 | 35 | 45.5 | 56 | 70 | 87.5 | 112 | 140 | 175 | 220.5 | | |
| Downstream side FAZ Characteristic D | 2 | | | | | x | x | x | x | x | x | x | x | x | | |
| | 4 | | | | | | | x | x | x | x | x | x | x | | |
| | 6 | | | | | | | | x | x | x | x | x | x | | |
| | 10 | | | | | | | | | | x | x | x | x | | |
| | 13 | | | | | | | | | | | x | x | x | | |
| | 16 | | | | | | | | | | | | x | x | | |
| | 20 | | | | | | | | | | | | | x | | |
| | 25 | | | | | | | | | | | | | | x | |
| | 32 | | | | | | | | | | | | | | | x |
| 40 | | | | | | | | | | | | | | | | x |

Overload Selectivity FAZ

FAZ-B(C)(D) to FAZ-C



Upstream side FAZ, Characteristic C
Downstream side FAZ, Characteristic B, C, D

x ... Selectivity range (i.e. only the downstream switch drops in case $I < I_g$)


| Upstream side → | | FAZ Characteristic C | | | | | | | | | | | | | | | |
|---|----|----------------------|-----|------|------|------|------|------|----|------|------|-----|-------|-------|-----|-----|-------|
| Type B rated current I_n [A] | | 0.5 | 1 | 2 | 3 | 4 | 6 | 8 | 10 | 13 | 16 | 20 | 25 | 32 | 40 | 50 | 63 |
| Selectivity limiting current I_g [A] | | 2.85 | 5.7 | 11.4 | 17.1 | 22.8 | 34.2 | 45.6 | 57 | 74.1 | 91.2 | 114 | 142.5 | 182.4 | 228 | 285 | 359.1 |
| Downstream side FAZ Characteristic B | 2 | | | | x | x | x | x | x | x | x | x | x | x | x | x | x |
| | 3 | | | | | x | x | x | x | x | x | x | x | x | x | x | x |
| | 4 | | | | | | x | x | x | x | x | x | x | x | x | x | x |
| | 6 | | | | | | | x | x | x | x | x | x | x | x | x | x |
| | 10 | | | | | | | | | x | x | x | x | x | x | x | x |
| | 13 | | | | | | | | | | x | x | x | x | x | x | x |
| | 16 | | | | | | | | | | | x | x | x | x | x | x |
| | 20 | | | | | | | | | | | | x | x | x | x | x |
| | 25 | | | | | | | | | | | | | x | x | x | x |
| | 32 | | | | | | | | | | | | | | x | x | x |
| | 40 | | | | | | | | | | | | | | | x | x |
| | 50 | | | | | | | | | | | | | | | | x |
| 63 | | | | | | | | | | | | | | | | | x |

| Upstream side → | | FAZ Characteristic C | | | | | | | | | | | | | | | |
|---|-----|----------------------|-----|------|------|------|------|------|----|------|------|-----|-------|-------|-----|-----|-------|
| Type B rated current I_n [A] | | 0.5 | 1 | 2 | 3 | 4 | 6 | 8 | 10 | 13 | 16 | 20 | 25 | 32 | 40 | 50 | 63 |
| Selectivity limiting current I_g [A] | | 2.85 | 5.7 | 11.4 | 17.1 | 22.8 | 34.2 | 45.6 | 57 | 74.1 | 91.2 | 114 | 142.5 | 182.4 | 228 | 285 | 359.1 |
| Downstream side FAZ Characteristic C | 0.5 | | x | x | x | x | x | x | x | x | x | x | x | x | x | x | x |
| | 1 | | | x | x | x | x | x | x | x | x | x | x | x | x | x | x |
| | 2 | | | | x | x | x | x | x | x | x | x | x | x | x | x | x |
| | 3 | | | | | x | x | x | x | x | x | x | x | x | x | x | x |
| | 4 | | | | | | x | x | x | x | x | x | x | x | x | x | x |
| | 6 | | | | | | | x | x | x | x | x | x | x | x | x | x |
| | 8 | | | | | | | | x | x | x | x | x | x | x | x | x |
| | 10 | | | | | | | | | x | x | x | x | x | x | x | x |
| | 13 | | | | | | | | | | x | x | x | x | x | x | x |
| | 16 | | | | | | | | | | | x | x | x | x | x | x |
| | 20 | | | | | | | | | | | | x | x | x | x | x |
| | 25 | | | | | | | | | | | | | x | x | x | x |
| | 32 | | | | | | | | | | | | | | x | x | x |
| | 40 | | | | | | | | | | | | | | | x | x |
| | 50 | | | | | | | | | | | | | | | | x |
| 63 | | | | | | | | | | | | | | | | | x |

| Upstream side → | | FAZ Characteristic C | | | | | | | | | | | | | | | |
|---|----|----------------------|-----|------|------|------|------|------|----|------|------|-----|-------|-------|-----|-----|-------|
| Type B rated current I_n [A] | | 0.5 | 1 | 2 | 3 | 4 | 6 | 8 | 10 | 13 | 16 | 20 | 25 | 32 | 40 | 50 | 63 |
| Selectivity limiting current I_g [A] | | 2.85 | 5.7 | 11.4 | 17.1 | 22.8 | 34.2 | 45.6 | 57 | 74.1 | 91.2 | 114 | 142.5 | 182.4 | 228 | 285 | 359.1 |
| Downstream side FAZ Characteristic D | 2 | | | | | | x | x | x | x | x | x | x | x | x | x | x |
| | 4 | | | | | | | x | x | x | x | x | x | x | x | x | x |
| | 6 | | | | | | | | x | x | x | x | x | x | x | x | x |
| | 10 | | | | | | | | | | x | x | x | x | x | x | x |
| | 13 | | | | | | | | | | | x | x | x | x | x | x |
| | 16 | | | | | | | | | | | | x | x | x | x | x |
| | 20 | | | | | | | | | | | | | x | x | x | x |
| | 25 | | | | | | | | | | | | | | | x | x |
| | 32 | | | | | | | | | | | | | | | | |
| 40 | | | | | | | | | | | | | | | | | |

Overload Selectivity FAZ

FAZ-B(C)(D) to FAZ-D



Upstream side FAZ, Characteristic D
Downstream side FAZ, Characteristic B, C, D

x ... Selectivity range (i.e. only the downstream switch drops in case $I < I_g$)


| Upstream side → | | FAZ Characteristic D | | | | | | | | | |
|---|----|----------------------|----|----|-----|-------|-----|-----|-------|-----|-----|
| Type B rated current I_n [A] | | 2 | 4 | 6 | 10 | 13 | 16 | 20 | 25 | 32 | 40 |
| Selectivity limiting current I_g [A] | | 21 | 42 | 63 | 105 | 136.5 | 168 | 210 | 262.5 | 336 | 420 |
| Downstream side FAZ Characteristic B | 2 | | x | x | x | x | x | x | x | x | x |
| | 3 | | x | x | x | x | x | x | x | x | x |
| | 4 | | | x | x | x | x | x | x | x | x |
| | 6 | | | | x | x | x | x | x | x | x |
| | 10 | | | | | x | x | x | x | x | x |
| | 13 | | | | | | x | x | x | x | x |
| | 16 | | | | | | | x | x | x | x |
| | 20 | | | | | | | | x | x | x |
| | 25 | | | | | | | | | x | x |
| | 32 | | | | | | | | | | x |
| | 40 | | | | | | | | | | |
| | 50 | | | | | | | | | | |
| 63 | | | | | | | | | | | |

| Upstream side → | | FAZ Characteristic D | | | | | | | | | |
|---|-----|----------------------|----|----|-----|-------|-----|-----|-------|-----|-----|
| Type B rated current I_n [A] | | 2 | 4 | 6 | 10 | 13 | 16 | 20 | 25 | 32 | 40 |
| Selectivity limiting current I_g [A] | | 21 | 42 | 63 | 105 | 136.5 | 168 | 210 | 262.5 | 336 | 420 |
| Downstream side FAZ Characteristic C | 0.5 | x | x | x | x | x | x | x | x | x | x |
| | 1 | x | x | x | x | x | x | x | x | x | x |
| | 2 | | x | x | x | x | x | x | x | x | x |
| | 3 | | x | x | x | x | x | x | x | x | x |
| | 4 | | | x | x | x | x | x | x | x | x |
| | 6 | | | | x | x | x | x | x | x | x |
| | 8 | | | | x | x | x | x | x | x | x |
| | 10 | | | | | x | x | x | x | x | x |
| | 13 | | | | | | x | x | x | x | x |
| | 16 | | | | | | | x | x | x | x |
| | 20 | | | | | | | | x | x | x |
| | 25 | | | | | | | | | x | x |
| | 32 | | | | | | | | | | x |
| | 40 | | | | | | | | | | |
| | 50 | | | | | | | | | | |
| 63 | | | | | | | | | | | |

| Upstream side → | | FAZ Characteristic D | | | | | | | | | |
|---|----|----------------------|----|----|-----|-------|-----|-----|-------|-----|-----|
| Type B rated current I_n [A] | | 2 | 4 | 6 | 10 | 13 | 16 | 20 | 25 | 32 | 40 |
| Selectivity limiting current I_g [A] | | 21 | 42 | 63 | 105 | 136.5 | 168 | 210 | 262.5 | 336 | 420 |
| Downstream side FAZ Characteristic D | 2 | | x | x | x | x | x | x | x | x | x |
| | 4 | | | x | x | x | x | x | x | x | x |
| | 6 | | | | x | x | x | x | x | x | x |
| | 10 | | | | | x | x | x | x | x | x |
| | 13 | | | | | | x | x | x | x | x |
| | 16 | | | | | | | x | x | x | x |
| | 20 | | | | | | | | x | x | x |
| | 25 | | | | | | | | | x | x |
| | 32 | | | | | | | | | | x |
| | 40 | | | | | | | | | | |

Overload Selectivity FAZ

FAZ-B(C)(D) to AZ-C



Upstream side AZ, Characteristic C
Downstream side FAZ, Characteristic B, C, D

x ... Selectivity range (i.e. only the downstream switch drops in case $I < I_g$)


| Upstream side → | | AZ Characteristic C | | | | | | | | | | |
|---|----|---------------------|-----|-----|-----|-----|-----|-----|-----|-----|---|--|
| Type B rated current I_n [A] | | 20 | 25 | 32 | 40 | 50 | 63 | 80 | 100 | 125 | | |
| Selectivity limiting current I_g [A] | | 130 | 163 | 208 | 260 | 325 | 410 | 520 | 650 | 813 | | |
| Downstream side FAZ Characteristic B | 2 | x | x | x | x | x | x | x | x | x | x | |
| | 3 | x | x | x | x | x | x | x | x | x | x | |
| | 4 | x | x | x | x | x | x | x | x | x | x | |
| | 6 | x | x | x | x | x | x | x | x | x | x | |
| | 10 | x | x | x | x | x | x | x | x | x | x | |
| | 13 | x | x | x | x | x | x | x | x | x | x | |
| | 16 | x | x | x | x | x | x | x | x | x | x | |
| | 20 | | x | x | x | x | x | x | x | x | x | |
| | 25 | | | x | x | x | x | x | x | x | x | |
| | 32 | | | | x | x | x | x | x | x | x | |
| | 40 | | | | | x | x | x | x | x | x | |
| | 50 | | | | | | x | x | x | x | x | |
| 63 | | | | | | | x | x | x | x | | |

| Upstream side → | | AZ Characteristic C | | | | | | | | | | |
|---|-----|---------------------|-----|-----|-----|-----|-----|-----|-----|-----|---|--|
| Type B rated current I_n [A] | | 20 | 25 | 32 | 40 | 50 | 63 | 80 | 100 | 125 | | |
| Selectivity limiting current I_g [A] | | 130 | 163 | 208 | 260 | 325 | 410 | 520 | 650 | 813 | | |
| Downstream side FAZ Characteristic C | 0.5 | x | x | x | x | x | x | x | x | x | x | |
| | 1 | x | x | x | x | x | x | x | x | x | x | |
| | 2 | x | x | x | x | x | x | x | x | x | x | |
| | 3 | x | x | x | x | x | x | x | x | x | x | |
| | 4 | x | x | x | x | x | x | x | x | x | x | |
| | 6 | x | x | x | x | x | x | x | x | x | x | |
| | 8 | x | x | x | x | x | x | x | x | x | x | |
| | 10 | x | x | x | x | x | x | x | x | x | x | |
| | 13 | x | x | x | x | x | x | x | x | x | x | |
| | 16 | x | x | x | x | x | x | x | x | x | x | |
| | 20 | | x | x | x | x | x | x | x | x | x | |
| | 25 | | | x | x | x | x | x | x | x | x | |
| | 32 | | | | x | x | x | x | x | x | x | |
| | 40 | | | | | x | x | x | x | x | x | |
| 50 | | | | | | x | x | x | x | x | | |
| 63 | | | | | | | x | x | x | x | | |

| Upstream side → | | AZ Characteristic C | | | | | | | | | | |
|---|----|---------------------|-----|-----|-----|-----|-----|-----|-----|-----|---|--|
| Type B rated current I_n [A] | | 20 | 25 | 32 | 40 | 50 | 63 | 80 | 100 | 125 | | |
| Selectivity limiting current I_g [A] | | 130 | 163 | 208 | 260 | 325 | 410 | 520 | 650 | 813 | | |
| Downstream side FAZ Characteristic D | 2 | x | x | x | x | x | x | x | x | x | x | |
| | 4 | x | x | x | x | x | x | x | x | x | x | |
| | 6 | x | x | x | x | x | x | x | x | x | x | |
| | 10 | x | x | x | x | x | x | x | x | x | x | |
| | 13 | | x | x | x | x | x | x | x | x | x | |
| | 16 | | | x | x | x | x | x | x | x | x | |
| | 20 | | | | x | x | x | x | x | x | x | |
| | 25 | | | | | x | x | x | x | x | x | |
| | 32 | | | | | | x | x | x | x | x | |
| | 40 | | | | | | | x | x | x | x | |

Overload Selectivity FAZ

FAZ-B(C)(D) to AZ-D



Upstream side AZ, Characteristic D
Downstream side FAZ, Characteristic B, C, D

x ... Selectivity range (i.e. only the downstream switch drops in case $I < I_g$)

| Upstream side → | | AZ Characteristic D | | | | | | | |
|---|----|---------------------|-----|-----|-----|-----|-----|-----|------|
| Type B rated current I_n [A] | | 20 | 25 | 32 | 40 | 50 | 63 | 80 | 100 |
| Selectivity limiting current I_g [A] | | 230 | 285 | 365 | 450 | 550 | 680 | 850 | 1020 |
| Downstream side FAZ Characteristic B | 2 | x | x | x | x | x | x | x | x |
| | 3 | x | x | x | x | x | x | x | x |
| | 4 | x | x | x | x | x | x | x | x |
| | 6 | x | x | x | x | x | x | x | x |
| | 10 | x | x | x | x | x | x | x | x |
| | 13 | x | x | x | x | x | x | x | x |
| | 16 | x | x | x | x | x | x | x | x |
| | 20 | | x | x | x | x | x | x | x |
| | 25 | | | x | x | x | x | x | x |
| | 32 | | | | x | x | x | x | x |
| | 40 | | | | | x | x | x | x |
| | 50 | | | | | | x | x | x |
| | 63 | | | | | | | x | x |

| Upstream side → | | AZ Characteristic D | | | | | | | |
|---|-----|---------------------|-----|-----|-----|-----|-----|-----|------|
| Type B rated current I_n [A] | | 20 | 25 | 32 | 40 | 50 | 63 | 80 | 100 |
| Selectivity limiting current I_g [A] | | 230 | 285 | 365 | 450 | 550 | 680 | 850 | 1020 |
| Downstream side FAZ Characteristic C | 0.5 | x | x | x | x | x | x | x | x |
| | 1 | x | x | x | x | x | x | x | x |
| | 2 | x | x | x | x | x | x | x | x |
| | 3 | x | x | x | x | x | x | x | x |
| | 4 | x | x | x | x | x | x | x | x |
| | 6 | x | x | x | x | x | x | x | x |
| | 8 | x | x | x | x | x | x | x | x |
| | 10 | x | x | x | x | x | x | x | x |
| | 13 | x | x | x | x | x | x | x | x |
| | 16 | x | x | x | x | x | x | x | x |
| | 20 | | x | x | x | x | x | x | x |
| | 25 | | | x | x | x | x | x | x |
| | 32 | | | | x | x | x | x | x |
| | 40 | | | | | x | x | x | x |
| | 50 | | | | | | x | x | x |
| 63 | | | | | | | x | x | |

| Upstream side → | | AZ Characteristic D | | | | | | | |
|---|----|---------------------|-----|-----|-----|-----|-----|-----|------|
| Type B rated current I_n [A] | | 20 | 25 | 32 | 40 | 50 | 63 | 80 | 100 |
| Selectivity limiting current I_g [A] | | 230 | 285 | 365 | 450 | 550 | 680 | 850 | 1020 |
| Downstream side FAZ Characteristic D | 2 | x | x | x | x | x | x | x | x |
| | 4 | x | x | x | x | x | x | x | x |
| | 6 | x | x | x | x | x | x | x | x |
| | 10 | x | x | x | x | x | x | x | x |
| | 13 | x | x | x | x | x | x | x | x |
| | 16 | x | x | x | x | x | x | x | x |
| | 20 | | x | x | x | x | x | x | x |
| | 25 | | | x | x | x | x | x | x |
| | 32 | | | | x | x | x | x | x |
| 40 | | | | | x | x | x | x | |

Influence of the Line Frequency FAZ

On the Instantaneous Tripping Current I_{MA}

| | Line Frequency f [Hz] | | | | | | |
|-------------------------------------|-----------------------|-----|-----|-----|-----|-----|-----|
| | $16\frac{2}{3}$ | 50 | 60 | 100 | 200 | 300 | 400 |
| $I_{MA}(f)/I_{MA}(50\text{Hz})$ [%] | 91 | 100 | 101 | 106 | 115 | 134 | 141 |

Miniature Circuit Breakers FAZ-T

SG56012



FAZ-T

- High-quality miniature circuit breakers for industrial and commercial applications
- Contact position indicator red - green
- Accessories suitable for subsequent installation
- Rated currents up to 40 A
- Tripping characteristics B, C, D
- Rated breaking capacity up to 25 kA according to EN 60947-2

FAZ-T Miniature Circuit Breakers (MCBs)

Characteristic B

| Rated current I_n (A) | Rated voltage IEC/EN 60898-1 (V) | Breaking capacity acc. to IEC/EN 60898-1 (kA) | Rated voltage IEC/EN 60947-2 (V) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Type Designation | Article No. | Units per package |
|----------------------------|---|---|---|---|---------------------|-------------|-------------------------|
|----------------------------|---|---|---|---|---------------------|-------------|-------------------------|

SG53212



1-pole

| | | | | | | | |
|----|---------|----|-----|----|------------|--------|--------|
| 1 | 240/415 | 15 | 240 | 25 | FAZT-B1/1 | 240770 | 12/120 |
| 2 | 240/415 | 15 | 240 | 25 | FAZT-B2/1 | 240771 | 12/120 |
| 3 | 240/415 | 15 | 240 | 25 | FAZT-B3/1 | 240772 | 12/120 |
| 4 | 240/415 | 15 | 240 | 25 | FAZT-B4/1 | 240777 | 12/120 |
| 6 | 240/415 | 15 | 240 | 25 | FAZT-B6/1 | 240782 | 12/120 |
| 10 | 240/415 | 15 | 240 | 25 | FAZT-B10/1 | 240787 | 12/120 |
| 12 | 240/415 | 15 | 240 | 25 | FAZT-B12/1 | 240792 | 12/120 |
| 13 | 240/415 | 15 | 240 | 25 | FAZT-B13/1 | 240793 | 12/120 |
| 15 | 240/415 | 15 | 240 | 25 | FAZT-B15/1 | 240794 | 12/120 |
| 16 | 240/415 | 15 | 240 | 25 | FAZT-B16/1 | 240795 | 12/120 |
| 20 | 240/415 | 15 | 240 | 25 | FAZT-B20/1 | 240796 | 12/120 |
| 25 | 240/415 | 15 | 240 | 25 | FAZT-B25/1 | 240797 | 12/120 |
| 32 | 240/415 | 10 | 240 | 20 | FAZT-B32/1 | 141907 | 12/120 |
| 40 | 240/415 | 10 | 240 | 20 | FAZT-B40/1 | 141908 | 12/120 |

SG55412



1+N-pole

| | | | | | | | |
|----|-----|----|-----|----|-------------|--------|------|
| 1 | 240 | 15 | 240 | 25 | FAZT-B1/1N | 240994 | 1/60 |
| 2 | 240 | 15 | 240 | 25 | FAZT-B2/1N | 240995 | 1/60 |
| 3 | 240 | 15 | 240 | 25 | FAZT-B3/1N | 240996 | 1/60 |
| 4 | 240 | 15 | 240 | 25 | FAZT-B4/1N | 240997 | 1/60 |
| 6 | 240 | 15 | 240 | 25 | FAZT-B6/1N | 240998 | 1/60 |
| 10 | 240 | 15 | 240 | 25 | FAZT-B10/1N | 240999 | 1/60 |
| 12 | 240 | 15 | 240 | 25 | FAZT-B12/1N | 241000 | 1/60 |
| 13 | 240 | 15 | 240 | 25 | FAZT-B13/1N | 241001 | 1/60 |
| 15 | 240 | 15 | 240 | 25 | FAZT-B15/1N | 241005 | 1/60 |
| 16 | 240 | 15 | 240 | 25 | FAZT-B16/1N | 241009 | 1/60 |
| 20 | 240 | 15 | 240 | 25 | FAZT-B20/1N | 241015 | 1/60 |
| 25 | 240 | 15 | 240 | 25 | FAZT-B25/1N | 241019 | 1/60 |
| 32 | 240 | 10 | 240 | 20 | FAZT-B32/1N | 142509 | 1/60 |
| 40 | 240 | 10 | 240 | 20 | FAZT-B40/1N | 142510 | 1/60 |

SG55212



2-pole

| | | | | | | | |
|----|-----|----|---------|----|------------|--------|------|
| 1 | 415 | 15 | 240/415 | 25 | FAZT-B1/2 | 240820 | 1/60 |
| 2 | 415 | 15 | 240/415 | 25 | FAZT-B2/2 | 240821 | 1/60 |
| 3 | 415 | 15 | 240/415 | 25 | FAZT-B3/2 | 240822 | 1/60 |
| 4 | 415 | 15 | 240/415 | 25 | FAZT-B4/2 | 240823 | 1/60 |
| 6 | 415 | 15 | 240/415 | 25 | FAZT-B6/2 | 240824 | 1/60 |
| 10 | 415 | 15 | 240/415 | 25 | FAZT-B10/2 | 240825 | 1/60 |
| 12 | 415 | 15 | 240/415 | 25 | FAZT-B12/2 | 240826 | 1/60 |
| 13 | 415 | 15 | 240/415 | 25 | FAZT-B13/2 | 240827 | 1/60 |
| 15 | 415 | 15 | 240/415 | 25 | FAZT-B15/2 | 240828 | 1/60 |
| 16 | 415 | 15 | 240/415 | 25 | FAZT-B16/2 | 240829 | 1/60 |
| 20 | 415 | 15 | 240/415 | 25 | FAZT-B20/2 | 240830 | 1/60 |
| 25 | 415 | 15 | 240/415 | 25 | FAZT-B25/2 | 240831 | 1/60 |
| 32 | 415 | 10 | 240/415 | 20 | FAZT-B32/2 | 142485 | 1/60 |
| 40 | 415 | 10 | 240/415 | 20 | FAZT-B40/2 | 142486 | 1/60 |

| Rated current I_n (A) | Rated voltage IEC/EN 60898-1 (V) | Breaking capacity acc. to IEC/EN 60898-1 (kA) | Rated voltage IEC/EN 60947-2 (V) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Type Designation | Article No. | Units per package |
|----------------------------|---|---|---|---|---------------------|-------------|-------------------------|
|----------------------------|---|---|---|---|---------------------|-------------|-------------------------|

SG53512



3-pole

| | | | | | | | |
|----|-----|----|---------|----|------------|--------|------|
| 1 | 415 | 15 | 240/415 | 25 | FAZT-B1/3 | 240874 | 1/40 |
| 2 | 415 | 15 | 240/415 | 25 | FAZT-B2/3 | 240875 | 1/40 |
| 3 | 415 | 15 | 240/415 | 25 | FAZT-B3/3 | 240876 | 1/40 |
| 4 | 415 | 15 | 240/415 | 25 | FAZT-B4/3 | 240877 | 1/40 |
| 6 | 415 | 15 | 240/415 | 25 | FAZT-B6/3 | 240878 | 1/40 |
| 10 | 415 | 15 | 240/415 | 25 | FAZT-B10/3 | 240879 | 1/40 |
| 12 | 415 | 15 | 240/415 | 25 | FAZT-B12/3 | 240880 | 1/40 |
| 13 | 415 | 15 | 240/415 | 25 | FAZT-B13/3 | 240881 | 1/40 |
| 15 | 415 | 15 | 240/415 | 25 | FAZT-B15/3 | 240882 | 1/40 |
| 16 | 415 | 15 | 240/415 | 25 | FAZT-B16/3 | 240883 | 1/40 |
| 20 | 415 | 15 | 240/415 | 25 | FAZT-B20/3 | 240884 | 1/40 |
| 25 | 415 | 15 | 240/415 | 25 | FAZT-B25/3 | 240885 | 1/40 |
| 32 | 415 | 10 | 240/415 | 20 | FAZT-B32/3 | 142493 | 1/40 |
| 40 | 415 | 10 | 240/415 | 20 | FAZT-B40/3 | 142494 | 1/40 |

SG55912



3+N-pole

| | | | | | | | |
|----|-----|----|---------|----|-------------|--------|------|
| 1 | 415 | 15 | 240/415 | 25 | FAZT-B1/3N | 241060 | 1/30 |
| 2 | 415 | 15 | 240/415 | 25 | FAZT-B2/3N | 241065 | 1/30 |
| 3 | 415 | 15 | 240/415 | 25 | FAZT-B3/3N | 241070 | 1/30 |
| 4 | 415 | 15 | 240/415 | 25 | FAZT-B4/3N | 241075 | 1/30 |
| 6 | 415 | 15 | 240/415 | 25 | FAZT-B6/3N | 241080 | 1/30 |
| 10 | 415 | 15 | 240/415 | 25 | FAZT-B10/3N | 241085 | 1/30 |
| 12 | 415 | 15 | 240/415 | 25 | FAZT-B12/3N | 241090 | 1/30 |
| 13 | 415 | 15 | 240/415 | 25 | FAZT-B13/3N | 241095 | 1/30 |
| 15 | 415 | 15 | 240/415 | 25 | FAZT-B15/3N | 241100 | 1/30 |
| 16 | 415 | 15 | 240/415 | 25 | FAZT-B16/3N | 241105 | 1/30 |
| 20 | 415 | 15 | 240/415 | 25 | FAZT-B20/3N | 241110 | 1/30 |
| 25 | 415 | 15 | 240/415 | 25 | FAZT-B25/3N | 241115 | 1/30 |
| 32 | 415 | 10 | 240/415 | 20 | FAZT-B32/3N | 142517 | 1/30 |
| 40 | 415 | 10 | 240/415 | 20 | FAZT-B40/3N | 142518 | 1/30 |

SG56012



4-pole

| | | | | | | | |
|----|-----|----|---------|----|------------|--------|------|
| 1 | 415 | 15 | 240/415 | 25 | FAZT-B1/4 | 240922 | 1/30 |
| 2 | 415 | 15 | 240/415 | 25 | FAZT-B2/4 | 240927 | 1/30 |
| 3 | 415 | 15 | 240/415 | 25 | FAZT-B3/4 | 240930 | 1/30 |
| 4 | 415 | 15 | 240/415 | 25 | FAZT-B4/4 | 240931 | 1/30 |
| 6 | 415 | 15 | 240/415 | 25 | FAZT-B6/4 | 240932 | 1/30 |
| 10 | 415 | 15 | 240/415 | 25 | FAZT-B10/4 | 240933 | 1/30 |
| 12 | 415 | 15 | 240/415 | 25 | FAZT-B12/4 | 240934 | 1/30 |
| 13 | 415 | 15 | 240/415 | 25 | FAZT-B13/4 | 240935 | 1/30 |
| 15 | 415 | 15 | 240/415 | 25 | FAZT-B15/4 | 240936 | 1/30 |
| 16 | 415 | 15 | 240/415 | 25 | FAZT-B16/4 | 240937 | 1/30 |
| 20 | 415 | 15 | 240/415 | 25 | FAZT-B20/4 | 240938 | 1/30 |
| 25 | 415 | 15 | 240/415 | 25 | FAZT-B25/4 | 240939 | 1/30 |
| 32 | 415 | 10 | 240/415 | 20 | FAZT-B32/4 | 142501 | 1/30 |
| 40 | 415 | 10 | 240/415 | 20 | FAZT-B40/4 | 142502 | 1/30 |

FAZ-T Miniature Circuit Breakers (MCBs)

Characteristic C

| Rated current I_n (A) | Rated voltage IEC/EN 60898-1 (V) | Breaking capacity acc. to IEC/EN 60898-1 (kA) | Rated voltage IEC/EN 60947-2 (V) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Type Designation | Article No. | Units per package |
|----------------------------|---|---|---|---|---------------------|-------------|-------------------------|
|----------------------------|---|---|---|---|---------------------|-------------|-------------------------|

SG53212



1-pole

| | | | | | | | |
|----|---------|----|-----|----|------------|--------|--------|
| 1 | 240/415 | 15 | 240 | 25 | FAZT-C1/1 | 240798 | 12/120 |
| 2 | 240/415 | 15 | 240 | 25 | FAZT-C2/1 | 240799 | 12/120 |
| 3 | 240/415 | 15 | 240 | 25 | FAZT-C3/1 | 240800 | 12/120 |
| 4 | 240/415 | 15 | 240 | 25 | FAZT-C4/1 | 240801 | 12/120 |
| 6 | 240/415 | 15 | 240 | 25 | FAZT-C6/1 | 240802 | 12/120 |
| 10 | 240/415 | 15 | 240 | 25 | FAZT-C10/1 | 240803 | 12/120 |
| 12 | 240/415 | 15 | 240 | 25 | FAZT-C12/1 | 240804 | 12/120 |
| 13 | 240/415 | 15 | 240 | 25 | FAZT-C13/1 | 240805 | 12/120 |
| 15 | 240/415 | 15 | 240 | 25 | FAZT-C15/1 | 240806 | 12/120 |
| 16 | 240/415 | 15 | 240 | 25 | FAZT-C16/1 | 240807 | 12/120 |
| 20 | 240/415 | 15 | 240 | 25 | FAZT-C20/1 | 240808 | 12/120 |
| 25 | 240/415 | 15 | 240 | 25 | FAZT-C25/1 | 240809 | 12/120 |
| 32 | 240/415 | 10 | 240 | 20 | FAZT-C32/1 | 141909 | 12/120 |
| 40 | 240/415 | 10 | 240 | 20 | FAZT-C40/1 | 142480 | 12/120 |

SG55412



1+N-pole

| | | | | | | | |
|----|-----|----|-----|----|-------------|--------|------|
| 1 | 240 | 15 | 240 | 25 | FAZT-C1/1N | 241022 | 1/60 |
| 2 | 240 | 15 | 240 | 25 | FAZT-C2/1N | 241023 | 1/60 |
| 3 | 240 | 15 | 240 | 25 | FAZT-C3/1N | 241024 | 1/60 |
| 4 | 240 | 15 | 240 | 25 | FAZT-C4/1N | 241025 | 1/60 |
| 6 | 240 | 15 | 240 | 25 | FAZT-C6/1N | 241026 | 1/60 |
| 10 | 240 | 15 | 240 | 25 | FAZT-C10/1N | 241027 | 1/60 |
| 12 | 240 | 15 | 240 | 25 | FAZT-C12/1N | 241028 | 1/60 |
| 13 | 240 | 15 | 240 | 25 | FAZT-C13/1N | 241029 | 1/60 |
| 15 | 240 | 15 | 240 | 25 | FAZT-C15/1N | 241030 | 1/60 |
| 16 | 240 | 15 | 240 | 25 | FAZT-C16/1N | 241034 | 1/60 |
| 20 | 240 | 15 | 240 | 25 | FAZT-C20/1N | 241038 | 1/60 |
| 25 | 240 | 15 | 240 | 25 | FAZT-C25/1N | 241044 | 1/60 |
| 32 | 240 | 10 | 240 | 20 | FAZT-C32/1N | 142511 | 1/60 |
| 40 | 240 | 10 | 240 | 20 | FAZT-C40/1N | 142512 | 1/60 |

SG55212



2-pole

| | | | | | | | |
|----|-----|----|---------|----|------------|--------|------|
| 1 | 415 | 15 | 240/415 | 25 | FAZT-C1/2 | 240832 | 1/60 |
| 2 | 415 | 15 | 240/415 | 25 | FAZT-C2/2 | 240833 | 1/60 |
| 3 | 415 | 15 | 240/415 | 25 | FAZT-C3/2 | 240838 | 1/60 |
| 4 | 415 | 15 | 240/415 | 25 | FAZT-C4/2 | 240843 | 1/60 |
| 6 | 415 | 15 | 240/415 | 25 | FAZT-C6/2 | 240850 | 1/60 |
| 10 | 415 | 15 | 240/415 | 25 | FAZT-C10/2 | 240855 | 1/60 |
| 12 | 415 | 15 | 240/415 | 25 | FAZT-C12/2 | 240858 | 1/60 |
| 13 | 415 | 15 | 240/415 | 25 | FAZT-C13/2 | 240859 | 1/60 |
| 15 | 415 | 15 | 240/415 | 25 | FAZT-C15/2 | 240860 | 1/60 |
| 16 | 415 | 15 | 240/415 | 25 | FAZT-C16/2 | 240861 | 1/60 |
| 20 | 415 | 15 | 240/415 | 25 | FAZT-C20/2 | 240862 | 1/60 |
| 25 | 415 | 15 | 240/415 | 25 | FAZT-C25/2 | 240863 | 1/60 |
| 32 | 415 | 10 | 240/415 | 20 | FAZT-C32/2 | 142487 | 1/60 |
| 40 | 415 | 10 | 240/415 | 20 | FAZT-C40/2 | 142488 | 1/60 |

SG53512



3-pole

| | Rated current I_n (A) | Rated voltage IEC/EN 60898-1 (V) | Breaking capacity acc. to IEC/EN 60898-1 (kA) | Rated voltage IEC/EN 60947-2 (V) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Type Designation | Article No. | Units per package |
|----|----------------------------|---|---|---|---|---------------------|-------------|-------------------------|
| 1 | 415 | 15 | 240/415 | 25 | FAZT-C1/3 | 240886 | 1/40 | |
| 2 | 415 | 15 | 240/415 | 25 | FAZT-C2/3 | 240887 | 1/40 | |
| 3 | 415 | 15 | 240/415 | 25 | FAZT-C3/3 | 240888 | 1/40 | |
| 4 | 415 | 15 | 240/415 | 25 | FAZT-C4/3 | 240889 | 1/40 | |
| 6 | 415 | 15 | 240/415 | 25 | FAZT-C6/3 | 240890 | 1/40 | |
| 10 | 415 | 15 | 240/415 | 25 | FAZT-C10/3 | 240891 | 1/40 | |
| 12 | 415 | 15 | 240/415 | 25 | FAZT-C12/3 | 240892 | 1/40 | |
| 13 | 415 | 15 | 240/415 | 25 | FAZT-C13/3 | 240893 | 1/40 | |
| 15 | 415 | 15 | 240/415 | 25 | FAZT-C15/3 | 240894 | 1/40 | |
| 16 | 415 | 15 | 240/415 | 25 | FAZT-C16/3 | 240895 | 1/40 | |
| 20 | 415 | 15 | 240/415 | 25 | FAZT-C20/3 | 240896 | 1/40 | |
| 25 | 415 | 15 | 240/415 | 25 | FAZT-C25/3 | 240897 | 1/40 | |
| 32 | 415 | 10 | 240/415 | 20 | FAZT-C32/3 | 142495 | 1/40 | |
| 40 | 415 | 10 | 240/415 | 20 | FAZT-C40/3 | 142496 | 1/40 | |

SG55912



3+N-pole

| | Rated current I_n (A) | Rated voltage IEC/EN 60898-1 (V) | Breaking capacity acc. to IEC/EN 60898-1 (kA) | Rated voltage IEC/EN 60947-2 (V) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Type Designation | Article No. | Units per package |
|----|----------------------------|---|---|---|---|---------------------|-------------|-------------------------|
| 1 | 415 | 15 | 240/415 | 25 | FAZT-C1/3N | 241120 | 1/30 | |
| 2 | 415 | 15 | 240/415 | 25 | FAZT-C2/3N | 241125 | 1/30 | |
| 3 | 415 | 15 | 240/415 | 25 | FAZT-C3/3N | 241130 | 1/30 | |
| 4 | 415 | 15 | 240/415 | 25 | FAZT-C4/3N | 241135 | 1/30 | |
| 6 | 415 | 15 | 240/415 | 25 | FAZT-C6/3N | 241140 | 1/30 | |
| 10 | 415 | 15 | 240/415 | 25 | FAZT-C10/3N | 241145 | 1/30 | |
| 12 | 415 | 15 | 240/415 | 25 | FAZT-C12/3N | 241150 | 1/30 | |
| 13 | 415 | 15 | 240/415 | 25 | FAZT-C13/3N | 241155 | 1/30 | |
| 15 | 415 | 15 | 240/415 | 25 | FAZT-C15/3N | 241160 | 1/30 | |
| 16 | 415 | 15 | 240/415 | 25 | FAZT-C16/3N | 241165 | 1/30 | |
| 20 | 415 | 15 | 240/415 | 25 | FAZT-C20/3N | 241170 | 1/30 | |
| 25 | 415 | 15 | 240/415 | 25 | FAZT-C25/3N | 241175 | 1/30 | |
| 32 | 415 | 10 | 240/415 | 20 | FAZT-C32/3N | 142519 | 1/30 | |
| 40 | 415 | 10 | 240/415 | 20 | FAZT-C40/3N | 142520 | 1/30 | |

SG56012



4-pole

| | Rated current I_n (A) | Rated voltage IEC/EN 60898-1 (V) | Breaking capacity acc. to IEC/EN 60898-1 (kA) | Rated voltage IEC/EN 60947-2 (V) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Type Designation | Article No. | Units per package |
|----|----------------------------|---|---|---|---|---------------------|-------------|-------------------------|
| 1 | 415 | 15 | 240/415 | 25 | FAZT-C1/4 | 240940 | 1/30 | |
| 2 | 415 | 15 | 240/415 | 25 | FAZT-C2/4 | 240941 | 1/30 | |
| 3 | 415 | 15 | 240/415 | 25 | FAZT-C3/4 | 240945 | 1/30 | |
| 4 | 415 | 15 | 240/415 | 25 | FAZT-C4/4 | 240949 | 1/30 | |
| 6 | 415 | 15 | 240/415 | 25 | FAZT-C6/4 | 240955 | 1/30 | |
| 10 | 415 | 15 | 240/415 | 25 | FAZT-C10/4 | 240959 | 1/30 | |
| 12 | 415 | 15 | 240/415 | 25 | FAZT-C12/4 | 240962 | 1/30 | |
| 13 | 415 | 15 | 240/415 | 25 | FAZT-C13/4 | 240963 | 1/30 | |
| 15 | 415 | 15 | 240/415 | 25 | FAZT-C15/4 | 240964 | 1/30 | |
| 16 | 415 | 15 | 240/415 | 25 | FAZT-C16/4 | 240965 | 1/30 | |
| 20 | 415 | 15 | 240/415 | 25 | FAZT-C20/4 | 240966 | 1/30 | |
| 25 | 415 | 15 | 240/415 | 25 | FAZT-C25/4 | 240967 | 1/30 | |
| 32 | 415 | 10 | 240/415 | 20 | FAZT-C32/4 | 142503 | 1/30 | |
| 40 | 415 | 10 | 240/415 | 20 | FAZT-C40/4 | 142504 | 1/30 | |

FAZ-T Miniature Circuit Breakers (MCBs)

Characteristic D

| | Rated current I_n (A) | Rated voltage IEC/EN 60898-1 (V) | Breaking capacity acc. to IEC/EN 60898-1 (kA) | Rated voltage IEC/EN 60947-2 (V) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Type Designation | Article No. | Units per package |
|-----------------|----------------------------|---|---|---|---|---------------------|-------------|-------------------------|
| 1-pole | | | | | | | | |
| 1 | 240/415 | 15 | 240 | 25 | FAZT-D1/1 | 240810 | 12/120 | |
| 2 | 240/415 | 15 | 240 | 25 | FAZT-D2/1 | 240811 | 12/120 | |
| 3 | 240/415 | 15 | 240 | 25 | FAZT-D3/1 | 240812 | 12/120 | |
| 4 | 240/415 | 15 | 240 | 25 | FAZT-D4/1 | 240813 | 12/120 | |
| 6 | 240/415 | 15 | 240 | 25 | FAZT-D6/1 | 240814 | 12/120 | |
| 10 | 240/415 | 15 | 240 | 25 | FAZT-D10/1 | 240815 | 12/120 | |
| 12 | 240/415 | 15 | 240 | 25 | FAZT-D12/1 | 240816 | 12/120 | |
| 13 | 240/415 | 15 | 240 | 25 | FAZT-D13/1 | 240817 | 12/120 | |
| 15 | 240/415 | 15 | 240 | 20 | FAZT-D15/1 | 240818 | 12/120 | |
| 16 | 240/415 | 15 | 240 | 20 | FAZT-D16/1 | 240819 | 12/120 | |
| 20 | 240/415 | 10 | 240 | 20 | FAZT-D20/1 | 142481 | 12/120 | |
| 25 | 240/415 | 10 | 240 | 15 | FAZT-D25/1 | 142482 | 12/120 | |
| 32 | 240/415 | 10 | 240 | 15 | FAZT-D32/1 | 142483 | 12/120 | |
| 40 | 240/415 | 10 | 240 | 15 | FAZT-D40/1 | 142484 | 12/120 | |
| 1+N-pole | | | | | | | | |
| 1 | 240 | 15 | 240 | 25 | FAZT-D1/1N | 241048 | 1/60 | |
| 2 | 240 | 15 | 240 | 25 | FAZT-D2/1N | 241051 | 1/60 | |
| 3 | 240 | 15 | 240 | 25 | FAZT-D3/1N | 241052 | 1/60 | |
| 4 | 240 | 15 | 240 | 25 | FAZT-D4/1N | 241053 | 1/60 | |
| 6 | 240 | 15 | 240 | 25 | FAZT-D6/1N | 241054 | 1/60 | |
| 10 | 240 | 15 | 240 | 25 | FAZT-D10/1N | 241055 | 1/60 | |
| 12 | 240 | 15 | 240 | 25 | FAZT-D12/1N | 241056 | 1/60 | |
| 13 | 240 | 15 | 240 | 25 | FAZT-D13/1N | 241057 | 1/60 | |
| 15 | 240 | 15 | 240 | 20 | FAZT-D15/1N | 241058 | 1/60 | |
| 16 | 240 | 15 | 240 | 20 | FAZT-D16/1N | 241059 | 1/60 | |
| 20 | 240 | 10 | 240 | 20 | FAZT-D20/1N | 142513 | 1/60 | |
| 25 | 240 | 10 | 240 | 15 | FAZT-D25/1N | 142514 | 1/60 | |
| 32 | 240 | 10 | 240 | 15 | FAZT-D32/1N | 142515 | 1/60 | |
| 40 | 240 | 10 | 240 | 15 | FAZT-D40/1N | 142516 | 1/60 | |
| 2-pole | | | | | | | | |
| 1 | 415 | 15 | 240/415 | 25 | FAZT-D1/2 | 240864 | 1/60 | |
| 2 | 415 | 15 | 240/415 | 25 | FAZT-D2/2 | 240865 | 1/60 | |
| 3 | 415 | 15 | 240/415 | 25 | FAZT-D3/2 | 240866 | 1/60 | |
| 4 | 415 | 15 | 240/415 | 25 | FAZT-D4/2 | 240867 | 1/60 | |
| 6 | 415 | 15 | 240/415 | 25 | FAZT-D6/2 | 240868 | 1/60 | |
| 10 | 415 | 15 | 240/415 | 25 | FAZT-D10/2 | 240869 | 1/60 | |
| 12 | 415 | 15 | 240/415 | 25 | FAZT-D12/2 | 240870 | 1/60 | |
| 13 | 415 | 15 | 240/415 | 25 | FAZT-D13/2 | 240871 | 1/60 | |
| 15 | 415 | 15 | 240/415 | 20 | FAZT-D15/2 | 240872 | 1/60 | |
| 16 | 415 | 15 | 240/415 | 20 | FAZT-D16/2 | 240873 | 1/60 | |
| 20 | 415 | 10 | 240/415 | 20 | FAZT-D20/2 | 142489 | 1/60 | |
| 25 | 415 | 10 | 240/415 | 15 | FAZT-D25/2 | 142490 | 1/60 | |
| 32 | 415 | 10 | 240/415 | 15 | FAZT-D32/2 | 142491 | 1/60 | |
| 40 | 415 | 10 | 240/415 | 15 | FAZT-D40/2 | 142492 | 1/60 | |

SG53212



SG55412



SG55212



SG53512



| Rated current I_n (A) | Rated voltage IEC/EN 60898-1 (V) | Breaking capacity acc. to IEC/EN 60898-1 (kA) | Rated voltage IEC/EN 60947-2 (V) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Type Designation | Article No. | Units per package |
|----------------------------|---|---|---|---|---------------------|-------------|-------------------------|
|----------------------------|---|---|---|---|---------------------|-------------|-------------------------|

3-pole

| | | | | | | | |
|----|-----|----|---------|----|------------|--------|------|
| 1 | 415 | 15 | 240/415 | 25 | FAZT-D1/3 | 240898 | 1/40 |
| 2 | 415 | 15 | 240/415 | 25 | FAZT-D2/3 | 240899 | 1/40 |
| 3 | 415 | 15 | 240/415 | 25 | FAZT-D3/3 | 240900 | 1/40 |
| 4 | 415 | 15 | 240/415 | 25 | FAZT-D4/3 | 240901 | 1/40 |
| 6 | 415 | 15 | 240/415 | 25 | FAZT-D6/3 | 240902 | 1/40 |
| 10 | 415 | 15 | 240/415 | 25 | FAZT-D10/3 | 240903 | 1/40 |
| 12 | 415 | 15 | 240/415 | 25 | FAZT-D12/3 | 240904 | 1/40 |
| 13 | 415 | 15 | 240/415 | 25 | FAZT-D13/3 | 240905 | 1/40 |
| 15 | 415 | 15 | 240/415 | 25 | FAZT-D15/3 | 240910 | 1/40 |
| 16 | 415 | 15 | 240/415 | 25 | FAZT-D16/3 | 240915 | 1/40 |
| 20 | 415 | 10 | 240/415 | 20 | FAZT-D20/3 | 142497 | 1/40 |
| 25 | 415 | 10 | 240/415 | 15 | FAZT-D25/3 | 142498 | 1/40 |
| 32 | 415 | 10 | 240/415 | 15 | FAZT-D32/3 | 142499 | 1/40 |
| 40 | 415 | 10 | 240/415 | 15 | FAZT-D40/3 | 142500 | 1/40 |

SG55912



3+N-pole

| | | | | | | | |
|----|-----|----|---------|----|-------------|--------|------|
| 1 | 415 | 15 | 240/415 | 25 | FAZT-D1/3N | 241180 | 1/30 |
| 2 | 415 | 15 | 240/415 | 25 | FAZT-D2/3N | 241181 | 1/30 |
| 3 | 415 | 15 | 240/415 | 25 | FAZT-D3/3N | 241182 | 1/30 |
| 4 | 415 | 15 | 240/415 | 25 | FAZT-D4/3N | 241183 | 1/30 |
| 6 | 415 | 15 | 240/415 | 25 | FAZT-D6/3N | 241184 | 1/30 |
| 10 | 415 | 15 | 240/415 | 25 | FAZT-D10/3N | 241185 | 1/30 |
| 12 | 415 | 15 | 240/415 | 25 | FAZT-D12/3N | 241186 | 1/30 |
| 13 | 415 | 15 | 240/415 | 25 | FAZT-D13/3N | 241187 | 1/30 |
| 15 | 415 | 15 | 240/415 | 25 | FAZT-D15/3N | 241188 | 1/30 |
| 16 | 415 | 15 | 240/415 | 25 | FAZT-D16/3N | 241189 | 1/30 |
| 20 | 415 | 10 | 240/415 | 20 | FAZT-D20/3N | 142521 | 1/30 |
| 25 | 415 | 10 | 240/415 | 15 | FAZT-D25/3N | 142522 | 1/30 |
| 32 | 415 | 10 | 240/415 | 15 | FAZT-D32/3N | 142523 | 1/30 |
| 40 | 415 | 10 | 240/415 | 15 | FAZT-D40/3N | 142524 | 1/30 |

SG56012



4-pole

| | | | | | | | |
|----|-----|----|---------|----|------------|--------|------|
| 1 | 415 | 15 | 240/415 | 25 | FAZT-D1/4 | 240968 | 1/30 |
| 2 | 415 | 15 | 240/415 | 25 | FAZT-D2/4 | 240969 | 1/30 |
| 3 | 415 | 15 | 240/415 | 25 | FAZT-D3/4 | 240970 | 1/30 |
| 4 | 415 | 15 | 240/415 | 25 | FAZT-D4/4 | 240971 | 1/30 |
| 6 | 415 | 15 | 240/415 | 25 | FAZT-D6/4 | 240975 | 1/30 |
| 10 | 415 | 15 | 240/415 | 25 | FAZT-D10/4 | 240979 | 1/30 |
| 12 | 415 | 15 | 240/415 | 25 | FAZT-D12/4 | 240985 | 1/30 |
| 13 | 415 | 15 | 240/415 | 25 | FAZT-D13/4 | 240989 | 1/30 |
| 15 | 415 | 15 | 240/415 | 25 | FAZT-D15/4 | 240992 | 1/30 |
| 16 | 415 | 15 | 240/415 | 25 | FAZT-D16/4 | 240993 | 1/30 |
| 20 | 415 | 10 | 240/415 | 20 | FAZT-D20/4 | 142505 | 1/30 |
| 25 | 415 | 10 | 240/415 | 15 | FAZT-D25/4 | 142506 | 1/30 |
| 32 | 415 | 10 | 240/415 | 15 | FAZT-D32/4 | 142507 | 1/30 |
| 40 | 415 | 10 | 240/415 | 15 | FAZT-D40/4 | 142508 | 1/30 |

Specifications FAZ-T

Technical data

| | FAZ-T |
|-----------------|----------------------------------|
| Productstandard | IEC/EN 60947-2 IEC/EN 60898-1 |
| Number of poles | 1, 1p+N, 2, 3, 3p+N, 4 |

Mechanical specifications

| | |
|---|--|
| Device width | 17.7 mm (1p), 27 mm (1p+N), 36 mm (2p), 54 mm (3p), 72mm (3p+N), 72 mm (4p) |
| Frame size | 45 mm |
| Socket size | 80 mm |
| Device depth | 60 mm |
| Terminals | lift terminal |
| Terminal capacity rigid solid/stranded wire | 1-25 mm ² |
| Terminal screw | M5 (with slotted screw acc. to EN ISO 4757-Z2, PZ2) |
| Terminal torque | max. 2.4 Nm |
| Snap on fixing | tristable (on DIN rail acc. to EN 50022) |
| Finger proof | acc. to VBG4, ÖVE EN-6 |
| Degree of Protection (DIN VDE 0470) | |
| Surface mounted | IP 20 |
| Built-in behind panel | IP 40 |
| Contact position indicator | red / green |

Electrical specifications

| | | |
|---------------------------------|-----------|---|
| Rated voltage | U_n | 240/415Vac 60Vdc per pole |
| Rated current | I_n | Type B, C, D: 1, 2, 3, 4, 6, 10, 12, 13, 15, 16, 20, 25, 32, 40 A |
| Rated insulation voltage | U_i | 440 V |
| Rated impulse withstand voltage | U_{imp} | 4 kV (1.2/50) μ sec |

Tripping characteristic

| | | |
|-----------------------------------|----------|--|
| Conventional non-tripping current | I_{nt} | $I_{nt} = 1.13 I_n$ |
| Conventional tripping current | I_t | $I_t = 1.45 I_n$ |
| Reference temperature | | 30 °C |
| Temperature factor | | 0.4% /K |
| Instantaneous tripping current | I_{mt} | type B: $3 I_n < I_{mt} = 5 I_n \cdot t (I_{mt}) < 0.1$ sec type C: $5 I_n < I_{mt} = 10 I_n \cdot t (I_{mt}) < 0.1$ sec type D: $10 I_n < I_{mt} = 20 I_n \cdot t (I_{mt}) < 0.1$ sec |


| | | |
|---|--------|---|
| Rated ultimate short-circuit braking capacity I_{cu} (IEC/EN 60947-2) | | |
| | type B | 1-25 A: 25 kA, 32-40 A: 20 kA |
| | type C | 1-25 A: 25 kA, 32-40 A: 20 kA |
| | type D | 1p/1p+N/2p - 1-13 A: 25 kA, 15-20 A: 20 kA, 25-40 A: 15 kA 3p/3p+N/4p - 1-16 A: 25 kA, 20 A: 20 kA, 25-40 A: 15 kA |

| | | |
|--|--|--|
| Rated service short-circuit braking capacity I_{cs} (IEC/EN 60947-2) | | |
| | | for $I_{cu} = 25$ kA $\rightarrow I_{cs} = 12.5$ kA for $I_{cu} = 20$ kA $\rightarrow I_{cs} = 10$ kA for $I_{cu} = 15$ kA $\rightarrow I_{cs} = 7.5$ kA |

| | | |
|--|--------|-------------------------------|
| Rated short-circuit braking capacity I_{cn} (IEC/EN 60898-1) | | |
| | type B | 1-25 A: 15 kA, 32-40 A: 10 kA |
| | type C | 1-25 A: 15 kA, 32-40 A: 10 kA |
| | type D | 1-16 A: 15 kA, 20-40 A: 10 kA |


| | | |
|---------------------------------|--|--|
| Selectivity class | | 3 (acc. to EN 60898) |
| Number of electrical operations | | > 4000 (IEC/EN 60898) |
| Number of mechanical operations | | > 10000 (IEC/EN 60947) |
| Climatic conditions | | acc. to IEC 68-2 (25..55°C / 90..95% RH) |
| Operating temperature range | | -40°C to +75°C |

Connection diagram

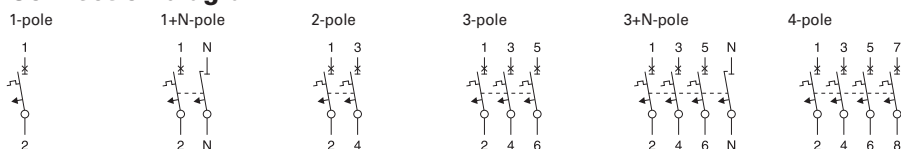


Dimensions (mm) FAZ-T


1-pole




1+N-pole

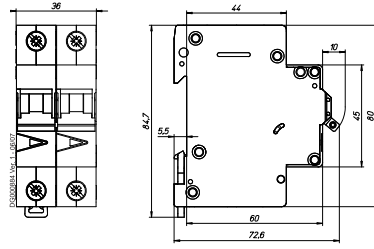


2-pole

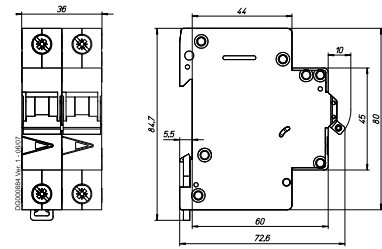

3-pole

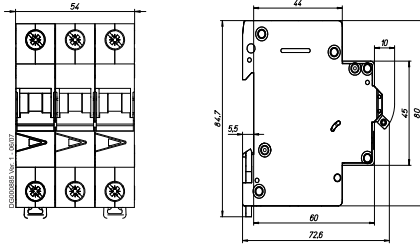


3+N-pole, 4-pole

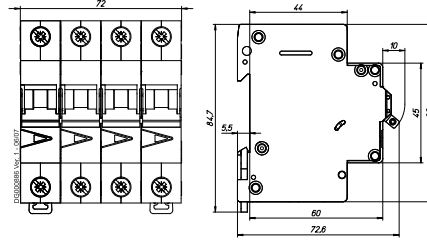

Tripping Characteristic FAZ-T

Characteristics B, C and D - EN60898

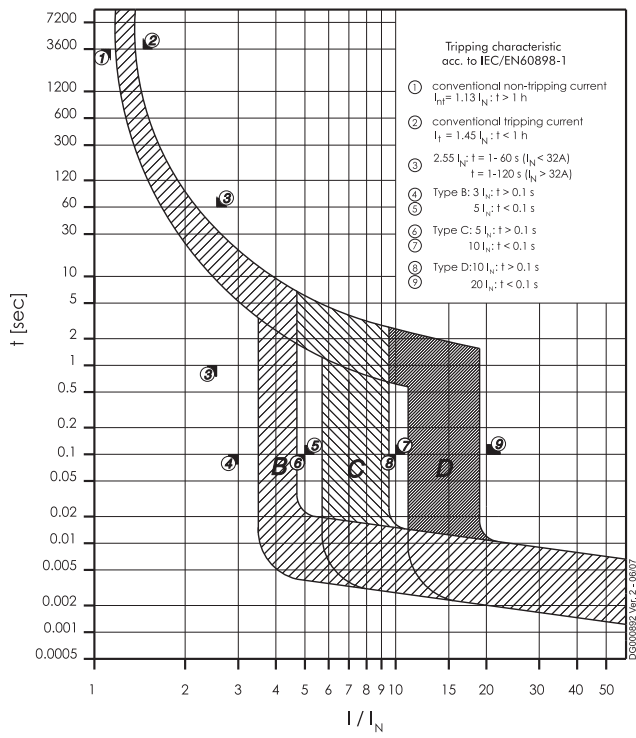

Power Loss at I_n FAZ-T

Type B

| | 1p | 1pN | 2p | 3p | 3pN* | 4p |
|-----------|-------|-------|-------|-------|-------|-------|
| I_n [A] | P [W] | P [W] | P [W] | P [W] | P [W] | P [W] |
| 1 | 1.6 | 1.7 | 3.1 | 4.7 | 4.8 | 6.3 |
| 2 | 1.4 | 1.5 | 2.8 | 4.1 | 4.3 | 5.5 |
| 3 | 2.5 | 2.7 | 5.0 | 7.6 | 7.8 | 10.1 |
| 4 | 1.4 | 1.6 | 2.9 | 4.4 | 4.5 | 5.8 |
| 6 | 1.8 | 2.0 | 3.6 | 5.5 | 5.6 | 7.3 |
| 10 | 1.9 | 2.1 | 3.9 | 5.9 | 6.1 | 7.8 |
| 12 | 2.8 | 3.2 | 5.9 | 8.7 | 9.0 | 11.5 |
| 13 | 2.5 | 2.9 | 5.3 | 7.8 | 8.1 | 10.3 |
| 15 | 2.1 | 2.4 | 4.4 | 6.5 | 6.7 | 8.6 |
| 16 | 2.2 | 2.6 | 4.7 | 6.9 | 7.2 | 9.1 |
| 20 | 3.2 | 3.6 | 6.6 | 9.8 | 10.1 | 13.0 |
| 25 | 3.0 | 3.5 | 6.4 | 9.4 | 9.7 | 12.4 |
| 32 | 3.7 | 4.4 | 8.1 | 12.1 | 12.5 | 15.8 |
| 40 | 3.4 | 4.1 | 7.5 | 11.2 | 11.5 | 14.6 |

*symmetrical load

Type C

| | 1p | 1pN | 2p | 3p | 3pN* | 4p |
|-----------|-------|-------|-------|-------|-------|-------|
| I_n [A] | P [W] | P [W] | P [W] | P [W] | P [W] | P [W] |
| 1 | 1.6 | 1.7 | 3.1 | 4.7 | 4.8 | 6.3 |
| 2 | 1.4 | 1.5 | 2.8 | 4.1 | 4.3 | 5.5 |
| 3 | 1.2 | 1.3 | 2.4 | 3.6 | 3.7 | 4.8 |
| 4 | 1.4 | 1.6 | 2.9 | 4.4 | 4.5 | 5.8 |
| 6 | 1.5 | 1.6 | 2.9 | 4.4 | 4.6 | 5.9 |
| 10 | 1.5 | 1.7 | 3.0 | 4.6 | 4.7 | 6.1 |
| 12 | 2.1 | 2.4 | 4.4 | 6.5 | 6.8 | 8.6 |
| 13 | 2.5 | 2.9 | 5.3 | 7.8 | 8.1 | 10.3 |
| 15 | 2.1 | 2.4 | 4.4 | 6.5 | 6.7 | 8.6 |
| 16 | 2.2 | 2.6 | 4.7 | 6.9 | 7.2 | 9.1 |
| 20 | 3.2 | 3.6 | 6.6 | 9.8 | 10.1 | 13.0 |
| 25 | 3.0 | 3.5 | 6.4 | 9.4 | 9.7 | 12.4 |
| 32 | 3.7 | 4.4 | 8.1 | 12.1 | 12.5 | 15.8 |
| 40 | 3.4 | 4.1 | 7.5 | 11.2 | 11.5 | 14.6 |

*symmetrical load

Type D

| | 1p | 1pN | 2p | 3p | 3pN* | 4p |
|-----------|-------|-------|-------|-------|-------|-------|
| I_n [A] | P [W] | P [W] | P [W] | P [W] | P [W] | P [W] |
| 1 | 0.8 | 0.9 | 1.6 | 2.4 | 2.5 | 3.2 |
| 2 | 1.0 | 1.1 | 2.0 | 3.0 | 3.1 | 4.0 |
| 3 | 1.2 | 1.3 | 2.4 | 3.6 | 3.7 | 4.8 |
| 4 | 1.4 | 1.6 | 2.9 | 4.4 | 4.5 | 5.8 |
| 6 | 1.5 | 1.6 | 2.9 | 4.4 | 4.6 | 5.9 |
| 10 | 1.5 | 1.7 | 3.0 | 4.6 | 4.7 | 6.1 |
| 12 | 1.7 | 2.0 | 3.6 | 5.3 | 5.4 | 7.0 |
| 13 | 1.9 | 2.2 | 4.0 | 5.9 | 6.1 | 7.8 |
| 15 | 2.1 | 2.4 | 4.4 | 6.5 | 6.7 | 8.6 |
| 16 | 2.2 | 2.6 | 4.7 | 6.9 | 7.2 | 9.1 |
| 20 | 2.0 | 2.2 | 4.1 | 6.1 | 6.2 | 8.1 |
| 25 | 2.5 | 2.9 | 5.2 | 7.7 | 7.9 | 10.2 |
| 32 | 3.4 | 4.0 | 7.4 | 11.1 | 11.4 | 14.5 |
| 40 | 3.2 | 3.8 | 7.0 | 10.4 | 10.7 | 13.6 |

*symmetrical load


Influence of Ambient Temperature FAZ-T

On Load Carrying Capacity (temperature derating)


| I_N [A] | Ambient temperature T [°C] | | | | | | | | | | | | | | | | |
|-----------|----------------------------|-----|-----|-----|-----|-----|-----|----|------|------|------|------|-----|------|------|------|------|
| | -40 | -30 | -20 | -10 | 0 | 10 | 20 | 30 | 35 | 40 | 45 | 50 | 55 | 60 | 65 | 70 | 75 |
| 1 | 1.3 | 1.2 | 1.2 | 1.2 | 1.1 | 1.1 | 1 | 1 | 0.99 | 0.97 | 0.95 | 0.93 | 0.9 | 0.89 | 0.87 | 0.85 | 0.83 |
| 2 | 2.6 | 2.5 | 2.4 | 2.3 | 2.2 | 2.2 | 2.1 | 2 | 2 | 1.9 | 1.9 | 1.9 | 1.8 | 1.8 | 1.7 | 1.7 | 1.7 |
| 3 | 3.8 | 3.7 | 3.6 | 3.5 | 3.4 | 3.3 | 3.1 | 3 | 3 | 2.9 | 2.8 | 2.8 | 2.7 | 2.7 | 2.6 | 2.5 | 2.5 |
| 4 | 5.1 | 5 | 4.8 | 4.7 | 4.5 | 4.3 | 4.2 | 4 | 3.9 | 3.9 | 3.8 | 3.7 | 3.6 | 3.5 | 3.5 | 3.4 | 3.3 |
| 6 | 7.7 | 7.5 | 7.2 | 7 | 6.7 | 6.5 | 6.3 | 6 | 5.9 | 5.8 | 5.7 | 5.6 | 5.4 | 5.3 | 5.2 | 5.1 | 5 |
| 10 | 13 | 12 | 12 | 12 | 11 | 11 | 10 | 10 | 9.9 | 9.7 | 9.5 | 9.3 | 9 | 8.9 | 8.7 | 8.5 | 8.3 |
| 12 | 15 | 15 | 14 | 14 | 13 | 13 | 13 | 12 | 12 | 12 | 11 | 11 | 11 | 11 | 10 | 10 | 10 |
| 13 | 17 | 16 | 16 | 15 | 15 | 14 | 14 | 13 | 13 | 13 | 12 | 12 | 12 | 12 | 11 | 11 | 11 |
| 15 | 19 | 19 | 18 | 17 | 17 | 16 | 16 | 15 | 15 | 15 | 14 | 14 | 14 | 13 | 13 | 13 | 12 |
| 16 | 20 | 20 | 19 | 19 | 18 | 17 | 17 | 16 | 16 | 15 | 15 | 15 | 14 | 14 | 14 | 14 | 13 |
| 20 | 26 | 25 | 24 | 23 | 22 | 22 | 21 | 20 | 20 | 19 | 19 | 19 | 18 | 18 | 17 | 17 | 17 |
| 25 | 32 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 25 | 24 | 24 | 23 | 23 | 22 | 22 | 21 | 21 |
| 32 | 41 | 40 | 38 | 37 | 36 | 35 | 33 | 32 | 32 | 31 | 30 | 30 | 29 | 28 | 28 | 27 | 26 |
| 40 | 51 | 50 | 48 | 47 | 45 | 43 | 42 | 40 | 39 | 39 | 38 | 37 | 36 | 35 | 35 | 34 | 33 |

Maximum Let-Through Energy FAZ-T


Type B

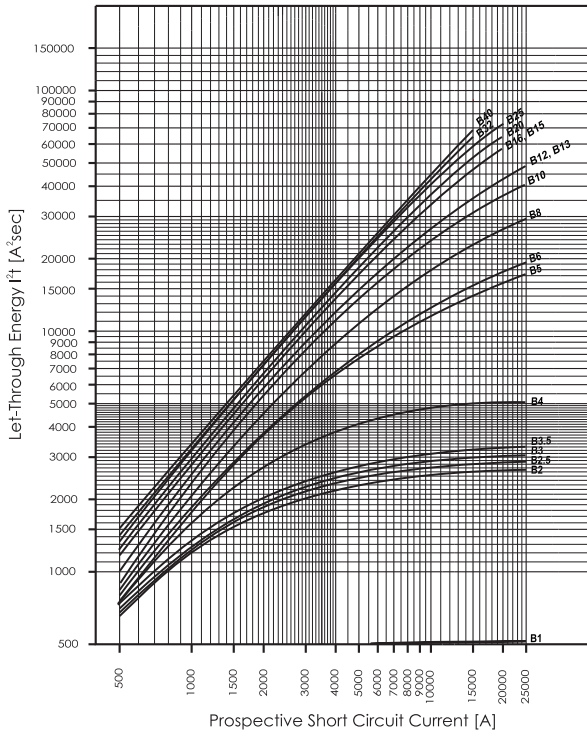

Type C

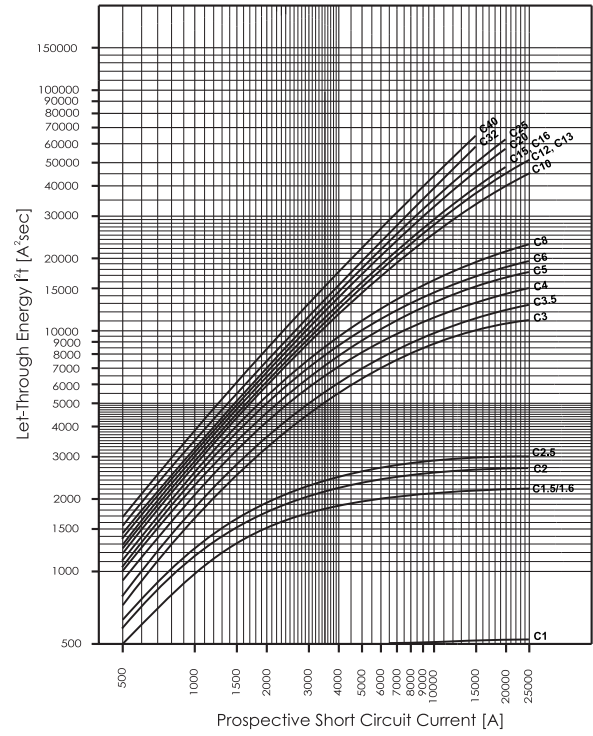


Type D

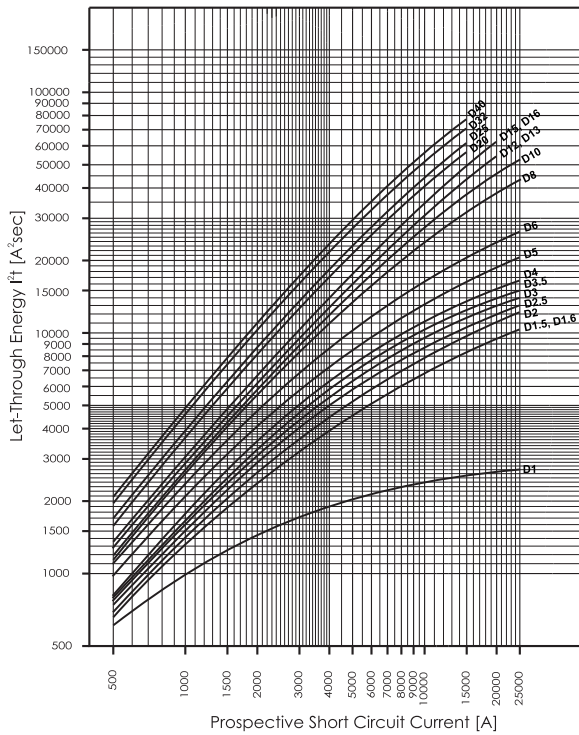


Maximum Let-Through Current FAZ-T


Type B

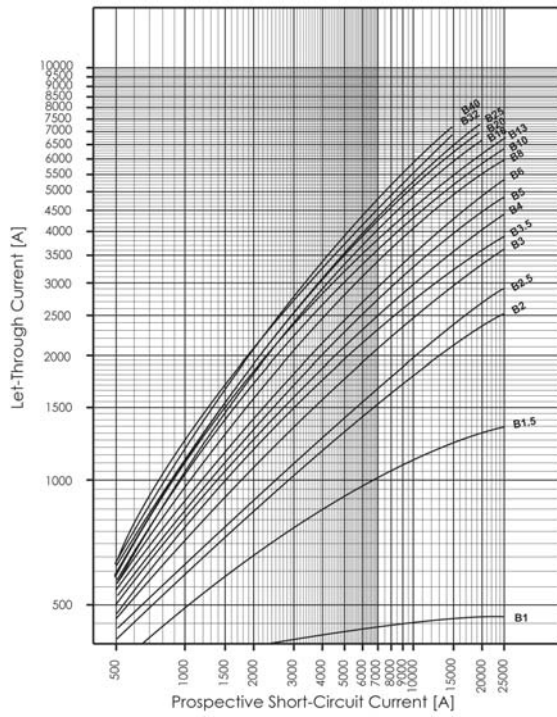

Type C

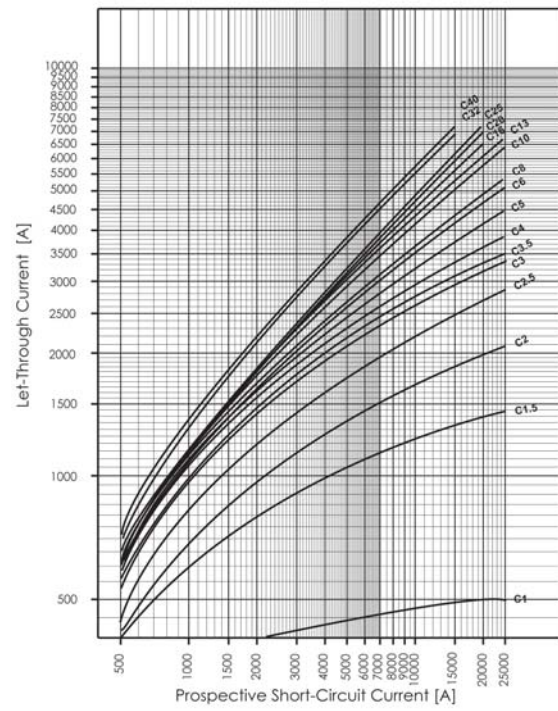

Type D

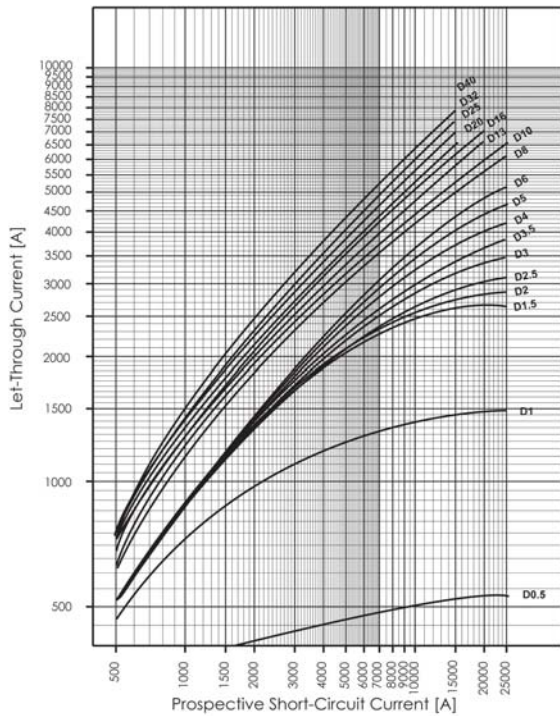


Influence of the Line Frequency FAZ-T

On the Instantaneous Tripping Current I_{MA}

| | Line Frequency f [Hz] | | | | | | |
|-------------------------------------|-----------------------|-----|-----|-----|-----|-----|-----|
| | $16\frac{2}{3}$ | 50 | 60 | 100 | 200 | 300 | 400 |
| $I_{MA}(f)/I_{MA}(50\text{Hz})$ [%] | 91 | 100 | 101 | 106 | 115 | 134 | 141 |

Load rating in case of circuit breakers arranged one next to the other FAZ-T

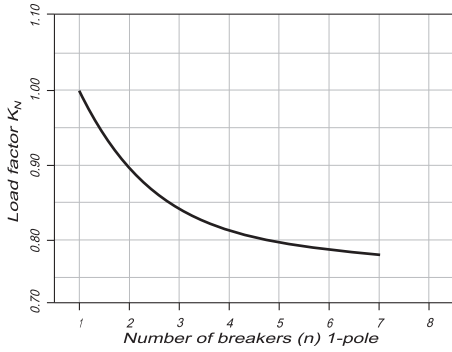

Miniature Circuit Breakers FAZ-DC

SG53312





FAZ-DC

- High-quality miniature circuit breakers for DC-applications
- Contact position indicator red - green
- Guide for secure terminal connection (not for FAZ-NA)
- 3-position DIN rail clip, permits removal from existing busbar system
- Comprehensive range of accessories suitable for subsequent installation
- Rated currents up to 50 A
- Tripping characteristic C
- Rated breaking capacity 10 kA according to IEC/EN 60947-2
- Up to 250 V DC pro pole

FAZ...-DC Miniature Circuit Breakers (MCBs)

Characteristic C

| | Rated current I_n (A) | Rated voltage IEC/EN 60947-2 (V DC) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Type Designation | Article No. | Units per package |
|--|----------------------------|--|---|---------------------|-------------|-------------------------|
| 1-pole | | | | | | |
|  | 2 | 220 | 10 | FAZ-C2/1-DC | 279122 | 12/120 |
| | 3 | 250 | 10 | FAZ-C3/1-DC | 279123 | 12/120 |
| | 4 | 250 | 10 | FAZ-C4/1-DC | 279124 | 12/120 |
| | 6 | 250 | 10 | FAZ-C6/1-DC | 279125 | 12/120 |
| | 10 | 250 | 10 | FAZ-C10/1-DC | 279126 | 12/120 |
| | 13 | 250 | 10 | FAZ-C13/1-DC | 279127 | 12/120 |
| | 16 | 250 | 10 | FAZ-C16/1-DC | 279128 | 12/120 |
| | 20 | 250 | 10 | FAZ-C20/1-DC | 279129 | 12/120 |
| | 25 | 250 | 10 | FAZ-C25/1-DC | 279130 | 12/120 |
| | 32 | 250 | 10 | FAZ-C32/1-DC | 279131 | 12/120 |
| | 40 | 250 | 10 | FAZ-C40/1-DC | 279132 | 12/120 |
| | 50 | 250 | 10 | FAZ-C50/1-DC | 279133 | 12/120 |
| 2-pole | | | | | | |
|  | 2 | 440 | 10 | FAZ-C2/2-DC | 279134 | 1/60 |
| | 3 | 500 | 10 | FAZ-C3/2-DC | 279135 | 1/60 |
| | 4 | 500 | 10 | FAZ-C4/2-DC | 279136 | 1/60 |
| | 6 | 500 | 10 | FAZ-C6/2-DC | 279137 | 1/60 |
| | 10 | 500 | 10 | FAZ-C10/2-DC | 279138 | 1/60 |
| | 13 | 500 | 10 | FAZ-C13/2-DC | 279139 | 1/60 |
| | 16 | 500 | 10 | FAZ-C16/2-DC | 279140 | 1/60 |
| | 20 | 500 | 10 | FAZ-C20/2-DC | 279141 | 1/60 |
| | 25 | 500 | 10 | FAZ-C25/2-DC | 279142 | 1/60 |
| | 32 | 500 | 10 | FAZ-C32/2-DC | 279143 | 1/60 |
| | 40 | 500 | 10 | FAZ-C40/2-DC | 279144 | 1/60 |
| | 50 | 500 | 10 | FAZ-C50/2-DC | 279145 | 1/60 |

Specifications FAZ-DC

Technical data

| | FAZ-DC *) |
|-----------------|----------------|
| Productstandard | IEC/EN 60947-2 |
| Number of poles | 1, 2 |

Mechanical specifications

| | |
|---|---|
| Device width | 17.7 mm (1p), 36 mm (2p) |
| Frame size | 45 mm |
| Socket size | 80 mm |
| Device depth | 60 mm |
| Terminals | lift terminal |
| Terminal capacity rigid solid/stranded wire | 1-25 mm ² |
| Terminal screw | M5 (with slotted screw acc. to EN ISO 4757-Z2, PZ2) |
| Terminal torque | max. 2.4 Nm |
| Snap on fixing | tristable (on DIN rail acc. to EN 50022) |
| Finger proof | acc. to VBG4, ÖVE EN-6 |
| Degree of Protection (DIN VDE 0470) | |
| Surface mounted | IP 20 |
| Built-in behind panel | IP 40 |
| Contact position indicator | red / green |

Electrical specifications


| | | |
|---------------------------------|-----------|--|
| Rated voltage DC | U_n | 2 A type: 220V (per pole) 3-50 A types: 250V (per pole) |
| Rated current | I_n | Type C: 2, 3, 4, 6, 10, 13, 16, 20, 25, 32, 40, 50 A |
| Rated insulation voltage | U_i | 440 V |
| Rated impulse withstand voltage | U_{imp} | 4 kV (1.2/50) μ sec |

Tripping characteristic

| | | |
|--------------------------------------|----------|---|
| Conventional non-tripping current | | $I_{nt}=1.13 I_n$ |
| Conventional tripping current | | $I_t=1.45 I_n$ |
| Reference temperature | | 30 °C |
| Temperature factor | | 0.4% /K |
| Instantaneous tripping current | I_{mt} | type C: $7 I_n < I_{mt} = 15 I_n$; $t(I_{mt}) < 0.1$ sec |
| Rated short-circuit braking capacity | I_{cu} | 10 kA |
| Selectivity class | | 3 |
| Number of electrical operations | | > 4000 |
| Number of mechanical operations | | > 20000 |
| Climatic conditions | | acc. to IEC 68-2 (25..55°C / 90..95% RH) |
| Operating temperature range | | -40°C to +75°C |


*) not for PV string protection!

Connection diagram




Dimensions (mm) FAZ-...-DC

1-pole




2-pole

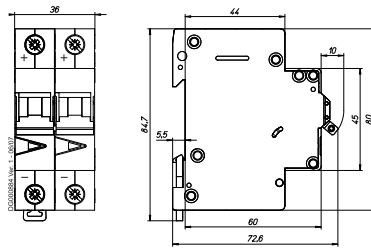


Connection examples FAZ-...-DC

Connection example at 250V=, 1-pole

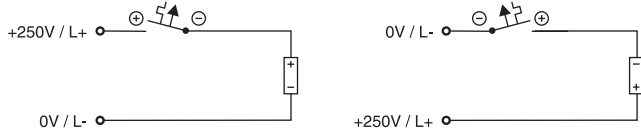


Connection example at 500V=, 2-pole

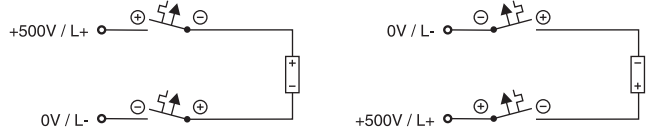


Tripping Characteristic FAZ-...-DC

Characteristics C - IEC/EN 60947-2

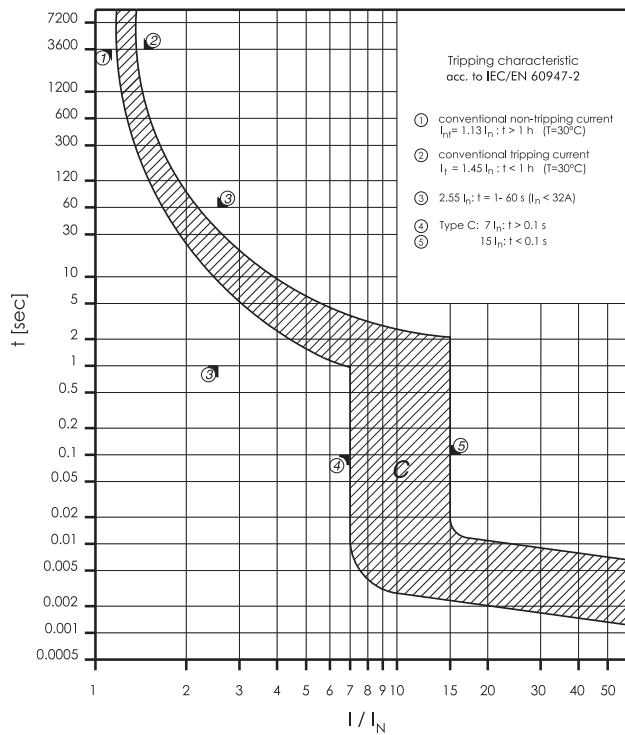

Maximum Let-Through Energy FAZ-...-DC

Type C

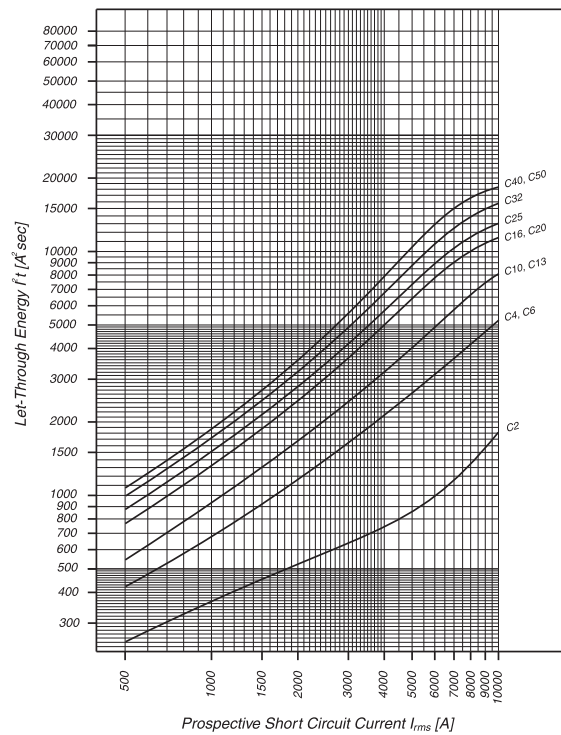

Miniature Circuit Breakers FAZ-NA, FAZ-RT, FAZ-DU

SG56912



FAZ-NA/-RT/-DU

- According to UL 489, CSA C22.2 No. 5 and also IEC 60947-2 standard
- For Applications, which are permitted for UL 1077 or CSA C22.2 No. 235
- Auxiliary switch and voltage trips suitable for subsequent installation
- Series with removable terminal screws (Type FAZ-...-RT/-DU), for use with ring cable lug
- Contact position indicator red - green
- Easy mounting at DIN-rail

FAZ-...-NA Miniature Circuit Breakers (MCBs)

Characteristic B

| | Rated current I_n (A) | Rated voltage IEC/EN 60947-2 (V) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Rated voltage UL489 (V) | Breaking capacity acc. to UL489 (kA) | SWD | NFPA 79 | Type Designation | Article No. | Units per package |
|---------------|----------------------------|---|---|-------------------------------|---|--------|---------------|---------------------|-------------|-------------------------|
| 1-pole | | | | | | | | | | |
| 1 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-B1/1-NA | 132414 | 12/120 | |
| 1.5 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-B1,5/1-NA | 132415 | 12/120 | |
| 2 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-B2/1-NA | 132416 | 12/120 | |
| 3 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-B3/1-NA | 132417 | 12/120 | |
| 4 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-B4/1-NA | 132418 | 12/120 | |
| 5 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-B5/1-NA | 132419 | 12/120 | |
| 6 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-B6/1-NA | 132680 | 12/120 | |
| 7 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-B7/1-NA | 132681 | 12/120 | |
| 8 | 240/415 | 15 | 277 | 10 | SWD | AWG 16 | FAZ-B8/1-NA | 132682 | 12/120 | |
| 10 | 240/415 | 15 | 277 | 10 | SWD | AWG 16 | FAZ-B10/1-NA | 132683 | 12/120 | |
| 13 | 240/415 | 15 | 277 | 10 | SWD | | FAZ-B13/1-NA | 132684 | 12/120 | |
| 15 | 240/415 | 15 | 277 | 14 | SWD | | FAZ-B15/1-NA | 132685 | 12/120 | |
| 16 | 240/415 | 15 | 277 | 14 | SWD | | FAZ-B16/1-NA | 132686 | 12/120 | |
| 20 | 240/415 | 15 | 277 | 14 | SWD | | FAZ-B20/1-NA | 132687 | 12/120 | |
| 25 | 240/415 | 15 | 277 | 14 | | | FAZ-B25/1-NA | 132688 | 12/120 | |
| 30 | 240/415 | 15 | 277 | 10 | | | FAZ-B30/1-NA | 132689 | 12/120 | |
| 32 | 240/415 | 15 | 277 | 10 | | | FAZ-B32/1-NA | 132690 | 12/120 | |
| 35 | 240/415 | 15 | 240 | 10 | | | FAZ-B35/1-NA | 132691 | 12/120 | |
| 40 | 240/415 | 15 | 240 | 10 | | | FAZ-B40/1-NA | 132692 | 12/120 | |
| 2-pole | | | | | | | | | | |
| 1 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B1/2-NA | 132693 | 1/60 | |
| 1.5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B1,5/2-NA | 132694 | 1/60 | |
| 2 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B2/2-NA | 132695 | 1/60 | |
| 3 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B3/2-NA | 132696 | 1/60 | |
| 4 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B4/2-NA | 132697 | 1/60 | |
| 5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B5/2-NA | 132698 | 1/60 | |
| 6 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B6/2-NA | 132699 | 1/60 | |
| 7 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B7/2-NA | 132700 | 1/60 | |
| 8 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 16 | FAZ-B8/2-NA | 132701 | 1/60 | |
| 10 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 16 | FAZ-B10/2-NA | 132702 | 1/60 | |
| 13 | 415 | 15 | 480Y/277 | 10 | SWD | | FAZ-B13/2-NA | 132703 | 1/60 | |
| 15 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-B15/2-NA | 132704 | 1/60 | |
| 16 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-B16/2-NA | 132705 | 1/60 | |
| 20 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-B20/2-NA | 132706 | 1/60 | |
| 25 | 415 | 15 | 480Y/277 | 14 | | | FAZ-B25/2-NA | 132707 | 1/60 | |
| 30 | 415 | 15 | 480Y/277 | 10 | | | FAZ-B30/2-NA | 132708 | 1/60 | |
| 32 | 415 | 15 | 480Y/277 | 10 | | | FAZ-B32/2-NA | 132709 | 1/60 | |
| 35 | 415 | 15 | 240 | 10 | | | FAZ-B35/2-NA | 132710 | 1/60 | |
| 40 | 415 | 15 | 240 | 10 | | | FAZ-B40/2-NA | 132711 | 1/60 | |
| 3-pole | | | | | | | | | | |
| 1 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B1/3-NA | 132712 | 1/40 | |
| 1.5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B1,5/3-NA | 132713 | 1/40 | |
| 2 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B2/3-NA | 132714 | 1/40 | |
| 3 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B3/3-NA | 132715 | 1/40 | |
| 4 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B4/3-NA | 132716 | 1/40 | |
| 5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B5/3-NA | 132717 | 1/40 | |
| 6 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B6/3-NA | 132718 | 1/40 | |
| 7 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B7/3-NA | 132719 | 1/40 | |
| 8 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 16 | FAZ-B8/3-NA | 132720 | 1/40 | |
| 10 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 16 | FAZ-B10/3-NA | 132721 | 1/40 | |
| 13 | 415 | 15 | 480Y/277 | 10 | SWD | | FAZ-B13/3-NA | 132722 | 1/40 | |
| 15 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-B15/3-NA | 132723 | 1/40 | |
| 16 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-B16/3-NA | 132724 | 1/40 | |
| 20 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-B20/3-NA | 132725 | 1/40 | |
| 25 | 415 | 15 | 480Y/277 | 14 | | | FAZ-B25/3-NA | 132726 | 1/40 | |
| 30 | 415 | 15 | 480Y/277 | 10 | | | FAZ-B30/3-NA | 132727 | 1/40 | |
| 32 | 415 | 15 | 480Y/277 | 10 | | | FAZ-B32/3-NA | 132728 | 1/40 | |
| 35 | 415 | 15 | 240 | 10 | | | FAZ-B35/3-NA | 132729 | 1/40 | |
| 40 | 415 | 15 | 240 | 10 | | | FAZ-B40/3-NA | 132730 | 1/40 | |

SG53012



SG56812



SG56912



FAZ...-NA Miniature Circuit Breakers (MCBs)

Characteristic C

| | Rated current I_n (A) | Rated voltage IEC/EN 60947-2 (V) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Rated voltage UL489 (V) | Breaking capacity acc. to UL489 (kA) | SWD | NFPA 79 | Type Designation | Article No. | Units per package |
|---------------|----------------------------|---|---|-------------------------------|---|--------|---------------|---------------------|-------------|-------------------------|
| 1-pole | | | | | | | | | | |
| 0.5 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-C0,5/1-NA | 181883 | 12/120 | |
| 1 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-C1/1-NA | 181885 | 12/120 | |
| 1.5 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-C1,5/1-NA | 181887 | 12/120 | |
| 2 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-C2/1-NA | 181889 | 12/120 | |
| 3 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-C3/1-NA | 181891 | 12/120 | |
| 4 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-C4/1-NA | 181893 | 12/120 | |
| 5 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-C5/1-NA | 181895 | 12/120 | |
| 6 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-C6/1-NA | 181897 | 12/120 | |
| 7 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-C7/1-NA | 181899 | 12/120 | |
| 8 | 240/415 | 15 | 277 | 10 | SWD | AWG 16 | FAZ-C8/1-NA | 181901 | 12/120 | |
| 10 | 240/415 | 15 | 277 | 10 | SWD | AWG 16 | FAZ-C10/1-NA | 181903 | 12/120 | |
| 13 | 240/415 | 15 | 277 | 10 | SWD | | FAZ-C13/1-NA | 181905 | 12/120 | |
| 15 | 240/415 | 15 | 277 | 14 | SWD | | FAZ-C15/1-NA | 181907 | 12/120 | |
| 16 | 240/415 | 15 | 277 | 14 | SWD | | FAZ-C16/1-NA | 181909 | 12/120 | |
| 20 | 240/415 | 15 | 277 | 14 | SWD | | FAZ-C20/1-NA | 181911 | 12/120 | |
| 25 | 240/415 | 15 | 277 | 14 | | | FAZ-C25/1-NA | 181913 | 12/120 | |
| 30 | 240/415 | 15 | 277 | 10 | | | FAZ-C30/1-NA | 181915 | 12/120 | |
| 32 | 240/415 | 15 | 277 | 10 | | | FAZ-C32/1-NA | 181917 | 12/120 | |
| 35 | 240/415 | 15 | 240 | 10 | | | FAZ-C35/1-NA | 181919 | 12/120 | |
| 40 | 240/415 | 15 | 240 | 10 | | | FAZ-C40/1-NA | 181921 | 12/120 | |
| 2-pole | | | | | | | | | | |
| 0.5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C0,5/2-NA | 181923 | 1/60 | |
| 1 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C1/2-NA | 181925 | 1/60 | |
| 1.5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C1,5/2-NA | 181927 | 1/60 | |
| 2 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C2/2-NA | 181929 | 1/60 | |
| 3 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C3/2-NA | 181931 | 1/60 | |
| 4 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C4/2-NA | 181933 | 1/60 | |
| 5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C5/2-NA | 181935 | 1/60 | |
| 6 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C6/2-NA | 181937 | 1/60 | |
| 7 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C7/2-NA | 181939 | 1/60 | |
| 8 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 16 | FAZ-C8/2-NA | 181941 | 1/60 | |
| 10 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 16 | FAZ-C10/2-NA | 181943 | 1/60 | |
| 13 | 415 | 15 | 480Y/277 | 10 | SWD | | FAZ-C13/2-NA | 181945 | 1/60 | |
| 15 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-C15/2-NA | 181947 | 1/60 | |
| 16 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-C16/2-NA | 181949 | 1/60 | |
| 20 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-C20/2-NA | 181951 | 1/60 | |
| 25 | 415 | 15 | 480Y/277 | 14 | | | FAZ-C25/2-NA | 181953 | 1/60 | |
| 30 | 415 | 15 | 480Y/277 | 10 | | | FAZ-C30/2-NA | 181955 | 1/60 | |
| 32 | 415 | 15 | 480Y/277 | 10 | | | FAZ-C32/2-NA | 181957 | 1/60 | |
| 35 | 415 | 15 | 240 | 10 | | | FAZ-C35/2-NA | 181959 | 1/60 | |
| 40 | 415 | 15 | 240 | 10 | | | FAZ-C40/2-NA | 181961 | 1/60 | |
| 3-pole | | | | | | | | | | |
| 0.5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C0,5/3-NA | 181963 | 1/40 | |
| 1 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C1/3-NA | 181965 | 1/40 | |
| 1.5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C1,5/3-NA | 181967 | 1/40 | |
| 2 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C2/3-NA | 181969 | 1/40 | |
| 3 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C3/3-NA | 181971 | 1/40 | |
| 4 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C4/3-NA | 181973 | 1/40 | |
| 5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C5/3-NA | 181975 | 1/40 | |
| 6 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C6/3-NA | 181977 | 1/40 | |
| 7 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C7/3-NA | 181979 | 1/40 | |
| 8 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 16 | FAZ-C8/3-NA | 181981 | 1/40 | |
| 10 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 16 | FAZ-C10/3-NA | 181983 | 1/40 | |
| 13 | 415 | 15 | 480Y/277 | 10 | SWD | | FAZ-C13/3-NA | 181985 | 1/40 | |
| 15 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-C15/3-NA | 181987 | 1/40 | |
| 16 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-C16/3-NA | 181989 | 1/40 | |
| 20 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-C20/3-NA | 181991 | 1/40 | |
| 25 | 415 | 15 | 480Y/277 | 14 | | | FAZ-C25/3-NA | 181993 | 1/40 | |
| 30 | 415 | 15 | 480Y/277 | 10 | | | FAZ-C30/3-NA | 181995 | 1/40 | |
| 32 | 415 | 15 | 480Y/277 | 10 | | | FAZ-C32/3-NA | 181997 | 1/40 | |
| 35 | 415 | 15 | 240 | 10 | | | FAZ-C35/3-NA | 181999 | 1/40 | |
| 40 | 415 | 15 | 240 | 10 | | | FAZ-C40/3-NA | 182001 | 1/40 | |

SG53012



SG56812



SG56912



FAZ-...-NA Miniature Circuit Breakers (MCBs)

Characteristic D

| | Rated current I_n (A) | Rated voltage IEC/EN 60947-2 (V) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Rated voltage UL489 (V) | Breaking capacity acc. to UL489 (kA) | SWD | NFPA 79 | Type Designation | Article No. | Units per package |
|---------------|----------------------------|---|---|-------------------------------|---|-----|---------|---------------------|-------------|-------------------------|
| 1-pole | | | | | | | | | | |
| | 0.5 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-D0,5/1-NA | 182003 | 12/120 |
| | 1 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-D1/1-NA | 182005 | 12/120 |
| | 1.5 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-D1,5/1-NA | 182007 | 12/120 |
| | 2 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-D2/1-NA | 182009 | 12/120 |
| | 3 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-D3/1-NA | 182011 | 12/120 |
| | 4 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-D4/1-NA | 182013 | 12/120 |
| | 5 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-D5/1-NA | 182015 | 12/120 |
| | 6 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-D6/1-NA | 182017 | 12/120 |
| | 7 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-D7/1-NA | 182019 | 12/120 |
| | 8 | 240/415 | 15 | 277 | 10 | SWD | AWG 16 | FAZ-D8/1-NA | 182021 | 12/120 |
| | 10 | 240/415 | 15 | 277 | 10 | SWD | AWG 16 | FAZ-D10/1-NA | 181831 | 12/120 |
| | 13 | 240/415 | 15 | 277 | 14 | SWD | | FAZ-D13/1-NA | 181833 | 12/120 |
| | 15 | 240/415 | 15 | 277 | 14 | SWD | | FAZ-D15/1-NA | 181835 | 12/120 |
| | 16 | 240/415 | 15 | 277 | 14 | SWD | | FAZ-D16/1-NA | 181837 | 12/120 |
| | 20 | 240/415 | 15 | 277 | 14 | SWD | | FAZ-D20/1-NA | 181839 | 12/120 |
| | 25 | 240/415 | 15 | 277 | 10 | | | FAZ-D25/1-NA | 181841 | 12/120 |
| | 30 | 240/415 | 15 | 277 | 10 | | | FAZ-D30/1-NA | 182023 | 12/120 |
| | 32 | 240/415 | 15 | 277 | 10 | | | FAZ-D32/1-NA | 182025 | 12/120 |
| | 35 | 240/415 | 15 | 240 | 10 | | | FAZ-D35/1-NA | 182027 | 12/120 |
| | 40 | 240/415 | 15 | 240 | 10 | | | FAZ-D40/1-NA | 182029 | 12/120 |
| 2-pole | | | | | | | | | | |
| | 0.5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D0,5/2-NA | 182031 | 1/60 |
| | 1 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D1/2-NA | 182033 | 1/60 |
| | 1.5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D1,5/2-NA | 182035 | 1/60 |
| | 2 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D2/2-NA | 182037 | 1/60 |
| | 3 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D3/2-NA | 182039 | 1/60 |
| | 4 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D4/2-NA | 182041 | 1/60 |
| | 5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D5/2-NA | 182043 | 1/60 |
| | 6 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D6/2-NA | 182045 | 1/60 |
| | 7 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D7/2-NA | 182047 | 1/60 |
| | 8 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 16 | FAZ-D8/2-NA | 182049 | 1/60 |
| | 10 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 16 | FAZ-D10/2-NA | 182051 | 1/60 |
| | 13 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-D13/2-NA | 182053 | 1/60 |
| | 15 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-D15/2-NA | 182055 | 1/60 |
| | 16 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-D16/2-NA | 182057 | 1/60 |
| | 20 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-D20/2-NA | 182059 | 1/60 |
| | 25 | 415 | 15 | 480Y/277 | 10 | | | FAZ-D25/2-NA | 182061 | 1/60 |
| | 30 | 415 | 15 | 480Y/277 | 10 | | | FAZ-D30/2-NA | 182063 | 1/60 |
| | 32 | 415 | 15 | 480Y/277 | 10 | | | FAZ-D32/2-NA | 182065 | 1/60 |
| | 35 | 415 | 15 | 240 | 10 | | | FAZ-D35/2-NA | 182067 | 1/60 |
| | 40 | 415 | 15 | 240 | 10 | | | FAZ-D40/2-NA | 182069 | 1/60 |
| 3-pole | | | | | | | | | | |
| | 0.5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D0,5/3-NA | 182071 | 1/40 |
| | 1 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D1/3-NA | 182073 | 1/40 |
| | 1.5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D1,5/3-NA | 182075 | 1/40 |
| | 2 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D2/3-NA | 182077 | 1/40 |
| | 3 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D3/3-NA | 182079 | 1/40 |
| | 4 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D4/3-NA | 182081 | 1/40 |
| | 5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D5/3-NA | 182083 | 1/40 |
| | 6 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D6/3-NA | 182085 | 1/40 |
| | 7 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D7/3-NA | 182087 | 1/40 |
| | 8 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 16 | FAZ-D8/3-NA | 182089 | 1/40 |
| | 10 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 16 | FAZ-D10/3-NA | 182091 | 1/40 |
| | 13 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-D13/3-NA | 182093 | 1/40 |
| | 15 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-D15/3-NA | 182095 | 1/40 |
| | 16 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-D16/3-NA | 182097 | 1/40 |
| | 20 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-D20/3-NA | 182099 | 1/40 |
| | 25 | 415 | 15 | 480Y/277 | 10 | | | FAZ-D25/3-NA | 182101 | 1/40 |
| | 30 | 415 | 15 | 480Y/277 | 10 | | | FAZ-D30/3-NA | 182103 | 1/40 |
| | 32 | 415 | 15 | 480Y/277 | 10 | | | FAZ-D32/3-NA | 182105 | 1/40 |
| | 35 | 415 | 15 | 240 | 10 | | | FAZ-D35/3-NA | 182107 | 1/40 |
| | 40 | 415 | 15 | 240 | 10 | | | FAZ-D40/3-NA | 182109 | 1/40 |

SG53012



SG56812



SG56912



FAZ...-RT/-DU Miniature Circuit Breakers (MCBs)

Characteristic B

| | Rated current I_n (A) | Rated voltage IEC/EN 60947-2 (V) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Rated voltage UL489 (V) | Breaking capacity acc. to UL489 (kA) | SWD | NFPA 79 | Type Designation | Article No. | Units per package |
|---------------|----------------------------|---|---|-------------------------------|---|--------|---------------|---------------------|-------------|-------------------------|
| 1-pole | | | | | | | | | | |
| 1 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-B1/1-RT | 132731 | 12/120 | |
| 1.5 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-B1,5/1-RT | 132732 | 12/120 | |
| 2 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-B2/1-RT | 132733 | 12/120 | |
| 3 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-B3/1-RT | 132734 | 12/120 | |
| 4 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-B4/1-RT | 132735 | 12/120 | |
| 5 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-B5/1-RT | 132736 | 12/120 | |
| 6 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-B6/1-RT | 132737 | 12/120 | |
| 7 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-B7/1-RT | 132738 | 12/120 | |
| 8 | 240/415 | 15 | 277 | 10 | SWD | AWG 16 | FAZ-B8/1-RT | 132739 | 12/120 | |
| 10 | 240/415 | 15 | 277 | 10 | SWD | AWG 16 | FAZ-B10/1-RT | 132740 | 12/120 | |
| 13 | 240/415 | 15 | 277 | 10 | SWD | | FAZ-B13/1-RT | 132741 | 12/120 | |
| 15 | 240/415 | 15 | 277 | 14 | SWD | | FAZ-B15/1-RT | 132742 | 12/120 | |
| 16 | 240/415 | 15 | 277 | 14 | SWD | | FAZ-B16/1-RT | 132743 | 12/120 | |
| 20 | 240/415 | 15 | 277 | 14 | SWD | | FAZ-B20/1-RT | 132744 | 12/120 | |
| 25 | 240/415 | 15 | 277 | 14 | | | FAZ-B25/1-RT | 132745 | 12/120 | |
| 30 | 240/415 | 15 | 277 | 10 | | | FAZ-B30/1-RT | 132746 | 12/120 | |
| 32 | 240/415 | 15 | 277 | 10 | | | FAZ-B32/1-RT | 132747 | 12/120 | |
| 35 | 240/415 | 15 | 240 | 10 | | | FAZ-B35/1-RT | 132748 | 12/120 | |
| 40 | 240/415 | 15 | 240 | 10 | | | FAZ-B40/1-RT | 132749 | 12/120 | |
| 2-pole | | | | | | | | | | |
| 1 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B1/2-RT | 132750 | 1/60 | |
| 1.5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B1,5/2-RT | 132751 | 1/60 | |
| 2 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B2/2-RT | 132752 | 1/60 | |
| 3 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B3/2-RT | 132753 | 1/60 | |
| 4 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B4/2-RT | 132754 | 1/60 | |
| 5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B5/2-RT | 132755 | 1/60 | |
| 6 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B6/2-RT | 132756 | 1/60 | |
| 7 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B7/2-RT | 132757 | 1/60 | |
| 8 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 16 | FAZ-B8/2-RT | 132758 | 1/60 | |
| 10 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 16 | FAZ-B10/2-RT | 132759 | 1/60 | |
| 13 | 415 | 15 | 480Y/277 | 10 | SWD | | FAZ-B13/2-RT | 132760 | 1/60 | |
| 15 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-B15/2-RT | 132761 | 1/60 | |
| 16 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-B16/2-RT | 132762 | 1/60 | |
| 20 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-B20/2-RT | 132763 | 1/60 | |
| 25 | 415 | 15 | 480Y/277 | 14 | | | FAZ-B25/2-RT | 132764 | 1/60 | |
| 30 | 415 | 15 | 480Y/277 | 10 | | | FAZ-B30/2-RT | 132765 | 1/60 | |
| 32 | 415 | 15 | 480Y/277 | 10 | | | FAZ-B32/2-RT | 132766 | 1/60 | |
| 35 | 415 | 15 | 240 | 10 | | | FAZ-B35/2-RT | 132767 | 1/60 | |
| 40 | 415 | 15 | 240 | 10 | | | FAZ-B40/2-RT | 132768 | 1/60 | |
| 3-pole | | | | | | | | | | |
| 1 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B1/3-RT | 132769 | 1/40 | |
| 1.5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B1,5/3-RT | 132770 | 1/40 | |
| 2 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B2/3-RT | 132771 | 1/40 | |
| 3 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B3/3-RT | 132772 | 1/40 | |
| 4 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B4/3-RT | 132773 | 1/40 | |
| 5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B5/3-RT | 132774 | 1/40 | |
| 6 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B6/3-RT | 132775 | 1/40 | |
| 7 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B7/3-RT | 132776 | 1/40 | |
| 8 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 16 | FAZ-B8/3-RT | 132777 | 1/40 | |
| 10 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 16 | FAZ-B10/3-RT | 132778 | 1/40 | |
| 13 | 415 | 15 | 480Y/277 | 10 | SWD | | FAZ-B13/3-RT | 132779 | 1/40 | |
| 15 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-B15/3-RT | 132780 | 1/40 | |
| 16 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-B16/3-RT | 132781 | 1/40 | |
| 20 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-B20/3-RT | 132782 | 1/40 | |
| 25 | 415 | 15 | 480Y/277 | 14 | | | FAZ-B25/3-RT | 132783 | 1/40 | |
| 30 | 415 | 15 | 480Y/277 | 10 | | | FAZ-B30/3-RT | 132784 | 1/40 | |
| 32 | 415 | 15 | 480Y/277 | 10 | | | FAZ-B32/3-RT | 132785 | 1/40 | |
| 35 | 415 | 15 | 240 | 10 | | | FAZ-B35/3-RT | 132786 | 1/40 | |
| 40 | 415 | 15 | 240 | 10 | | | FAZ-B40/3-RT | 132787 | 1/40 | |

SG56412



SG56712



SG57012



FAZ...-RT/-DU Miniature Circuit Breakers (MCBs)

Characteristic C



FAZ-RT has the plastic limiter at both terminals, as showed in red circle; While FAZ-DU doesn't have

SG56412



| Rated current I_n (A) | Rated voltage IEC/EN 60947-2 (V) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Rated voltage UL489 (V) | Breaking capacity acc. to UL489 (kA) | SWD | NFPA 79 | RT Type Designation | RT Article No. | DU Type Designation | DU Article No. | Units per package |
|----------------------------|---|---|-------------------------------|---|-----|---------|------------------------|-------------------|------------------------|-------------------|-------------------------|
|----------------------------|---|---|-------------------------------|---|-----|---------|------------------------|-------------------|------------------------|-------------------|-------------------------|

1-pole

| | | | | | | | | | | | |
|-----|---------|----|-----|----|-----|--------|---------------|--------|---------------|--------|--------|
| 0.5 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-C0,5/1-RT | 181884 | FAZ-C0,5/1-DU | 185095 | 12/120 |
| 1 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-C1/1-RT | 181886 | FAZ-C1/1-DU | 185096 | 12/120 |
| 1.5 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-C1,5/1-RT | 181888 | FAZ-C1,5/1-DU | 185097 | 12/120 |
| 2 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-C2/1-RT | 181890 | FAZ-C2/1-DU | 185098 | 12/120 |
| 3 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-C3/1-RT | 181892 | FAZ-C3/1-DU | 185099 | 12/120 |
| 4 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-C4/1-RT | 181894 | FAZ-C4/1-DU | 185100 | 12/120 |
| 5 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-C5/1-RT | 181896 | FAZ-C5/1-DU | 185101 | 12/120 |
| 6 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-C6/1-RT | 181898 | FAZ-C6/1-DU | 185102 | 12/120 |
| 7 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-C7/1-RT | 181900 | FAZ-C7/1-DU | 185103 | 12/120 |
| 8 | 240/415 | 15 | 277 | 10 | SWD | AWG 16 | FAZ-C8/1-RT | 181902 | FAZ-C8/1-DU | 184990 | 12/120 |
| 10 | 240/415 | 15 | 277 | 10 | SWD | AWG 16 | FAZ-C10/1-RT | 181904 | FAZ-C10/1-DU | 184991 | 12/120 |
| 13 | 240/415 | 15 | 277 | 10 | SWD | | FAZ-C13/1-RT | 181906 | FAZ-C13/1-DU | 184992 | 12/120 |
| 15 | 240/415 | 15 | 277 | 14 | SWD | | FAZ-C15/1-RT | 181908 | FAZ-C15/1-DU | 184993 | 12/120 |
| 16 | 240/415 | 15 | 277 | 14 | SWD | | FAZ-C16/1-RT | 181910 | FAZ-C16/1-DU | 184994 | 12/120 |
| 20 | 240/415 | 15 | 277 | 14 | SWD | | FAZ-C20/1-RT | 181912 | FAZ-C20/1-DU | 184995 | 12/120 |
| 25 | 240/415 | 15 | 277 | 14 | | | FAZ-C25/1-RT | 181914 | FAZ-C25/1-DU | 184996 | 12/120 |
| 30 | 240/415 | 15 | 277 | 10 | | | FAZ-C30/1-RT | 181916 | FAZ-C30/1-DU | 184997 | 12/120 |
| 32 | 240/415 | 15 | 277 | 10 | | | FAZ-C32/1-RT | 181918 | FAZ-C32/1-DU | 184998 | 12/120 |
| 35 | 240/415 | 15 | 240 | 10 | | | FAZ-C35/1-RT | 181920 | FAZ-C35/1-DU | 184999 | 12/120 |
| 40 | 240/415 | 15 | 240 | 10 | | | FAZ-C40/1-RT | 181922 | FAZ-C40/1-DU | 185000 | 12/120 |

SG56712



2-pole

| | | | | | | | | | | | |
|-----|-----|----|----------|----|-----|--------|---------------|--------|---------------|--------|------|
| 0.5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C0,5/2-RT | 181924 | FAZ-C0,5/2-DU | 185021 | 1/60 |
| 1 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C1/2-RT | 181926 | FAZ-C1/2-DU | 185022 | 1/60 |
| 1.5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C1,5/2-RT | 181928 | FAZ-C1,5/2-DU | 185023 | 1/60 |
| 2 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C2/2-RT | 181930 | FAZ-C2/2-DU | 185024 | 1/60 |
| 3 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C3/2-RT | 181932 | FAZ-C3/2-DU | 185025 | 1/60 |
| 4 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C4/2-RT | 181934 | FAZ-C4/2-DU | 185026 | 1/60 |
| 5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C5/2-RT | 181936 | FAZ-C5/2-DU | 185027 | 1/60 |
| 6 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C6/2-RT | 181938 | FAZ-C6/2-DU | 185028 | 1/60 |
| 7 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C7/2-RT | 181940 | FAZ-C7/2-DU | 185029 | 1/60 |
| 8 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 16 | FAZ-C8/2-RT | 181942 | FAZ-C8/2-DU | 185030 | 1/60 |
| 10 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 16 | FAZ-C10/2-RT | 181944 | FAZ-C10/2-DU | 185031 | 1/60 |
| 13 | 415 | 15 | 480Y/277 | 10 | SWD | | FAZ-C13/2-RT | 181946 | FAZ-C13/2-DU | 185032 | 1/60 |
| 15 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-C15/2-RT | 181948 | FAZ-C15/2-DU | 185033 | 1/60 |
| 16 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-C16/2-RT | 181950 | FAZ-C16/2-DU | 185034 | 1/60 |
| 20 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-C20/2-RT | 181952 | FAZ-C20/2-DU | 185035 | 1/60 |
| 25 | 415 | 15 | 480Y/277 | 14 | | | FAZ-C25/2-RT | 181954 | FAZ-C25/2-DU | 185036 | 1/60 |
| 30 | 415 | 15 | 480Y/277 | 10 | | | FAZ-C30/2-RT | 181956 | FAZ-C30/2-DU | 185037 | 1/60 |
| 32 | 415 | 15 | 480Y/277 | 10 | | | FAZ-C32/2-RT | 181958 | FAZ-C32/2-DU | 185038 | 1/60 |
| 35 | 415 | 15 | 240 | 10 | | | FAZ-C35/2-RT | 181960 | FAZ-C35/2-DU | 185039 | 1/60 |
| 40 | 415 | 15 | 240 | 10 | | | FAZ-C40/2-RT | 181962 | FAZ-C40/2-DU | 185040 | 1/60 |

SG57012



3-pole

| | | | | | | | | | | | |
|-----|-----|----|----------|----|-----|--------|---------------|--------|---------------|--------|------|
| 0.5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C0,5/3-RT | 181964 | FAZ-C0,5/3-DU | 185061 | 1/40 |
| 1 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C1/3-RT | 181966 | FAZ-C1/3-DU | 185062 | 1/40 |
| 1.5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C1,5/3-RT | 181968 | FAZ-C1,5/3-DU | 185063 | 1/40 |
| 2 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C2/3-RT | 181970 | FAZ-C2/3-DU | 185064 | 1/40 |
| 3 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C3/3-RT | 181972 | FAZ-C3/3-DU | 185065 | 1/40 |
| 4 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C4/3-RT | 181974 | FAZ-C4/3-DU | 185066 | 1/40 |
| 5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C5/3-RT | 181976 | FAZ-C5/3-DU | 185067 | 1/40 |
| 6 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C6/3-RT | 181978 | FAZ-C6/3-DU | 185068 | 1/40 |
| 7 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C7/3-RT | 181980 | FAZ-C7/3-DU | 185069 | 1/40 |
| 8 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 16 | FAZ-C8/3-RT | 181982 | FAZ-C8/3-DU | 185070 | 1/40 |
| 10 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 16 | FAZ-C10/3-RT | 181984 | FAZ-C10/3-DU | 185071 | 1/40 |
| 13 | 415 | 15 | 480Y/277 | 10 | SWD | | FAZ-C13/3-RT | 181986 | FAZ-C13/3-DU | 185072 | 1/40 |
| 15 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-C15/3-RT | 181988 | FAZ-C15/3-DU | 185073 | 1/40 |
| 16 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-C16/3-RT | 181990 | FAZ-C16/3-DU | 185074 | 1/40 |
| 20 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-C20/3-RT | 181992 | FAZ-C20/3-DU | 185075 | 1/40 |
| 25 | 415 | 15 | 480Y/277 | 14 | | | FAZ-C25/3-RT | 181994 | FAZ-C25/3-DU | 185076 | 1/40 |
| 30 | 415 | 15 | 480Y/277 | 10 | | | FAZ-C30/3-RT | 181996 | FAZ-C30/3-DU | 185077 | 1/40 |
| 32 | 415 | 15 | 480Y/277 | 10 | | | FAZ-C32/3-RT | 181998 | FAZ-C32/3-DU | 185078 | 1/40 |
| 35 | 415 | 15 | 240 | 10 | | | FAZ-C35/3-RT | 182000 | FAZ-C35/3-DU | 185079 | 1/40 |
| 40 | 415 | 15 | 240 | 10 | | | FAZ-C40/3-RT | 182002 | FAZ-C40/3-DU | 185080 | 1/40 |

FAZ-...-RT/-DU Miniature Circuit Breakers (MCBs)

Characteristic D

| | Rated current I_n (A) | Rated voltage IEC/EN 60947-2 (V) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Rated voltage UL489 (V) | Breaking capacity acc. to UL489 (kA) | SWD | NFPA 79 AWG | RT Type Designation | RT Article No. | DU Type Designation | DU Article No. | Units per package |
|---------------|----------------------------|---|---|-------------------------------|---|--------|----------------|------------------------|-------------------|------------------------|-------------------|-------------------------|
| 1-pole | | | | | | | | | | | | |
| 0.5 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-D0,5/1-RT | 182004 | FAZ-D0,5/1-DU | 185001 | 12/120 | |
| 1 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-D1/1-RT | 182006 | FAZ-D1/1-DU | 185002 | 12/120 | |
| 1.5 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-D1,5/1-RT | 182008 | FAZ-D1,5/1-DU | 185003 | 12/120 | |
| 2 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-D2/1-RT | 182010 | FAZ-D2/1-DU | 185004 | 12/120 | |
| 3 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-D3/1-RT | 182012 | FAZ-D3/1-DU | 185005 | 12/120 | |
| 4 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-D4/1-RT | 182014 | FAZ-D4/1-DU | 185006 | 12/120 | |
| 5 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-D5/1-RT | 182016 | FAZ-D5/1-DU | 185007 | 12/120 | |
| 6 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-D6/1-RT | 182018 | FAZ-D6/1-DU | 185008 | 12/120 | |
| 7 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-D7/1-RT | 182020 | FAZ-D7/1-DU | 185009 | 12/120 | |
| 8 | 240/415 | 15 | 277 | 10 | SWD | AWG 16 | FAZ-D8/1-RT | 182022 | FAZ-D8/1-DU | 185010 | 12/120 | |
| 10 | 240/415 | 15 | 277 | 10 | SWD | AWG 16 | FAZ-D10/1-RT | 181832 | FAZ-D10/1-DU | 185011 | 12/120 | |
| 13 | 240/415 | 15 | 277 | 14 | SWD | | FAZ-D13/1-RT | 181834 | FAZ-D13/1-DU | 185012 | 12/120 | |
| 15 | 240/415 | 15 | 277 | 14 | SWD | | FAZ-D15/1-RT | 181836 | FAZ-D15/1-DU | 185013 | 12/120 | |
| 16 | 240/415 | 15 | 277 | 14 | SWD | | FAZ-D16/1-RT | 181838 | FAZ-D16/1-DU | 185014 | 12/120 | |
| 20 | 240/415 | 15 | 277 | 14 | SWD | | FAZ-D20/1-RT | 181840 | FAZ-D20/1-DU | 185015 | 12/120 | |
| 25 | 240/415 | 15 | 277 | 10 | | | FAZ-D25/1-RT | 181842 | FAZ-D25/1-DU | 185016 | 12/120 | |
| 30 | 240/415 | 15 | 277 | 10 | | | FAZ-D30/1-RT | 182024 | FAZ-D30/1-DU | 185017 | 12/120 | |
| 32 | 240/415 | 15 | 277 | 10 | | | FAZ-D32/1-RT | 182026 | FAZ-D32/1-DU | 185018 | 12/120 | |
| 35 | 240/415 | 15 | 240 | 10 | | | FAZ-D35/1-RT | 182028 | FAZ-D35/1-DU | 185019 | 12/120 | |
| 40 | 240/415 | 15 | 240 | 10 | | | FAZ-D40/1-RT | 182030 | FAZ-D40/1-DU | 185020 | 12/120 | |
| 2-pole | | | | | | | | | | | | |
| 0.5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D0,5/2-RT | 182032 | FAZ-D0,5/2-DU | 185041 | 1/60 | |
| 1 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D1/2-RT | 182034 | FAZ-D1/2-DU | 185042 | 1/60 | |
| 1.5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D1,5/2-RT | 182036 | FAZ-D1,5/2-DU | 185043 | 1/60 | |
| 2 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D2/2-RT | 182038 | FAZ-D2/2-DU | 185044 | 1/60 | |
| 3 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D3/2-RT | 182040 | FAZ-D3/2-DU | 185045 | 1/60 | |
| 4 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D4/2-RT | 182042 | FAZ-D4/2-DU | 185046 | 1/60 | |
| 5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D5/2-RT | 182044 | FAZ-D5/2-DU | 185047 | 1/60 | |
| 6 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D6/2-RT | 182046 | FAZ-D6/2-DU | 185048 | 1/60 | |
| 7 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D7/2-RT | 182048 | FAZ-D7/2-DU | 185049 | 1/60 | |
| 8 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 16 | FAZ-D8/2-RT | 182050 | FAZ-D8/2-DU | 185050 | 1/60 | |
| 10 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 16 | FAZ-D10/2-RT | 182052 | FAZ-D10/2-DU | 185051 | 1/60 | |
| 13 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-D13/2-RT | 182054 | FAZ-D13/2-DU | 185052 | 1/60 | |
| 15 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-D15/2-RT | 182056 | FAZ-D15/2-DU | 185053 | 1/60 | |
| 16 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-D16/2-RT | 182058 | FAZ-D16/2-DU | 185054 | 1/60 | |
| 20 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-D20/2-RT | 182060 | FAZ-D20/2-DU | 185055 | 1/60 | |
| 25 | 415 | 15 | 480Y/277 | 10 | | | FAZ-D25/2-RT | 182062 | FAZ-D25/2-DU | 185056 | 1/60 | |
| 30 | 415 | 15 | 480Y/277 | 10 | | | FAZ-D30/2-RT | 182064 | FAZ-D30/2-DU | 185057 | 1/60 | |
| 32 | 415 | 15 | 480Y/277 | 10 | | | FAZ-D32/2-RT | 182066 | FAZ-D32/2-DU | 185058 | 1/60 | |
| 35 | 415 | 15 | 240 | 10 | | | FAZ-D35/2-RT | 182068 | FAZ-D35/2-DU | 185059 | 1/60 | |
| 40 | 415 | 15 | 240 | 10 | | | FAZ-D40/2-RT | 182070 | FAZ-D40/2-DU | 185060 | 1/60 | |
| 3-pole | | | | | | | | | | | | |
| 0.5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D0,5/3-RT | 182072 | FAZ-D0,5/3-DU | 185081 | 1/40 | |
| 1 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D1/3-RT | 182074 | FAZ-D1/3-DU | 185082 | 1/40 | |
| 1.5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D1,5/3-RT | 182076 | FAZ-D1,5/3-DU | 185083 | 1/40 | |
| 2 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D2/3-RT | 182078 | FAZ-D2/3-DU | 185084 | 1/40 | |
| 3 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D3/3-RT | 182080 | FAZ-D3/3-DU | 185085 | 1/40 | |
| 4 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D4/3-RT | 182082 | FAZ-D4/3-DU | 185086 | 1/40 | |
| 5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D5/3-RT | 182084 | FAZ-D5/3-DU | 185087 | 1/40 | |
| 6 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D6/3-RT | 182086 | FAZ-D6/3-DU | 185088 | 1/40 | |
| 7 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D7/3-RT | 182088 | FAZ-D7/3-DU | 185089 | 1/40 | |
| 8 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 16 | FAZ-D8/3-RT | 182090 | FAZ-D8/3-DU | 185090 | 1/40 | |
| 10 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 16 | FAZ-D10/3-RT | 182092 | FAZ-D10/3-DU | 185091 | 1/40 | |
| 13 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-D13/3-RT | 182094 | FAZ-D13/3-DU | 185092 | 1/40 | |
| 15 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-D15/3-RT | 182096 | FAZ-D15/3-DU | 185093 | 1/40 | |
| 16 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-D16/3-RT | 182098 | FAZ-D16/3-DU | 185094 | 1/40 | |
| 20 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-D20/3-RT | 182100 | FAZ-D20/3-DU | 184984 | 1/40 | |
| 25 | 415 | 15 | 480Y/277 | 10 | | | FAZ-D25/3-RT | 182102 | FAZ-D25/3-DU | 184985 | 1/40 | |
| 30 | 415 | 15 | 480Y/277 | 10 | | | FAZ-D30/3-RT | 182104 | FAZ-D30/3-DU | 184986 | 1/40 | |
| 32 | 415 | 15 | 480Y/277 | 10 | | | FAZ-D32/3-RT | 182106 | FAZ-D32/3-DU | 184987 | 1/40 | |
| 35 | 415 | 15 | 240 | 10 | | | FAZ-D35/3-RT | 182108 | FAZ-D35/3-DU | 184988 | 1/40 | |
| 40 | 415 | 15 | 240 | 10 | | | FAZ-D40/3-RT | 182110 | FAZ-D40/3-DU | 184989 | 1/40 | |

SG56412



SG56712



SG57012



FAZ-NA, -RT, -DU Miniature Circuit Breakers

Accessories:


| | | |
|---|----------------------|--------|
| Auxiliary switch for subsequent installation | Z-IHK-NA | 113895 |
| Tripping signal contact for subsequent installation | Z-NHK | 248434 |
| Shunt trip release | FAZ-XAA-NA12-110VAC | 102037 |
| | FAZ-XAA-NA110-415VAC | 102036 |
| Switching interlock | IS/SPE-1TE | 101911 |
| | Z-IS/SPE-1TE | 274418 |

Specifications FAZ-NA, -RT, -DU

Technical data IEC/EN

| | FAZ-...-NA, -RT, -DU | |
|---|---|--|
| Productstandard | IEC/EN 60947-2 | |
| Number of poles | 1, 2, 3 | |
| Mechanical specifications | | |
| Device width | 17.7mm (1-pole), 35.4 mm (2-poles), 53.1 mm (3-poles) | |
| Frame size | 45 mm | |
| Socket size | 105 mm | |
| Device depth | 60 mm | |
| Terminals | lift terminal / ring-tongue | |
| Terminal capacity rigid solid/stranded wire | 1-25 mm ² | |
| Terminal screw | M5 (with slotted screw Pozidriv PZ2) | |
| Terminal torque | max. 2.4 Nm | |
| Snap on fixing | tristable (on DIN Rail acc. to IEC/EN 60715) | |
| Degree of Protection (DIN VDE 0470) | | |
| Surface mounted | IP 20 | |
| Built-in behind panel | IP 40 | |
| Contact position indicator | red / green | |
| Electrical specifications | | |
| Rated voltage | U_n | 240/415 V AC |
| Rated current | I_n | 0.5, 1, 1.5, 2, 3, 4, 5, 6, 7, 8, 10, 13, 15, 16, 20, 25, 30, 32, 35, 40 A |
| Rated insulation voltage | U_i | 440 V AC |
| Rated impulse withstand voltage | U_{imp} | 4 kV (1.2/50)µsec |
| Tripping characteristic | | |
| Conventional non-tripping current | I_{nt} | $I_{nt}=1.05 I_n$ |
| Conventional tripping current | I_t | $I_t=1.30 I_n$ |
| Reference temperature | 30 °C | |
| Temperature factor | 0.5% /K | |
| Instantaneous tripping current | I_{mt} | type B: $3 I_n < I_{mt} = 5 I_n$; $t(I_{mt}) < 0.1$ sec (IEC/EN 60898-1) type C: $5 I_n < I_{mt} = 10 I_n$; $t(I_{mt}) < 0.1$ sec (IEC/EN 60898-1) type D: $10 I_n < I_{mt} = 20 I_n$; $t(I_{mt}) < 0.1$ sec (IEC/EN 60898-1) |
| Rated short-circuit braking capacity | I_{cu} | 15 kA |
| Service short circuit capacity | I_{cs} | 7.5 kA |
| Selectivity class | 3 (acc. to EN 60898) | |
| Number of electrical operations | > 1500 | |
| Number of mechanical operations | > 10000 | |
| Climatic conditions | acc. to IEC 68-2 (25..55°C / 90..95% RH) | |
| Operating temperature range | -40°C to +75°C | |

Connection diagram

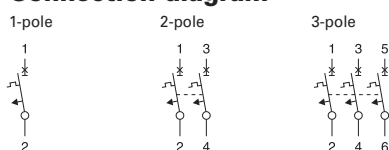


Specifications FAZ-NA, -RT, -DU

Technical data UL


| | FAZ-...-NA, -RT, -DU | |
|--|--|---|
| Productstandard | UL 489 CSA C22.2 No. 5-02 | |
| Number of poles | 1, 2, 3 | |
| Mechanical specifications | | |
| Device width | 0.697 in. (1-pole), 1.394 in. (2-poles), 2.090 in. (3-poles) | |
| Frame size | 1.772 in. | |
| Socket size | 4.134 in. | |
| Device depth | 2.362 in. | |
| Terminals | lift terminal / ring-tongue | |
| Terminal capacity | 1 Wire: #18-6 AWG (Cu only) 2 Wires: #18-10 AWG (Cu only) | |
| Terminal screw | M5 (with slotted screw Pozidriv PZ2) | |
| Terminal torque | #18-12 AWG: 21 lb-in #10-8 AWG: 25 lb-in #6 AWG: 36 lb-in | |
| Snap on fixing | tristable (on DIN Rail acc. to IEC/EN 60715) | |
| Contact position indicator | red / green | |
| Electrical specifications | | |
| Rated voltage | U_n | 0.5-32 A: 480Y/277 V AC, 35-40 A: 240 V AC |
| Rated current | I_n | 0.5, 1, 1.5, 2, 3, 4, 5, 6, 7, 8, 10, 13, 15, 16, 20, 25, 30, 32, 35, 40 A |
| Tripping characteristic | | |
| Conventional non-tripping current | I_{nt} | $I_{nt} = 1.00 I_n$ |
| Conventional tripping current | I_t | $I_t = 1.35 I_n$ |
| Reference temperature | 40 °C | |
| Temperature factor | 0.5% /K | |
| Instantaneous tripping current | I_{mt} | type C: $5 I_n < I_{mt} = 10 I_n$; $t(I_{mt}) < 0.1$ sec type D: $10 I_n < I_{mt} = 20 I_n$; $t(I_{mt}) < 0.1$ sec |
| Current interrupting rating | 10 kA, 14 kA (types D13, B/C/D15, 16, 20, B/C25 A) | |
| Current-Limiting at 240 V / 10 kA | 1p, 2p, 3p to $I^2t = 43 \text{ kA}^2\text{s}$ and $I_{peak} = 6.2 \text{ kA}$ | |
| Current-Limiting at 480Y/277 V / 10 kA | 1p, 2p, 3p to $I^2t = 60 \text{ kA}^2\text{s}$ and $I_{peak} = 6.2 \text{ kA}$ | |
| Current-Limiting at 480Y/277 V / 14 kA | 1p, 2p, 3p to $I^2t = 65 \text{ kA}^2\text{s}$ and $I_{peak} = 7.5 \text{ kA}$ | |
| Selectivity class | 3 (acc. to EN 60898) | |
| Number of electrical operations | 6000 | |
| Number of mechanical operations | 10000 | |
| Climatic conditions | acc. to IEC 68-2 (25..55°C / 90..95% RH) | |
| Operating temperature range | -5°C to +40°C | |

Connection diagram

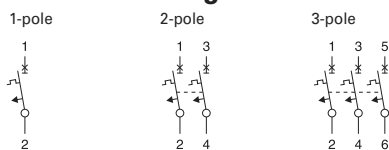


Dimensions (mm) FAZ-...-NA, -RT, -DU


1-pole



2-pole




3-pole

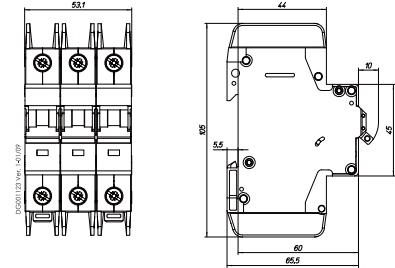


Tripping Characteristic FAZ-...-NA, -RT, -DU

Characteristics C and D - EN/IEC 60947-2

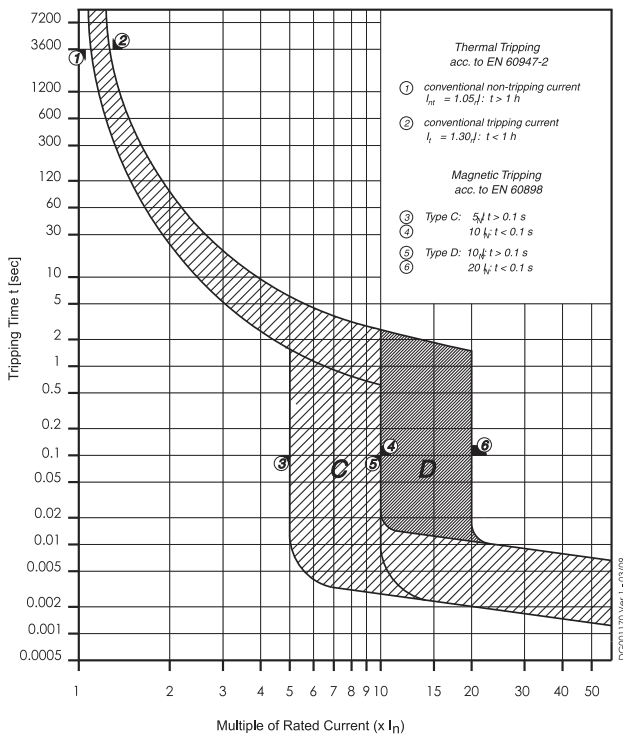

Characteristics C and D - UL 489

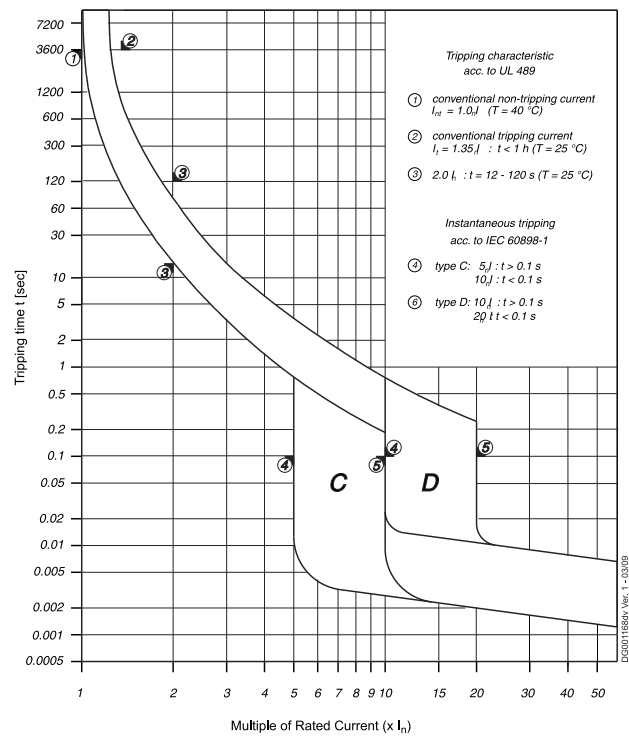

Internal Resistance FAZ-...-NA, -RT, -DU

Type C

At room temperature (single pole)

| I_n [A] | Z^* [m Ω] | R [m Ω] |
|-----------|---------------------|-------------------|
| 0.5 | 6400 | 6300 |
| 1 | 1100 | 1080 |
| 1.5 | 560 | 550 |
| 2 | 340 | 330 |
| 3 | 132 | 130 |
| 4 | 86 | 85 |
| 5 | 70 | 69 |
| 6 | 31 | 30 |
| 7 | 28 | 27 |
| 8 | 20 | 19.6 |
| 10 | 15.8 | 15.5 |
| 13 | 12.3 | 12.1 |
| 15 | 7.1 | 7.0 |
| 16 | 7.1 | 7.0 |
| 20 | 6.0 | 5.9 |
| 25 | 4.1 | 4.0 |
| 30 | 2.8 | 2.7 |
| 32 | 2.8 | 2.7 |
| 35 | 2.5 | 2.5 |
| 40 | 2.1 | 2.1 |

* 50Hz

Type D

At room temperature (single pole)

| I_n [A] | Z^* [m Ω] | R [m Ω] |
|-----------|---------------------|-------------------|
| 0.5 | 6400 | 6300 |
| 1 | 770 | 755 |
| 1.5 | 460 | 450 |
| 2 | 250 | 245 |
| 3 | 132 | 130 |
| 4 | 86 | 85 |
| 5 | 57 | 56 |
| 6 | 31 | 30 |
| 7 | 28 | 27 |
| 8 | 18 | 17.6 |
| 10 | 13.5 | 13.2 |
| 13 | 10.5 | 10.3 |
| 15 | 5.9 | 5.8 |
| 16 | 5.9 | 5.8 |
| 20 | 4.0 | 3.9 |
| 25 | 3.4 | 3.3 |
| 30 | 2.5 | 2.5 |
| 32 | 2.5 | 2.5 |
| 35 | 2.5 | 2.5 |
| 40 | 2.0 | 2.0 |

* 50Hz

Power Loss at I_n FAZ-...-NA, -RT, -DU

Type C

| I_n [A] | 1p | 2p | 3p |
|-----------|-----------|-----------|-----------|
| | P^* [W] | P^* [W] | P^* [W] |
| 0.5 | 1.6 | 3.2 | 4.7 |
| 1 | 1.1 | 2.2 | 3.4 |
| 1.5 | 1.3 | 2.6 | 3.9 |
| 2 | 1.4 | 2.8 | 4.3 |
| 3 | 1.2 | 2.4 | 3.6 |
| 4 | 1.4 | 2.9 | 4.3 |
| 5 | 1.9 | 3.7 | 5.6 |
| 6 | 1.2 | 2.3 | 3.5 |
| 7 | 1.4 | 2.8 | 4.3 |
| 8 | 1.4 | 2.8 | 4.2 |
| 10 | 1.8 | 3.6 | 5.3 |
| 13 | 2.4 | 4.7 | 7.1 |
| 15 | 1.9 | 3.8 | 5.6 |
| 16 | 2.1 | 4.3 | 6.4 |
| 20 | 2.9 | 5.8 | 8.7 |
| 25 | 3.1 | 6.2 | 9.3 |
| 30 | 3.0 | 6.0 | 9.0 |
| 32 | 3.4 | 6.8 | 10.2 |
| 35 | 3.7 | 7.4 | 11.0 |
| 40 | 4.0 | 8.1 | 12.1 |

*50Hz


Type D

| I_n [A] | 1p | 2p | 3p |
|-----------|-----------|-----------|-----------|
| | P^* [W] | P^* [W] | P^* [W] |
| 0.5 | 1.6 | 3.2 | 4.8 |
| 1 | 0.8 | 1.5 | 2.3 |
| 1.5 | 1.0 | 2.1 | 3.1 |
| 2 | 1.0 | 2.1 | 3.1 |
| 3 | 1.2 | 2.4 | 3.6 |
| 4 | 1.4 | 2.9 | 4.3 |
| 5 | 1.5 | 2.9 | 4.4 |
| 6 | 1.2 | 2.3 | 3.5 |
| 7 | 1.4 | 2.8 | 4.3 |
| 8 | 1.2 | 2.4 | 3.7 |
| 10 | 1.5 | 3.0 | 4.5 |
| 13 | 2.0 | 4.1 | 6.1 |
| 15 | 1.5 | 3.1 | 4.6 |
| 16 | 1.7 | 3.5 | 5.2 |
| 20 | 1.8 | 3.7 | 5.5 |
| 25 | 2.6 | 5.1 | 7.7 |
| 30 | 2.7 | 5.4 | 8.1 |
| 32 | 3.1 | 6.2 | 9.3 |
| 35 | 3.8 | 7.6 | 11.3 |
| 40 | 3.9 | 7.8 | 11.6 |


*50Hz

Maximum Let-Through Energy FAZ-...-NA, -RT, -DU


Type C (0.5 - 32 A), 277 V

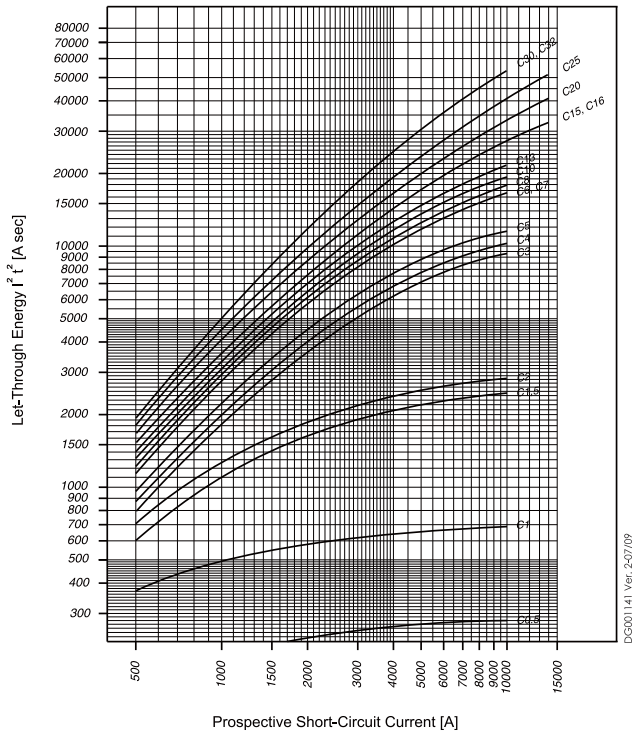


Type C (35 - 40 A), 240 V

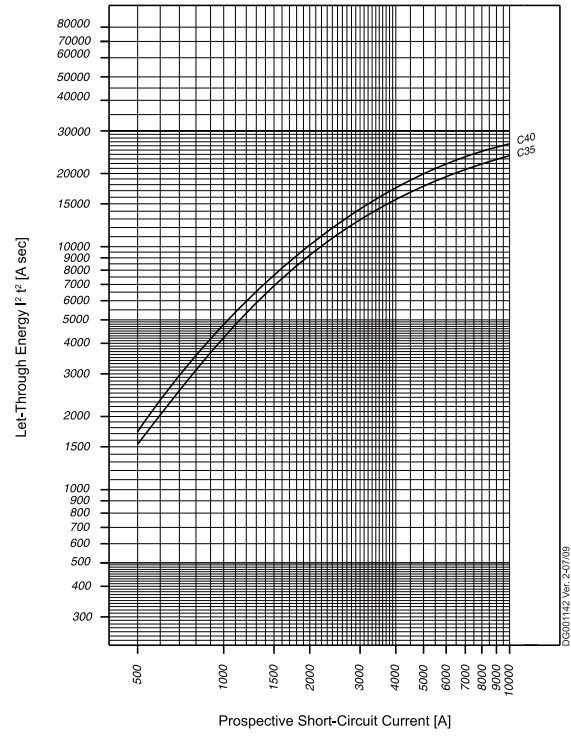

Type D (0.5 - 32 A), 277 V

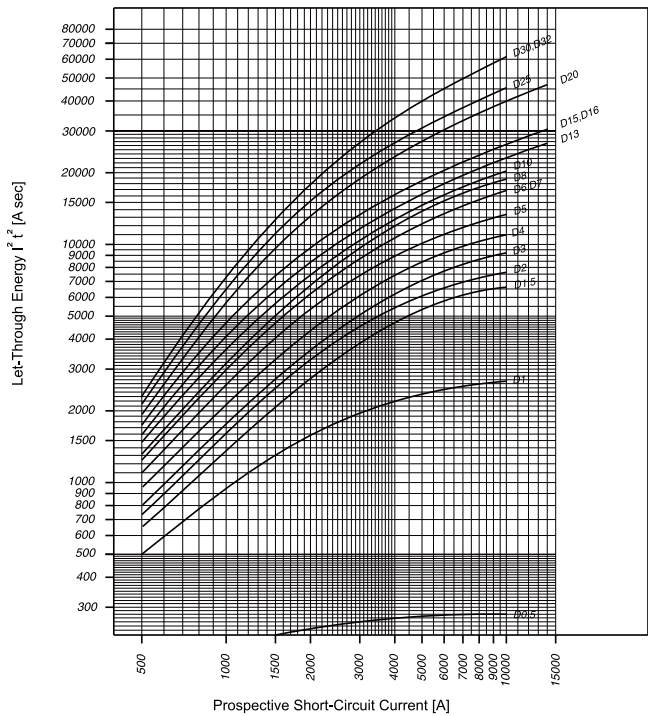


Type D (35 - 40 A), 240 V

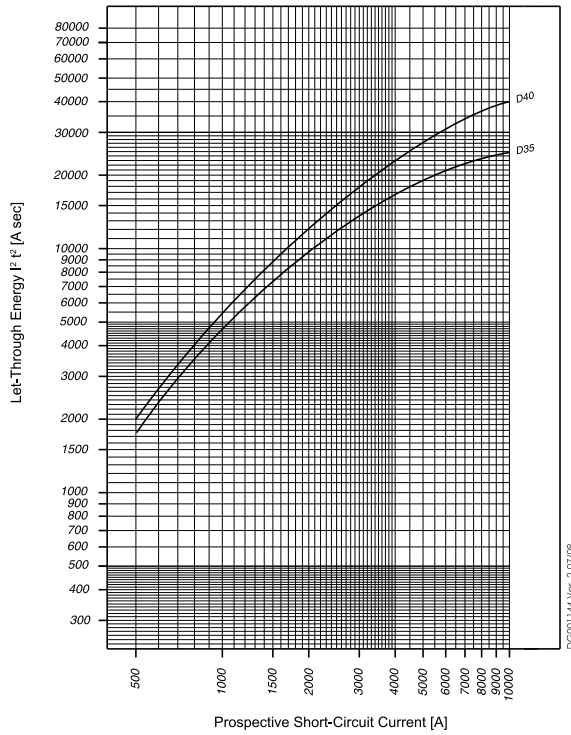


Maximum Let-Through Current FAZ-...-NA, -RT, -DU


Type C (0.5 - 32 A), 277 V

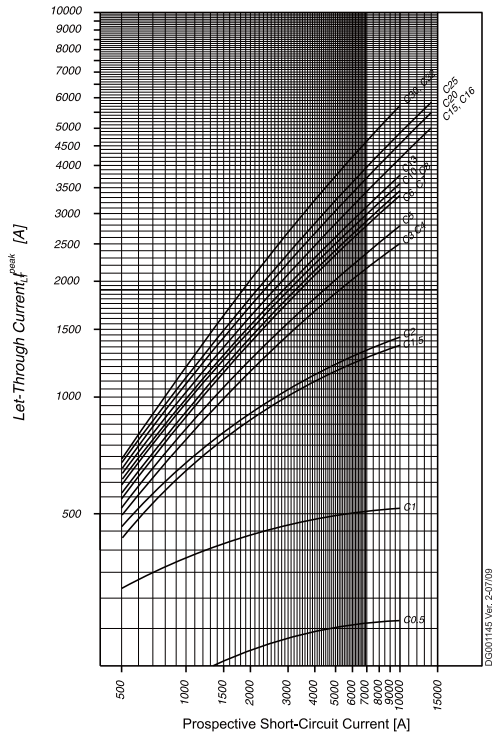


Type C (35 - 40 A), 240 V

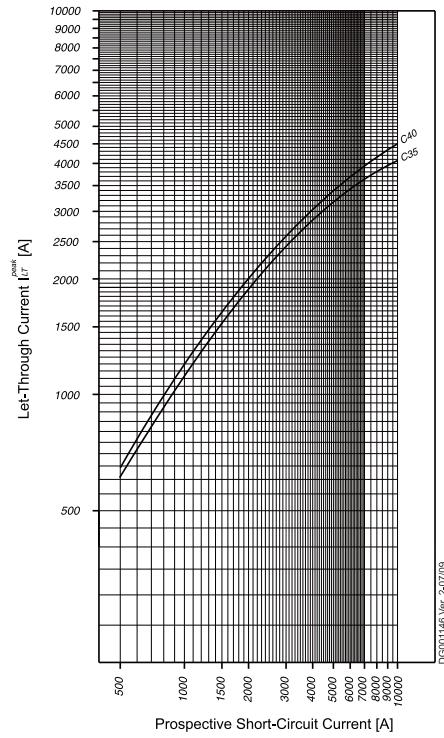

Type D (0.5 - 32 A), 277 V

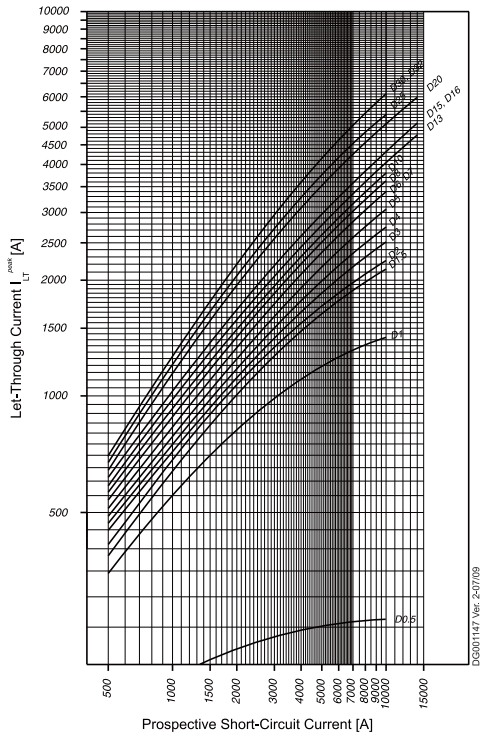

Type D (35 - 40 A), 240 V

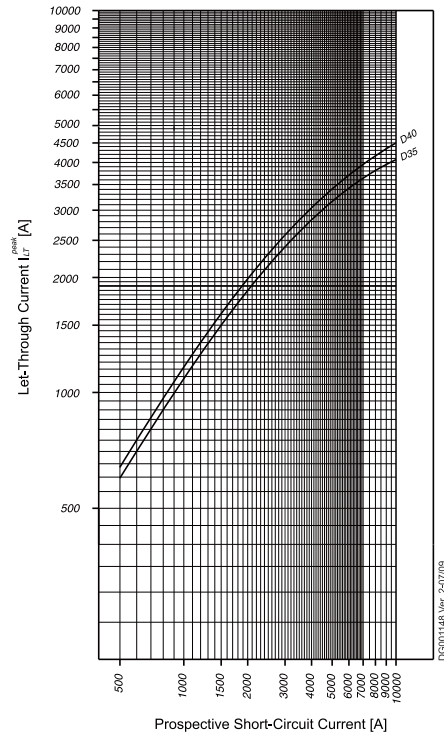

Miniature Circuit Breakers FAZ-NA-DC

SG56612



FAZ-NA-DC

- High-quality miniature circuit breakers for DC-applications
- Contact position indicator red - green
- Guide for secure terminal connection (not for FAZ-NA)
- 3-position DIN rail clip, permits removal from existing busbar system
- Comprehensive range of accessories suitable for subsequent installation
- Rated currents up to 40 A
- Tripping characteristic C
- Rated breaking capacity 10 kA according to IEC/EN 60947-2
- Up to 125 V DC per pole

FAZ-...-NA-DC Miniature Circuit Breakers (MCBs)

Characteristic C

| Rated current I_n (A) | Rated voltage IEC/EN 60947-2 (V DC) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Rated voltage UL489 (V) | Breaking capacity acc. to UL489 (kA) | SWD | NFPA 79 | Type Designation | Article No. | Units per package |
|----------------------------|--|---|-------------------------------|---|-----|---------|---------------------|-------------|-------------------------|
| 1-pole | | | | | | | | | |
| 2 | 220 | 10 | 125 | 10 | | | FAZ-C2/1-NA-DC | 113752 | 12/120 |
| 3 | 250 | 10 | 125 | 10 | | | FAZ-C3/1-NA-DC | 113753 | 12/120 |
| 4 | 250 | 10 | 125 | 10 | | | FAZ-C4/1-NA-DC | 113754 | 12/120 |
| 5 | 250 | 10 | 125 | 10 | | | FAZ-C5/1-NA-DC | 113755 | 12/120 |
| 6 | 250 | 10 | 125 | 10 | | | FAZ-C6/1-NA-DC | 113756 | 12/120 |
| 7 | 250 | 10 | 125 | 10 | | | FAZ-C7/1-NA-DC | 113757 | 12/120 |
| 8 | 250 | 10 | 125 | 10 | | | FAZ-C8/1-NA-DC | 113758 | 12/120 |
| 10 | 250 | 10 | 125 | 10 | | | FAZ-C10/1-NA-DC | 113759 | 12/120 |
| 13 | 250 | 10 | 125 | 10 | | | FAZ-C13/1-NA-DC | 113760 | 12/120 |
| 15 | 250 | 10 | 125 | 10 | | | FAZ-C15/1-NA-DC | 113761 | 12/120 |
| 16 | 250 | 10 | 125 | 10 | | | FAZ-C16/1-NA-DC | 113762 | 12/120 |
| 20 | 250 | 10 | 125 | 10 | | | FAZ-C20/1-NA-DC | 113763 | 12/120 |
| 25 | 250 | 10 | 125 | 10 | | | FAZ-C25/1-NA-DC | 113764 | 12/120 |
| 30 | 250 | 10 | 125 | 10 | | | FAZ-C30/1-NA-DC | 113765 | 12/120 |
| 32 | 250 | 10 | 125 | 10 | | | FAZ-C32/1-NA-DC | 113766 | 12/120 |
| 35 | 250 | 10 | 125 | 10 | | | FAZ-C35/1-NA-DC | 113767 | 12/120 |
| 40 | 250 | 10 | 125 | 10 | | | FAZ-C40/1-NA-DC | 113768 | 12/120 |

SG56512



SG56612




| | | | | | | | | | |
|---------------|-----|----|-----|----|--|--|-----------------|--------|------|
| 2-pole | | | | | | | | | |
| 2 | 440 | 10 | 250 | 10 | | | FAZ-C2/2-NA-DC | 137239 | 1/60 |
| 3 | 500 | 10 | 250 | 10 | | | FAZ-C3/2-NA-DC | 137250 | 1/60 |
| 4 | 500 | 10 | 250 | 10 | | | FAZ-C4/2-NA-DC | 137251 | 1/60 |
| 5 | 500 | 10 | 250 | 10 | | | FAZ-C5/2-NA-DC | 137252 | 1/60 |
| 6 | 500 | 10 | 250 | 10 | | | FAZ-C6/2-NA-DC | 120638 | 1/60 |
| 7 | 500 | 10 | 250 | 10 | | | FAZ-C7/2-NA-DC | 120639 | 1/60 |
| 8 | 500 | 10 | 250 | 10 | | | FAZ-C8/2-NA-DC | 120640 | 1/60 |
| 10 | 500 | 10 | 250 | 10 | | | FAZ-C10/2-NA-DC | 120641 | 1/60 |
| 13 | 500 | 10 | 250 | 10 | | | FAZ-C13/2-NA-DC | 120642 | 1/60 |
| 15 | 500 | 10 | 250 | 10 | | | FAZ-C15/2-NA-DC | 120643 | 1/60 |
| 16 | 500 | 10 | 250 | 10 | | | FAZ-C16/2-NA-DC | 120644 | 1/60 |
| 20 | 500 | 10 | 250 | 10 | | | FAZ-C20/2-NA-DC | 120645 | 1/60 |
| 25 | 500 | 10 | 250 | 10 | | | FAZ-C25/2-NA-DC | 120646 | 1/60 |
| 30 | 500 | 10 | 250 | 10 | | | FAZ-C30/2-NA-DC | 120647 | 1/60 |
| 32 | 500 | 10 | 250 | 10 | | | FAZ-C32/2-NA-DC | 120648 | 1/60 |
| 35 | 500 | 10 | 250 | 10 | | | FAZ-C35/2-NA-DC | 120649 | 1/60 |
| 40 | 500 | 10 | 250 | 10 | | | FAZ-C40/2-NA-DC | 120650 | 1/60 |

Specifications FAZ-NA-DC

Technical data


| | | FAZ-NA-DC |
|---|-----------|---|
| Productstandard | | UL 489, CSA C22.2 No 5-02 |
| Number of poles | | 1, 2 |
| Mechanical specifications | | |
| Device width | | 1 pole = 0.697 inch, 2 poles = 1.394 inch |
| Frame size | | 1.772 inch |
| Socket size | | 4.134 inch |
| Device depth | | 2.362 inch |
| Terminals | | lift terminal / ring-tongue |
| Terminal capacity rigid solid/stranded wire | | 1 Wire: AWG 18-6 (Cu only) 2 Wires: AWG 18-10 (Cu only) |
| Terminal screw | | M5 (with slotted screw Pozidriv PZ2) |
| Terminal torque | | #18-12 AWG: 21 lb-in #10-8 AWG: 25 lb-in #6 AWG: 36 lb-in |
| Snap on fixing | | tristable (on DIN Rail acc. to IEC/EN 60715) |
| Finger proof | | acc.to VBG4, ÖVE EN-6 |
| Contact position indicator | | red / green |
| Electrical specifications | | |
| Rated voltage DC | U_n | 125 V d.c. (1p) 250 V d.c. (2p) |
| Rated current | I_n | 2, 3, 4, 5, 6, 7, 8, 10, 13, 15, 16, 20, 25, 30, 32, 35, 40 A |
| Rated impulse withstand voltage | U_{imp} | 4 kV (1.2/50) μ sec |
| Tripping characteristic | | |
| Conventional non-tripping current | | $I_{nt}=1.0 I_n$ |
| Conventional tripping current | | $I_t=1.35 I_n$ |
| Reference temperature | | 40 °C |
| Temperature factor | | 0.5% /K |
| Instantaneous tripping current | I_{mt} | $7 I_n < I_{mt} = 15 I_n \cdot t (I_{mt}) < 0.1 \text{ sec}$ |
| Current interrupting rating | | 10 kA |
| Number of electrical operating cycles | | 6000 |
| Number of mechanical operating cycles | | 10000 |
| Climatic conditions | | acc. to IEC 68-2 (25..55°C / 90..95% RH) |
| Operating temperature range | | -25°C to +55°C |

Connection diagram




Dimensions (mm) FAZ-NA-DC

1-pole

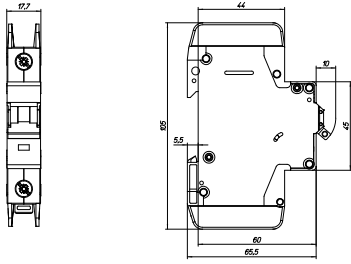


2-pole

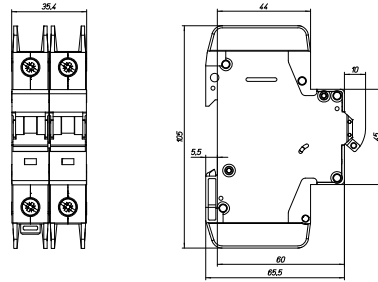

Tripping Characteristic FAZ-NA-DC

Characteristics C - UL 489

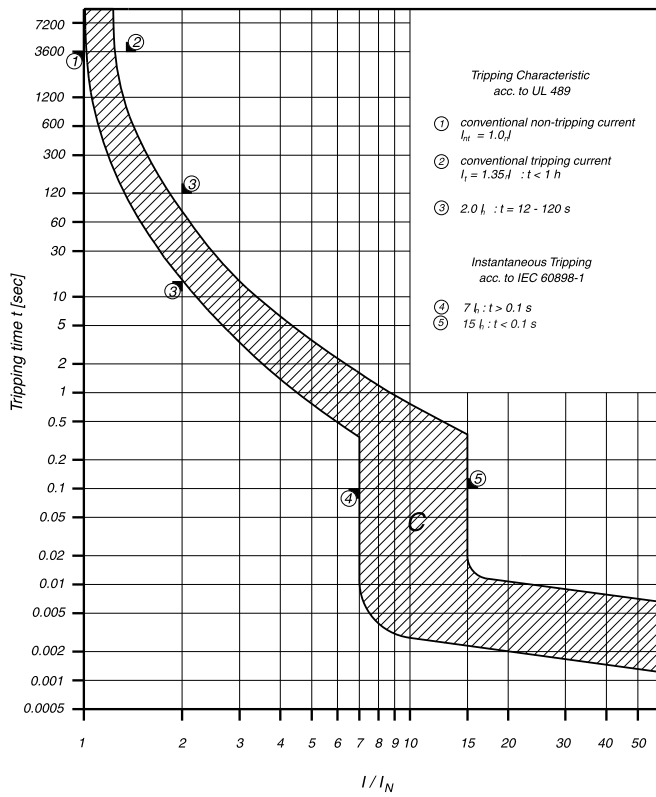






Miniature Circuit Breakers AZ

SG51412







- High-quality miniature circuit breakers for commercial and industrial applications
- Contact position indicator red - green
- Accessories suitable for subsequent installation
- Rated currents up to 125 A
- Tripping characteristics C, D
- Rated breaking capacity up to 25 kA according to EN 60947-2

AZ Miniature Circuit Breakers (MCBs) Characteristic C

| | Rated current I_n (A) | Type Designation | Article No. | Units per package |
|---|----------------------------|------------------|-------------|-------------------|
| SG51212  | 1-pole | | | |
| | 20 | AZ-C20 | 211769 | 12 |
| | 25 | AZ-C25 | 211774 | 12 |
| | 32 | AZ-C32 | 211779 | 12 |
| | 40 | AZ-C40 | 211784 | 12 |
| | 50 | AZ-C50 | 211789 | 12 |
| | 63 | AZ-C63 | 211794 | 12 |
| | 80 | AZ-C80 | 211799 | 12 |
| | 100 | AZ-C100 | 211804 | 12 |
| 125 | AZ-C125 | 211809 | 12 | |
| SG51312  | 2-pole | | | |
| | 20 | AZ-2-C20 | 211770 | 2 |
| | 25 | AZ-2-C25 | 211775 | 2 |
| | 32 | AZ-2-C32 | 211780 | 2 |
| | 40 | AZ-2-C40 | 211785 | 2 |
| | 50 | AZ-2-C50 | 211790 | 2 |
| | 63 | AZ-2-C63 | 211795 | 2 |
| | 80 | AZ-2-C80 | 211800 | 2 |
| | 100 | AZ-2-C100 | 211805 | 2 |
| 125 | AZ-2-C125 | 211810 | 2 | |
| wa_sg00314  | 3-pole | | | |
| | 20 | AZ-3-C20 | 211771 | 1 |
| | 25 | AZ-3-C25 | 211776 | 1 |
| | 32 | AZ-3-C32 | 211781 | 1 |
| | 40 | AZ-3-C40 | 211786 | 1 |
| | 50 | AZ-3-C50 | 211791 | 1 |
| | 63 | AZ-3-C63 | 211796 | 1 |
| | 80 | AZ-3-C80 | 211801 | 1 |
| | 100 | AZ-3-C100 | 211806 | 1 |
| 125 | AZ-3-C125 | 211811 | 1 | |
| wa_sg00214  | 3+N-pole | | | |
| | 20 | AZ-3N-C20 | 211773 | 1 |
| | 25 | AZ-3N-C25 | 211778 | 1 |
| | 32 | AZ-3N-C32 | 211783 | 1 |
| | 40 | AZ-3N-C40 | 211788 | 1 |
| | 50 | AZ-3N-C50 | 211793 | 1 |
| | 63 | AZ-3N-C63 | 211798 | 1 |
| | 80 | AZ-3N-C80 | 211803 | 1 |
| | 100 | AZ-3N-C100 | 211808 | 1 |
| 125 | AZ-3N-C125 | 211813 | 1 | |
| SG51412  | 4-pole | | | |
| | 20 | AZ-4-C20 | 211772 | 1 |
| | 25 | AZ-4-C25 | 211777 | 1 |
| | 32 | AZ-4-C32 | 211782 | 1 |
| | 40 | AZ-4-C40 | 211787 | 1 |
| | 50 | AZ-4-C50 | 211792 | 1 |
| | 63 | AZ-4-C63 | 211797 | 1 |
| | 80 | AZ-4-C80 | 211802 | 1 |
| | 100 | AZ-4-C100 | 211807 | 1 |
| 125 | AZ-4-C125 | 211812 | 1 | |


AZ Miniature Circuit Breakers (MCBs)

Characteristic D


| | Rated current I_n (A) | Type Designation | Article No. | Units per package |
|---|----------------------------|------------------|-------------|-------------------|
| SG51212  | 1-pole | | | |
| | 50 | AZ-D50 | 211814 | 12 |
| | 63 | AZ-D63 | 211818 | 12 |
| | 80 | AZ-D80 | 211822 | 12 |
| | 100 | AZ-D100 | 211826 | 12 |
| SG51312  | 2-pole | | | |
| | 50 | AZ-2-D50 | 211815 | 2 |
| | 63 | AZ-2-D63 | 211819 | 2 |
| | 80 | AZ-2-D80 | 211823 | 2 |
| | 100 | AZ-2-D100 | 211827 | 2 |
| wa_sg00314  | 3-pole | | | |
| | 50 | AZ-3-D50 | 211816 | 1 |
| | 63 | AZ-3-D63 | 211820 | 1 |
| | 80 | AZ-3-D80 | 211824 | 1 |
| | 100 | AZ-3-D100 | 211828 | 1 |
| wa_sg00214  | 3+N-pole | | | |
| | 50 | AZ-3N-D50 | 211817 | 1 |
| | 63 | AZ-3N-D63 | 211821 | 1 |
| | 80 | AZ-3N-D80 | 211825 | 1 |
| | 100 | AZ-3N-D100 | 211829 | 1 |

Maximum Let-Through Current AZ


Type C

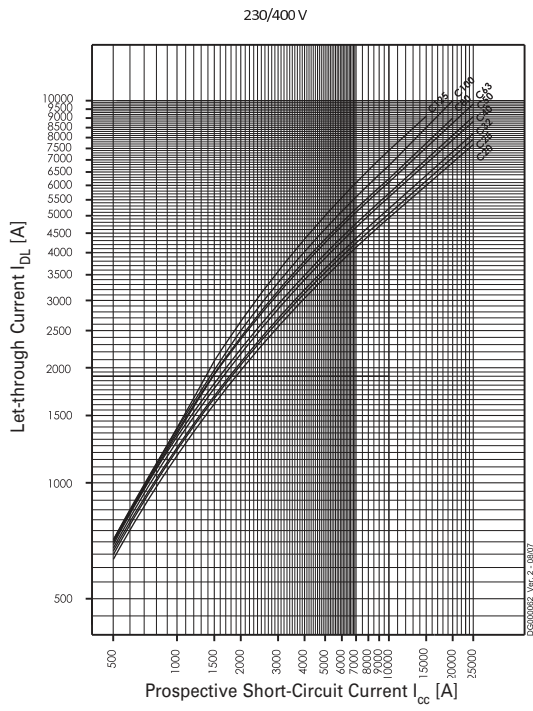


Type D

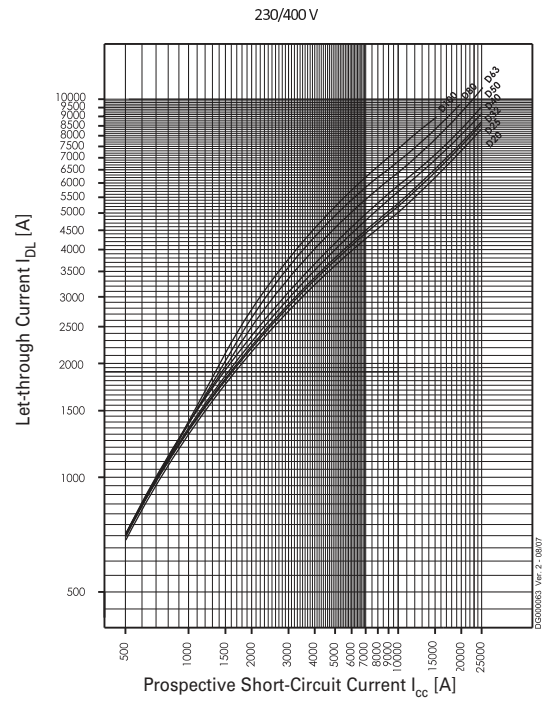

Dimensions (mm)

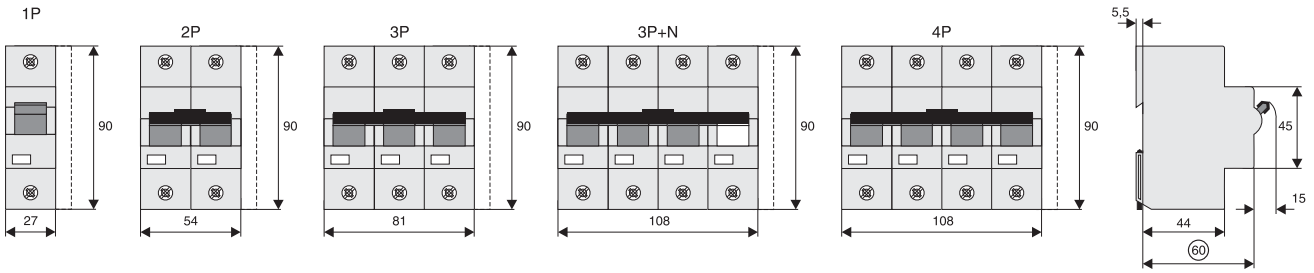


Effect of ambient temperature AZ

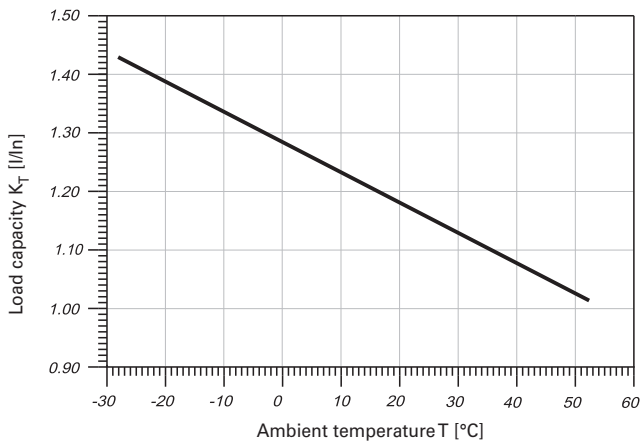


Permitted permanent load at ambient temperature T [°C] with n devices: $I_{DL} = I_n K_T(T) K_N(N)$.

Maximum Let-Through Current AZ

Type C

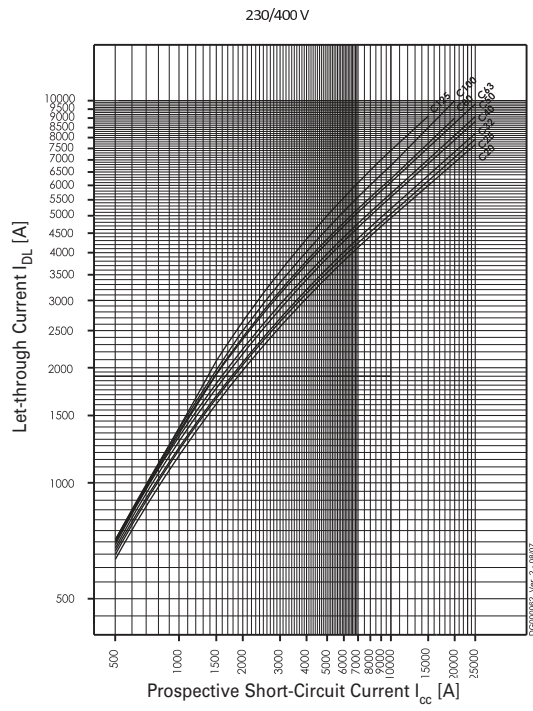

Type D

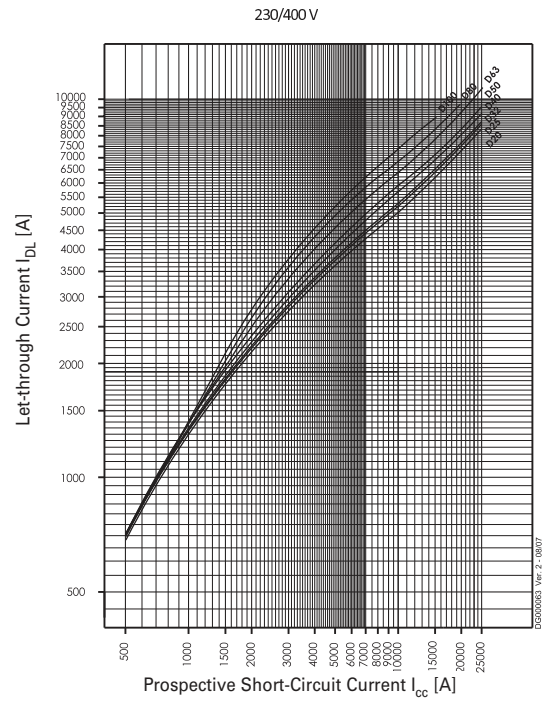

Short Circuit Selectivity AZ

In case of short circuit, there is selectivity between the miniature circuit breakers AZ and the upstream protection devices up to the specified values of the selectivity limit current I_s [kA] (i. e. in case of short-circuit currents I_{ks} under I_s , only the MCB will trip, in case of short circuit currents above this value both protective devices will respond).

AZ towards back-up fuses D01, D02, D03

| Rated current I_n AZ in A | Rated current of the back-up fuse in A | | | | | | |
|--------------------------------|--|-----|-----|-----|-----|-----|-----|
| | 25 | 35 | 50 | 63 | 80 | 100 | |
| C - Characteristic | 20 | 0,5 | 1,0 | 2,0 | 2,9 | 3,9 | 7,6 |
| | 25 | | 1,0 | 1,9 | 2,8 | 3,8 | 7,3 |
| | 32 | | 1,0 | 1,8 | 2,7 | 3,6 | 7,0 |
| | 40 | | | 1,6 | 2,2 | 3,0 | 5,6 |
| | 50 | | | | 2,1 | 2,8 | 5,2 |
| | 63 | | | | | 2,7 | 4,8 |
| | 80 | | | | | | 4,3 |
| | 100 | | | | | | |
| | 125 | | | | | | |
| | D -Characteristic | 20 | 0,5 | 0,9 | 1,7 | 2,5 | 3,4 |
| 25 | | | 0,9 | 1,6 | 2,3 | 3,2 | 6,2 |
| 32 | | | 0,9 | 1,5 | 2,3 | 3,0 | 6,0 |
| 40 | | | | 1,4 | 2,0 | 2,6 | 4,7 |
| 50 | | | | | 1,8 | 2,3 | 4,3 |
| 63 | | | | | | 2,1 | 3,7 |
| 80 | | | | | | | 3,1 |
| 100 | | | | | | | |
| 125 | | | | | | | |

AZ towards back-up fuses NH Gr. 00

| Rated current I_n AZ in A | Rated current of the back-up fuse in A | | | | | | | | | | |
|--------------------------------|--|-----|------|-----|-----|-----|-----|-----|------|------|------|
| | 25 | 35 | 40 | 50 | 63 | 80 | 100 | 125 | 160 | 200 | |
| C - Characteristic | 20 | 0,5 | 1,0 | 1,3 | 1,9 | 2,7 | 3,7 | 6,7 | 17,0 | 25,0 | 25,0 |
| | 25 | | 0,9 | 1,3 | 1,8 | 2,6 | 3,5 | 6,5 | 17,0 | 25,0 | 25,0 |
| | 32 | | 0,9 | 1,2 | 1,7 | 2,4 | 3,3 | 6,0 | 15,0 | 23,0 | 25,0 |
| | 40 | | | | 1,4 | 2,1 | 2,9 | 4,8 | 12,0 | 18,0 | 25,0 |
| | 50 | | | | | 1,9 | 2,7 | 4,5 | 11,0 | 17,0 | 25,0 |
| | 63 | | | | | | | 4,2 | 10,0 | 15,0 | 25,0 |
| | 80 | | | | | | | 3,8 | 8,5 | 12,0 | 25,0 |
| | 100 | | | | | | | | 7,0 | 10,0 | 25,0 |
| | 125 | | | | | | | | | 7,5 | 25,0 |
| | D - Characteristic | 20 | <0,5 | 0,8 | 1,1 | 1,5 | 2,3 | 3,1 | 5,6 | 16,0 | 25,0 |
| 25 | | | 0,7 | 1,0 | 1,4 | 2,1 | 3,0 | 5,3 | 14,0 | 23,0 | 25,0 |
| 32 | | | 0,7 | 1,0 | 1,3 | 2,1 | 2,9 | 5,0 | 13,0 | 22,0 | 25,0 |
| 40 | | | | | 1,1 | 1,8 | 2,5 | 4,2 | 10,0 | 15,0 | 25,0 |
| 50 | | | | | | 1,6 | 2,3 | 3,8 | 8,5 | 13,0 | 22,0 |
| 63 | | | | | | | 2,1 | 3,2 | 7,0 | 10,5 | 18,0 |
| 80 | | | | | | | | 2,8 | 5,5 | 8,4 | 15,0 |
| 100 | | | | | | | | | 4,8 | 7,5 | 12,5 |
| 125 | | | | | | | | | | | |


AZ towards NZM 1

Short circuit selectivity **characteristic C** towards **NZM***)

| AZ | NZM...1-A gL/gG | | | | | |
|--------------------|-----------------|-----|-----|------|------|------|
| I _n [A] | 40 | 50 | 63 | 80 | 100 | 125 |
| 20 | 0.3 | 0.4 | 0.5 | 0.75 | 0.9 | 1.25 |
| 25 | 0.3 | 0.4 | 0.5 | 0.7 | 0.9 | 1.2 |
| 32 | | 0.4 | 0.5 | 0.7 | 0.85 | 1.2 |
| 40 | | | 0.5 | 0.6 | 0.85 | 1.1 |
| 50 | | | | 0.6 | 0.85 | 1.1 |
| 63 | | | | | 0.8 | 1 |
| 80 | | | | | | 1 |
| 100 | | | | | | |
| 125 | | | | | | |

Short circuit selectivity **characteristic D** towards **NZM***)

| AZ | NZM...1-A gL/gG | | | | | |
|--------------------|-----------------|----|----|----|-----|-----|
| I _n [A] | 40 | 50 | 63 | 80 | 100 | 125 |
| 50 | | | | | | |
| 63 | | | | | | |
| 80 | | | | | | |
| 100 | | | | | | |

 no selectivity


AZ towards NZM 2

Short circuit selectivity **characteristic C** towards **NZM***)

| AZ | NZM...2-A gL/gG | | | | | | | | |
|--------------------|-----------------|-----|-----|------|------|------|------|-----|-----|
| I _n [A] | 40 | 50 | 63 | 80 | 100 | 125 | 160 | 200 | 250 |
| 20 | 0.3 | 0.4 | 0.5 | 0.75 | 0.9 | 1.25 | 1.8 | 2.5 | 3.5 |
| 25 | 0.3 | 0.4 | 0.5 | 0.7 | 0.9 | 1.2 | 1.7 | 2.4 | 3.3 |
| 32 | | 0.4 | 0.5 | 0.7 | 0.85 | 1.2 | 1.65 | 2.3 | 3.2 |
| 40 | | | 0.5 | 0.6 | 0.85 | 1.1 | 1.5 | 2.1 | 2.9 |
| 50 | | | | 0.6 | 0.85 | 1.1 | 1.5 | 2 | 2.8 |
| 63 | | | | | 0.8 | 1 | 1.4 | 1.8 | 2.5 |
| 80 | | | | | | 1 | 1.4 | 1.8 | 2.4 |
| 100 | | | | | | | 1.3 | 1.7 | 2.3 |
| 125 | | | | | | | | 1.6 | 2.1 |

Short circuit selectivity **characteristic D** towards **NZM***)

| AZ | NZM...2-A gL/gG | | | | | | | | |
|--------------------|-----------------|----|----|----|-----|-----|-----|-----|-----|
| I _n [A] | 40 | 50 | 63 | 80 | 100 | 125 | 160 | 200 | 250 |
| 50 | | | | | | | 1 | 1.4 | 2.6 |
| 63 | | | | | | | 1 | 1.3 | 2.3 |
| 80 | | | | | | | | | 2.1 |
| 100 | | | | | | | | | |

 no selectivity

Back-up Protection AZ

The up-stream protective devices will protect the down-stream AZ up to the short-circuit current specified.

AZ and NZM(B)(C)(N)(H)1

| I_n [A] | AZ-$I_n/1(2,3,4)$ / C(D) + NZMB1 $U_e = 230/400$ V |
|-----------|---|
| 20 | 25 kA |
| 25 | 25 kA |
| 32 | 25 kA |
| 40 | 25 kA |
| 50 | 25 kA |
| 63 | 25 kA |
| 80 | 25 kA |
| 100 | 25 kA |
| 125 | 25 kA |

| I_n [A] | AZ-$I_n/1(2,3,4)$ / C(D) + NZMC1 $U_e = 230/400$ V |
|-----------|---|
| 20 | 36 kA |
| 25 | 36 kA |
| 32 | 36 kA |
| 40 | 36 kA |
| 50 | 36 kA |
| 63 | 36 kA |
| 80 | 36 kA |
| 100 | 36 kA |
| 125 | 36 kA |

| I_n [A] | AZ-$I_n/1(2,3,4)$ / C(D) + NZMN1 $U_e = 230/400$ V |
|-----------|---|
| 20 | 50 kA |
| 25 | 50 kA |
| 32 | 50 kA |
| 40 | 50 kA |
| 50 | 50 kA |
| 63 | 50 kA |
| 80 | 50 kA |
| 100 | 50 kA |
| 125 | 50 kA |

| I_n [A] | AZ-$I_n/1(2,3,4)$ / C(D) + NZMH1 $U_e = 230/400$ V |
|-----------|---|
| 20 | 80 kA |
| 25 | 80 kA |
| 32 | 80 kA |
| 40 | 80 kA |
| 50 | 80 kA |
| 63 | 80 kA |
| 80 | 80 kA |
| 100 | 80 kA |
| 125 | 80 kA |

AZ and NZM(B)(C)(N)(H)2


| I_n [A] | AZ-$I_n/1(2,3,4)$ / C(D) + NZMB2 $U_e = 230/400$ V |
|-----------|---|
| 20 | 25 kA |
| 25 | 25 kA |
| 32 | 25 kA |
| 40 | 25 kA |
| 50 | 25 kA |
| 63 | 25 kA |
| 80 | 25 kA |
| 100 | 25 kA |
| 125 | 25 kA |

| I_n [A] | AZ-$I_n/1(2,3,4)$ / C(D) + NZMC2 $U_e = 230/400$ V |
|-----------|---|
| 20 | 36 kA |
| 25 | 36 kA |
| 32 | 36 kA |
| 40 | 36 kA |
| 50 | 36 kA |
| 63 | 36 kA |
| 80 | 36 kA |
| 100 | 36 kA |
| 125 | 36 kA |

| I_n [A] | AZ-$I_n/1(2,3,4)$ / C(D) + NZMN2 $U_e = 230/400$ V |
|-----------|---|
| 20 | 50 kA |
| 25 | 50 kA |
| 32 | 50 kA |
| 40 | 50 kA |
| 50 | 50 kA |
| 63 | 50 kA |
| 80 | 50 kA |
| 100 | 50 kA |
| 125 | 50 kA |

| I_n [A] | AZ-$I_n/1(2,3,4)$ / C(D) + NZMH2 $U_e = 230/400$ V |
|-----------|---|
| 20 | 65 kA |
| 25 | 65 kA |
| 32 | 65 kA |
| 40 | 65 kA |
| 50 | 65 kA |
| 63 | 65 kA |
| 80 | 65 kA |
| 100 | 65 kA |
| 125 | 65 kA |

Load capacity in case of block installation AZ

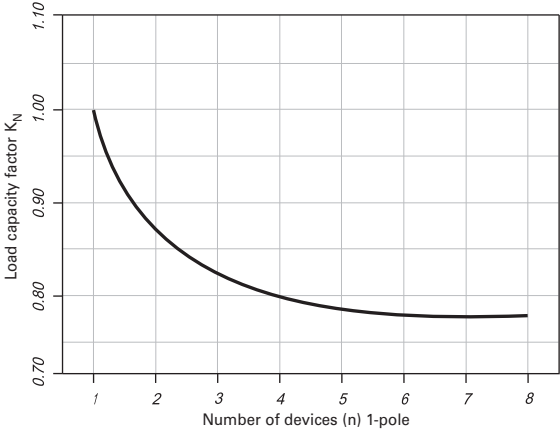





Main Load Disconnecter Switch (Isolator) IS

SG10911




- Load circuit breaker with isolating function
- Highly wear resistant contacts
- Quick make
- Terminal capacity 50 mm²
- Compatible busbars
- 1-, 2-, 3-, 4-pole

Main Load Disconnect Switch (Isolator) IS

| | Rated Current (A) | Poles | Type Designation | Article No. | Units per package | |
|---|--|-------|------------------|-------------|-------------------|--------|
|  SG10611 | 16 | 1 | IS-16/1 | 276254 | 12/120 | |
| | 16 | 2 | IS-16/2 | 276255 | 1/60 | |
| | 16 | 3 | IS-16/3 | 276256 | 1/40 | |
| | 16 | 4 | IS-16/4 | 276257 | 1/30 | |
| | 20 | 1 | IS-20/1 | 276258 | 12/120 | |
| | 20 | 2 | IS-20/2 | 276259 | 1/60 | |
| | 20 | 3 | IS-20/3 | 276260 | 1/40 | |
| | 20 | 4 | IS-20/4 | 276261 | 1/30 | |
| |  SG10711 | 25 | 1 | IS-25/1 | 276262 | 12/120 |
| | | 25 | 2 | IS-25/2 | 276263 | 1/60 |
| 25 | | 3 | IS-25/3 | 276264 | 1/40 | |
| 25 | | 4 | IS-25/4 | 276265 | 1/30 | |
| 32 | | 1 | IS-32/1 | 276266 | 12/120 | |
| 32 | | 2 | IS-32/2 | 276267 | 1/60 | |
| 32 | | 3 | IS-32/3 | 276268 | 1/40 | |
| 32 | | 4 | IS-32/4 | 276269 | 1/30 | |
|  SG10811 | | 40 | 1 | IS-40/1 | 276270 | 12/120 |
| | | 40 | 2 | IS-40/2 | 276271 | 1/60 |
| | 40 | 3 | IS-40/3 | 276272 | 1/40 | |
| | 40 | 4 | IS-40/4 | 276273 | 1/30 | |
| | 63 | 1 | IS-63/1 | 276274 | 12/120 | |
| | 63 | 2 | IS-63/2 | 276275 | 1/60 | |
| | 63 | 3 | IS-63/3 | 276276 | 1/40 | |
| | 63 | 4 | IS-63/4 | 276277 | 1/30 | |
| |  SG10911 | 80 | 1 | IS-80/1 | 276278 | 12/120 |
| | | 80 | 2 | IS-80/2 | 276279 | 1/60 |
| 80 | | 3 | IS-80/3 | 276280 | 1/40 | |
| 80 | | 4 | IS-80/4 | 276281 | 1/30 | |
| 100 | | 1 | IS-100/1 | 276282 | 12/120 | |
| 100 | | 2 | IS-100/2 | 276283 | 1/60 | |
| 100 | | 3 | IS-100/3 | 276284 | 1/40 | |
| 100 | | 4 | IS-100/4 | 276285 | 1/30 | |
| | | 125 | 1 | IS-125/1 | 276286 | 12/120 |
| | | 125 | 2 | IS-125/2 | 276287 | 1/60 |
| | 125 | 3 | IS-125/3 | 276288 | 1/40 | |
| | 125 | 4 | IS-125/4 | 276289 | 1/30 | |

Accessories

| | Description | Type Designation | Article No. | Units per package |
|--|--|------------------|-------------|-------------------|
|  SG47812 | Switching interlock without lock for Isolators, RCDs, combined RCD/MCBs, ... | IS/SPE-1TE | 101911 | 5/30 |
| | Terminal cover | Z-IS/AK-1TE | 276290 | 10/600 |

Switching interlock IS/SPE-1TE

- Without lock
- Also suitable for PFIM, CF16, PKNM, CKN6

Terminal Cover Caps Z-IS/AK-1TE

- Can be sealed with leads
- Modular design, width 1 MU

Specifications | Main Load Disconnect Switch (Isolator) IS


Description

- Load circuit breaker with isolating function
- Design according to IEC/EN 60947-3
- Highly wear resistant contacts
- Quick make, black toggle
- Terminal capacity 50 mm²
- Compatible busbars with switchgear series Xpole by use of the mouth terminal in combination with standard fork busbar


Technical Data

| | IS-16 | IS-20 | IS-25 | IS-32 | IS-40 | IS-63 | IS-80 | IS-100 | IS-125 |
|---|---|---------|---------|---------|---------|---------|---------|---------|---------|
| Electrical | | | | | | | | | |
| Design | according to IEC/EN 60947-3 | | | | | | | | |
| Rated voltage | 240/415 V | | | | | | | | |
| Frequency | 50/60 Hz | | | | | | | | |
| Rated insulation voltage | U_i | 690 V~ | | | | | | | |
| Rated peak withstand voltage | U_{imp} | 6 kV | | | | | | | |
| Pollution degree | 3 | | | | | | | | |
| Rated short-time withstand current | I_{cw} | 2 kA | | | | | | | |
| Rated short-circuit making capacity | I_{cm} | 2.8 kA | | | | | | | |
| Rated current | | | | | | | | | |
| 240/415V, AC23A | 16 A | 20 A | 25 A | 32 A | 40 A | 63 A | 80 A | 100 A | 125 A |
| Number of poles | 1-, 2-, 3-, 4-pole | | | | | | | | |
| Maximum back-up fuse | 125 A gG | | | | | | | | |
| Short circuit strength - with back-up fuse acc. to the applicable rules | | | | | | | | | |
| IEC/EN 60947-3 | 12.5 kA | 12.5 kA | 12.5 kA | 12.5 kA | 12.5 kA | 12.5 kA | 12.5 kA | 10 kA | 10 kA |
| Endurance | | | | | | | | | |
| electrical components operation cycles | ≥3.000 | ≥3.000 | ≥3.000 | ≥3.000 | ≥3.000 | ≥3.000 | ≥3.000 | ≥3.000 | ≥2.000 |
| mechanical components operation cycles | ≥16.000 | ≥16.000 | ≥16.000 | ≥16.000 | ≥16.000 | ≥16.000 | ≥16.000 | ≥16.000 | ≥14.000 |
| Mechanical | | | | | | | | | |
| Frame size | 45 mm | | | | | | | | |
| Device height | 80 mm | | | | | | | | |
| Device width | 17.5mm/pole | | | | | | | | |
| Mounting | quick fastening with 2 lock-in positions on DIN rail IEC/EN 60715 | | | | | | | | |
| Degree of protection, built-in | IP40 | | | | | | | | |
| Terminal protection | finger and hand touch safe according to BGV A3 | | | | | | | | |
| Terminals | open mouthed/lift terminals | | | | | | | | |
| Terminal capacity | 2.5 - 50 mm ² | | | | | | | | |
| Busbar thickness | 0.8 - 2 mm | | | | | | | | |
| Fastening torque of terminal screws | 2.5 - 5 Nm | | | | | | | | |
| Function | irrespective of the position of installation | | | | | | | | |

Connection diagram

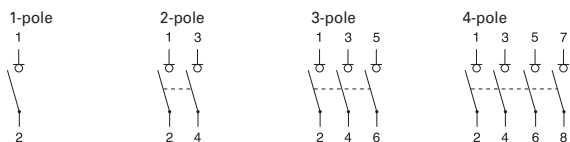


Dimensions (mm)

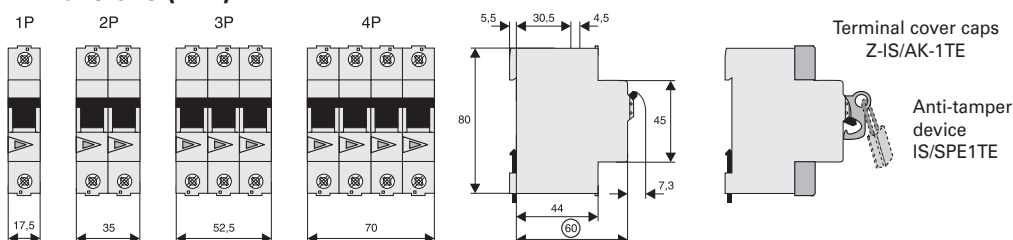

Busbar System xEffect BB-EV

SG13113

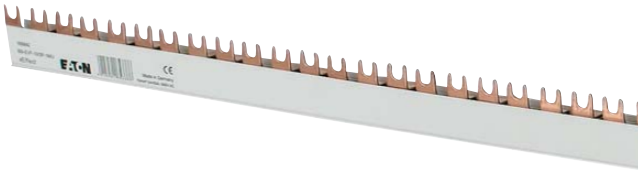

Busbar System xEffect is the modular design system for busbars. xEffect busbars are available as yard goods with 1, 2 or 3 poles. Now, there is a special feature: each bar can easily be extended by one-pole bar as you like. The additional pole can be added completely without tools by easy clamping technique. The lugs or forks in the xEffect bars - available in 10 and 16 mm² and all common distances - can be broken out at a predetermined breaking point. There is actually no more flexibility available.

Busbar System xEffect saves time and material

The yard good can be cut with a saw of course. However, there is no need neither for deburring nor for cutting the conductor. Just cut to the required dimension and close with the fitting end cap -ready! The end caps have also breakable edges, which enable further connecting of the Busbar System xEffect. By overlapping assembly, doubling the cross section can be achieved.

Busbar System xEffect in use

Busbar System xEffect is especially well suited for solving flexible busbar applications rack-mounted models in series. Fork-pin combinations for 1+N applications can be realized by individual combinations - for this also the one-pole version with blue isolation is available besides the one with grey isolation. Even different cross sections can be combined in this case.

Accessories, such as feeder terminals and self adhesive phase marking labels will complete the comfortable total package. Existing contact prevention caps can be used.

Busbar System xEffect at a glance:

- Yard goods can be cut
- No cutting back of copper required
- No deburring required
- Almost no waste during cutting
- End caps available with 1- to 4-poles, end caps can be broken out for further extensions
- 4-pole end cap molded in pairs (left and right)
- Overlapping rail extension possible
- Rails can be extended on demand by 1-pole rails (plug-in technology)
- All step distances
- 10 and 16 mm²
- Fork and stud
- Lugs can be broken out at any predetermined breaking point
- Self adhesive phase indication labels available
- Contact preventing caps (ZV-BS-G) can be used
- Simple, flexible handling
- All assembly requirements can be covered by the Busbar System xEffect
- Low storage space requirements due to modular system
- Less time consuming (no deburring, no cutting back)
- Individual and self configurable
- Fork-pin combination for 1+N application possible, feeding through rail (terminal clamp) not possible.
- Protected technology

| Description | Step Distance (mm) | Cu-factor | Type Designation | Article No. | Units per package |
|-------------|--------------------|-----------|------------------|-------------|-------------------|
|-------------|--------------------|-----------|------------------|-------------|-------------------|

xEffect busbar 1m 10mm², 16mm² (Fork) BB-EVF


for MCBs, RCCBs, RCBOs, SPDs

- Delivered without end caps

SG13113



SG13413

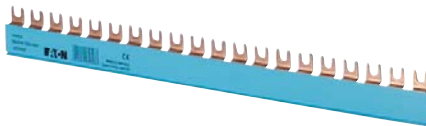


10 mm², Rated Current 63 A

| | | | | | |
|---------------|------------|------|----------------------|--------|----|
| 1-phase | 17.8 | 0.22 | BB-EVF-10/1P-1MU | 168826 | 10 |
| | 27 | 0.24 | BB-EVF-10/1P-2MU | 168830 | 10 |
| | 36 | 0.24 | BB-EVF-10/1P-3MU | 168834 | 10 |
| 2-phase | 17.8 | 0.31 | BB-EVF-10/2P-1MU | 168838 | 10 |
| | 27 | 0.36 | BB-EVF-10/2P-2MU | 168840 | 10 |
| 3-phase | 17.8 | 0.46 | BB-EVF-10/3P-1MU | 168842 | 10 |
| | 27 | 0.58 | BB-EVF-10/3P-2MU | 168844 | 10 |
| | 36 | 0.56 | BB-EVF-10/3P-3MU | 168850 | 10 |
| 3-phase + AUX | 3x17.5+1x9 | 0.58 | BB-EVF-10/3P-1MU/AUX | 168846 | 10 |
| | 3x17.5+2x9 | 0.57 | BB-EVF-10/3P-1MU2AUX | 168848 | 10 |
| Neutral | 17.8 | 0.22 | BB-EVF-10/N-1MU | 168828 | 10 |
| | 27 | 0.24 | BB-EVF-10/N-2MU | 168832 | 10 |
| | 36 | 0.24 | BB-EVF-10/N-3MU | 168836 | 10 |

SG13213



SG13613

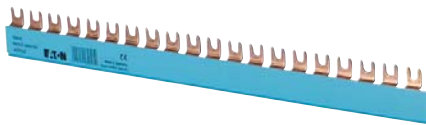

16 mm², Rated Current 80 A

| | | | | | |
|---------------|------------|------|----------------------|--------|----|
| 1-phase | 17.8 | 0.33 | BB-EVF-16/1P-1MU | 168827 | 10 |
| | 27 | 0.36 | BB-EVF-16/1P-2MU | 168831 | 10 |
| | 36 | 0.32 | BB-EVF-16/1P-3MU | 168835 | 10 |
| 2-phase | 17.8 | 0.46 | BB-EVF-16/2P-1MU | 168839 | 10 |
| | 27 | 0.54 | BB-EVF-16/2P-2MU | 168841 | 10 |
| 3-phase | 17.8 | 0.69 | BB-EVF-16/3P-1MU | 168843 | 10 |
| | 27 | 0.87 | BB-EVF-16/3P-2MU | 168845 | 10 |
| | 36 | 0.84 | BB-EVF-16/3P-3MU | 168851 | 10 |
| 3-phase + AUX | 3x17.5+1x9 | 0.87 | BB-EVF-16/3P-1MU/AUX | 168847 | 10 |
| | 3x17.5+2x9 | 0.86 | BB-EVF-16/3P-1MU2AUX | 168849 | 10 |
| Neutral | 17.8 | 0.33 | BB-EVF-16/N-1MU | 168829 | 10 |
| | 27 | 0.36 | BB-EVF-16/N-2MU | 168833 | 10 |
| | 36 | 0.32 | BB-EVF-16/N-3MU | 168837 | 10 |

| Description | Step Distance (mm) | Cu-factor | Type Designation | Article No. | Units per package |
|-------------|--------------------|-----------|------------------|-------------|-------------------|
|-------------|--------------------|-----------|------------------|-------------|-------------------|

xEffect busbar 1m 10mm², 16mm² (Pin) BB-EVP

for MCBs, RCCBs, RCBOs, SPDs

- Delivered without end caps


SG13013



10 mm², Rated Current 63 A

| | | | | | |
|---------------|------------|------|----------------------|--------|----|
| 1-phase | 17.8 | 0.22 | BB-EVP-10/1P-1MU | 168852 | 10 |
| | 27 | 0.24 | BB-EVP-10/1P-2MU | 168856 | 10 |
| | 36 | 0.24 | BB-EVP-10/1P-3MU | 168860 | 10 |
| 2-phase | 17.8 | 0.31 | BB-EVP-10/2P-1MU | 168864 | 10 |
| | 27 | 0.36 | BB-EVP-10/2P-2MU | 168866 | 10 |
| | 36 | 0.36 | BB-EVP-10/2P-3MU | 168866 | 10 |
| 3-phase | 17.8 | 0.46 | BB-EVP-10/3P-1MU | 168868 | 10 |
| | 27 | 0.58 | BB-EVP-10/3P-2MU | 168870 | 10 |
| | 36 | 0.56 | BB-EVP-10/3P-3MU | 168876 | 10 |
| 3-phase + AUX | 3x17.5+1x9 | 0.58 | BB-EVP-10/3P-1MU/AUX | 168872 | 10 |
| | 3x17.5+2x9 | 0.57 | BB-EVP-10/3P-1MU2AUX | 168874 | 10 |
| Neutral | 17.8 | 0.22 | BB-EVP-10/N-1MU | 168854 | 10 |
| | 27 | 0.24 | BB-EVP-10/N-2MU | 168858 | 10 |
| | 36 | 0.24 | BB-EVP-10/N-3MU | 168862 | 10 |

SG13513

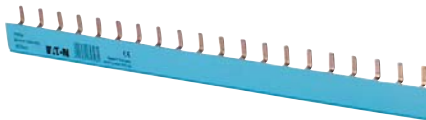


SG12913



16 mm², Rated Current 80 A

| | | | | | |
|---------------|------------|------|----------------------|--------|----|
| 1-phase | 17.8 | 0.33 | BB-EVP-16/1P-1MU | 168853 | 10 |
| | 27 | 0.36 | BB-EVP-16/1P-2MU | 168857 | 10 |
| | 36 | 0.32 | BB-EVP-16/1P-3MU | 168861 | 10 |
| 2-phase | 17.8 | 0.46 | BB-EVP-16/2P-1MU | 168865 | 10 |
| | 27 | 0.54 | BB-EVP-16/2P-2MU | 168867 | 10 |
| | 36 | 0.54 | BB-EVP-16/2P-3MU | 168867 | 10 |
| 3-phase | 17.8 | 0.69 | BB-EVP-16/3P-1MU | 168869 | 10 |
| | 27 | 0.87 | BB-EVP-16/3P-2MU | 168871 | 10 |
| | 36 | 0.84 | BB-EVP-16/3P-3MU | 168877 | 10 |
| 3-phase + AUX | 3x17.5+1x9 | 0.87 | BB-EVP-16/3P-1MU/AUX | 168873 | 10 |
| | 3x17.5+2x9 | 0.86 | BB-EVP-16/3P-1MU2AUX | 168875 | 10 |
| Neutral | 17.8 | 0.33 | BB-EVP-16/N-1MU | 168855 | 10 |
| | 27 | 0.36 | BB-EVP-16/N-2MU | 168859 | 10 |
| | 36 | 0.32 | BB-EVP-16/N-3MU | 168863 | 10 |

SG13313

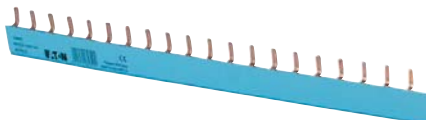

| Description | Cu-factor | Type Designation | Article No. | Units per package |
|-------------|-----------|------------------|-------------|-------------------|
|-------------|-----------|------------------|-------------|-------------------|

Accessories

End caps BB-EV-EC

wa_sg05612



| | | | | |
|-----------|---|---------------|--------|----|
| 1-phase | - | BB-EV-EC/1P | 168878 | 40 |
| 2+3-phase | - | BB-EV-EC/2-3P | 168823 | 40 |
| 4-phase | - | BB-EV-EC/4P | 168824 | 20 |
| Neutral | - | BB-EV-EC/N | 168879 | 20 |

Terminal BB-EV-TE/35

wa_sg05312



| | | | | |
|--|------|-------------|--------|---|
| | 0.04 | BB-EV-TE/35 | 168825 | 3 |
|--|------|-------------|--------|---|

Sticker phase sequence

SG08713



| | | | | |
|--|---|---------|--------|---|
| | - | BB-S-PS | 169831 | 5 |
|--|---|---------|--------|---|

Busbar Tag Shrouds ZV-BS-G

SG05705






| | | | | |
|--|---|---------|--------|--------|
| | - | ZV-BS-G | 104903 | 10/600 |
|--|---|---------|--------|--------|

Technical Data






| BB-EV. | |
|--------------------------------------|---|
| General | |
| Heat deflection temperature | ≥80°C UL94 V0 |
| Standards | EN 60947-1:2007 / IEC 60947-1:2007 / IEC 60999:2000 |
| Climate stability | according to DIN EN 60068 |
| Insulation coordination | Overvoltage category III / Degree of pollution 2 |
| Electrical | |
| Impulse voltage strenght | ≥4.5 kV |
| Min. air distance | >5.5 mm |
| Min. creeping distance | >5 mm |
| Max. operating voltage | 690 V AC/DC 1,000 V DC 1-pole only |
| Max. current I _g /Phase | |
| 10 mm ² | 63 A |
| 16 mm ² | 80 A |
| Protection class | IP20 |
| Short circuit rating I _{CC} | 25kA - NH3 355A gC500V JM |
| Dielectric strenght | PC - ABS >32 kV / mm |

Assembly instruction:




Cutting

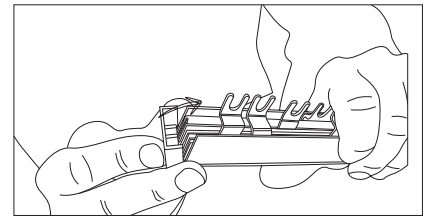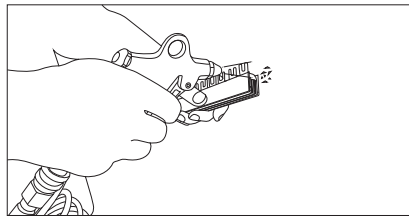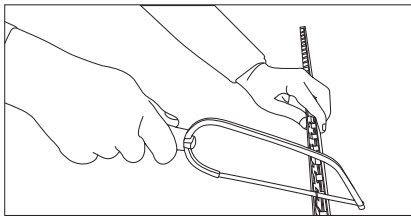


Mounting of an extension busbar

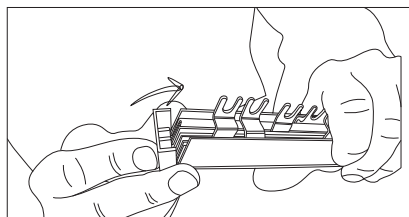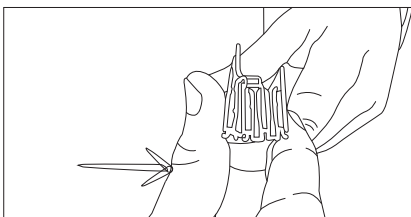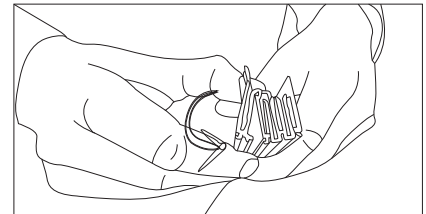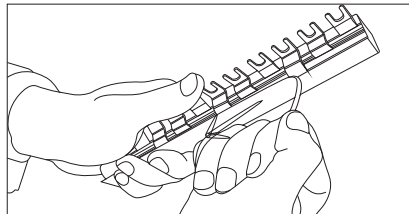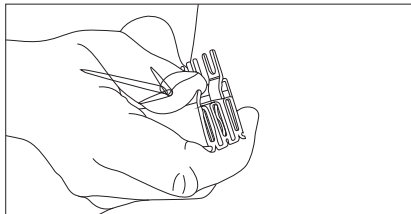


Overlapping mounting or further connection, resp.

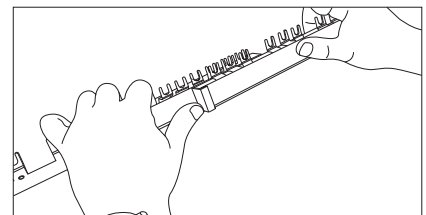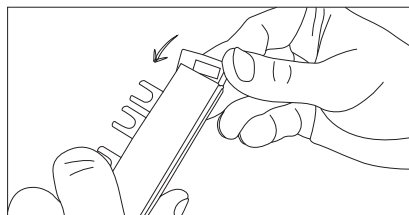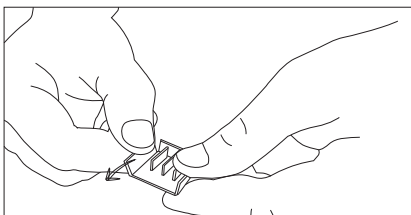

Bracking out of connection lugs

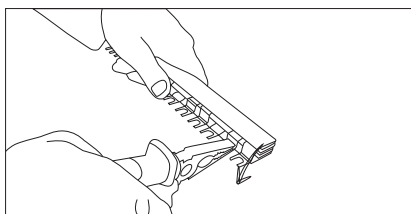

Sticking on phase marking

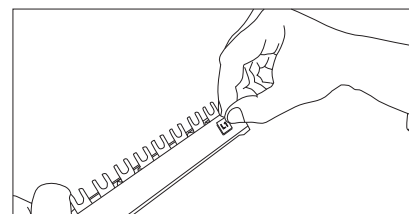

Busbar UL489 Z-BB/UL

SG13713



- For MCB FAZ-NA/RT/DU
- Sliceable
- 18 and 25 mm²
- Pin busbar
- Accessories available:
 - End cap
 - Terminal
 - Busbar tag shrouds
- Length 1 m

| Description | Step Distance (mm) | Cu-factor | Type Designation | Article No. | Units per package |
|-------------|--------------------|-----------|------------------|-------------|-------------------|
|-------------|--------------------|-----------|------------------|-------------|-------------------|

Busbar UL489 sliceable 1m 18mm², 25mm² (Pin), Z-BB/UL

for FAZ-NA/RT/DU

- Delivered without end caps

SG13713



18 mm², Rated Current 80 A

| | | | | | |
|------------------|----------------|-------|--------------------------|--------|----|
| 1-phase | 17.6 | 0.39 | Z-BB/UL18/1P1MU/57 | 171128 | 10 |
| 1-phase + AUX | 26.4 | 0.378 | Z-BB/UL18/1P1MU+AUX/37 | 171134 | 10 |
| 2x 1-phase + AUX | 26.4 | 0.56 | Z-BB/UL18/2X1P1MU+AUX/38 | 171142 | 10 |
| 3x 1-phase + AUX | 26.4 | 0.945 | Z-BB/UL18/3X1P1MU+AUX/39 | 171140 | 10 |
| 2-phase | 17.6 | 0.625 | Z-BB/UL18/2P1MU/56 | 171129 | 10 |
| 2-phase + AUX | 17.6 + 26.4 | 0.625 | Z-BB/UL18/2P1MU+AUX/46 | 171135 | 10 |
| 3-phase | 17.6 | 0.95 | Z-BB/UL18/3P1MU/57 | 171130 | 10 |
| 3-phase + AUX | 2x 17.6 + 26.4 | 0.93 | Z-BB/UL18/3P1MU+AUX/48 | 171136 | 10 |

SG14213



25 mm², Rated Current 100 A

| | | | | | |
|------------------|----------------|-------|--------------------------|--------|----|
| 1-phase | 17.6 | 0.535 | Z-BB/UL25/1P1MU/57 | 171131 | 10 |
| 1-phase + AUX | 26.4 | 0.745 | Z-BB/UL25/1P1MU+AUX/37 | 171137 | 10 |
| 2x 1-phase + AUX | 26.4 | 0.78 | Z-BB/UL25/2X1P1MU+AUX/38 | 171143 | 10 |
| 3x 1-phase + AUX | 26.4 | 1.315 | Z-BB/UL25/3X1P1MU+AUX/39 | 171141 | 10 |
| 2-phase | 17.6 | 0.888 | Z-BB/UL25/2P1MU/56 | 171132 | 10 |
| 2-phase + AUX | 17.6 + 26.4 | 0.87 | Z-BB/UL25/2P1MU+AUX/46 | 171138 | 10 |
| 3-phase | 17.6 | 1.31 | Z-BB/UL25/3P1MU/57 | 171133 | 10 |
| 3-phase + AUX | 2x 17.6 + 26.4 | 1.28 | Z-BB/UL25/3P1MU+AUX/48 | 171139 | 10 |

| Description | Cu-factor | Type Designation | Article No. | Units per package |
|-------------|-----------|------------------|-------------|-------------------|
|-------------|-----------|------------------|-------------|-------------------|

Accessories

End cap Z-ECUL

| | | | | |
|---|---|--------|--------|----|
| - | - | Z-ECUL | 171145 | 10 |
|---|---|--------|--------|----|

Terminal Z-TEUL35

| | | | | |
|-------|---|----------|--------|----|
| 0,038 | - | Z-TEUL35 | 171144 | 10 |
|-------|---|----------|--------|----|










Busbar Tag Shrouds Z-FPUL

SG08613



| | | | | |
|---|---|--------|--------|----|
| - | - | Z-FPUL | 171146 | 10 |
|---|---|--------|--------|----|

Description of the Busbar UL489, Z-BB/UL for FAZ-NA, -RT, -DU


| | |  |  |  |  |  |  |  |  |  |
|------------------------|--------|---|---|---|---|---|--|---|---|---|
| Z-BB/UL18/1P1MU/57 | 171128 | 57 | - | - | - | - | - | - | - | - |
| Z-BB/UL18/2P1MU/56 | 171129 | - | 56 | - | - | - | - | - | - | - |
| Z-BB/UL18/3P1MU/57 | 171130 | - | - | 57 | - | - | - | - | - | - |
| Z-BB/UL25/1P1MU/57 | 171131 | 57 | - | - | - | - | - | - | - | - |
| Z-BB/UL25/2P1MU/56 | 171132 | - | 56 | - | - | - | - | - | - | - |
| Z-BB/UL25/3P1MU/57 | 171133 | - | - | 57 | - | - | - | - | - | - |
| Z-BB/UL18/1P1MU+AUX/37 | 171134 | - | - | - | 37 | - | - | - | - | - |
| Z-BB/UL18/2P1MU+AUX/46 | 171135 | - | - | - | - | - | - | 46 | - | - |
| Z-BB/UL18/3P1MU+AUX/48 | 171136 | - | - | - | - | - | - | - | - | 48 |
| Z-BB/UL25/1P1MU+AUX/37 | 171137 | - | - | - | 37 | - | - | - | - | - |
| Z-BB/UL25/2P1MU+AUX/46 | 171138 | - | - | - | - | - | - | 46 | - | - |
| Z-BB/UL25/3P1MU+AUX/48 | 171139 | - | - | - | - | - | - | - | - | 48 |
| Z-BB/UL18/3X1MU+AUX/39 | 171140 | - | - | - | - | - | 39 | - | - | - |
| Z-BB/UL25/3X1MU+AUX/39 | 171141 | - | - | - | - | - | 39 | - | - | - |
| Z-BB/UL18/2X1MU+AUX/38 | 171142 | - | - | - | - | 38 | - | - | - | - |
| Z-BB/UL25/2X1MU+AUX/38 | 171143 | - | - | - | - | 38 | - | - | - | - |
| Z-TEUL35 | 171144 | - | - | - | - | - | - | - | - | - |
| Z-ECUL | 171145 | - | - | - | - | - | - | - | - | - |
| Z-FPUL | 171146 | - | - | - | - | - | - | - | - | - |

Technical Data

| | | Z-BB/UL |
|--------------------------------------|--|--|
| General | | |
| Heat deflection temperature | | >100°C - UL94 V0 |
| Standards | | UL489, EN 60947-1, IEC 60947-1:2004 |
| Climate stability | | according to DIN EN 60068 |
| Insulation coordination | | Overvoltage category III / Degree of pollution 2 |
| Electrical | | |
| Impulse voltage strenght | | ≥10 kV |
| Min. air distance | | ≥1" ext. |
| Min. creeping distance | | ≥2" ext. |
| Max. operating voltage | | |
| 1-pole | | 1,000 V AC/DC |
| 2-, 3-pole | | 600 V AC/DC |
| Max. current I _g /Phase | | |
| 18 mm ² | | 80 A |
| 25 mm ² | | 100 A |
| Protection class | | IP20 |
| Short circuit rating I _{CC} | | 10 kA |
| Dielectric strenght | | PA66-V0, >35 kV |

Mounting example of busbar UL489, Z-BB/UL for FAZ-NA, -RT, -DU

Z-BB/UL18/XX
Z-BB/UL25/XX

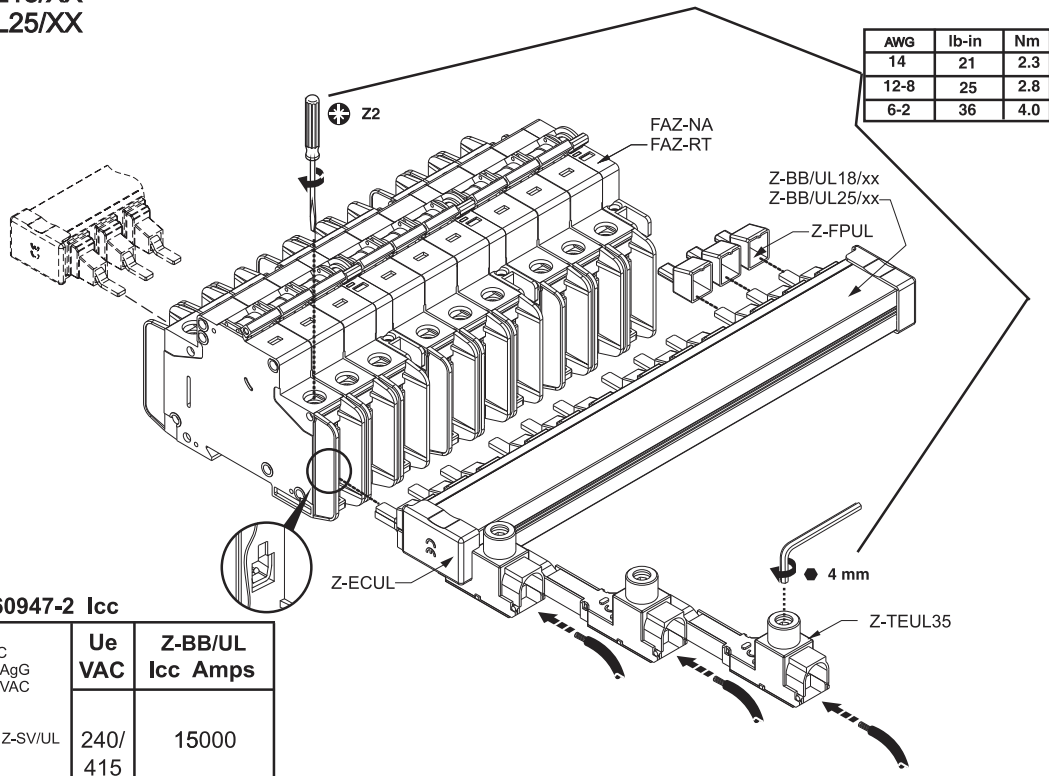

IEC/EN 60947-2 Icc

| Ue HRC 315AgG 500VAC | Ue VAC | Z-BB/UL Icc Amps |
|-------------------------------|-------------|---------------------|
| Z-SV/UL | 240/ 415 | 15000 |

UL SCCR

| Ue Z-SV/UL | FAZ-NA FAZ-RT In Amps | Ue VAC | Z-BB/UL SCCR RMS Sym Amps |
|------------------|--------------------------------|--------------|---------------------------------|
| FAZ-NA FAZ-RT | 0.5-32 | 480Y/ 277 | 10000 |
| | 35-40 | 240 | 10000 |

Busbar UL508 BB/UL

- For MCB FAZ
- Sliceable
- 18 and 25 mm²
- Pin busbar
- Accessories available:
 - End caps
 - Terminals
 - Busbar tag shrouds
- Length 1 m

| Description | Step Distance (mm) | Cu-factor | Type Designation | Article No. | Units per package |
|-------------|--------------------|-----------|------------------|-------------|-------------------|
|-------------|--------------------|-----------|------------------|-------------|-------------------|

Busbar UL508 sliceable 1m 18mm², 25mm² (Pin), BB/UL

for FAZ

- Delivered without end caps

18 mm², Rated Current 80 A

| | | | | | |
|---------------|----------------|-------|------------------------|--------|----|
| 1-phase | 17.8 | 0.33 | BB-UL-18/1P-1M/57 | 121981 | 10 |
| 2-phase | 17.8 | 0.508 | BB-UL-18/2P-2M/56 | 121982 | 10 |
| 3-phase | 17.8 | 0.8 | BB-UL-18/3P-3M/57 | 121983 | 10 |
| 1-phase + AUX | 27 | 0.33 | BB-UL-18/1P-1,5M/37 | 121984 | 10 |
| 2-phase + AUX | 17.8 + 26.7 | 0.52 | BB-UL-18/2P+AS-2,5M/46 | 121987 | 10 |
| 3-phase + AUX | 2x 17.8 + 26.7 | 0.8 | BB-UL-18/3P+AS-3,5M/48 | 121988 | 10 |

25 mm², Rated Current 100 A

| | | | | | |
|---------------|----------------|------|------------------------|--------|----|
| 1-phase | 17.8 | 0.45 | BB-UL-25/1P-1M/57 | 121989 | 10 |
| 2-phase | 17.8 | 0.68 | BB-UL-25/2P-2M/56 | 121990 | 10 |
| 3-phase | 17.8 | 1.07 | BB-UL-25/3P-3M/57 | 121991 | 10 |
| 1-phase + AUX | 27 | 0.45 | BB-UL-25/1P-1,5M/37 | 121992 | 10 |
| 2-phase + AUX | 17.8 + 26.7 | 0.69 | BB-UL-25/2P+AS-2,5M/46 | 121995 | 10 |
| 3-phase + AUX | 2x 17.8 + 26.7 | 1.03 | BB-UL-25/3P+AS-3,5M/48 | 121996 | 10 |

| Description | Cu-factor | Type Designation | Article No. | Units per package |
|-------------|-----------|------------------|-------------|-------------------|
|-------------|-----------|------------------|-------------|-------------------|

Accessories

End caps BB-UL-EC

| | | | | |
|----------|---|------------|--------|----|
| 1-phasig | - | BB-UL-EC/1 | 122000 | 10 |
| 3-phasig | - | BB-UL-EC/3 | 122001 | 10 |








Terminals BB-UL-TE

| | | | | |
|---|-------|---------------|--------|----|
| 6 - 35mm ² (single and multi wire) | 0,035 | BB-UL-TEP/35 | 121997 | 10 |
| 6 - 50mm ² | 0,038 | BB-UL-TEPA/35 | 169823 | 10 |
| 6 - 50mm ² (single and multi wire) | 0,038 | BB-UL-TE/50 | 121998 | 10 |

Busbar Tag Shrouds BB-IP/5

| | | | | |
|------------|---|---------|--------|----|
| for 5 pins | - | BB-IP/5 | 121999 | 10 |
|------------|---|---------|--------|----|


Description of the Busbar UL508, BB/UL for FAZ




| Article No. |  |  |  |  |  |  |  |
|-------------|---|---|---|---|---|---|---|
| 121981 | BB-UL-18/1P-1M/57 | 57 | - | - | - | - | - |
| 121982 | BB-UL-18/2P-2M/56 | - | 28 | - | - | - | - |
| 121983 | BB-UL-18/3P-3M/57 | - | - | 19 | - | - | - |
| 121984 | BB-UL-18/1P-1,5M/37 | - | - | - | 37 | - | - |
| 121987 | BB-UL-18/2P+AS-2,5M/46 | - | - | - | - | 23 | - |
| 121988 | BB-UL-18/3P+AS-3,5M/48 | - | - | - | - | - | 16 |
| 121989 | BB-UL-25/1P-1M/57 | 57 | - | - | - | - | - |
| 121990 | BB-UL-25/2P-2M/56 | - | 28 | - | - | - | - |
| 121991 | BB-UL-25/3P-3M/57 | - | - | 19 | - | - | - |
| 121992 | BB-UL-25/1P-1,5M/37 | - | - | - | 37 | - | - |
| 121995 | BB-UL-25/2P+AS-2,5M/46 | - | - | - | - | 23 | - |
| 121996 | BB-UL-25/3P+AS-3,5M/48 | - | - | - | - | - | 16 |
| 121997 | BB-UL-TEP/35 | - | - | - | - | - | - |
| 169823 | BB-UL-TEPA/35 | - | - | - | - | - | - |
| 121998 | BB-UL-TE/50 | - | - | - | - | - | - |
| 121999 | BB-IP/5 | - | - | - | - | - | - |
| 122000 | BB-UL-EC/1 | - | - | - | - | - | - |
| 122001 | BB-UL-EC/3 | - | - | - | - | - | - |


Technical Data

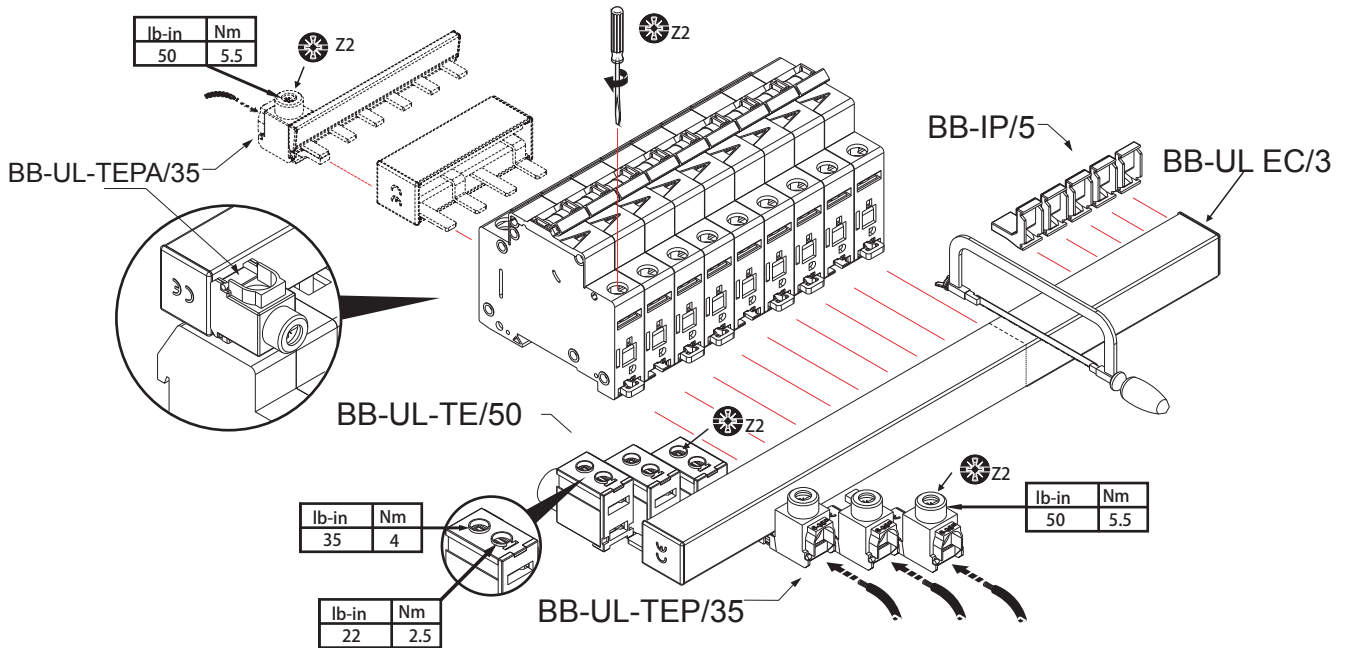


| Z-BB/UL | |
|------------------------------------|---|
| General | |
| Heat deflection temperature | 125°C - UL94 V0 |
| Standards | DIN EN 60947-2, VDE 0660 - 101 = IEC 60947-2, IEC 60999:2000, UL508, UL486A, CSA C22.2 |
| Climate stability | according to DIN EN 60068 |
| Insulation coordination | Overvoltage category III / Degree of pollution 2 |
| Electrical | |
| Impulse voltage strenght | ≥9.5 kV |
| Min. air distance | >9.5 mm |
| Min. creeping distance | >12.7 mm |
| Max. operating voltage | |
| 1-pole | 1,000 V AC/DC |
| 2-, 3-pole | IEC/EN 690 V AC/DC 600 V AC/DC UL Fuse 480 V AC/DC UL-SP |
| Terminals | 1, 000 V AC/DC |
| Max. current I _g /Phase | |
| 18 mm ² | 80 A (feed in the center: 160 A) |
| 25 mm ² | 100 A (feed in the center: 200 A) |
| Protection class | IP20 |
| Short circuit rating | 10kA 3 cycles@480V / 100 kA Fuse Class J 175A@18mm ² - 200A@25mm ² |
| Dielectric strenght | >32 kV/mm |

Mounting example of busbar UL508, BB/UL for FAZ



| | | |
|---|--------------------------|--------------------------------|
| BB-UL-TE/50 | | |
|  | UL508 | EN/IEC 60947-2 |
| U_e | 480 V AC | 240/690V AC |
| f | 50/60 Hz | 50/60 Hz |
| I_e | 115 A @ 40° C | 160 A @ 30° C |
|  | #1-14 AWG 60/75° C Cu | 1.5 – 50 mm ² Cu |
|  | 0.56 in | 14 mm |

| | | |
|---|------------------|------------------|
| BB-UL | | |
|  | UL508 | EN/IEC 60947-2 |
| U_e | 480 V AC | 690V AC |
| f | 50/60 Hz | |
| I_{pk} | 10kA | 15kA |
| I_e | 18mm \boxtimes | 25mm \boxtimes |
| Infeed at the start of the busbar | 80A@40° C | 100A@30° C |
| Infeed at the center of the busbar | 160A@40° C | 200A@30° C |

| | | |
|---|--------------------------|--------------------------------|
| BB-UL-TEP/35 / BB-UL-TEPA/35 | | |
|  | UL508 | EN/IEC 60947-2 |
| U_e | 480 V AC | 240/690V AC |
| f | 50/60 Hz | 50/60 Hz |
| I_e | 115 A@40° C | 80 A@30° C |
|  | #2-14 AWG 60/75° C Cu | 2.5 – 35 mm ² Cu |
|  | 0.56 in | 14 mm |

*-UL508 SHORT CIRCUIT RATINGS

-SUITABLE FOR USE ON A CIRCUIT CAPABLE OF DELIVERING NOT MORE THAN 10,000 RMS SYMMETRICAL AMPERES, 600 VOLTS MAXIMUM.

-SUITABLE FOR USE ON A CIRCUIT CAPABLE OF DELIVERING NOT MORE THAN 100,000 RMS SYMMETRICAL AMPERES, 600 VOLTS MAXIMUM WHEN PROTECTED BY A CLASS J FUSE RATED 175A.

Busbar UL489 Z-SV/UL16

wa_sg03511



- For MCB FAZ-NA/RT/DU
- 16 mm²
- Pin busbar
- Accessories available:
 - Terminals
 - Busbar tag shrouds
- Several length

| Description | Step Distance (mm) | Cu-factor | Type Designation | Article No. | Units per package |
|-------------|--------------------|-----------|------------------|-------------|-------------------|
|-------------|--------------------|-----------|------------------|-------------|-------------------|

Busbar UL489 16mm² (Pin), Z-SV/UL16

for FAZ-NA/RT/DU, not sliceable!!

- Delivered with end caps

wa_sg03511



16 mm², Rated Current 80 A

| | | | | | |
|---------------|------|-------|----------------------|--------|----|
| 1-phase, 6MU | 17.6 | 0.035 | Z-SV/UL-16/1P-1MU/6 | 104892 | 10 |
| 1-phase, 12MU | 17.6 | 0.07 | Z-SV/UL-16/1P-1MU/12 | 104893 | 10 |
| 1-phase, 18MU | 17.6 | 0.105 | Z-SV/UL-16/1P-1MU/18 | 104894 | 10 |
| 2-phase, 6MU | 17.6 | 0.07 | Z-SV/UL-16/2P-2MU/6 | 104895 | 10 |
| 2-phase, 12MU | 17.6 | 0.14 | Z-SV/UL-16/2P-2MU/12 | 104896 | 10 |
| 2-phase, 18MU | 17.6 | 0.21 | Z-SV/UL-16/2P-2MU/18 | 104897 | 10 |
| 3-phase, 6MU | 17.6 | 0.14 | Z-SV/UL-16/3P-3MU/6 | 104898 | 10 |
| 3-phase, 12MU | 17.6 | 0.221 | Z-SV/UL-16/3P-3MU/12 | 104899 | 10 |
| 3-phase, 18MU | 17.6 | 0.332 | Z-SV/UL-16/3P-3MU/18 | 104900 | 10 |

| Description | Cu-factor | Type Designation | Article No. | Units per package |
|-------------|-----------|------------------|-------------|-------------------|
|-------------|-----------|------------------|-------------|-------------------|

Accessories

Terminals Z-TEUL35

SG07506



| | | | | |
|-------------------------|-------|------------|--------|---|
| 2.5 - 35mm ² | 0.035 | Z-EK/35/UL | 104901 | 3 |
| 1.5 - 50mm ² | 0.038 | Z-EB/50/UL | 104902 | 3 |





Busbar Tag Shrouds Z-FPUL

SG07706



| | | | | |
|------------|---|----------|--------|----|
| for 3 pins | - | ZV-BS-UL | 104904 | 10 |
|------------|---|----------|--------|----|

Description of the Busbar UL489, Z-SV/UL-16 for FAZ-NA/RT/DU

| Article No. |  |  |  |  |
|-------------|---|---|---|--|
| 104892 | Z-SV/UL-16/1P-1TE/6 | 6 | - | - |
| 104893 | Z-SV/UL-16/1P-1TE/12 | 12 | - | - |
| 104894 | Z-SV/UL-16/1P-1TE/18 | 18 | - | - |
| 104895 | Z-SV/UL-16/2P-2TE/6 | - | 3 | - |
| 104896 | Z-SV/UL-16/2P-2TE/12 | - | 6 | - |
| 104897 | Z-SV/UL-16/2P-2TE/18 | - | 9 | - |
| 104898 | Z-SV/UL-16/3P-3TE/6 | - | - | 2 |
| 104899 | Z-SV/UL-16/3P-3TE/12 | - | - | 4 |
| 104900 | Z-SV/UL-16/3P-3TE/18 | - | - | 6 |
| 104901 | Z-EK/35/UL | - | - | - |
| 104902 | Z-EB/50/UL | - | - | - |
| 104904 | ZV-BS-UL | - | - | - |

Technical Data

| Z-SV/UL16 | |
|------------------------------------|---|
| General | |
| Heat deflection temperature | 125°C - UL94 V0 |
| Standards | |
| Busbar | UL489, DIN EN 60947-1, VDE 0660 part 100 = IEC 60947-1:2004, IEC 60947-2:2003 |
| Terminal | IEC 60999:2000, UL489, UL486A, CSA C22.2 |
| Climate stability | according to DIN EN 60068 |
| Insulation coordination | Overvoltage category III / Degree of pollution 2 |
| Electrical | |
| Impulse voltage strenght | ≥9.5 kV (1kV / mmLS) |
| Min. air distance | >9.5mm/25.4mm (intern/external) |
| Min. creeping distance | >12.7mm/50.8mm (intern/external) |
| Max. operating voltage | |
| 1-, 3-phase | 690 V IEC 480Y/277V & 240V AC |
| Terminals | 1,000 V AC/DC |
| Max. current I _g /Phase | 80 A |
| Protection class | IP20 |
| Short circuit rating | 15kA with NH3 355 A gL 500V JM / 7.5kA 3 cycles @ 600V |
| Dielectric strenght | >30 kV/mm |

Mounting example of busbar UL489, Z-SV/UL-16 for FAZ-NA, -RT, -DU



ATTENTION: Maximum of 3 commoning links allowed. Any combination of same pole configuration.

ATTENTION: 3 liaisons communes autorisées au maximum. Toute combinaison de configurations de polarité identiques.

ACHTUNG: Maximal 3 Schienenblöcke. Beliebige Kombination gleichpoliger Konfigurationen.

ATTENZIONE: Sono consentiti al massimo 3 pettini di collegamento in qualsiasi combinazione della stessa configurazione di poli.

ATENCIÓN: Se permite un máximo de 3 enlaces comunes.

Cualquier combinación del mismo tipo de configuración de polo




ATTENTION: Do not cut.


ATTENTION: Ne pas couper.




ACHTUNG: Nicht durchschneiden.

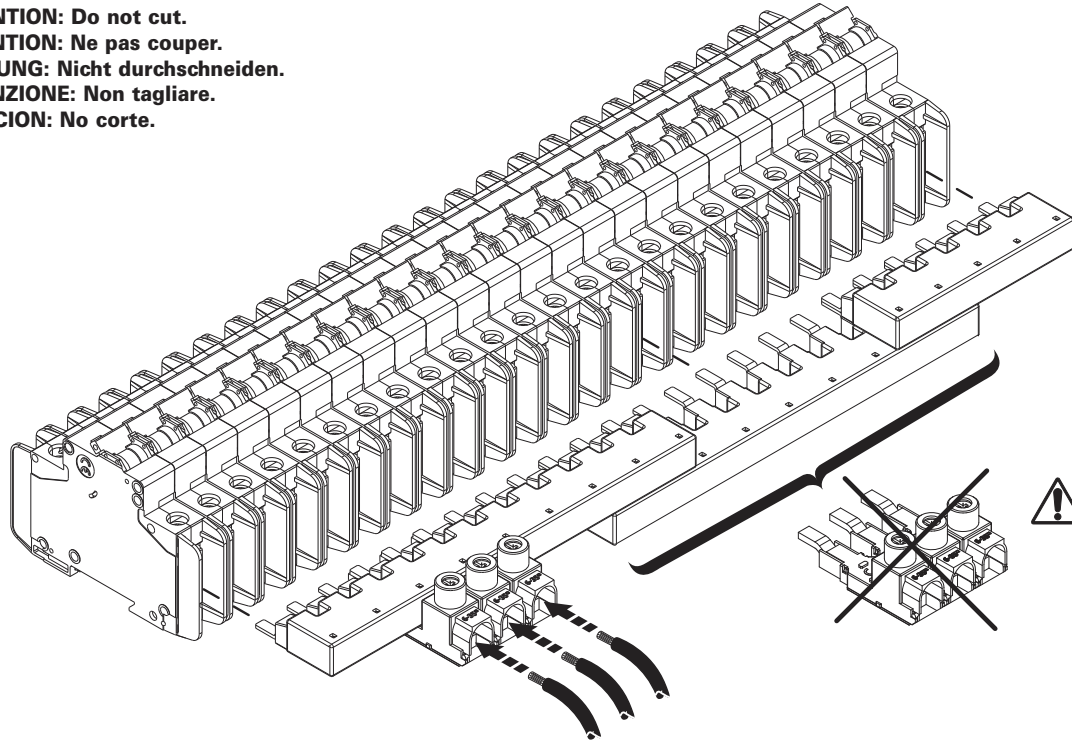


ATTENZIONE: Non tagliare.

ATENCIÓN: No corte.




| | | | |
|---|-------------|---------|--------------------|
|  | UL489 | | EN/IEC 00947-2 |
| U_e | 480 V AC | 96 V DC | 240/415 V AC |
| f | 50/60 Hz | ----- | 50/60 Hz |
| U_{imp} | ----- | | 9.5 kV |
| I_e | 80 A @ 40°C | | 80 A @ 30°C |
| Cross section | ----- | | 16 mm ² |

| | | | |
|---|------------|------------------------|----------------|
|  | UL489 | | EN/IEC 00947-2 |
| U_e | 480 V AC | 96 V DC | 240/415 V AC |
| f | 50/60 Hz | ----- | 50/60 Hz |
| U_{imp} | ----- | | 9.5 kV |
|  | #1-14 AWG | 1.5-50 mm ² | |
| | 60/75°C Cu | Cu | |
|  | 0.56 in | 14 mm | |


| | | | |
|--|-------------|------------------------|----------------|
|  | UL489 | | EN/IEC 00947-2 |
| U_e | 480 V AC | 96 V DC | 240/415 V AC |
| f | 50/60 Hz | ----- | 50/60 Hz |
| U_{imp} | ----- | | 9.5 kV |
| I_e | 80 A @ 40°C | | 80 A @ 30°C |
|  | #2-14 AWG | 2.5-35 mm ² | |
| | 60/75°C Cu | Cu | |
|  | 0.56 in | 14 mm | |

Mounting example of busbar UL489, Z-SV/UL-16 for FAZ-NA, -RT, -DU

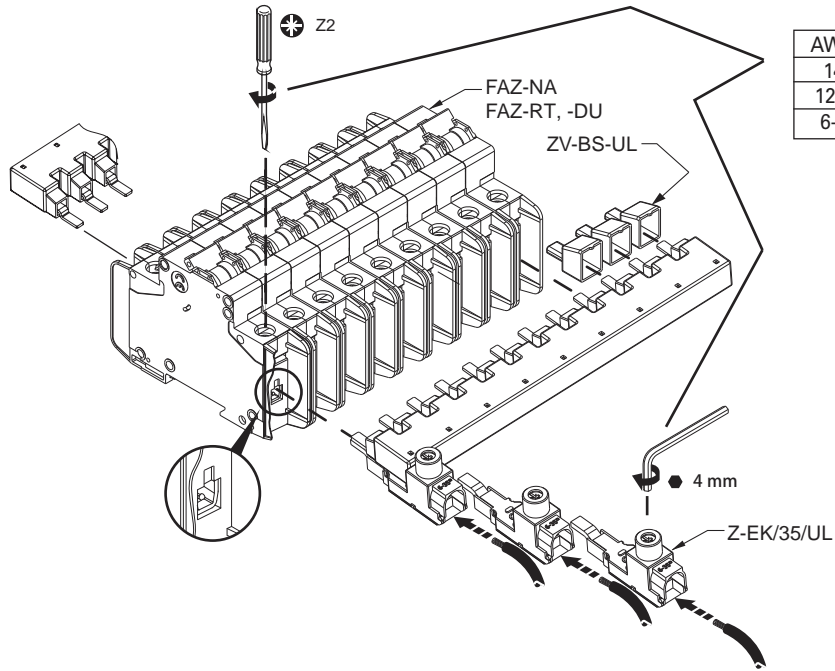


| AWG | lb-in | Nm |
|------|-------|-----|
| 14 | 21 | 2.3 |
| 12-8 | 25 | 2.8 |
| 6-2 | 36 | 4.0 |

IEC/EN 60947-2 Icc

|  | Ue VAC | Z-SV/UL Icc Amps |
|--|-------------|---------------------|
| | 240/ 415 | 15000 |

UL SCCR

|  | FAZ-NA FAZ-RT/-DU In Amps | Ue VAC | Z-SV/UL SCCR RMS Sym Amps |
|---|------------------------------------|--------------|---------------------------------|
| | 0.5-32 | 480Y/ 277 | 10000 |
| | 35-40 | 240 | 10000 |

Accessories for RCDs, MCBs, Combined RCD/MCB Devices

SG60811







- Auxiliary Switch
- RCD-Tripping Module
- Shunt Trip Release
- Undervoltage Release
- Remote Control and Automatic Switching Device
- Switching Interlocks
- Terminal Covers

SG60811



Auxiliary Switch Z-HK, Z-AHK, Z-HD; Tripping Signal Switch Z-NHK

Design: for screwing

| | For Protective Device / Function | Type Designation | Article No. | Units per package |
|--|----------------------------------|------------------|-------------|-------------------|
| SG34812  | RCCB / 1NO+1NC | Z-HK | 248432 | 4/120 |
| SG60911  | MCB, RCBO, RCCB / 1NO+1NC | Z-AHK | 248433 | 4/120 |
| SG61011  | MCB, RCBO, RCCB / 2CO | Z-NHK | 248434 | 4/120 |
| SG34412  | RCCB / 1CO+1NC | Z-HD | 265620 | 1 |

Specifications | Auxiliary Switch Z-HK, Z-AHK; Tripping Signal Switch Z-NHK


Description

- Design according to IEC/EN 60947-5-1, IEC/EN 62019
- Can be mounted subsequently (screws) onto FRCmM, FRCdM
- The specified minimum voltages are per contact.
Take into account particularly in case of series connection!
- **Z-AHK, Z-NHK:** Contact function with relative movement (self-cleaning contacts)
- Contact material and design particularly suitable for extra low voltage
- **Z-NHK:** The function of one of the two change-over contacts can be switched from "auxiliary switch" to "tripping signal switch"
- Tripping signal contact transmits message of electric tripping, not mechanical switch-off
- Test key for contact function "electrical tripping"


Technical Data

| | Z-HK | Z-AHK | Z-NHK |
|---|--|-------------------------|-------------------------|
| Electrical | | | |
| Contact function | 1NO + 1NC | 1NO + 1NC | 2CO |
| Rated voltage | 250 V | 250 V | 250 V |
| Frequency | 50/60 Hz | 50/60 Hz | 50/60 Hz |
| Rated current | 8 A | 4 A | 4 A |
| Rated thermal current | I_{th} 8 A | 4 A | 4 A |
| Utilisation category AC13 | | | |
| Rated operational current | I_e 6A/250V AC 2A/440V AC | 3A/250V AC - | 3A/250V AC - |
| Utilisation category AC15 | | | |
| Rated operational current | I_e - | 2A/250V AC | 2A/250V AC |
| Utilisation category DC12 | | | |
| Rated operational current | I_e - | 0.5A/110V DC | 0.5A/110V DC |
| Utilisation category DC13 | | | |
| Rated operational current | I_e 0.5A/230V DC 2A/110V DC 4A/60V DC | - - - | - - - |
| Rated insulation voltage | U_i 250 V AC | 250 V AC | 250 V AC |
| Minimum operational voltage per contact | U_{min} 24 V AC/DC | 5 V DC | 5 V DC |
| Minimum operational current | I_{min} 50 mA AC/DC | 10 mA DC | 10 mA DC |
| Rated peak withstand voltage | U_{imp} (1.2/50 μ) 2.5 kV | 2.5 kV | 2.5 kV |
| Conditional short circuit current | I_k | | |
| with back-up fuse 6A or FAZ-B4-HS | 1 kA | 1 kA | 1 kA |
| Max. back-up fuse, overload and short circuit | 6 A gL / FAZ-4/..B-HS | 4 A gL / FAZ-4/..B-HS | 4 A gL / FAZ-4/..B-HS |
| Mechanical | | | |
| Can be mounted from the left onto | RCCB | MCB, RCBO | MCB, RCBO |
| Can be mounted from the right onto | - | - | RCCB |
| Tripping indicator "electrical tripping" | - | - | blue/white |
| Frame size | 45 mm | 45 mm | 45 mm |
| Device height | 80 mm | 80 mm | 80 mm |
| Device width | 8.8 mm (0.5MU) | 8.8 mm (0.5MU) | 8.8 mm (0.5MU) |
| Mounting | onto switching device | onto switching device | onto switching device |
| Degree of protection, built-in | IP40 | IP40 | IP40 |
| Terminal protection | finger and hand touch safe according to BGV A3, ÖVE-EN 6 | | |
| Terminals | lift terminals | lift terminals | lift terminals |
| Terminal capacity | 0.5-2.5 mm ² | 0.5-2.5 mm ² | 0.5-2.5 mm ² |
| Terminal screws | M3 (Pozidrive Z0) | M3 (Pozidrive Z0) | M3 (Pozidrive Z0) |
| Fastening torque of terminal screws | max. 0.8-1.0 Nm | max.0.8-1.0 Nm | max. 0.8-1.0 Nm |


Connection diagram



Dimensions (mm)

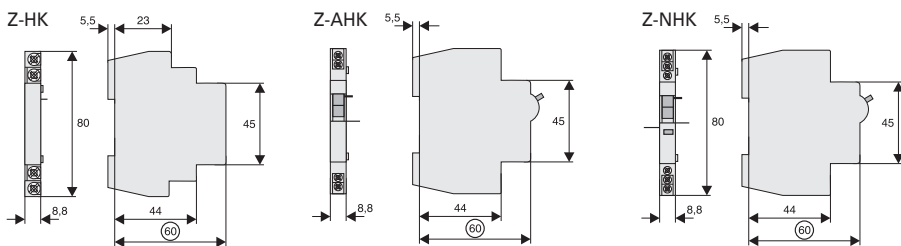


Example: Z-HK+RCCB




1NO+1NC 24V 50mA min.

Example: Z-AHK+MCB



1NO+1NC 5V 10mA min.


Example: Z-NHK+MCB RCCB+Z-NHK

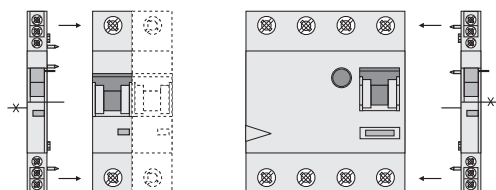

2CO 5V 10mA min.

Specifications | Auxiliary Switch Z-HD


Function Auxiliary Switch Z-HD

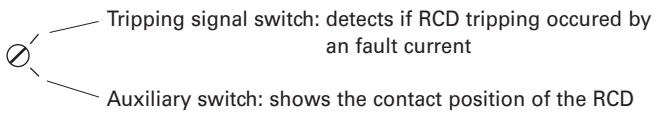


Technical Data

| Z-HD | |
|--|---------------------------|
| Electrical | |
| Subsequent installation to the left onto | FRCmM-125A |
| Contacts | 1CO + 1NC |
| Load rating | |
| AC11 | 6 A / 230 V AC |
| DC11 | 1 A / 230 V DC |
| Mechanical | |
| Terminal capacity | up to 2.5 mm ² |

Connection diagram






Dimensions (mm)



Auxiliary Switch ZP-AHK, ZP-IHK, ZP-WHK; Tripping Signal Switch ZP-NHK

Design: for snapping

| | For Protective Device / Function | Type Designation | Article No. | Units per package |
|---|----------------------------------|------------------|-------------|-------------------|
|  <p>SG60811</p> | MCB, RCBO / 1NO+1NC | ZP-IHK | 286052 | 4/120 |
|  <p>SG34612</p> | MCB, RCBO / 1CO | ZP-WHK | 286053 | 4/120 |
|  <p>SG34512</p> | MCB, RCBO / 2CO | ZP-NHK | 248437 | 4/120 |

Specifications | Auxiliary Switch ZP-IHK, ZP-WHK; Tripping Signal Switch ZP-NHK


Description

- Design according to IEC/EN 62019
- No screws required. Can be snapped onto FAZ and FRBmM-1N subsequently
- **ZP-IHK, ZP-WHK:** Can be snapped on additionally 1 time onto itself
- The specified minimum voltages are per contact. Take into account particularly in case of series connection!
- Contact material and design particularly suitable for extra low voltage.
- Contact function with relative movement (self-cleaning contacts)e)
- **ZP-NHK:** The function of one of the two change-over contacts can be switched from "auxiliary switch" to "tripping signal switch"
- Tripping signal contact transmits message of electric tripping, not mechanical switch-off
- **ZP-NHK:** The "Service button" is used to check whether or not the auxiliary switch is correctly wired in the tripping-signal-switch position. Activating the "service button" will mechanically simulate an electrical switch-off, so the mechanism for the electrical switchoff will disengage and can be checked. The main switchgear (MCB or combined MCB/RCD) connected to the ZP-NHK auxiliary switch does not need to trip as well during an inspection through the service button.

Technical Data

| | ZP-IHK | ZP-WHK | ZP-NHK |
|---|--|-------------------------|-------------------------|
| Electrical | | | |
| Contact function | 1NO + 1NC | 1CO | 2CO |
| Rated voltage | 250 V | 250 V | 250 V |
| Frequency | 50/60 Hz | 50/60 Hz | 50/60 Hz |
| Rated current | 6 A | 6 A | 4 A |
| Rated thermal current | I_{th} 6 A | 6 A | 4 A |
| Utilisation category AC13 | | | |
| Rated operational current | I_e 3A/250V AC | 3A/250V AC | 3A/250V AC |
| Utilisation category AC15 | | | |
| Rated operational current | I_e 2A/250V AC | 2A/250V AC | 2A/250V AC |
| Utilisation category DC12 | | | |
| Rated operational current | I_e 0.5A/110V DC | 0.5A/110V DC | 0.5A/110V DC |
| Rated insulation voltage | U_I 250 V AC | 250 V AC | 250 V AC |
| Minimum operational voltage per contact | U_{min} 5 V DC | 5 V DC | 5 V DC |
| Minimum operational current | I_{min} 10 mA DC | 10 mA DC | 10 mA DC |
| Rated peak withstand voltage | U_{imp} (1.2/50 μ) 2.5 kV | 2.5 kV | 2.5 kV |
| Conditional short circuit current | | | |
| with back-up fuse 6A or PLSM-B4-HS | I_k 1 kA | 1 kA | 1 kA |
| Max. back-up fuse, overload and short circuit | 6 A gL / FAZ-B4-HS | 6 A gL / FAZ-B4-HS | 6 A gL / FAZ-B4-HS |
| Mechanical | | | |
| Can be mounted from the left onto | MCB, RCBO | MCB, RCBO | MCB, RCBO |
| Accessories: | ZP-ASA | ZP-ASA | ZP-ASA |
| Tripping indicator "electrical tripping" | – | – | blue/white |
| Frame size | 45 mm | 45 mm | 45 mm |
| Device height | 80 mm | 80 mm | 80 mm |
| Device width | 8.8 mm (0.5MU) | 8.8 mm (0.5MU) | 8.8 mm (0.5MU) |
| Degree of protection, built-in | IP40 | IP40 | IP40 |
| Terminal protection | finger and hand touch safe according to BGV A3, ÖVE-EN 6 | | |
| Terminals | lift terminals | lift terminals | lift terminals |
| Terminal capacity | 0.5-2.5 mm ² | 0.5-2.5 mm ² | 0.5-2.5 mm ² |
| Terminal screws | M4 (Pozidrive Z2) | M4 (Pozidrive Z2) | M3 (Pozidrive Z0) |
| Fastening torque of terminal screws | max. 1.2 Nm | max. 1.2 Nm | max. 0.8-1.0 Nm |


Connection diagram




Dimensions (mm)

ZP-IHK, ZP-WHK


ZP-NHK

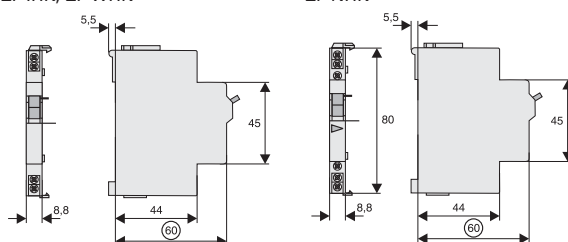

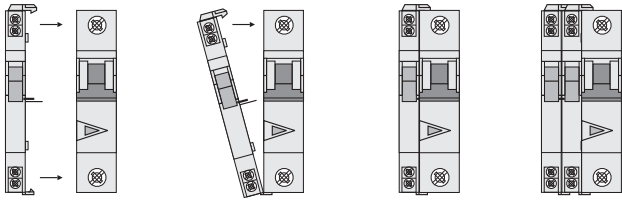

Example: ZP-IHK/(ZP-WHK)+MCB

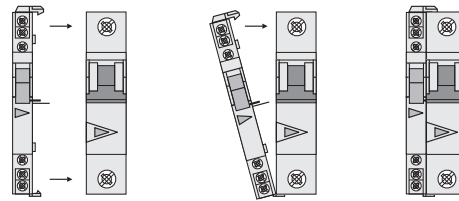

Example: ZP-NHK+MCB



RCCB-Tripping Module Z-.AM

| | For Protective Device | Type Designation | Article No. | Units per package |
|--|-----------------------|------------------|-------------|-------------------|
|  <p>SG16011</p> | RCCB | Z-FAM | 248293 | 1/60 |
|  <p>SG16211</p> | RCBO | Z-KAM | 248294 | 1/60 |

Specifications | RCCB Tripping Module Z-FAM, Z-KAM


Description

- For remote switch-off of RCCBs, standard and electronic combined RCD/MCB devices
- Remote switch-off by one or several parallel potential-free contacts, e.g. pushbutton max. rated current 3 A at 250 V, take into account maximum pushbutton voltage
- Remote tripping test by means of remote testing module Z-FW
- Can be mounted subsequently, to be wired according to connection diagram with the respective terminals of the RCCB
- No undesired voltage rise in the consumer system during remote switch-off thanks to integrated breaker contact K1-K2


Technical Data

| | Z-FAM | Z-KAM |
|--------------------------------|---|---------------------------|
| Electrical | | |
| Rated voltage | 230(400) V AC | 230(400) V AC |
| Frequency | 50-60 Hz | 50-60 Hz |
| Rated tripping current | $I_{\Delta n}$ 0.01 - 0.3 A | 0.01 - 0.3 A |
| Function | 1NO | 1NO |
| Mechanical | | |
| Tripping module for | RCCB | RCBO |
| Frame size | 45 mm | 45 mm |
| Device height | 80 mm | 80 mm |
| Device width | 8.8 mm (0.5MU) | 8.8 mm (0.5MU) |
| Degree of protection, built-in | IP40 | IP40 |
| Terminal capacity | 1 - 2x2.5 mm ² | 1 - 2x2.5 mm ² |
| Terminal protection | finger and hand touch safe, according to BGV A3, ÖVE-EN 6 | |


Connection diagram




Dimensions (mm)

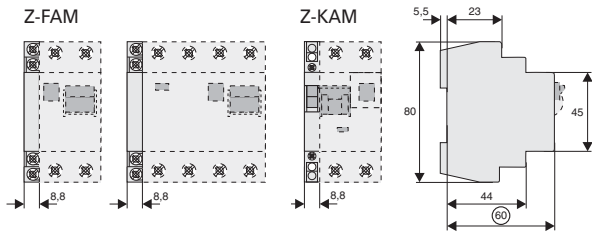


Connection examples Lay lines to the switching devices with double insulation **and** overload protection, e.g. 4A gL or CLS6-4..-HS




Connection diagram:
RCCB-2p, RCCB feed above



Connection diagram:
RCCB-4p, RCCB feed above



Connection diagram:
RCBO-2p, RCBO feed below



Connection diagram:
RCCB-4p, RCCB feed below

Shunt Trip Release Z-ASA, ZP-ASA

| Operational voltage range (V-) | Type Designation | Article No. | Units per package |
|--------------------------------|------------------|-------------|-------------------|
|--------------------------------|------------------|-------------|-------------------|

SG00712



To be glued on

| | | | |
|---------|-----------|--------|------|
| 12-110 | Z-ASA/24 | 248286 | 1/60 |
| 110-415 | Z-ASA/230 | 248287 | 1/60 |

SG00212



To be snapped on

| | | | |
|---------|------------|--------|------|
| 12-110 | ZP-ASA/24 | 248438 | 1/60 |
| 110-415 | ZP-ASA/230 | 248439 | 1/60 |

Specifications | Shunt Trip Release Z-ASA, ZP-ASA


Description

- Remote release for subsequent mounting onto FAZ, FRBmM-1N, Z-MS
- Module width 1MU
- Additional installation of standard auxiliary switch is possible
- Position indicator red - green
- Type ZP-ASA for snap-on mounting

Technical Data


| | Z-ASA24 | Z-ASA230 | ZP-ASA24 | ZP-ASA230 |
|---|-------------------------|-------------------------|------------------------------|------------------------------|
| Electrical | | | | |
| Minimum pulse duration | 15 ms | 10 ms | 15 ms | 10 ms |
| Internal resistance | 2.2 Ω | 215 Ω | 2.2 Ω | 215 Ω |
| Duty cycle | 100% | 100% | 100% | 100% |
| Tripping time | < 20 ms | < 20 ms | < 20 ms | < 20 ms |
| Rated peak withstand voltage (1.2/50μs) | 2.5 kV | 2.5 kV | 2.5 kV | 2.5 kV |
| Endurance | > 4000 operating cycles | > 4000 operating cycles | > 4000 operating cycles | > 4000 operating cycles |
| AC voltage range | | | | |
| Operating limit | 10 V | 60 V | 10 V | 60 V |
| Operational voltage range | 12-110 V | 110-415 V | 12-110 V | 110-415 V |
| Maximum current consumption during switch-on | 15 A | | 2.1 A | 15 A |
| Current flow time at max. current consumption | 10 ms | | 10 ms | 10 ms |
| DC voltage range | | | | |
| Operating limit | 9 V | 72 V | 9 V | 72 V |
| Operational voltage range | 10-60 V | 110-220 V | 10-60 V | 110-220 V |
| Maximum current consumption during switch-on | 21 A | | 1 A | 21 A |
| Current flow time at max. current consumption | 2 ms | | 2 ms | 2 ms |
| Mechanical | | | | |
| Frame size | 45 mm | 45 mm | 45 mm | 45 mm |
| Device height | 80 mm | 80 mm | 80 mm | 80 mm |
| Device width | 17.5 mm (1MU) | 17.5 mm (1MU) | 17.5 mm (1MU) | 17.5 mm (1MU) |
| Mounting | bonding | bonding | to snap on | to snap on |
| Degree of protection, built-in | IP40 | IP40 | IP40 | IP40 |
| Terminals above/below | open mouthed/lift | open mouthed/lift | open mouthed/lift with guide | open mouthed/lift with guide |
| Klemmquerschnitt | 1-25 mm ² | 1-25 mm ² | 1-25 mm ² | 1-25 mm ² |
| Fastening torque of terminal screws | max. 2.4 Nm | max. 2.4 Nm | max. 2.4 Nm | max. 2.4 Nm |

Connection diagram




Dimensions (mm)


Z-ASA




ZP-ASA




Connection Example 230 V




Connection Example 24 V



Example: Z-ASA + MCB

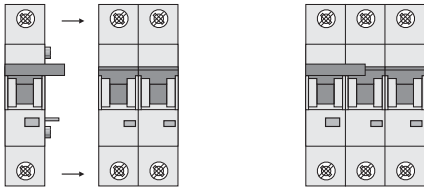

Example: ZP-ASA + MCB

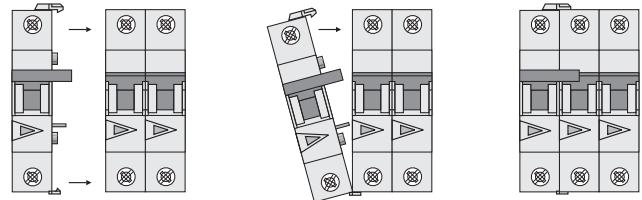

Undervoltage Release Z-USA, Z-USD

SG78811



| Operational voltage range (V-) / Function | Type Designation | Article No. | Units per package |
|---|------------------|-------------|-------------------|
| To be screwed on | | | |
| 115 / undelayed | Z-USA/115 | 248288 | 1/60 |
| 230 / undelayed | Z-USA/230 | 248289 | 1/60 |
| 400 / undelayed | Z-USA/400 | 248290 | 1/60 |
| 115 / delayed 0.4s | Z-USD/115 | 248292 | 1/60 |
| 230 / delayed 0.4s | Z-USD/230 | 248291 | 1/60 |

Specifications | Undervoltage Release Z-USA, Z-USD


Description

- Tripping:
Instantaneous Z-USA
Delayed Z-USD, typ. 0,4 s
- Voltage control indicator blue/white
- Service key for zero voltage switch-on for testing purposes
- Can be used with FAZ


Technical Data

| | Z-US./115 | Z-US./230 | Z-US./400 |
|--------------------------------|---|---------------------------|---------------------------|
| Electrical | | | |
| Rated voltage | U_n 115 V AC | 230 V AC | 400 V AC |
| Frequency | 50-60 Hz | 50-60 Hz | 50-60 Hz |
| Making threshold | 80% of U_n | 80% of U_n | 80% of U_n |
| Tripping threshold | 50% of U_n | 50% of U_n | 50% of U_n |
| Mechanical | | | |
| Frame size | 45 mm | 45 mm | 45 mm |
| Device height | 80 mm | 80 mm | 80 mm |
| Device width | 17.5 mm (1MU) | 17.5 mm (1MU) | 17.5 mm (1MU) |
| Mounting | quick fastening on DIN rail IEC/EN 60715 | | |
| Degree of protection, built-in | IP40 | IP40 | IP40 |
| Terminals | open mouthed/lift | open mouthed/lift | open mouthed/lift |
| Terminal capacity | 1 - 2x2.5 mm ² | 1 - 2x2.5 mm ² | 1 - 2x2.5 mm ² |
| Terminal protection | finger and hand touch safe, according to BGV A3, ÖVE-EN 6 | | |


Connection diagram




Dimensions (mm)



Connection Example Release




Connection Examples 400V and 230V

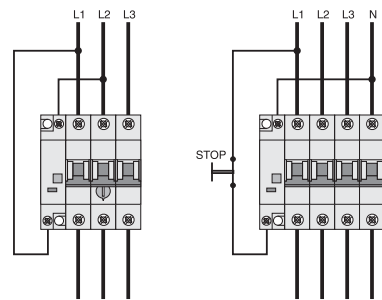

Connection example
Z-USA/400 + Z-MS

Connection example
Z-USA/230 + MCB

Switching interlocks IS/SPE-1TE, Z-IS/SPE-1TE

| | Description | Type Designation | Article No. | Units per package |
|---|--|------------------|-------------|-------------------|
|  | Switching interlock without lock for Isolators, RCDs, combined RCD/MCBs, ... | IS/SPE-1TE | 101911 | 5/30 |
| | Switching interlock without lock for MCBs and Circuit Breaker ZP-A | Z-IS/SPE-1TE | 274418 | 5/30 |

Specifications | Switching interlocks IS/SPE-1TE, Z-IS/SPE-1TE


Description

- Without lock
- Type IS/SPE-1TE:**
 - for Isolators, RCDs, combined RCD/MCBs, ...
- Type Z-IS/SPE-1TE:**
 - for MCB



Accessories for Add-on Residual Current Protection Unit FBHmV

Shunt Trip Release Kit Z-BHASA

| | Operational voltage range V~ | Type Designation | Article No. | Units per package |
|---|------------------------------|------------------|-------------|-------------------|
|  | 110-415 | Z-BHASA/230 | 248445 | 8 |
| | 12-60 | Z-BHASA/24 | 248444 | 8 |

Specifications | Shunt Trip Release Kit Z-BHASA

Description


- Can be mounted subsequently
- Contact position indicator red - green
- Wide operational voltage range
- Sufficient power of extra low voltage source must be ensured
FBHmV-ASA/24: min. 90 VA
- Screws for mounting included FBHmV => BHASA => AZ

Accessories for Add-on Residual Current Protection Unit FBHmV


Technical Data

| | Z-BHASA/24 | Z-BHASA/230 |
|---|--|-------------------------|
| Electrical | | |
| Minimum pulse duration | 15 ms | 10 ms |
| Internal resistance | 2 W | 130 W |
| Duty | 100% | 100% |
| Tripping time | < 20 ms | < 20 ms |
| Peak withstand voltage (1.2/50µs) | 2 kV | 2 kV |
| Endurance | >4,000 operating cycles | >4,000 operating cycles |
| AC voltage range: | | |
| Responding limit | 8 V | 70 V |
| Operational voltage range | 12-60 V | 110-415 V |
| Maximum current consumption during switch-on | 14 A | 3.4 A |
| Current flow time at max. current consumption | 4.0 ms | 4.5 ms |
| DC voltage range: | | |
| Responding limit | 11 V | 90 V |
| Operational voltage range | 12-60 V | 110-230 V |
| Maximum current consumption during switch-on | 23.5 A typ. | 1.7 A typ. |
| Current flow time at max. current consumption | 2 ms | 4 ms |
| Mechanical | | |
| Frame size | 45 mm | 45 mm |
| Device height | 90 mm | 90 mm |
| Device width | 27 mm | 27 mm |
| Mounting | quick fastening on DIN rail IEC/EN 60715 | |
| Degree of protection, built-in | IP40 | IP40 |
| Upper and lower terminal screws | lift terminals | lift terminals |
| Terminal capacity | 2.5-30 mm ² | 2.5-30 mm ² |
| Fastening torque of terminal screws | 4 Nm | 4 Nm |

Connection diagram



Dimensions (mm)

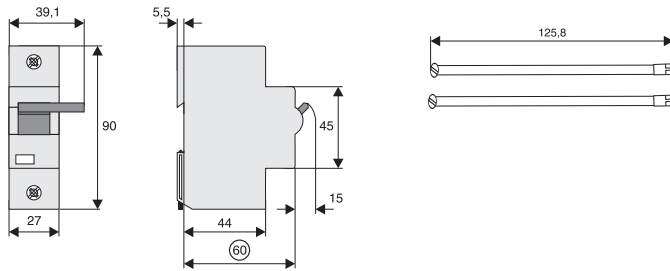

Accessories for Miniature Circuit Breakers AZ

Shunt Trip Release Z-LHASA

| | Operational voltage range V~ | Type Designation | Article No. | Units per package |
|--|------------------------------|------------------|-------------|-------------------|
| | 110-415 | Z-LHASA/230 | 248442 | 8 |
| | 12-60 | Z-LHASA/24 | 248441 | 8 |

Specifications | Shunt Trip Release Z-LHASA


Description

- Can be mounted subsequently
- Contact position indicator red - green
- Wide operational voltage range
- Sufficient power of extra low voltage source must be ensured
Z-LHASA/24: min. 90 VA


Technical Data

| | Z-LHASA/24 | Z-LHASA/230 |
|---|--|-------------------------|
| Electrical | | |
| Minimum pulse duration | 15 ms | 10 ms |
| Internal resistance | 2 W | 130 W |
| Duty | 100% | 100% |
| Tripping time | < 20 ms | < 20 ms |
| Peak withstand voltage (1.2/50µs) | 2 kV | 2 kV |
| Endurance | >4,000 operating cycles | >4,000 operating cycles |
| AC voltage range: | | |
| Responding limit | 8 V | 70 V |
| Operational voltage range | 12-60 V | 110-415 V |
| Maximum current consumption during switch-on | 14 A | 3.4 A |
| Current flow time at max. current consumption | 4.0 ms | 4.5 ms |
| DC voltage range: | | |
| Responding limit | 11 V | 90 V |
| Operational voltage range | 12-60 V | 110-230 V |
| Maximum current consumption during switch-on | 23.5 A typ. | 1.7 A typ. |
| Current flow time at max. current consumption | 2 ms | 4 ms |
| Mechanical | | |
| Frame size | 45 mm | 45 mm |
| Device height | 90 mm | 90 mm |
| Device width | 27 mm | 27 mm |
| Mounting | quick fastening on DIN rail IEC/EN 60715 | |
| Degree of protection, built-in | IP40 | IP40 |
| Upper and lower terminal screws | lift terminals | lift terminals |
| Terminal capacity | 2.5-30 mm ² | 2.5-30 mm ² |
| Fastening torque of terminal screws | 4 Nm | 4 Nm |

Connection diagram



Dimensions (mm)



Accessories for Miniature Circuit Breakers AZ

Auxiliary Switch Z-LHK

| Function | Type Designation | Article No. | Units per package |
|----------|------------------|-------------|-------------------|
| 1NO+1NC | Z-LHK | 248440 | 10/100 |

SG16111



Specifications | Auxiliary Switch Z-LHK

Description

- Auxiliary switch according to IEC 947-5-1
- Can be mounted subsequently


Technical Data

| | | Z-LHK |
|---|-----------------------|--|
| Electrical | | |
| Contact function | | 1NO + 1NC |
| Rated voltage | | 250 V |
| Frequency | | 50/60 Hz |
| Rated current | | 8 A |
| Rated thermal current | I_{th} | 8 A |
| Utilisation category AC13 | | |
| Rated operational current | I_e | 6A/250V AC 2A/440V AC |
| Utilisation category AC15 | | |
| Rated operational current | I_e | – |
| Utilisation category DC12 | | |
| Rated operational current | I_e | – |
| Utilisation category DC13 | | |
| Rated operational current | I_e | 0.5A/230V DC 2A/110V DC 4A/60V DC |
| Rated insulation voltage | U_I | 250 V AC |
| Minimum operational voltage per contact | U_{min} | 24 V AC/DC |
| Minimum operational current | I_{min} | 50 mA AC/DC |
| Rated peak withstand voltage | $U_{imp} (1.2/50\mu)$ | 2.5 kV |
| Conditional short circuit current | I_k | 1 kA |
| with back-up fuse 6A or FAZ-B4-HS | | |
| Max. back-up fuse, overload and short circuit | | 6 A gL / FAZ-4/..B-HS |
| Mechanical | | |
| Can be mounted from the left onto | | AZ |
| Can be mounted from the right onto | | – |
| Tripping indicator "electrical tripping" | | – |
| Frame size | | 45 mm |
| Device height | | 80 mm |
| Device width | | 8.8 mm (0.5MU) |
| Mounting | | onto switching device |
| Degree of protection, built-in | | IP40 |
| Terminal protection | | finger and hand touch safe according to BGV A3, ÖVE-EN 6 |
| Terminals | | lift terminals |
| Terminal capacity | | 0.5-2.5 mm ² |
| Terminal screws | | M3 (PoziDrive Z0) |
| Fastening torque of terminal screws | | max. 0.8-1.0 Nm |

Connection diagram



Dimensions (mm)



Accessories for Miniature Circuit Breakers AZ

Interlocks LH-SP

| Function | Type Designation | Article No. | Units per package |
|---------------------|------------------|-------------|-------------------|
| Tripping interlock | LH-SPL | 285752 | 1 |
| Tripping interlock | LH-SPE | 215999 | 1 |
| Switchoff interlock | LH-SPA | 216000 | 1 |

Specifications | Anti-Tamper Device LH-SPE, LH-SPL

Description


- Prevents undesired switching ON or OFF

Specifications | Switchoff Interlock LH-SPA

Description

- Prevents undesired switch-OFF

Dimensions (mm)

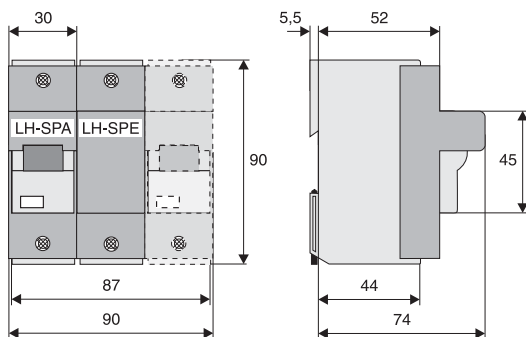

Accessories for Miniature Circuit Breaker FAZ-...-NA, -RT, -DU

Auxiliary Contact Z-IHK-NA

| | Operational Voltage Range | Type Designation | Article No. | Units per package |
|---|---------------------------|------------------|-------------|-------------------|
|  | 250 VAC | Z-IHK-NA | 113895 | 1 |

Specifications | Auxiliary Contact Z-IHK-NA


Description

- Design according to IEC/EN 60947-5-1, IEC/EN 62019
- Field installable
- The specified minimum voltages are per contact—take into account particularly in case of series connection
- Self-cleaning contacts
- Contact material and design particularly suitable for extra low voltage
- Tripping signal contact transmits message of electric tripping, not mechanical switch-off
- Test key for contact function “electrical tripping”
- Will allow for > 480Y/277 VAC rating


Technical Data

| | | Z-IHK-NA |
|---|-----------------------|--|
| Electrical | | |
| Contact function | | 1NO + 1NC |
| Rated voltage | | 250V |
| Rated current | | 6A |
| Rated thermal current | I_{th} | 6A |
| Utilization category AC13 | | |
| Rated operational current | I_e | 3A/250 Vac |
| Utilization category AC15 | | |
| Rated operational current | I_e | 2A/250 Vac |
| Utilization category DC12 | | |
| Rated operational current | I_e | 0.5A/110 Vdc |
| Rated insulation voltage | U_i | 250 Vac |
| Minimum operational voltage per contact | U_{min} | 5 Vdc |
| Minimum operational current | I_{min} | 10 mA AC/DC |
| Rated peak withstand voltage | $U_{imp} (1.2/50\mu)$ | 4 kV |
| Conditional short circuit current | I_k | |
| with Back-Up Fuse 6A | | 1 kA |
| Max. back-up fuse, overload and short circuit | | 6 A gL / FAZ-4/..B-HS |
| Mechanical | | |
| Tripping indicator “electrical tripping” | | — |
| Frame size | | 45 mm |
| Device height | | 80 mm |
| Device width | | 8.8 mm (0.5MU) |
| Mounting | | — |
| Degree of protection, built-in | | IP40 |
| Terminal protection | | Finger and hand touch safe according to BGV A3, ÖVE-EN 6 |
| Terminals | | Lift terminals |
| Terminal capacity | | 0.5–2.5 mm ² |
| Terminal screws | | M3 (Pozidrive Z2) |
| Tightening torque of terminal screws | | max. 1.2 Nm |

Connection diagram



Dimensions (mm)

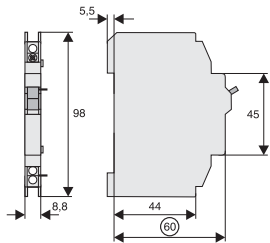

Accessories for Miniature Circuit Breaker FAZ-..-NA, -RT, -DU

Shunt Trip FAZ-XAA-NA

SG13511



| Operational Voltage Range | Type Designation | Article No. | Units per package |
|----------------------------|----------------------|-------------|-------------------|
| 12–110 VAC 12–60 VDC | FAZ-XAA-NA12-110VAC | 102037 | 1 |
| 110–415 VAC 110–230 VDC | FAZ-XAA-NA110-415VAC | 102036 | 1 |

Specifications | Shunt Trip FAZ-XAA-NA


Description

- Remote release for subsequent mounting onto FAZ-NA
- Additional installation of standard auxiliary switch is possible
- Position indicator red–green

Technical Data

| | FAZ-XAA-NA12-110VAC | FAZ-XAA-NA110-415VAC |
|--------------------------------------|--|--|
| Electrical | | |
| Can be mounted onto | FAZ-NA / FAZ-NA-DC / FAZ-RT/-DU | FAZ-NA / FAZ-NA-DC / FAZ-RT/-DU |
| Operational voltage range | 12–110 Vac 12–60 Vdc | 110–415 Vac 110–230 Vdc |
| Frequency | 50/60 Hz | 50/60 Hz |
| Mechanical | | |
| Frame size | 45 mm | 45 mm |
| Device height | 105 mm | 105 mm |
| Device width | 17.5 mm | 17.5 mm |
| Mounting | Quick fastening with two lock-in positions on EN 50022 | |
| Degree of protection, built-in | IP40 | IP40 |
| Terminal protection | Finger and hand touch safe according to BGV A3, ÖVE-EN 6 | Finger and hand touch safe according to BGV A3, ÖVE-EN 6 |
| Terminals | Open mouthed/lift | Open mouthed/lift |
| Terminal capacity, one and two wires | 18–10 AWG | 18–10 AWG |

Connection diagram



Terminal Covers

| Description | Type Designation | Article No. | Units per package |
|-------------|------------------|-------------|-------------------|
|-------------|------------------|-------------|-------------------|

Terminal Covers for RCDs

| | | | |
|--------|-------------|--------|----|
| 2-pole | Z-RC/AK-2TE | 285385 | 10 |
| 4-pole | Z-RC/AK-4TE | 101062 | 10 |

Terminal Covers for Add-on Device

| | | | |
|----------|--------------|-----------|----|
| 2-pole | Z-CV/AO-2P | 221957600 | 10 |
| 3+4-pole | Z-CV/AO-3-4P | 221957500 | 10 |



Terminal Covers for MCB, RCBO

| | | | |
|--------|------------|-----------|----|
| 2-pole | Z-CV/SD-2P | 221954800 | 10 |
| 3-pole | Z-CV/SD-3P | 221954900 | 10 |
| 4-pole | Z-CV/SD-4P | 221953900 | 10 |


Terminal Cover for MCB

| | | | |
|--------|-----------|-----------|----|
| 1-pole | Z7-AK-1TE | 750754200 | 10 |
|--------|-----------|-----------|----|


Remote Control and Automatic Switching Device Z-ZW

| Function | Type Designation | Article No. | Units per package | |
|--|---|-------------|-------------------|------|
|  SG30811 | Automatic restarting 230VAC | Z-FW-LP | 248296 | 1/20 |
| | Automatic restarting 24-48VDC | Z-FW-LPD | 265244 | 1/20 |
|  SG30711 | + Remote control ON/OFF/TEST (only in connection with Z-FW-LP, -LPD from delivery date 2006!) | Z-FW-MO | 284730 | 1 |

Pre-mounted sets Z-FW

| Operational voltage range | Type Designation | Article No. | Units per package | |
|---|------------------|-------------|-------------------|------|
|  SG31311 | 230 VAC | Z-FW-LP/MO | 290171 | 1/12 |
| | 24-48 VDC | Z-FW-LPD/MO | 290172 | 1/12 |

Remote Testing Module Z-FW (for Z-FW-LP/MO set use only)

| Operational voltage range | Type Designation | Article No. | Units per package | |
|--|------------------|-------------|-------------------|-------|
|  SG12111 | 0.01 A | Z-FW/001 | 248297 | 4/120 |
| | 0.03 A | Z-FW/003 | 248298 | 4/120 |
| | 0.1 A | Z-FW/010 | 248299 | 4/120 |
| | 0.3 A | Z-FW/030 | 248300 | 4/120 |
| | 0.5 A | Z-FW/050 | 248301 | 4/120 |

Specifications | Remote Control and Automatic Switching Z-FW


Description

- Shape compatible switching device suitable for subsequent installation for automatic re-setting and remote control of CLS6, PFIM, PFHM-4p, dRCM, Z-A40, PFR, Z-MS
- Mechanical interlock, can be sealed with leads
- Mechanical switching capability up to max. PFIM-100/4p, CLS6-100/4p
- Operating and alarm display by green and red LED
- Function extension with Switching Modul Z-FW-MO
Operating and trouble display by LED pre-assembled only with Z-FW...

Technical Data


| | Z-FW-LP | Z-FW-LPD | Z-FW-MO |
|--|--|---|---|
| Electrical | | | |
| Possible operating voltages | 220-240 V AC | 24-48 V DC | – |
| Frequency | 50/60 Hz | – | – |
| Testing module (0.5MU) for remote testing of RCDs | Z-FW... | Z-FW... | – |
| Control voltage for remote control | – | – | 24-230 V AC/DC |
| Relay output for tripping test with Z-FW | – | – | 400 V AC max. |
| Relay output for alarm, potential-free | 5A/250V AC | 5A/250V AC | – |
| Functions | automatic restarting | automatic restarting | +ON/OFF/TEST |
| Function selector | Automatic 5x, OFF/RESET | Automatic 5x, OFF/RESET | ON, OFF/RESET |
| Remote control function via telephone with Telecommander | – | – | – |
| Mechanical | | | |
| Frame size | 45 mm | 45 mm | 45 mm |
| Device height | 80 mm | 80 mm | 80 mm |
| Device width | 70 mm | 70 mm | 35 mm |
| Mounting | quick fastening with 2 lock-in positions on DIN rail IEC/EN 60715 | | – |
| Degree of protection, built-in | IP40 | IP40 | IP40 |
| Terminal protection | finger and hand touch safe according to BGV A3, ÖVE-EN 6 | | |
| Terminals | lift terminals | lift terminals | lift terminals |
| Terminal capacity | 2 x 1.5 mm ² or 1 x 2.5 mm ² | 2 x 1.5 mm ² or 1 x 2.5 mm ² | 4 x 1.5 mm ² or 2 x 2.5 mm ² |
| Scope of delivery | – | – | Coupling plug |

Connection diagram

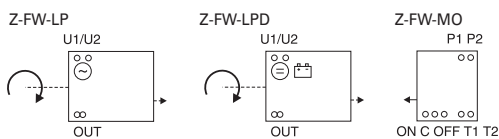


Dimensions (mm)



Z-FW-LP, -LPD

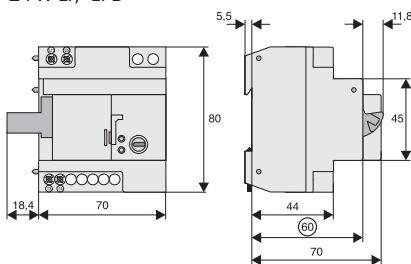



Z-FW-MO



Connection example

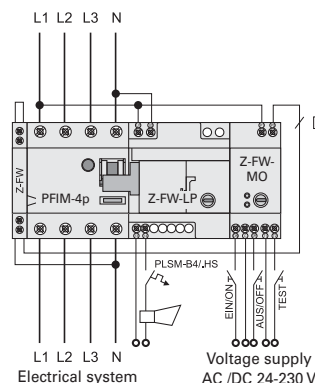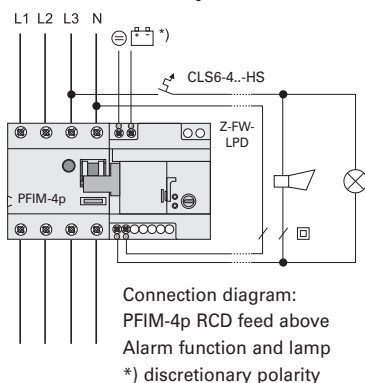

Pre-mounted Sets

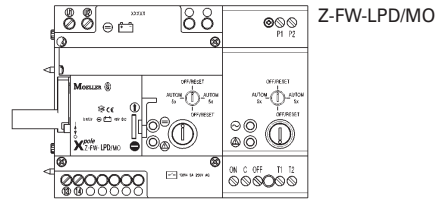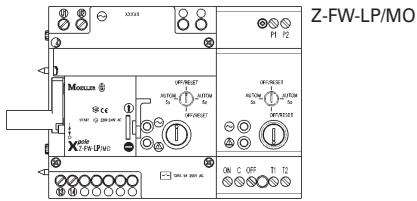


Specifications | Remote Testing Module Z-FW (for Z-FW-LP)


Description

- External testing module with testing resistor for RCDs
- Proper "external" test key function according to the applicable rules thanks to design adapted to the rated tripping current
- For remote testing with remote control and automatic switching device Z-FW-LP
- No undesired voltage rise in the consumer system during remote switch-off thanks to integrated breaker contact K1-K2
- Can also be used as a remote tripping module for PFIM, PFHM


Dimensions (mm)



Connection examples



Connection diagram:
PFIM-2p, RCD feed above

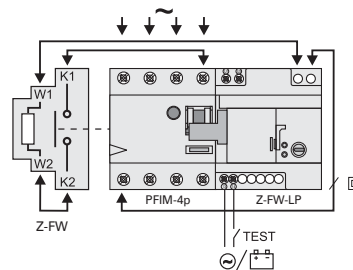

Connection diagram:
PFIM-4p, RCD feed above

Miniature Circuit Breakers FAZ, FAZ-PN, FAZ-HS

SG55812



FAZ

- High-quality miniature circuit breakers for industrial applications and residential applications
- Contact position indicator red - green
- Guide for secure terminal connection
- 3-position DIN rail clip, permits removal from existing busbar system
- Comprehensive range of accessories suitable for subsequent installation
- Rated currents up to 63 A
- Tripping characteristics B, C, D, K, S, Z
- Rated breaking capacity up to 15 kA according to IEC/EN 60947-2

FAZ-PN

- Tripping characteristic B
- Rated breaking capacity up to 6 kA according to IEC/EN 60898-1
- Module width 1MU (1+N-poles)

FAZ-HS

- Tripping characteristic B
- Rated breaking capacity up to 10 kA according to IEC/EN 60898-1
- 1- and 2-poles available

FAZ Miniature Circuit Breakers (MCBs)

Characteristic B

| | Rated current I_n (A) | Rated voltage (V) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Rated voltage UL1077 (V) | Breaking capacity acc. to UL1077 (kA) | Type Designation | Article No. | Units per package |
|---------------|----------------------------|----------------------|---|--------------------------------|--|---------------------|-------------|-------------------------|
| 1-pole | | | | | | | | |
| 1 | 240/415 | 15 | 277 | 10 | | FAZ-B1/1 | 182114 | 12 |
| 1.5 | 240/415 | 15 | 277 | 10 | | FAZ-B1,5/1 | 182115 | 12 |
| 1.6 | 240/415 | 15 | 277 | 10 | | FAZ-B1,6/1 | 182116 | 12 |
| 2 | 240/415 | 15 | 277 | 10 | | FAZ-B2/1 | 182117 | 12 |
| 3 | 240/415 | 15 | 277 | 10 | | FAZ-B3/1 | 182119 | 12 |
| 3.5 | 240/415 | 15 | 277 | 10 | | FAZ-B3,5/1 | 182120 | 12 |
| 4 | 240/415 | 15 | 277 | 10 | | FAZ-B4/1 | 182121 | 12 |
| 5 | 240/415 | 15 | 277 | 10 | | FAZ-B5/1 | 182122 | 12 |
| 6 | 240/415 | 15 | 277 | 10 | | FAZ-B6/1 | 182123 | 12 |
| 8 | 240/415 | 15 | 277 | 10 | | FAZ-B8/1 | 182124 | 12 |
| 10 | 240/415 | 15 | 277 | 10 | | FAZ-B10/1 | 182125 | 12 |
| 12 | 240/415 | 15 | 277 | 10 | | FAZ-B12/1 | 182126 | 12 |
| 13 | 240/415 | 15 | 277 | 10 | | FAZ-B13/1 | 182127 | 12 |
| 15 | 240/415 | 15 | 277 | 10 | | FAZ-B15/1 | 182128 | 12 |
| 16 | 240/415 | 15 | 277 | 10 | | FAZ-B16/1 | 182129 | 12 |
| 20 | 240/415 | 15 | 277 | 10 | | FAZ-B20/1 | 182130 | 12 |
| 25 | 240/415 | 15 | 277 | 10 | | FAZ-B25/1 | 182131 | 12 |
| 32 | 240/415 | 15 | 277 | 10 | | FAZ-B32/1 | 182132 | 12 |
| 40 | 240/415 | 15 | 277 | 5 | | FAZ-B40/1 | 182133 | 12 |
| 50 | 240/415 | 15 | 277 | 5 | | FAZ-B50/1 | 182134 | 12 |
| 63 | 240/415 | 15 | 277 | 5 | | FAZ-B63/1 | 182135 | 12 |

SG53112



SG56612



| | | | | | | | | |
|-----------------|-----|----|-----|----|--|-------------|--------|---|
| 1+N-pole | | | | | | | | |
| 1 | 240 | 15 | 277 | 10 | | FAZ-B1/1N | 182136 | 6 |
| 1.5 | 240 | 15 | 277 | 10 | | FAZ-B1,5/1N | 182137 | 6 |
| 1.6 | 240 | 15 | 277 | 10 | | FAZ-B1,6/1N | 182138 | 6 |
| 2 | 240 | 15 | 277 | 10 | | FAZ-B2/1N | 182139 | 6 |
| 2.5 | 240 | 15 | 277 | 10 | | FAZ-B2,5/1N | 182140 | 6 |
| 3 | 240 | 15 | 277 | 10 | | FAZ-B3/1N | 182141 | 6 |
| 3.5 | 240 | 15 | 277 | 10 | | FAZ-B3,5/1N | 182142 | 6 |
| 4 | 240 | 15 | 277 | 10 | | FAZ-B4/1N | 182143 | 6 |
| 5 | 240 | 15 | 277 | 10 | | FAZ-B5/1N | 182144 | 6 |
| 6 | 240 | 15 | 277 | 10 | | FAZ-B6/1N | 182145 | 6 |
| 8 | 240 | 15 | 277 | 10 | | FAZ-B8/1N | 182146 | 6 |
| 10 | 240 | 15 | 277 | 10 | | FAZ-B10/1N | 182147 | 6 |
| 12 | 240 | 15 | 277 | 10 | | FAZ-B12/1N | 182148 | 6 |
| 13 | 240 | 15 | 277 | 10 | | FAZ-B13/1N | 182149 | 6 |
| 15 | 240 | 15 | 277 | 10 | | FAZ-B15/1N | 182150 | 6 |
| 16 | 240 | 15 | 277 | 10 | | FAZ-B16/1N | 182151 | 6 |
| 20 | 240 | 15 | 277 | 10 | | FAZ-B20/1N | 182152 | 6 |
| 25 | 240 | 15 | 277 | 10 | | FAZ-B25/1N | 182153 | 6 |
| 32 | 240 | 15 | 277 | 10 | | FAZ-B32/1N | 182154 | 6 |
| 40 | 240 | 15 | 277 | 5 | | FAZ-B40/1N | 182155 | 6 |
| 50 | 240 | 15 | 277 | 5 | | FAZ-B50/1N | 182156 | 6 |
| 63 | 240 | 15 | 277 | 5 | | FAZ-B63/1N | 182157 | 6 |

SG55112



| Rated current I_n (A) | Rated voltage (V) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Rated voltage UL1077 (V) | Breaking capacity acc. to UL1077 (kA) | Type Designation | Article No. | Units per package |
|----------------------------|----------------------|---|--------------------------------|--|---------------------|-------------|-------------------------|
|----------------------------|----------------------|---|--------------------------------|--|---------------------|-------------|-------------------------|

2-pole

| | | | | | | | |
|-----|-----|----|----------|----|------------|--------|---|
| 1 | 415 | 15 | 480Y/277 | 10 | FAZ-B1/2 | 182158 | 6 |
| 1.5 | 415 | 15 | 480Y/277 | 10 | FAZ-B1,5/2 | 182159 | 6 |
| 1.6 | 415 | 15 | 480Y/277 | 10 | FAZ-B1,6/2 | 182160 | 6 |
| 2 | 415 | 15 | 480Y/277 | 10 | FAZ-B2/2 | 182161 | 6 |
| 2.5 | 415 | 15 | 480Y/277 | 10 | FAZ-B2,5/2 | 182162 | 6 |
| 3 | 415 | 15 | 480Y/277 | 10 | FAZ-B3/2 | 182112 | 6 |
| 3.5 | 415 | 15 | 480Y/277 | 10 | FAZ-B3,5/2 | 182113 | 6 |
| 4 | 415 | 15 | 480Y/277 | 10 | FAZ-B4/2 | 182175 | 6 |
| 5 | 415 | 15 | 480Y/277 | 10 | FAZ-B5/2 | 182176 | 6 |
| 6 | 415 | 15 | 480Y/277 | 10 | FAZ-B6/2 | 182177 | 6 |
| 7 | 415 | 15 | 480Y/277 | 10 | FAZ-B7/2 | 182178 | 6 |
| 8 | 415 | 15 | 480Y/277 | 10 | FAZ-B8/2 | 182179 | 6 |
| 10 | 415 | 15 | 480Y/277 | 10 | FAZ-B10/2 | 182180 | 6 |
| 12 | 415 | 15 | 480Y/277 | 10 | FAZ-B12/2 | 182181 | 6 |
| 13 | 415 | 15 | 480Y/277 | 10 | FAZ-B13/2 | 182182 | 6 |
| 15 | 415 | 15 | 480Y/277 | 10 | FAZ-B15/2 | 182183 | 6 |
| 16 | 415 | 15 | 480Y/277 | 10 | FAZ-B16/2 | 182184 | 6 |
| 20 | 415 | 15 | 480Y/277 | 10 | FAZ-B20/2 | 182185 | 6 |
| 25 | 415 | 15 | 480Y/277 | 10 | FAZ-B25/2 | 182186 | 6 |
| 32 | 415 | 15 | 480Y/277 | 10 | FAZ-B32/2 | 182188 | 6 |
| 40 | 415 | 15 | 480Y/277 | 5 | FAZ-B40/2 | 182189 | 6 |
| 50 | 415 | 15 | 480Y/277 | 5 | FAZ-B50/2 | 182190 | 6 |
| 63 | 415 | 15 | 480Y/277 | 5 | FAZ-B63/2 | 182191 | 6 |

SG53412



3-pole

| | | | | | | | |
|-----|-----|----|----------|----|------------|--------|---|
| 1 | 415 | 15 | 480Y/277 | 10 | FAZ-B1/3 | 182192 | 4 |
| 1.5 | 415 | 15 | 480Y/277 | 10 | FAZ-B1,5/3 | 182193 | 4 |
| 1.6 | 415 | 15 | 480Y/277 | 10 | FAZ-B1,6/3 | 182194 | 4 |
| 2 | 415 | 15 | 480Y/277 | 10 | FAZ-B2/3 | 182195 | 4 |
| 2.5 | 415 | 15 | 480Y/277 | 10 | FAZ-B2,5/3 | 182196 | 4 |
| 3 | 415 | 15 | 480Y/277 | 10 | FAZ-B3/3 | 182197 | 4 |
| 3.5 | 415 | 15 | 480Y/277 | 10 | FAZ-B3,5/3 | 182198 | 4 |
| 4 | 415 | 15 | 480Y/277 | 10 | FAZ-B4/3 | 182199 | 4 |
| 5 | 415 | 15 | 480Y/277 | 10 | FAZ-B5/3 | 182200 | 4 |
| 6 | 415 | 15 | 480Y/277 | 10 | FAZ-B6/3 | 182201 | 4 |
| 7 | 415 | 15 | 480Y/277 | 10 | FAZ-B7/3 | 182202 | 4 |
| 8 | 415 | 15 | 480Y/277 | 10 | FAZ-B8/3 | 182203 | 4 |
| 10 | 415 | 15 | 480Y/277 | 10 | FAZ-B10/3 | 182204 | 4 |
| 12 | 415 | 15 | 480Y/277 | 10 | FAZ-B12/3 | 182205 | 4 |
| 13 | 415 | 15 | 480Y/277 | 10 | FAZ-B13/3 | 182206 | 4 |
| 15 | 415 | 15 | 480Y/277 | 10 | FAZ-B15/3 | 182207 | 4 |
| 16 | 415 | 15 | 480Y/277 | 10 | FAZ-B16/3 | 182208 | 4 |
| 20 | 415 | 15 | 480Y/277 | 10 | FAZ-B20/3 | 182209 | 4 |
| 25 | 415 | 15 | 480Y/277 | 10 | FAZ-B25/3 | 182210 | 4 |
| 32 | 415 | 15 | 480Y/277 | 10 | FAZ-B32/3 | 182212 | 4 |
| 40 | 415 | 15 | 480Y/277 | 5 | FAZ-B40/3 | 182213 | 4 |
| 50 | 415 | 15 | 480Y/277 | 5 | FAZ-B50/3 | 182214 | 4 |
| 63 | 415 | 15 | 480Y/277 | 5 | FAZ-B63/3 | 182215 | 4 |

SG55712



| Rated current I_n (A) | Rated voltage (V) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Rated voltage UL1077 (V) | Breaking capacity acc. to UL1077 (kA) | Type Designation | Article No. | Units per package |
|----------------------------|----------------------|---|--------------------------------|--|---------------------|-------------|-------------------------|
|----------------------------|----------------------|---|--------------------------------|--|---------------------|-------------|-------------------------|

3+N-pole

| | | | | | | | |
|-----|-----|----|----------|----|-------------|--------|---|
| 1 | 415 | 15 | 480Y/277 | 10 | FAZ-B1/3N | 182216 | 3 |
| 1.5 | 415 | 15 | 480Y/277 | 10 | FAZ-B1,5/3N | 182217 | 3 |
| 1.6 | 415 | 15 | 480Y/277 | 10 | FAZ-B1,6/3N | 182218 | 3 |
| 2 | 415 | 15 | 480Y/277 | 10 | FAZ-B2/3N | 182219 | 3 |
| 2.5 | 415 | 15 | 480Y/277 | 10 | FAZ-B2,5/3N | 182220 | 3 |
| 3 | 415 | 15 | 480Y/277 | 10 | FAZ-B3/3N | 182221 | 3 |
| 3.5 | 415 | 15 | 480Y/277 | 10 | FAZ-B3,5/3N | 182222 | 3 |
| 4 | 415 | 15 | 480Y/277 | 10 | FAZ-B4/3N | 182223 | 3 |
| 5 | 415 | 15 | 480Y/277 | 10 | FAZ-B5/3N | 182224 | 3 |
| 6 | 415 | 15 | 480Y/277 | 10 | FAZ-B6/3N | 182225 | 3 |
| 8 | 415 | 15 | 480Y/277 | 10 | FAZ-B8/3N | 182226 | 3 |
| 10 | 415 | 15 | 480Y/277 | 10 | FAZ-B10/3N | 182227 | 3 |
| 12 | 415 | 15 | 480Y/277 | 10 | FAZ-B12/3N | 182228 | 3 |
| 13 | 415 | 15 | 480Y/277 | 10 | FAZ-B13/3N | 182229 | 3 |
| 15 | 415 | 15 | 480Y/277 | 10 | FAZ-B15/3N | 182230 | 3 |
| 16 | 415 | 15 | 480Y/277 | 10 | FAZ-B16/3N | 182231 | 3 |
| 20 | 415 | 15 | 480Y/277 | 10 | FAZ-B20/3N | 182232 | 3 |
| 25 | 415 | 15 | 480Y/277 | 10 | FAZ-B25/3N | 182233 | 3 |
| 32 | 415 | 15 | 480Y/277 | 10 | FAZ-B32/3N | 182234 | 3 |
| 40 | 415 | 15 | 480Y/277 | 5 | FAZ-B40/3N | 182235 | 3 |
| 50 | 415 | 15 | 480Y/277 | 5 | FAZ-B50/3N | 182236 | 3 |
| 63 | 415 | 15 | 480Y/277 | 5 | FAZ-B63/3N | 182237 | 3 |

SG55812



4-pole

| | | | | | | | |
|-----|-----|----|----------|----|------------|--------|---|
| 1 | 415 | 15 | 480Y/277 | 10 | FAZ-B1/4 | 182238 | 3 |
| 1.5 | 415 | 15 | 480Y/277 | 10 | FAZ-B1,5/4 | 182239 | 3 |
| 1.6 | 415 | 15 | 480Y/277 | 10 | FAZ-B1,6/4 | 182240 | 3 |
| 2 | 415 | 15 | 480Y/277 | 10 | FAZ-B2/4 | 182241 | 3 |
| 2.5 | 415 | 15 | 480Y/277 | 10 | FAZ-B2,5/4 | 182242 | 3 |
| 3 | 415 | 15 | 480Y/277 | 10 | FAZ-B3/4 | 182243 | 3 |
| 3.5 | 415 | 15 | 480Y/277 | 10 | FAZ-B3,5/4 | 182244 | 3 |
| 4 | 415 | 15 | 480Y/277 | 10 | FAZ-B4/4 | 182245 | 3 |
| 5 | 415 | 15 | 480Y/277 | 10 | FAZ-B5/4 | 182246 | 3 |
| 6 | 415 | 15 | 480Y/277 | 10 | FAZ-B6/4 | 182247 | 3 |
| 7 | 415 | 15 | 480Y/277 | 10 | FAZ-B7/4 | 182248 | 3 |
| 8 | 415 | 15 | 480Y/277 | 10 | FAZ-B8/4 | 182249 | 3 |
| 10 | 415 | 15 | 480Y/277 | 10 | FAZ-B10/4 | 182250 | 3 |
| 12 | 415 | 15 | 480Y/277 | 10 | FAZ-B12/4 | 182251 | 3 |
| 13 | 415 | 15 | 480Y/277 | 10 | FAZ-B13/4 | 182252 | 3 |
| 15 | 415 | 15 | 480Y/277 | 10 | FAZ-B15/4 | 182253 | 3 |
| 16 | 415 | 15 | 480Y/277 | 10 | FAZ-B16/4 | 182254 | 3 |
| 20 | 415 | 15 | 480Y/277 | 10 | FAZ-B20/4 | 182255 | 3 |
| 25 | 415 | 15 | 480Y/277 | 10 | FAZ-B25/4 | 182256 | 3 |
| 32 | 415 | 15 | 480Y/277 | 10 | FAZ-B32/4 | 182257 | 3 |
| 40 | 415 | 15 | 480Y/277 | 5 | FAZ-B40/4 | 182258 | 3 |
| 50 | 415 | 15 | 480Y/277 | 5 | FAZ-B50/4 | 182259 | 3 |
| 63 | 415 | 15 | 480Y/277 | 5 | FAZ-B63/4 | 182260 | 3 |

FAZ Miniature Circuit Breakers (MCBs)

Characteristic C

| Rated current I_n (A) | Rated voltage (V) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Rated voltage UL1077 (V) | Breaking capacity acc. to UL1077 (kA) | Type Designation | Article No. | Units per package |
|----------------------------|----------------------|---|--------------------------------|--|---------------------|-------------|-------------------------|
| 1-pole | | | | | | | |
| 0.16 | 240/415 | 15 | 277 | 5 | FAZ-C0,16/1 | 182261 | 12 |
| 0.25 | 240/415 | 15 | 277 | 5 | FAZ-C0,25/1 | 182262 | 12 |
| 0.5 | 240/415 | 15 | 277 | 10 | FAZ-C0,5/1 | 182263 | 12 |
| 0.75 | 240/415 | 15 | 277 | 10 | FAZ-C0,75/1 | 182264 | 12 |
| 1 | 240/415 | 15 | 277 | 10 | FAZ-C1/1 | 182265 | 12 |
| 1.5 | 240/415 | 15 | 277 | 10 | FAZ-C1,5/1 | 182266 | 12 |
| 1.6 | 240/415 | 15 | 277 | 10 | FAZ-C1,6/1 | 182267 | 12 |
| 2 | 240/415 | 15 | 277 | 10 | FAZ-C2/1 | 182268 | 12 |
| 2.5 | 240/415 | 15 | 277 | 10 | FAZ-C2,5/1 | 182269 | 12 |
| 3 | 240/415 | 15 | 277 | 10 | FAZ-C3/1 | 182270 | 12 |
| 3.5 | 240/415 | 15 | 277 | 10 | FAZ-C3,5/1 | 182271 | 12 |
| 4 | 240/415 | 15 | 277 | 10 | FAZ-C4/1 | 182272 | 12 |
| 5 | 240/415 | 15 | 277 | 10 | FAZ-C5/1 | 182273 | 12 |
| 6 | 240/415 | 15 | 277 | 10 | FAZ-C6/1 | 182274 | 12 |
| 8 | 240/415 | 15 | 277 | 10 | FAZ-C8/1 | 182275 | 12 |
| 10 | 240/415 | 15 | 277 | 10 | FAZ-C10/1 | 182276 | 12 |
| 12 | 240/415 | 15 | 277 | 10 | FAZ-C12/1 | 182277 | 12 |
| 13 | 240/415 | 15 | 277 | 10 | FAZ-C13/1 | 182278 | 12 |
| 15 | 240/415 | 15 | 277 | 10 | FAZ-C15/1 | 182279 | 12 |
| 16 | 240/415 | 15 | 277 | 10 | FAZ-C16/1 | 182280 | 12 |
| 20 | 240/415 | 15 | 277 | 10 | FAZ-C20/1 | 182281 | 12 |
| 25 | 240/415 | 15 | 277 | 10 | FAZ-C25/1 | 182282 | 12 |
| 32 | 240/415 | 15 | 277 | 10 | FAZ-C32/1 | 182283 | 12 |
| 40 | 240/415 | 15 | 277 | 5 | FAZ-C40/1 | 182284 | 12 |
| 50 | 240/415 | 15 | 277 | 5 | FAZ-C50/1 | 182285 | 12 |
| 63 | 240/415 | 15 | 277 | 5 | FAZ-C63/1 | 182286 | 12 |

SG53112



SG55612



1+N-pole

| | | | | | | | |
|------|-----|----|-----|----|--------------|--------|---|
| 0.16 | 240 | 15 | 277 | 5 | FAZ-C0,16/1N | 182287 | 6 |
| 0.25 | 240 | 15 | 277 | 5 | FAZ-C0,25/1N | 182288 | 6 |
| 0.5 | 240 | 15 | 277 | 10 | FAZ-C0,5/1N | 182289 | 6 |
| 0.75 | 240 | 15 | 277 | 10 | FAZ-C0,75/1N | 182290 | 6 |
| 1 | 240 | 15 | 277 | 10 | FAZ-C1/1N | 182291 | 6 |
| 1.5 | 240 | 15 | 277 | 10 | FAZ-C1,5/1N | 182292 | 6 |
| 1.6 | 240 | 15 | 277 | 10 | FAZ-C1,6/1N | 182293 | 6 |
| 2 | 240 | 15 | 277 | 10 | FAZ-C2/1N | 182294 | 6 |
| 2.5 | 240 | 15 | 277 | 10 | FAZ-C2,5/1N | 182295 | 6 |
| 3 | 240 | 15 | 277 | 10 | FAZ-C3/1N | 182296 | 6 |
| 3.5 | 240 | 15 | 277 | 10 | FAZ-C3,5/1N | 182297 | 6 |
| 4 | 240 | 15 | 277 | 10 | FAZ-C4/1N | 182298 | 6 |
| 5 | 240 | 15 | 277 | 10 | FAZ-C5/1N | 182299 | 6 |
| 6 | 240 | 15 | 277 | 10 | FAZ-C6/1N | 182300 | 6 |
| 8 | 240 | 15 | 277 | 10 | FAZ-C8/1N | 182301 | 6 |
| 10 | 240 | 15 | 277 | 10 | FAZ-C10/1N | 182302 | 6 |
| 12 | 240 | 15 | 277 | 10 | FAZ-C12/1N | 182303 | 6 |
| 13 | 240 | 15 | 277 | 10 | FAZ-C13/1N | 182304 | 6 |
| 15 | 240 | 15 | 277 | 10 | FAZ-C15/1N | 182305 | 6 |
| 16 | 240 | 15 | 277 | 10 | FAZ-C16/1N | 182306 | 6 |
| 20 | 240 | 15 | 277 | 10 | FAZ-C20/1N | 182307 | 6 |
| 25 | 240 | 15 | 277 | 10 | FAZ-C25/1N | 182308 | 6 |
| 32 | 240 | 15 | 277 | 10 | FAZ-C32/1N | 182309 | 6 |
| 40 | 240 | 15 | 277 | 5 | FAZ-C40/1N | 182310 | 6 |
| 50 | 240 | 15 | 277 | 5 | FAZ-C50/1N | 182311 | 6 |
| 63 | 240 | 15 | 277 | 5 | FAZ-C63/1N | 182312 | 6 |

SG55112



| Rated current I_n (A) | Rated voltage (V) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Rated voltage UL1077 (V) | Breaking capacity acc. to UL1077 (kA) | Type Designation | Article No. | Units per package |
|----------------------------|----------------------|---|--------------------------------|--|---------------------|-------------|-------------------------|
|----------------------------|----------------------|---|--------------------------------|--|---------------------|-------------|-------------------------|

2-pole

| | | | | | | | |
|------|-----|----|----------|----|-------------|--------|---|
| 0.16 | 415 | 15 | 480Y/277 | 5 | FAZ-C0,16/2 | 182313 | 6 |
| 0.25 | 415 | 15 | 480Y/277 | 5 | FAZ-C0,25/2 | 182314 | 6 |
| 0.5 | 415 | 15 | 480Y/277 | 10 | FAZ-C0,5/2 | 182315 | 6 |
| 0.75 | 415 | 15 | 480Y/277 | 10 | FAZ-C0,75/2 | 182316 | 6 |
| 1 | 415 | 15 | 480Y/277 | 10 | FAZ-C1/2 | 182317 | 6 |
| 1.5 | 415 | 15 | 480Y/277 | 10 | FAZ-C1,5/2 | 182318 | 6 |
| 1.6 | 415 | 15 | 480Y/277 | 10 | FAZ-C1,6/2 | 182319 | 6 |
| 2 | 415 | 15 | 480Y/277 | 10 | FAZ-C2/2 | 182320 | 6 |
| 2.5 | 415 | 15 | 480Y/277 | 10 | FAZ-C2,5/2 | 182321 | 6 |
| 3 | 415 | 15 | 480Y/277 | 10 | FAZ-C3/2 | 182322 | 6 |
| 3.5 | 415 | 15 | 480Y/277 | 10 | FAZ-C3,5/2 | 182323 | 6 |
| 4 | 415 | 15 | 480Y/277 | 10 | FAZ-C4/2 | 182324 | 6 |
| 5 | 415 | 15 | 480Y/277 | 10 | FAZ-C5/2 | 182325 | 6 |
| 6 | 415 | 15 | 480Y/277 | 10 | FAZ-C6/2 | 182326 | 6 |
| 7 | 415 | 15 | 480Y/277 | 10 | FAZ-C7/2 | 182327 | 6 |
| 8 | 415 | 15 | 480Y/277 | 10 | FAZ-C8/2 | 182328 | 6 |
| 10 | 415 | 15 | 480Y/277 | 10 | FAZ-C10/2 | 182329 | 6 |
| 12 | 415 | 15 | 480Y/277 | 10 | FAZ-C12/2 | 182330 | 6 |
| 13 | 415 | 15 | 480Y/277 | 10 | FAZ-C13/2 | 182331 | 6 |
| 15 | 415 | 15 | 480Y/277 | 10 | FAZ-C15/2 | 182332 | 6 |
| 16 | 415 | 15 | 480Y/277 | 10 | FAZ-C16/2 | 182333 | 6 |
| 20 | 415 | 15 | 480Y/277 | 10 | FAZ-C20/2 | 182334 | 6 |
| 25 | 415 | 15 | 480Y/277 | 10 | FAZ-C25/2 | 182335 | 6 |
| 30 | 415 | 15 | 480Y/277 | 10 | FAZ-C30/2 | 182336 | 6 |
| 32 | 415 | 15 | 480Y/277 | 10 | FAZ-C32/2 | 182337 | 6 |
| 40 | 415 | 15 | 480Y/277 | 5 | FAZ-C40/2 | 182338 | 6 |
| 50 | 415 | 15 | 480Y/277 | 5 | FAZ-C50/2 | 182339 | 6 |
| 63 | 415 | 15 | 480Y/277 | 5 | FAZ-C63/2 | 182340 | 6 |

SG53412



3-pole

| | | | | | | | |
|------|-----|----|----------|----|-------------|--------|---|
| 0.16 | 415 | 15 | 480Y/277 | 5 | FAZ-C0,16/3 | 182341 | 4 |
| 0.25 | 415 | 15 | 480Y/277 | 5 | FAZ-C0,25/3 | 182342 | 4 |
| 0.5 | 415 | 15 | 480Y/277 | 10 | FAZ-C0,5/3 | 182163 | 4 |
| 0.75 | 415 | 15 | 480Y/277 | 10 | FAZ-C0,75/3 | 182164 | 4 |
| 1 | 415 | 15 | 480Y/277 | 10 | FAZ-C1/3 | 182165 | 4 |
| 1.5 | 415 | 15 | 480Y/277 | 10 | FAZ-C1,5/3 | 182166 | 4 |
| 1.6 | 415 | 15 | 480Y/277 | 10 | FAZ-C1,6/3 | 182167 | 4 |
| 2 | 415 | 15 | 480Y/277 | 10 | FAZ-C2/3 | 182168 | 4 |
| 2.5 | 415 | 15 | 480Y/277 | 10 | FAZ-C2,5/3 | 182169 | 4 |
| 3 | 415 | 15 | 480Y/277 | 10 | FAZ-C3/3 | 182170 | 4 |
| 3.5 | 415 | 15 | 480Y/277 | 10 | FAZ-C3,5/3 | 182171 | 4 |
| 4 | 415 | 15 | 480Y/277 | 10 | FAZ-C4/3 | 182172 | 4 |
| 5 | 415 | 15 | 480Y/277 | 10 | FAZ-C5/3 | 182173 | 4 |
| 6 | 415 | 15 | 480Y/277 | 10 | FAZ-C6/3 | 182174 | 4 |
| 7 | 415 | 15 | 480Y/277 | 10 | FAZ-C7/3 | 181651 | 4 |
| 8 | 415 | 15 | 480Y/277 | 10 | FAZ-C8/3 | 181652 | 4 |
| 10 | 415 | 15 | 480Y/277 | 10 | FAZ-C10/3 | 181653 | 4 |
| 12 | 415 | 15 | 480Y/277 | 10 | FAZ-C12/3 | 181654 | 4 |
| 13 | 415 | 15 | 480Y/277 | 10 | FAZ-C13/3 | 181655 | 4 |
| 15 | 415 | 15 | 480Y/277 | 10 | FAZ-C15/3 | 181656 | 4 |
| 16 | 415 | 15 | 480Y/277 | 10 | FAZ-C16/3 | 181657 | 4 |
| 20 | 415 | 15 | 480Y/277 | 10 | FAZ-C20/3 | 181658 | 4 |
| 25 | 415 | 15 | 480Y/277 | 10 | FAZ-C25/3 | 181659 | 4 |
| 30 | 415 | 15 | 480Y/277 | 10 | FAZ-C30/3 | 181660 | 4 |
| 32 | 415 | 15 | 480Y/277 | 10 | FAZ-C32/3 | 181661 | 4 |
| 40 | 415 | 15 | 480Y/277 | 5 | FAZ-C40/3 | 181662 | 4 |
| 50 | 415 | 15 | 480Y/277 | 5 | FAZ-C50/3 | 181663 | 4 |
| 63 | 415 | 15 | 480Y/277 | 5 | FAZ-C63/3 | 181664 | 4 |

SG55712



| Rated current I_n (A) | Rated voltage (V) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Rated voltage UL1077 (V) | Breaking capacity acc. to UL1077 (kA) | Type Designation | Article No. | Units per package |
|----------------------------|----------------------|---|--------------------------------|--|---------------------|-------------|-------------------------|
|----------------------------|----------------------|---|--------------------------------|--|---------------------|-------------|-------------------------|

3+N-pole

| | | | | | | | |
|------|-----|----|----------|----|--------------|--------|---|
| 0.16 | 415 | 15 | 480Y/277 | 5 | FAZ-C0,16/3N | 181665 | 3 |
| 0.25 | 415 | 15 | 480Y/277 | 5 | FAZ-C0,25/3N | 181666 | 3 |
| 0.5 | 415 | 15 | 480Y/277 | 10 | FAZ-C0,5/3N | 181667 | 3 |
| 0.75 | 415 | 15 | 480Y/277 | 10 | FAZ-C0,75/3N | 181668 | 3 |
| 1 | 415 | 15 | 480Y/277 | 10 | FAZ-C1/3N | 181669 | 3 |
| 1.5 | 415 | 15 | 480Y/277 | 10 | FAZ-C1,5/3N | 181670 | 3 |
| 1.6 | 415 | 15 | 480Y/277 | 10 | FAZ-C1,6/3N | 181671 | 3 |
| 2 | 415 | 15 | 480Y/277 | 10 | FAZ-C2/3N | 181672 | 3 |
| 2.5 | 415 | 15 | 480Y/277 | 10 | FAZ-C2,5/3N | 181673 | 3 |
| 3 | 415 | 15 | 480Y/277 | 10 | FAZ-C3/3N | 181674 | 3 |
| 3.5 | 415 | 15 | 480Y/277 | 10 | FAZ-C3,5/3N | 181675 | 3 |
| 4 | 415 | 15 | 480Y/277 | 10 | FAZ-C4/3N | 181676 | 3 |
| 5 | 415 | 15 | 480Y/277 | 10 | FAZ-C5/3N | 181677 | 3 |
| 6 | 415 | 15 | 480Y/277 | 10 | FAZ-C6/3N | 181678 | 3 |
| 8 | 415 | 15 | 480Y/277 | 10 | FAZ-C8/3N | 181679 | 3 |
| 10 | 415 | 15 | 480Y/277 | 10 | FAZ-C10/3N | 181680 | 3 |
| 12 | 415 | 15 | 480Y/277 | 10 | FAZ-C12/3N | 181681 | 3 |
| 13 | 415 | 15 | 480Y/277 | 10 | FAZ-C13/3N | 181682 | 3 |
| 15 | 415 | 15 | 480Y/277 | 10 | FAZ-C15/3N | 181683 | 3 |
| 16 | 415 | 15 | 480Y/277 | 10 | FAZ-C16/3N | 181684 | 3 |
| 20 | 415 | 15 | 480Y/277 | 10 | FAZ-C20/3N | 181685 | 3 |
| 25 | 415 | 15 | 480Y/277 | 10 | FAZ-C25/3N | 181686 | 3 |
| 32 | 415 | 15 | 480Y/277 | 10 | FAZ-C32/3N | 181687 | 3 |
| 40 | 415 | 15 | 480Y/277 | 5 | FAZ-C40/3N | 181688 | 3 |
| 50 | 415 | 15 | 480Y/277 | 5 | FAZ-C50/3N | 181689 | 3 |
| 63 | 415 | 15 | 480Y/277 | 5 | FAZ-C63/3N | 181690 | 3 |

SG55812



4-pole

| | | | | | | | |
|------|-----|----|----------|----|-------------|--------|---|
| 0.16 | 415 | 15 | 480Y/277 | 5 | FAZ-C0,16/4 | 181691 | 3 |
| 0.25 | 415 | 15 | 480Y/277 | 5 | FAZ-C0,25/4 | 181692 | 3 |
| 0.5 | 415 | 15 | 480Y/277 | 10 | FAZ-C0,5/4 | 181693 | 3 |
| 0.75 | 415 | 15 | 480Y/277 | 10 | FAZ-C0,75/4 | 181694 | 3 |
| 1 | 415 | 15 | 480Y/277 | 10 | FAZ-C1/4 | 181695 | 3 |
| 1.5 | 415 | 15 | 480Y/277 | 10 | FAZ-C1,5/4 | 181696 | 3 |
| 1.6 | 415 | 15 | 480Y/277 | 10 | FAZ-C1,6/4 | 181697 | 3 |
| 2 | 415 | 15 | 480Y/277 | 10 | FAZ-C2/4 | 181698 | 3 |
| 2.5 | 415 | 15 | 480Y/277 | 10 | FAZ-C2,5/4 | 181699 | 3 |
| 3 | 415 | 15 | 480Y/277 | 10 | FAZ-C3/4 | 181700 | 3 |
| 3.5 | 415 | 15 | 480Y/277 | 10 | FAZ-C3,5/4 | 181701 | 3 |
| 4 | 415 | 15 | 480Y/277 | 10 | FAZ-C4/4 | 181702 | 3 |
| 5 | 415 | 15 | 480Y/277 | 10 | FAZ-C5/4 | 181703 | 3 |
| 6 | 415 | 15 | 480Y/277 | 10 | FAZ-C6/4 | 181704 | 3 |
| 7 | 415 | 15 | 480Y/277 | 10 | FAZ-C7/4 | 181705 | 3 |
| 8 | 415 | 15 | 480Y/277 | 10 | FAZ-C8/4 | 181706 | 3 |
| 10 | 415 | 15 | 480Y/277 | 10 | FAZ-C10/4 | 181707 | 3 |
| 12 | 415 | 15 | 480Y/277 | 10 | FAZ-C12/4 | 181708 | 3 |
| 13 | 415 | 15 | 480Y/277 | 10 | FAZ-C13/4 | 181709 | 3 |
| 15 | 415 | 15 | 480Y/277 | 10 | FAZ-C15/4 | 181710 | 3 |
| 16 | 415 | 15 | 480Y/277 | 10 | FAZ-C16/4 | 181711 | 3 |
| 20 | 415 | 15 | 480Y/277 | 10 | FAZ-C20/4 | 181712 | 3 |
| 25 | 415 | 15 | 480Y/277 | 10 | FAZ-C25/4 | 181713 | 3 |
| 32 | 415 | 15 | 480Y/277 | 10 | FAZ-C32/4 | 181714 | 3 |
| 40 | 415 | 15 | 480Y/277 | 5 | FAZ-C40/4 | 181715 | 3 |
| 50 | 415 | 15 | 480Y/277 | 5 | FAZ-C50/4 | 181716 | 3 |
| 63 | 415 | 15 | 480Y/277 | 5 | FAZ-C63/4 | 181717 | 3 |

FAZ Miniature Circuit Breakers (MCBs)

Characteristic D

| | Rated current I_n (A) | Rated voltage (V) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Rated voltage UL1077 (V) | Breaking capacity acc. to UL1077 (kA) | Type Designation | Article No. | Units per package |
|---------------|----------------------------|----------------------|---|--------------------------------|--|---------------------|-------------|-------------------------|
| 1-pole | | | | | | | | |
| 0.5 | 240/415 | 15 | 277 | 5 | | FAZ-D0,5/1 | 181718 | 12 |
| 1 | 240/415 | 15 | 277 | 5 | | FAZ-D1/1 | 181719 | 12 |
| 1.5 | 240/415 | 15 | 277 | 5 | | FAZ-D1,5/1 | 181720 | 12 |
| 1.6 | 240/415 | 15 | 277 | 5 | | FAZ-D1,6/1 | 181721 | 12 |
| 2 | 240/415 | 15 | 277 | 5 | | FAZ-D2/1 | 181722 | 12 |
| 2.5 | 240/415 | 15 | 277 | 5 | | FAZ-D2,5/1 | 181723 | 12 |
| 3 | 240/415 | 15 | 277 | 5 | | FAZ-D3/1 | 181724 | 12 |
| 3.5 | 240/415 | 15 | 277 | 5 | | FAZ-D3,5/1 | 181725 | 12 |
| 4 | 240/415 | 15 | 277 | 5 | | FAZ-D4/1 | 181726 | 12 |
| 5 | 240/415 | 15 | 277 | 5 | | FAZ-D5/1 | 181727 | 12 |
| 6 | 240/415 | 15 | 277 | 5 | | FAZ-D6/1 | 181728 | 12 |
| 8 | 240/415 | 15 | 277 | 5 | | FAZ-D8/1 | 181729 | 12 |
| 10 | 240/415 | 15 | 277 | 5 | | FAZ-D10/1 | 181730 | 12 |
| 12 | 240/415 | 15 | 277 | 5 | | FAZ-D12/1 | 181731 | 12 |
| 13 | 240/415 | 15 | 277 | 5 | | FAZ-D13/1 | 181732 | 12 |
| 15 | 240/415 | 15 | 277 | 5 | | FAZ-D15/1 | 181733 | 12 |
| 16 | 240/415 | 15 | 277 | 5 | | FAZ-D16/1 | 181734 | 12 |
| 20 | 240/415 | 15 | 277 | 5 | | FAZ-D20/1 | 181735 | 12 |
| 25 | 240/415 | 15 | 277 | 5 | | FAZ-D25/1 | 181736 | 12 |
| 32 | 240/415 | 15 | 277 | 5 | | FAZ-D32/1 | 181737 | 12 |
| 40 | 240/415 | 15 | 277 | 5 | | FAZ-D40/1 | 181738 | 12 |
| 50 | 240/415 | 10 | - | - | | FAZ-D50/1 | 181739 | 12 |
| 63 | 240/415 | 10 | - | - | | FAZ-D63/1 | 181740 | 12 |

SG53112



SG55612



1+N-pole

| | | | | | | | | |
|-----|-----|----|-----|---|--|-------------|--------|---|
| 0.5 | 240 | 15 | 277 | 5 | | FAZ-D0,5/1N | 181741 | 6 |
| 1 | 240 | 15 | 277 | 5 | | FAZ-D1/1N | 181742 | 6 |
| 1.5 | 240 | 15 | 277 | 5 | | FAZ-D1,5/1N | 181743 | 6 |
| 1.6 | 240 | 15 | 277 | 5 | | FAZ-D1,6/1N | 181744 | 6 |
| 2 | 240 | 15 | 277 | 5 | | FAZ-D2/1N | 181745 | 6 |
| 2.5 | 240 | 15 | 277 | 5 | | FAZ-D2,5/1N | 181746 | 6 |
| 3 | 240 | 15 | 277 | 5 | | FAZ-D3/1N | 181747 | 6 |
| 3.5 | 240 | 15 | 277 | 5 | | FAZ-D3,5/1N | 181748 | 6 |
| 4 | 240 | 15 | 277 | 5 | | FAZ-D4/1N | 181749 | 6 |
| 5 | 240 | 15 | 277 | 5 | | FAZ-D5/1N | 181750 | 6 |
| 6 | 240 | 15 | 277 | 5 | | FAZ-D6/1N | 181751 | 6 |
| 8 | 240 | 15 | 277 | 5 | | FAZ-D8/1N | 181752 | 6 |
| 10 | 240 | 15 | 277 | 5 | | FAZ-D10/1N | 181753 | 6 |
| 12 | 240 | 15 | 277 | 5 | | FAZ-D12/1N | 181754 | 6 |
| 13 | 240 | 15 | 277 | 5 | | FAZ-D13/1N | 181755 | 6 |
| 15 | 240 | 15 | 277 | 5 | | FAZ-D15/1N | 181756 | 6 |
| 16 | 240 | 15 | 277 | 5 | | FAZ-D16/1N | 181757 | 6 |
| 20 | 240 | 15 | 277 | 5 | | FAZ-D20/1N | 181758 | 6 |
| 25 | 240 | 15 | 277 | 5 | | FAZ-D25/1N | 181759 | 6 |
| 32 | 240 | 15 | 277 | 5 | | FAZ-D32/1N | 181760 | 6 |
| 40 | 240 | 15 | 277 | 5 | | FAZ-D40/1N | 181761 | 6 |
| 50 | 240 | 10 | - | - | | FAZ-D50/1N | 181762 | 6 |
| 63 | 240 | 10 | - | - | | FAZ-D63/1N | 181763 | 6 |

SG55112



| Rated current I_n (A) | Rated voltage (V) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Rated voltage UL1077 (V) | Breaking capacity acc. to UL1077 (kA) | Type Designation | Article No. | Units per package |
|----------------------------|----------------------|---|--------------------------------|--|---------------------|-------------|-------------------------|
|----------------------------|----------------------|---|--------------------------------|--|---------------------|-------------|-------------------------|

2-pole

| | | | | | | | |
|-----|-----|----|----------|---|------------|--------|---|
| 0.5 | 415 | 15 | 480Y/277 | 5 | FAZ-D0,5/2 | 181764 | 6 |
| 1 | 415 | 15 | 480Y/277 | 5 | FAZ-D1/2 | 181765 | 6 |
| 1.5 | 415 | 15 | 480Y/277 | 5 | FAZ-D1,5/2 | 181766 | 6 |
| 1.6 | 415 | 15 | 480Y/277 | 5 | FAZ-D1,6/2 | 181767 | 6 |
| 2 | 415 | 15 | 480Y/277 | 5 | FAZ-D2/2 | 181768 | 6 |
| 2.5 | 415 | 15 | 480Y/277 | 5 | FAZ-D2,5/2 | 181769 | 6 |
| 3 | 415 | 15 | 480Y/277 | 5 | FAZ-D3/2 | 181770 | 6 |
| 3.5 | 415 | 15 | 480Y/277 | 5 | FAZ-D3,5/2 | 181771 | 6 |
| 4 | 415 | 15 | 480Y/277 | 5 | FAZ-D4/2 | 181772 | 6 |
| 5 | 415 | 15 | 480Y/277 | 5 | FAZ-D5/2 | 181773 | 6 |
| 6 | 415 | 15 | 480Y/277 | 5 | FAZ-D6/2 | 181774 | 6 |
| 7 | 415 | 15 | 480Y/277 | 5 | FAZ-D7/2 | 181775 | 6 |
| 8 | 415 | 15 | 480Y/277 | 5 | FAZ-D8/2 | 181776 | 6 |
| 10 | 415 | 15 | 480Y/277 | 5 | FAZ-D10/2 | 181777 | 6 |
| 12 | 415 | 15 | 480Y/277 | 5 | FAZ-D12/2 | 181778 | 6 |
| 13 | 415 | 15 | 480Y/277 | 5 | FAZ-D13/2 | 181779 | 6 |
| 15 | 415 | 15 | 480Y/277 | 5 | FAZ-D15/2 | 181780 | 6 |
| 16 | 415 | 15 | 480Y/277 | 5 | FAZ-D16/2 | 181781 | 6 |
| 20 | 415 | 15 | 480Y/277 | 5 | FAZ-D20/2 | 181782 | 6 |
| 25 | 415 | 15 | 480Y/277 | 5 | FAZ-D25/2 | 181783 | 6 |
| 32 | 415 | 15 | 480Y/277 | 5 | FAZ-D32/2 | 181785 | 6 |
| 40 | 415 | 15 | 480Y/277 | 5 | FAZ-D40/2 | 181786 | 6 |
| 50 | 415 | 10 | - | - | FAZ-D50/2 | 181787 | 6 |
| 63 | 415 | 10 | - | - | FAZ-D63/2 | 181788 | 6 |

SG53412



3-pole

| | | | | | | | |
|-----|-----|----|----------|---|------------|--------|---|
| 0.5 | 415 | 15 | 480Y/277 | 5 | FAZ-D0,5/3 | 181789 | 4 |
| 1 | 415 | 15 | 480Y/277 | 5 | FAZ-D1/3 | 181790 | 4 |
| 1.5 | 415 | 15 | 480Y/277 | 5 | FAZ-D1,5/3 | 181791 | 4 |
| 1.6 | 415 | 15 | 480Y/277 | 5 | FAZ-D1,6/3 | 181792 | 4 |
| 2 | 415 | 15 | 480Y/277 | 5 | FAZ-D2/3 | 181793 | 4 |
| 2.5 | 415 | 15 | 480Y/277 | 5 | FAZ-D2,5/3 | 181794 | 4 |
| 3 | 415 | 15 | 480Y/277 | 5 | FAZ-D3/3 | 181795 | 4 |
| 3.5 | 415 | 15 | 480Y/277 | 5 | FAZ-D3,5/3 | 181796 | 4 |
| 4 | 415 | 15 | 480Y/277 | 5 | FAZ-D4/3 | 181797 | 4 |
| 5 | 415 | 15 | 480Y/277 | 5 | FAZ-D5/3 | 181798 | 4 |
| 6 | 415 | 15 | 480Y/277 | 5 | FAZ-D6/3 | 181799 | 4 |
| 7 | 415 | 15 | 480Y/277 | 5 | FAZ-D7/3 | 181800 | 4 |
| 8 | 415 | 15 | 480Y/277 | 5 | FAZ-D8/3 | 181801 | 4 |
| 10 | 415 | 15 | 480Y/277 | 5 | FAZ-D10/3 | 181802 | 4 |
| 12 | 415 | 15 | 480Y/277 | 5 | FAZ-D12/3 | 181803 | 4 |
| 13 | 415 | 15 | 480Y/277 | 5 | FAZ-D13/3 | 181804 | 4 |
| 15 | 415 | 15 | 480Y/277 | 5 | FAZ-D15/3 | 181805 | 4 |
| 16 | 415 | 15 | 480Y/277 | 5 | FAZ-D16/3 | 181806 | 4 |
| 20 | 415 | 15 | 480Y/277 | 5 | FAZ-D20/3 | 181807 | 4 |
| 25 | 415 | 15 | 480Y/277 | 5 | FAZ-D25/3 | 181808 | 4 |
| 30 | 415 | 15 | 480Y/277 | 5 | FAZ-D30/3 | 181809 | 4 |
| 32 | 415 | 15 | 480Y/277 | 5 | FAZ-D32/3 | 181810 | 4 |
| 40 | 415 | 10 | 480Y/277 | 5 | FAZ-D40/3 | 181811 | 4 |
| 50 | 415 | 10 | - | - | FAZ-D50/3 | 181812 | 4 |
| 63 | 415 | 10 | - | - | FAZ-D63/3 | 181813 | 4 |

SG55712



3+N-pole

| Rated current I_n (A) | Rated voltage (V) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Rated voltage UL1077 (V) | Breaking capacity acc. to UL1077 (kA) | Type Designation | Article No. | Units per package |
|----------------------------|----------------------|---|--------------------------------|--|---------------------|-------------|-------------------------|
| 0.5 | 415 | 15 | 480Y/277 | 5 | FAZ-D0,5/3N | 181814 | 3 |
| 1 | 415 | 15 | 480Y/277 | 5 | FAZ-D1/3N | 181815 | 3 |
| 1.5 | 415 | 15 | 480Y/277 | 5 | FAZ-D1,5/3N | 181816 | 3 |
| 1.6 | 415 | 15 | 480Y/277 | 5 | FAZ-D1,6/3N | 181817 | 3 |
| 2 | 415 | 15 | 480Y/277 | 5 | FAZ-D2/3N | 181818 | 3 |
| 2.5 | 415 | 15 | 480Y/277 | 5 | FAZ-D2,5/3N | 181819 | 3 |
| 3 | 415 | 15 | 480Y/277 | 5 | FAZ-D3/3N | 181820 | 3 |
| 3.5 | 415 | 15 | 480Y/277 | 5 | FAZ-D3,5/3N | 181821 | 3 |
| 4 | 415 | 15 | 480Y/277 | 5 | FAZ-D4/3N | 181822 | 3 |
| 5 | 415 | 15 | 480Y/277 | 5 | FAZ-D5/3N | 181823 | 3 |
| 6 | 415 | 15 | 480Y/277 | 5 | FAZ-D6/3N | 181824 | 3 |
| 8 | 415 | 15 | 480Y/277 | 5 | FAZ-D8/3N | 181825 | 3 |
| 10 | 415 | 15 | 480Y/277 | 5 | FAZ-D10/3N | 181826 | 3 |
| 12 | 415 | 15 | 480Y/277 | 5 | FAZ-D12/3N | 181827 | 3 |
| 13 | 415 | 15 | 480Y/277 | 5 | FAZ-D13/3N | 181828 | 3 |
| 15 | 415 | 15 | 480Y/277 | 5 | FAZ-D15/3N | 181829 | 3 |
| 16 | 415 | 15 | 480Y/277 | 5 | FAZ-D16/3N | 181830 | 3 |
| 20 | 415 | 15 | 480Y/277 | 5 | FAZ-D20/3N | 181639 | 3 |
| 25 | 415 | 15 | 480Y/277 | 5 | FAZ-D25/3N | 181640 | 3 |
| 32 | 415 | 15 | 480Y/277 | 5 | FAZ-D32/3N | 181641 | 3 |
| 40 | 415 | 15 | 480Y/277 | 5 | FAZ-D40/3N | 181642 | 3 |
| 50 | 415 | 10 | - | - | FAZ-D50/3N | 181643 | 3 |
| 63 | 415 | 10 | - | - | FAZ-D63/3N | 181644 | 3 |

SG55812



4-pole

| Rated current I_n (A) | Rated voltage (V) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Rated voltage UL1077 (V) | Breaking capacity acc. to UL1077 (kA) | Type Designation | Article No. | Units per package |
|----------------------------|----------------------|---|--------------------------------|--|---------------------|-------------|-------------------------|
| 0.5 | 415 | 15 | 480Y/277 | 5 | FAZ-D0,5/4 | 181645 | 3 |
| 1 | 415 | 15 | 480Y/277 | 5 | FAZ-D1/4 | 181646 | 3 |
| 1.5 | 415 | 15 | 480Y/277 | 5 | FAZ-D1,5/4 | 181647 | 3 |
| 1.6 | 415 | 15 | 480Y/277 | 5 | FAZ-D1,6/4 | 181648 | 3 |
| 2 | 415 | 15 | 480Y/277 | 5 | FAZ-D2/4 | 181649 | 3 |
| 2.5 | 415 | 15 | 480Y/277 | 5 | FAZ-D2,5/4 | 181650 | 3 |
| 3 | 415 | 15 | 480Y/277 | 5 | FAZ-D3/4 | 181843 | 3 |
| 3.5 | 415 | 15 | 480Y/277 | 5 | FAZ-D3,5/4 | 181844 | 3 |
| 4 | 415 | 15 | 480Y/277 | 5 | FAZ-D4/4 | 181845 | 3 |
| 5 | 415 | 15 | 480Y/277 | 5 | FAZ-D5/4 | 181846 | 3 |
| 6 | 415 | 15 | 480Y/277 | 5 | FAZ-D6/4 | 181847 | 3 |
| 7 | 415 | 15 | 480Y/277 | 5 | FAZ-D7/4 | 181848 | 3 |
| 8 | 415 | 15 | 480Y/277 | 5 | FAZ-D8/4 | 181849 | 3 |
| 10 | 415 | 15 | 480Y/277 | 5 | FAZ-D10/4 | 181850 | 3 |
| 12 | 415 | 15 | 480Y/277 | 5 | FAZ-D12/4 | 181851 | 3 |
| 13 | 415 | 15 | 480Y/277 | 5 | FAZ-D13/4 | 181852 | 3 |
| 15 | 415 | 15 | 480Y/277 | 5 | FAZ-D15/4 | 181853 | 3 |
| 16 | 415 | 15 | 480Y/277 | 5 | FAZ-D16/4 | 181854 | 3 |
| 20 | 415 | 15 | 480Y/277 | 5 | FAZ-D20/4 | 181855 | 3 |
| 25 | 415 | 15 | 480Y/277 | 5 | FAZ-D25/4 | 181856 | 3 |
| 32 | 415 | 15 | 480Y/277 | 5 | FAZ-D32/4 | 181857 | 3 |
| 40 | 415 | 10 | 480Y/277 | 5 | FAZ-D40/4 | 181858 | 3 |
| 50 | 415 | 10 | - | - | FAZ-D50/4 | 181859 | 3 |
| 63 | 415 | 10 | - | - | FAZ-D63/4 | 181860 | 3 |

FAZ Miniature Circuit Breakers (MCBs)

Characteristic K

| | Rated current I_n (A) | Rated voltage (V) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Rated voltage UL1077 (V) | Breaking capacity acc. to UL1077 (kA) | Type Designation | Article No. | Units per package |
|---------------|----------------------------|----------------------|---|--------------------------------|--|---------------------|-------------|-------------------------|
| 1-pole | | | | | | | | |
| | 0.5 | 240/415 | 15 | 277 | 5 | FAZ-K0,5/1 | 278589 | 12/120 |
| | 1 | 240/415 | 15 | 277 | 5 | FAZ-K1/1 | 278590 | 12/120 |
| | 1.6 | 240/415 | 15 | 277 | 5 | FAZ-K1,6/1 | 278591 | 12/120 |
| | 2 | 240/415 | 15 | 277 | 5 | FAZ-K2/1 | 278592 | 12/120 |
| | 3 | 240/415 | 15 | 277 | 5 | FAZ-K3/1 | 278593 | 12/120 |
| | 4 | 240/415 | 15 | 277 | 5 | FAZ-K4/1 | 278594 | 12/120 |
| | 6 | 240/415 | 15 | 277 | 5 | FAZ-K6/1 | 278595 | 12/120 |
| | 8 | 240/415 | 15 | 277 | 5 | FAZ-K8/1 | 278596 | 12/120 |
| | 10 | 240/415 | 15 | 277 | 5 | FAZ-K10/1 | 278597 | 12/120 |
| | 13 | 240/415 | 15 | 277 | 5 | FAZ-K13/1 | 278598 | 12/120 |
| | 16 | 240/415 | 15 | 277 | 5 | FAZ-K16/1 | 278599 | 12/120 |
| | 20 | 240/415 | 15 | 277 | 5 | FAZ-K20/1 | 278600 | 12/120 |
| | 25 | 240/415 | 15 | 277 | 5 | FAZ-K25/1 | 278601 | 12/120 |
| | 32 | 240/415 | 15 | 277 | 5 | FAZ-K32/1 | 278602 | 12/120 |
| | 40 | 240/415 | 15 | 277 | 5 | FAZ-K40/1 | 278603 | 12/120 |
| | 50 | 240/415 | 15 | 277 | 5 | FAZ-K50/1 | 278604 | 12/120 |
| | 63 | 240/415 | 15 | 277 | 5 | FAZ-K63/1 | 278605 | 12/120 |

SG53112



SG55612



| | | | | | | | | |
|-----------------|-----|-----|----|-----|---|-------------|--------|------|
| 1+N-pole | | | | | | | | |
| | 0.5 | 240 | 15 | 277 | 5 | FAZ-K0,5/1N | 278702 | 1/60 |
| | 1 | 240 | 15 | 277 | 5 | FAZ-K1/1N | 278703 | 1/60 |
| | 1.6 | 240 | 15 | 277 | 5 | FAZ-K1,6/1N | 278704 | 1/60 |
| | 2 | 240 | 15 | 277 | 5 | FAZ-K2/1N | 278705 | 1/60 |
| | 3 | 240 | 15 | 277 | 5 | FAZ-K3/1N | 278706 | 1/60 |
| | 4 | 240 | 15 | 277 | 5 | FAZ-K4/1N | 278707 | 1/60 |
| | 6 | 240 | 15 | 277 | 5 | FAZ-K6/1N | 278708 | 1/60 |
| | 8 | 240 | 15 | 277 | 5 | FAZ-K8/1N | 278709 | 1/60 |
| | 10 | 240 | 15 | 277 | 5 | FAZ-K10/1N | 278710 | 1/60 |
| | 13 | 240 | 15 | 277 | 5 | FAZ-K13/1N | 278711 | 1/60 |
| | 16 | 240 | 15 | 277 | 5 | FAZ-K16/1N | 278712 | 1/60 |
| | 20 | 240 | 15 | 277 | 5 | FAZ-K20/1N | 278713 | 1/60 |
| | 25 | 240 | 15 | 277 | 5 | FAZ-K25/1N | 278714 | 1/60 |
| | 32 | 240 | 15 | 277 | 5 | FAZ-K32/1N | 278715 | 1/60 |
| | 40 | 240 | 15 | 277 | 5 | FAZ-K40/1N | 278716 | 1/60 |
| | 50 | 240 | 15 | 277 | 5 | FAZ-K50/1N | 278717 | 1/60 |
| | 63 | 240 | 15 | 277 | 5 | FAZ-K63/1N | 278718 | 1/60 |

SG55112



| Rated current I_n (A) | Rated voltage (V) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Rated voltage UL1077 (V) | Breaking capacity acc. to UL1077 (kA) | Type Designation | Article No. | Units per package |
|----------------------------|----------------------|---|--------------------------------|--|---------------------|-------------|-------------------------|
|----------------------------|----------------------|---|--------------------------------|--|---------------------|-------------|-------------------------|

2-pole

| | | | | | | | |
|-----|-----|----|----------|---|------------|--------|------|
| 0.5 | 415 | 15 | 480Y/277 | 5 | FAZ-K0,5/2 | 278788 | 1/60 |
| 1 | 415 | 15 | 480Y/277 | 5 | FAZ-K1/2 | 278789 | 1/60 |
| 1.6 | 415 | 15 | 480Y/277 | 5 | FAZ-K1,6/2 | 278790 | 1/60 |
| 2 | 415 | 15 | 480Y/277 | 5 | FAZ-K2/2 | 278791 | 1/60 |
| 3 | 415 | 15 | 480Y/277 | 5 | FAZ-K3/2 | 278792 | 1/60 |
| 4 | 415 | 15 | 480Y/277 | 5 | FAZ-K4/2 | 278793 | 1/60 |
| 6 | 415 | 15 | 480Y/277 | 5 | FAZ-K6/2 | 278794 | 1/60 |
| 8 | 415 | 15 | 480Y/277 | 5 | FAZ-K8/2 | 278795 | 1/60 |
| 10 | 415 | 15 | 480Y/277 | 5 | FAZ-K10/2 | 278796 | 1/60 |
| 13 | 415 | 15 | 480Y/277 | 5 | FAZ-K13/2 | 278797 | 1/60 |
| 16 | 415 | 15 | 480Y/277 | 5 | FAZ-K16/2 | 278798 | 1/60 |
| 20 | 415 | 15 | 480Y/277 | 5 | FAZ-K20/2 | 278799 | 1/60 |
| 25 | 415 | 15 | 480Y/277 | 5 | FAZ-K25/2 | 278800 | 1/60 |
| 32 | 415 | 15 | 480Y/277 | 5 | FAZ-K32/2 | 278801 | 1/60 |
| 40 | 415 | 15 | 480Y/277 | 5 | FAZ-K40/2 | 278802 | 1/60 |
| 50 | 415 | 15 | 480Y/277 | 5 | FAZ-K50/2 | 278803 | 1/60 |
| 63 | 415 | 15 | 480Y/277 | 5 | FAZ-K63/2 | 278804 | 1/60 |

SG53412



3-pole

| | | | | | | | |
|-----|-----|----|----------|---|------------|--------|------|
| 0.5 | 415 | 15 | 480Y/277 | 5 | FAZ-K0,5/3 | 278901 | 1/40 |
| 1 | 415 | 15 | 480Y/277 | 5 | FAZ-K1/3 | 278902 | 1/40 |
| 1.6 | 415 | 15 | 480Y/277 | 5 | FAZ-K1,6/3 | 278903 | 1/40 |
| 2 | 415 | 15 | 480Y/277 | 5 | FAZ-K2/3 | 278904 | 1/40 |
| 3 | 415 | 15 | 480Y/277 | 5 | FAZ-K3/3 | 278905 | 1/40 |
| 4 | 415 | 15 | 480Y/277 | 5 | FAZ-K4/3 | 278906 | 1/40 |
| 6 | 415 | 15 | 480Y/277 | 5 | FAZ-K6/3 | 278907 | 1/40 |
| 8 | 415 | 15 | 480Y/277 | 5 | FAZ-K8/3 | 278908 | 1/40 |
| 10 | 415 | 15 | 480Y/277 | 5 | FAZ-K10/3 | 278909 | 1/40 |
| 13 | 415 | 15 | 480Y/277 | 5 | FAZ-K13/3 | 278910 | 1/40 |
| 16 | 415 | 15 | 480Y/277 | 5 | FAZ-K16/3 | 278911 | 1/40 |
| 20 | 415 | 15 | 480Y/277 | 5 | FAZ-K20/3 | 278912 | 1/40 |
| 25 | 415 | 15 | 480Y/277 | 5 | FAZ-K25/3 | 278913 | 1/40 |
| 32 | 415 | 15 | 480Y/277 | 5 | FAZ-K32/3 | 278914 | 1/40 |
| 40 | 415 | 15 | 480Y/277 | 5 | FAZ-K40/3 | 278915 | 1/40 |
| 50 | 415 | 15 | 480Y/277 | 5 | FAZ-K50/3 | 278916 | 1/40 |
| 63 | 415 | 15 | 480Y/277 | 5 | FAZ-K63/3 | 278917 | 1/40 |

| Rated current I_n (A) | Rated voltage (V) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Rated voltage UL1077 (V) | Breaking capacity acc. to UL1077 (kA) | Type Designation | Article No. | Units per package |
|----------------------------|----------------------|---|--------------------------------|--|---------------------|-------------|-------------------------|
|----------------------------|----------------------|---|--------------------------------|--|---------------------|-------------|-------------------------|

SG55712



3+N-pole

| | | | | | | | |
|-----|-----|----|----------|---|-------------|--------|------|
| 0.5 | 415 | 15 | 480Y/277 | 5 | FAZ-K0,5/3N | 279003 | 1/30 |
| 1 | 415 | 15 | 480Y/277 | 5 | FAZ-K1/3N | 279004 | 1/30 |
| 1.6 | 415 | 15 | 480Y/277 | 5 | FAZ-K1,6/3N | 279005 | 1/30 |
| 2 | 415 | 15 | 480Y/277 | 5 | FAZ-K2/3N | 279006 | 1/30 |
| 3 | 415 | 15 | 480Y/277 | 5 | FAZ-K3/3N | 279007 | 1/30 |
| 4 | 415 | 15 | 480Y/277 | 5 | FAZ-K4/3N | 279008 | 1/30 |
| 6 | 415 | 15 | 480Y/277 | 5 | FAZ-K6/3N | 279009 | 1/30 |
| 8 | 415 | 15 | 480Y/277 | 5 | FAZ-K8/3N | 279010 | 1/30 |
| 10 | 415 | 15 | 480Y/277 | 5 | FAZ-K10/3N | 279011 | 1/30 |
| 13 | 415 | 15 | 480Y/277 | 5 | FAZ-K13/3N | 279012 | 1/30 |
| 16 | 415 | 15 | 480Y/277 | 5 | FAZ-K16/3N | 279013 | 1/30 |
| 20 | 415 | 15 | 480Y/277 | 5 | FAZ-K20/3N | 279014 | 1/30 |
| 25 | 415 | 15 | 480Y/277 | 5 | FAZ-K25/3N | 279015 | 1/30 |
| 32 | 415 | 15 | 480Y/277 | 5 | FAZ-K32/3N | 279016 | 1/30 |
| 40 | 415 | 15 | 480Y/277 | 5 | FAZ-K40/3N | 279017 | 1/30 |
| 50 | 415 | 15 | 480Y/277 | 5 | FAZ-K50/3N | 279018 | 1/30 |
| 63 | 415 | 15 | 480Y/277 | 5 | FAZ-K63/3N | 279019 | 1/30 |

SG55812



4-pole

| | | | | | | | |
|-----|-----|----|----------|---|------------|--------|------|
| 0.5 | 415 | 15 | 480Y/277 | 5 | FAZ-K0,5/4 | 279089 | 1/30 |
| 1 | 415 | 15 | 480Y/277 | 5 | FAZ-K1/4 | 279090 | 1/30 |
| 1.6 | 415 | 15 | 480Y/277 | 5 | FAZ-K1,6/4 | 279091 | 1/30 |
| 2 | 415 | 15 | 480Y/277 | 5 | FAZ-K2/4 | 279092 | 1/30 |
| 3 | 415 | 15 | 480Y/277 | 5 | FAZ-K3/4 | 279093 | 1/30 |
| 4 | 415 | 15 | 480Y/277 | 5 | FAZ-K4/4 | 279094 | 1/30 |
| 6 | 415 | 15 | 480Y/277 | 5 | FAZ-K6/4 | 279095 | 1/30 |
| 8 | 415 | 15 | 480Y/277 | 5 | FAZ-K8/4 | 279096 | 1/30 |
| 10 | 415 | 15 | 480Y/277 | 5 | FAZ-K10/4 | 279097 | 1/30 |
| 13 | 415 | 15 | 480Y/277 | 5 | FAZ-K13/4 | 279098 | 1/30 |
| 16 | 415 | 15 | 480Y/277 | 5 | FAZ-K16/4 | 279099 | 1/30 |
| 20 | 415 | 15 | 480Y/277 | 5 | FAZ-K20/4 | 279100 | 1/30 |
| 25 | 415 | 15 | 480Y/277 | 5 | FAZ-K25/4 | 279101 | 1/30 |
| 32 | 415 | 15 | 480Y/277 | 5 | FAZ-K32/4 | 279102 | 1/30 |
| 40 | 415 | 15 | 480Y/277 | 5 | FAZ-K40/4 | 279103 | 1/30 |
| 50 | 415 | 15 | 480Y/277 | 5 | FAZ-K50/4 | 279104 | 1/30 |
| 63 | 415 | 15 | 480Y/277 | 5 | FAZ-K63/4 | 279105 | 1/30 |

FAZ Miniature Circuit Breakers (MCBs)

Characteristic S

| | Rated current I_n (A) | Rated voltage (V) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Rated voltage UL1077 (V) | Breaking capacity acc. to UL1077 (kA) | Type Designation | Article No. | Units per package |
|---------------|----------------------------|----------------------|---|--------------------------------|--|---------------------|-------------|-------------------------|
| 1-pole | | | | | | | | |
| | 1 | 240/415 | 10 | 277 | 5 | FAZ-S1/1 | 181861 | 12 |
| | 2 | 240/415 | 10 | 277 | 5 | FAZ-S2/1 | 181862 | 12 |
| | 3 | 240/415 | 10 | 277 | 5 | FAZ-S3/1 | 181863 | 12 |
| | 4 | 240/415 | 10 | 277 | 5 | FAZ-S4/1 | 181864 | 12 |
| | 6 | 240/415 | 10 | 277 | 5 | FAZ-S6/1 | 181865 | 12 |
| | 10 | 240/415 | 10 | 277 | 5 | FAZ-S10/1 | 181866 | 12 |
| | 16 | 240/415 | 10 | 277 | 5 | FAZ-S16/1 | 181867 | 12 |
| | 20 | 240/415 | 10 | 277 | 5 | FAZ-S20/1 | 181868 | 12 |
| | 25 | 240/415 | 10 | 277 | 5 | FAZ-S25/1 | 181869 | 12 |
| | 32 | 240/415 | 10 | 277 | 5 | FAZ-S32/1 | 181870 | 12 |
| | 40 | 240/415 | 10 | 277 | 5 | FAZ-S40/1 | 181871 | 12 |

SG53112



SG55112



| | | | | | | | | |
|---------------|----|-----|----|----------|---|-----------|--------|---|
| 2-pole | | | | | | | | |
| | 1 | 415 | 10 | 480Y/277 | 5 | FAZ-S1/2 | 181872 | 6 |
| | 2 | 415 | 10 | 480Y/277 | 5 | FAZ-S2/2 | 181873 | 6 |
| | 3 | 415 | 10 | 480Y/277 | 5 | FAZ-S3/2 | 181874 | 6 |
| | 4 | 415 | 10 | 480Y/277 | 5 | FAZ-S4/2 | 181875 | 6 |
| | 6 | 415 | 10 | 480Y/277 | 5 | FAZ-S6/2 | 181876 | 6 |
| | 10 | 415 | 10 | 480Y/277 | 5 | FAZ-S10/2 | 181877 | 6 |
| | 16 | 415 | 10 | 480Y/277 | 5 | FAZ-S16/2 | 181878 | 6 |
| | 20 | 415 | 10 | 480Y/277 | 5 | FAZ-S20/2 | 181879 | 6 |
| | 25 | 415 | 10 | 480Y/277 | 5 | FAZ-S25/2 | 181880 | 6 |
| | 32 | 415 | 10 | 480Y/277 | 5 | FAZ-S32/2 | 181881 | 6 |
| | 40 | 415 | 10 | 480Y/277 | 5 | FAZ-S40/2 | 181882 | 6 |

FAZ Miniature Circuit Breakers (MCBs)

Characteristic Z

| Rated current I_n (A) | Rated voltage (V) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Rated voltage UL1077 (V) | Breaking capacity acc. to UL1077 (kA) | Type Designation | Article No. | Units per package |
|----------------------------|----------------------|---|--------------------------------|--|---------------------|-------------|-------------------------|
| 1-pole | | | | | | | |
| 0,5 | 240/415 | 15 | 277 | 5 | FAZ-Z0,5/1 | 278617 | 12/120 |
| 1 | 240/415 | 15 | 277 | 5 | FAZ-Z1/1 | 278618 | 12/120 |
| 1.6 | 240/415 | 15 | 277 | 5 | FAZ-Z1,6/1 | 278619 | 12/120 |
| 2 | 240/415 | 15 | 277 | 5 | FAZ-Z2/1 | 278620 | 12/120 |
| 3 | 240/415 | 15 | 277 | 5 | FAZ-Z3/1 | 278621 | 12/120 |
| 4 | 240/415 | 15 | 277 | 5 | FAZ-Z4/1 | 278622 | 12/120 |
| 6 | 240/415 | 15 | 277 | 5 | FAZ-Z6/1 | 278623 | 12/120 |
| 8 | 240/415 | 15 | 277 | 5 | FAZ-Z8/1 | 278624 | 12/120 |
| 10 | 240/415 | 15 | 277 | 5 | FAZ-Z10/1 | 278625 | 12/120 |
| 13 | 240/415 | 15 | 277 | 5 | FAZ-Z13/1 | 106020 | 12/120 |
| 16 | 240/415 | 15 | 277 | 5 | FAZ-Z16/1 | 278626 | 12/120 |
| 20 | 240/415 | 15 | 277 | 5 | FAZ-Z20/1 | 278627 | 12/120 |
| 25 | 240/415 | 15 | 277 | 5 | FAZ-Z25/1 | 278628 | 12/120 |
| 32 | 240/415 | 15 | 277 | 5 | FAZ-Z32/1 | 278629 | 12/120 |
| 40 | 240/415 | 15 | 277 | 5 | FAZ-Z40/1 | 278630 | 12/120 |
| 50 | 240/415 | 15 | 277 | 5 | FAZ-Z50/1 | 278631 | 12/120 |
| 63 | 240/415 | 15 | 277 | 5 | FAZ-Z63/1 | 278632 | 12/120 |

SG53112



SG55112



| | | | | | | | |
|---------------|-----|----|----------|---|------------|--------|------|
| 2-pole | | | | | | | |
| 0,5 | 415 | 15 | 480Y/277 | 5 | FAZ-Z0,5/2 | 278816 | 1/60 |
| 1 | 415 | 15 | 480Y/277 | 5 | FAZ-Z1/2 | 278817 | 1/60 |
| 1.6 | 415 | 15 | 480Y/277 | 5 | FAZ-Z1,6/2 | 278818 | 1/60 |
| 2 | 415 | 15 | 480Y/277 | 5 | FAZ-Z2/2 | 278819 | 1/60 |
| 3 | 415 | 15 | 480Y/277 | 5 | FAZ-Z3/2 | 278820 | 1/60 |
| 4 | 415 | 15 | 480Y/277 | 5 | FAZ-Z4/2 | 278821 | 1/60 |
| 6 | 415 | 15 | 480Y/277 | 5 | FAZ-Z6/2 | 278822 | 1/60 |
| 8 | 415 | 15 | 480Y/277 | 5 | FAZ-Z8/2 | 278823 | 1/60 |
| 10 | 415 | 15 | 480Y/277 | 5 | FAZ-Z10/2 | 278824 | 1/60 |
| 13 | 415 | 15 | 480Y/277 | 5 | FAZ-Z13/2 | 106021 | 1/60 |
| 16 | 415 | 15 | 480Y/277 | 5 | FAZ-Z16/2 | 278825 | 1/60 |
| 20 | 415 | 15 | 480Y/277 | 5 | FAZ-Z20/2 | 278826 | 1/60 |
| 25 | 415 | 15 | 480Y/277 | 5 | FAZ-Z25/2 | 278827 | 1/60 |
| 32 | 415 | 15 | 480Y/277 | 5 | FAZ-Z32/2 | 278828 | 1/60 |
| 40 | 415 | 15 | 480Y/277 | 5 | FAZ-Z40/2 | 278829 | 1/60 |
| 50 | 415 | 15 | 480Y/277 | 5 | FAZ-Z50/2 | 278830 | 1/60 |
| 63 | 415 | 15 | 480Y/277 | 5 | FAZ-Z63/2 | 278831 | 1/60 |

SG53412



3-pole

| Rated current I_n (A) | Rated voltage (V) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Rated voltage UL1077 (V) | Breaking capacity acc. to UL1077 (kA) | Type Designation | Article No. | Units per package |
|----------------------------|----------------------|---|--------------------------------|--|---------------------|-------------|-------------------------|
| 0.5 | 415 | 15 | 480Y/277 | 5 | FAZ-Z0,5/3 | 278918 | 1/40 |
| 1 | 415 | 15 | 480Y/277 | 5 | FAZ-Z1/3 | 278919 | 1/40 |
| 1.6 | 415 | 15 | 480Y/277 | 5 | FAZ-Z1,6/3 | 278920 | 1/40 |
| 2 | 415 | 15 | 480Y/277 | 5 | FAZ-Z2/3 | 278921 | 1/40 |
| 3 | 415 | 15 | 480Y/277 | 5 | FAZ-Z3/3 | 278922 | 1/40 |
| 4 | 415 | 15 | 480Y/277 | 5 | FAZ-Z4/3 | 278923 | 1/40 |
| 6 | 415 | 15 | 480Y/277 | 5 | FAZ-Z6/3 | 278924 | 1/40 |
| 8 | 415 | 15 | 480Y/277 | 5 | FAZ-Z8/3 | 278925 | 1/40 |
| 10 | 415 | 15 | 480Y/277 | 5 | FAZ-Z10/3 | 278926 | 1/40 |
| 13 | 415 | 15 | 480Y/277 | 5 | FAZ-Z13/3 | 106022 | 1/40 |
| 16 | 415 | 15 | 480Y/277 | 5 | FAZ-Z16/3 | 278927 | 1/40 |
| 20 | 415 | 15 | 480Y/277 | 5 | FAZ-Z20/3 | 278928 | 1/40 |
| 25 | 415 | 15 | 480Y/277 | 5 | FAZ-Z25/3 | 278929 | 1/40 |
| 32 | 415 | 15 | 480Y/277 | 5 | FAZ-Z32/3 | 278930 | 1/40 |
| 40 | 415 | 15 | 480Y/277 | 5 | FAZ-Z40/3 | 278931 | 1/40 |
| 50 | 415 | 15 | 480Y/277 | 5 | FAZ-Z50/3 | 278932 | 1/40 |
| 63 | 415 | 15 | 480Y/277 | 5 | FAZ-Z63/3 | 278933 | 1/40 |

SG55812



4-pole

| Rated current I_n (A) | Rated voltage (V) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Rated voltage UL1077 (V) | Breaking capacity acc. to UL1077 (kA) | Type Designation | Article No. | Units per package |
|----------------------------|----------------------|---|--------------------------------|--|---------------------|-------------|-------------------------|
| 0.5 | 415 | 15 | 480Y/277 | 5 | FAZ-Z0,5/4 | 279106 | 1/60 |
| 1 | 415 | 15 | 480Y/277 | 5 | FAZ-Z1/4 | 279107 | 1/60 |
| 1.6 | 415 | 15 | 480Y/277 | 5 | FAZ-Z1,6/4 | 279108 | 1/60 |
| 2 | 415 | 15 | 480Y/277 | 5 | FAZ-Z2/4 | 279109 | 1/60 |
| 3 | 415 | 15 | 480Y/277 | 5 | FAZ-Z3/4 | 279110 | 1/60 |
| 4 | 415 | 15 | 480Y/277 | 5 | FAZ-Z4/4 | 279111 | 1/60 |
| 6 | 415 | 15 | 480Y/277 | 5 | FAZ-Z6/4 | 279112 | 1/60 |
| 8 | 415 | 15 | 480Y/277 | 5 | FAZ-Z8/4 | 279113 | 1/60 |
| 10 | 415 | 15 | 480Y/277 | 5 | FAZ-Z10/4 | 279114 | 1/60 |
| 13 | 415 | 15 | 480Y/277 | 5 | FAZ-Z13/4 | 106023 | 1/60 |
| 16 | 415 | 15 | 480Y/277 | 5 | FAZ-Z16/4 | 279115 | 1/60 |
| 20 | 415 | 15 | 480Y/277 | 5 | FAZ-Z20/4 | 279116 | 1/60 |
| 25 | 415 | 15 | 480Y/277 | 5 | FAZ-Z25/4 | 279117 | 1/60 |
| 32 | 415 | 15 | 480Y/277 | 5 | FAZ-Z32/4 | 279118 | 1/60 |
| 40 | 415 | 15 | 480Y/277 | 5 | FAZ-Z40/4 | 279119 | 1/60 |
| 50 | 415 | 15 | 480Y/277 | 5 | FAZ-Z50/4 | 279120 | 1/60 |
| 63 | 415 | 15 | 480Y/277 | 5 | FAZ-Z63/4 | 279121 | 1/60 |

FAZ-PN Miniature Circuit Breakers (MCBs)

Characteristic B

| Rated current I_n (A) | Rated voltage (V) | Breaking capacity acc. to IEC/EN 60898-1 (kA) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Type Designation | Article No. | Units per package |
|----------------------------|----------------------|---|---|---------------------|-------------|-------------------------|
| 1+N-pole (1MU) | | | | | | |
| 6 | 240 | 6 | 10 | FAZ-PN-B6/1N | 279146 | 12/120 |
| 10 | 240 | 6 | 10 | FAZ-PN-B10/1N | 279147 | 12/120 |
| 13 | 240 | 6 | 10 | FAZ-PN-B13/1N | 279148 | 12/120 |
| 16 | 240 | 6 | 10 | FAZ-PN-B16/1N | 279149 | 12/120 |
| 20 | 240 | 6 | 10 | FAZ-PN-B20/1N | 279150 | 12/120 |
| 25 | 240 | 6 | 10 | FAZ-PN-B25/1N | 279151 | 12/120 |
| 32 | 240 | 6 | 10 | FAZ-PN-B32/1N | 279152 | 12/120 |
| 40 | 240 | 6 | 10 | FAZ-PN-B40/1N | 279153 | 12/120 |

SG54212



FAZ-PN Miniature Circuit Breakers (MCBs)

Characteristic C



| Rated current I_n (A) | Rated voltage (V) | Breaking capacity acc. to IEC/EN 60898-1 (kA) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Type Designation | Article No. | Units per package |
|----------------------------|----------------------|---|---|---------------------|-------------|-------------------------|
| 1+N-pole (1MU) | | | | | | |
| 2 | 240 | 6 | 10 | FAZ-PN-C2/1N | 279154 | 12/120 |
| 4 | 240 | 6 | 10 | FAZ-PN-C4/1N | 279155 | 12/120 |
| 6 | 240 | 6 | 10 | FAZ-PN-C6/1N | 279156 | 12/120 |
| 10 | 240 | 6 | 10 | FAZ-PN-C10/1N | 279157 | 12/120 |
| 13 | 240 | 6 | 10 | FAZ-PN-C13/1N | 279158 | 12/120 |
| 16 | 240 | 6 | 10 | FAZ-PN-C16/1N | 279159 | 12/120 |
| 20 | 240 | 6 | 10 | FAZ-PN-C20/1N | 279160 | 12/120 |
| 25 | 240 | 6 | 10 | FAZ-PN-C25/1N | 279161 | 12/120 |
| 32 | 240 | 6 | 10 | FAZ-PN-C32/1N | 279162 | 12/120 |
| 40 | 240 | 6 | 10 | FAZ-PN-C40/1N | 279163 | 12/120 |

SG54212



FAZ-...-HS Miniature Circuit Breakers (MCBs)

Characteristic B

| | Rated current I_n (A) | Rated voltage (V) | Breaking capacity acc. to IEC/EN 60898-1 (kA) | Type Designation | Article No. | Units per package |
|--|----------------------------|----------------------|---|---------------------|-------------|-------------------------|
| 1-pole | | | | | | |
|  wa_sg00114 | 4 | 240 | 10 | FAZ-B4/1-HS | 279274 | 12/120 |
| 2-pole | | | | | | |
|  SG55512 | 4 | 240 | 10 | FAZ-B4/2-HS | 279275 | 1/60 |

FAZ Miniature Circuit Breakers

Accessories:

| | | |
|---|--------------|------------------------|
| Auxiliary switch for subsequent installation | ZP-IHK | 286052 |
| Auxiliary switch for subsequent installation | ZP-WHK | 286053 |
| Tripping signal contact for subsequent installation | ZP-NHK | 248437 |
| Shunt trip release | ZP-ASA | 248438, 248439 |
| Undervoltage release | Z-USA | 258288, 248289, 248290 |
| | Z-USD | 248292, 248291 |
| Switching interlock | Z-IS/SPE-1TE | 274418 |
| Terminal cover | | |
| 1-pole | Z7-AK-1TE | 750754200 |
| 2-pole | Z-CV/SD-2P | 221954800 |
| 3-pole | Z-CV/SD-3P | 221954900 |
| 4-pole | Z-CV/SD-4P | 221953900 |

Specifications FAZ

Technical data


| | B Curve | C Curve | D Curve |
|--|--|---|---|
| Electrical | | | |
| Approvals | UR (UL 1077), CSA (CSA 22.2 No. 235), CE, CB (Not for D50 and D63) | | |
| Standards | IEC/EN 60947-2 | | |
| Short-circuit trip response | 3–5 I_n | 5–10 I_n | 10–20 I_n |
| Supplementary Protectors – UL/CSA | | | |
| Current range | 1–63A | 0.5–63A | 0.5–40A |
| Maximum voltage ratings – UL/CSA | | | |
| Single-pole | 277 Vac 48 Vdc | 277 Vac 48 Vdc | 277 Vac 48 Vdc |
| Two-, three-pole | 480Y/277 Vac | 480Y/277 Vac | 480Y/277 Vac |
| Two poles in series | 96 Vdc | 96 Vdc | 96 Vdc |
| Thermal tripping characteristics | | | |
| Single-pole | < 1 hour @ 1.35 x I_n @ 40°C | < 1 hour @ 1.35 x I_n @ 40°C | < 1 hour @ 1.35 x I_n @ 40°C |
| Multi-pole | < 1 hour @ 1.45 x I_n @ 40°C | < 1 hour @ 1.45 x I_n @ 40°C | < 1 hour @ 1.45 x I_n @ 40°C |
| Short-circuit ratings (at max. voltage) | | | |
| Single-pole | 10 kA (5 kA for 40–63A device) | 10 kA (5 kA for 40–63A device) | 5 kA |
| Two-, three-pole | 10 kA (5 kA for 40–63A device) | 10 kA (5 kA for 40–63A device) | 5 kA |
| Single-pole | 10 kA @ 48 Vdc | 10 kA @ 48 Vdc | 10 kA @ 48 Vdc |
| Two poles in series | 10 kA @ 96 Vdc | 10 kA @ 96 Vdc | 10 kA @ 96 Vdc |
| Miniature Circuit Breaker – IEC | | | |
| Current range | 1–63A | 0.5–63A | 0.5–63A |
| Maximum voltage ratings – IEC 60947-2 | | | |
| Single-pole | 230 Vac 60 Vdc | 230 Vac 60 Vdc | 230 Vac 60 Vdc |
| Two-, three-pole | 230/400 Vac | 230/400 Vac | 230/400 Vac |
| Maximum Voltage Ratings – IEC 60898 | | | |
| Single-pole | 240 Vac | 240 Vac | 240 Vac |
| Two-, three-pole | 240/415 Vac | 240/415 Vac | 240/415 Vac |
| Thermal tripping characteristics | | | |
| | > 1 hour @ 1.05 x I_n @ 40°C < 1 hour @ 1.3 x I_n @ 40°C | > 1 hour @ 1.05 x I_n @ 40°C < 1 hour @ 1.3 x I_n @ 40°C | > 1 hour @ 1.05 x I_n @ 40°C < 1 hour @ 1.3 x I_n @ 40°C |
| Interrupt ratings (at max. voltage) | | | |
| IEC 60947-2 | 15 kA | 15 kA | 15 kA (type D50 and D63: 10kA) |
| IEC 60898 | 10 kA | 10 kA | 10 kA (type D50 and D63: 6kA) |
| Operational switching capacity | 7.5 kA | 7.5 kA | 7.5 kA (type D50 and D63: 6kA) |
| Max. back-up fuse [gL/gG] | 125A | 125A | 125A |
| Rated impulse withstand – U_{imp} | 4000 Vac | 4000 Vac | 4000 Vac |
| Rated insulation voltage – U_i | 440 Vac | 440 Vac | 440 Vac |
| Environmental/General | | | |
| Selectivity class | 3 | 3 | 3 |
| Lifespan (operations) | > 10000 (1 operation = ON/OFF) | > 10000 (1 operation = ON/OFF) | > 10000 (1 operation = ON/OFF) |
| Shock (IEC 68-2-22) | 10g–120 ms | 10g–120 ms | 10g–120 ms |
| Operating temperature range | -40 to +75°C | -40 to +75°C | -40 to +75°C |
| Mechanical | | | |
| Standard front dimension | | | |
| Device height | 80 mm | 80 mm | 80 mm |
| Terminal protection | Finger and back-of-hand proof | Finger and back-of-hand proof | Finger and back-of-hand proof |
| Mounting width per pole | 17.5 mm | 17.5 mm | 17.5 mm |
| Mounting | IEC/EN 60715 top-hat rail | IEC/EN 60715 top-hat rail | IEC/EN 60715 top-hat rail |
| Degree of protection | IP20 | IP20 | IP20 |
| Terminals top and bottom | Twin-purpose terminals | Twin-purpose terminals | Twin-purpose terminals |
| Supply connection | Line or load side | Line or load side | Line or load side |
| Terminal capacity [mm ²] | 1 x 25 / 2 x 10 | 1 x 25 / 2 x 10 | 1 x 25 / 2 x 10 |
| Torque | 2.4 Nm | 2.4 Nm | 2.4 Nm |
| Thickness of busbar material | 0.8–2 mm | 0.8–2 mm | 0.8–2 mm |
| Mounting position | As required | As required | As required |

Specifications FAZ

Technical Data (continued)


| | K Curve | S Curve | Z Curve |
|--|---|---|---|
| Electrical | | | |
| Approvals | UR (UL 1077), CE | UR (UL 1077), CSA (CSA 22.2 No. 235) for 1-16 A, CE, CB | UR (UL 1077), CE |
| Standards | IEC/EN 60947-2 | | |
| Short-circuit trip response | 8–12 I_n | 13–17 I_n | 2–3 I_n |
| Supplementary Protectors—UL/CSA | | | |
| Current range | 0.5–63A | 0.5–40A | 1–63A |
| Maximum voltage ratings—UL/CSA | | | |
| Single-pole, single-pole + neutral | 277 Vac 48 Vdc | 277 Vac 48 Vdc | 277 Vac 48 Vdc |
| Two-, three-, four-pole and three-pole + neutral | 480Y/277 Vac | 480Y/277 Vac | 480Y/277 Vac |
| Two poles in series | 96 Vdc | 96 Vdc | 96 Vdc |
| Thermal tripping characteristics | | | |
| Single-pole | < 1 hour @ 1.35 x I_n @ 40°C | < 1 hour @ 1.35 x I_n @ 40°C | < 1 hour @ 1.35 x I_n @ 40°C |
| Multi-pole | < 1 hour @ 1.45 x I_n @ 40°C | < 1 hour @ 1.45 x I_n @ 40°C | < 1 hour @ 1.45 x I_n @ 40°C |
| Short-circuit ratings (at max. voltage) | | | |
| Single-pole | 5 kA @ 277 Vac | 5 kA @ 277 Vac | 5 kA @ 277 Vac |
| Single-pole + neutral | 5 kA @ 277 Vac | 5 kA @ 277 Vac | 5 kA @ 277 Vac |
| Two-, three-, four-pole | 5 kA @ 480Y/277 Vac | 5 kA @ 480Y/277 Vac | 5 kA @ 480Y/277 Vac |
| Miniature Circuit Breaker—IEC | | | |
| Current range | 0.5–63A | 0.5–40A | 1–63A |
| Maximum voltage ratings—IEC 60947-2 | | | |
| Single-pole, single-pole + neutral | 240 Vac | 240 Vac | 240 Vac |
| Single-pole | 60 Vdc | 60 Vdc | 60 Vdc |
| Two-, three-, four-pole, three-pole + neutral | 240/415 Vac | 240/415 Vac | 240/415 Vac |
| Thermal tripping characteristics | | | |
| | > 1 hour @ 1.05 x I_n @ 30°C < 1 hour @ 1.3 x I_n @ 30°C | > 1 hour @ 1.05 x I_n @ 30°C < 1 hour @ 1.3 x I_n @ 30°C | > 1 hour @ 1.05 x I_n @ 30°C < 1 hour @ 1.3 x I_n @ 30°C |
| Interrupt ratings (at max. voltage) | | | |
| IEC 60947-2 | 15 kA | 10 kA | 10 kA |
| Operational switching capacity | 7.5 kA | 7.5 kA | 7.5 kA |
| Max. back-up fuse [gL/gG] | 125A | 125A | 125A |
| Rated impulse withstand— U_{imp} | 4000 Vac | 4000 Vac | 4000 Vac |
| Rated insulation voltage— U_i | 440 Vac | 440 Vac | 440 Vac |
| Environmental/General | | | |
| Selectivity class | 3 | 3 | 3 |
| Lifespan (operations) | > 10000 (1 operation = ON/OFF) | > 10000 (1 operation = ON/OFF) | > 10000 (1 operation = ON/OFF) |
| Shock (IEC 68-2-22) | 10g–120 ms | 10g–120 ms | 10g–120 ms |
| Operating temperature range | -40°C to +75°C | -40°C to +75°C | -40°C to +75°C |
| Mechanical | | | |
| Standard front dimension | | | |
| Device height | 80 mm | 80 mm | 80 mm |
| Terminal protection | Finger and back-of-hand proof | Finger and back-of-hand proof | Finger and back-of-hand proof |
| Mounting width per pole | 17.5 mm | 17.5 mm | 17.5 mm |
| Mounting | | | |
| Degree of protection | IP20 | IP20 | IP20 |
| Terminals top and bottom | Twin-purpose terminals | Twin-purpose terminals | Twin-purpose terminals |
| Supply connection | Line or load side | Line or load side | Line or load side |
| Terminal capacity [mm ²] | 1 x 25 / 2 x 10 | 1 x 25 / 2 x 10 | 1 x 25 / 2 x 10 |
| Torque | 2.4 Nm | 2.4 Nm | 2.4 Nm |
| Thickness of busbar material | 0.8–2 mm | 0.8–2 mm | 0.8–2 mm |
| Mounting position | As required | As required | As required |

Connection diagram

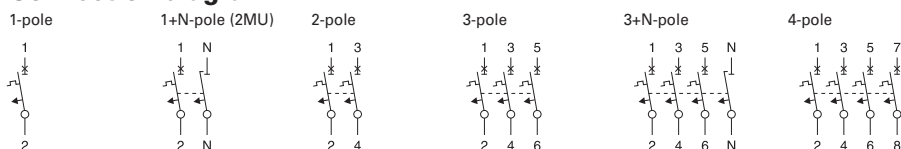


Dimensions (mm) FAZ


1-pole




1+N-pole, 2-pole

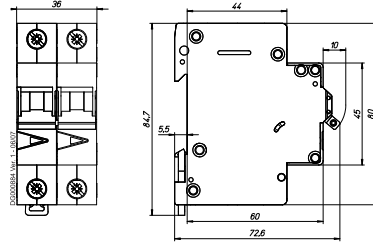

3-pole

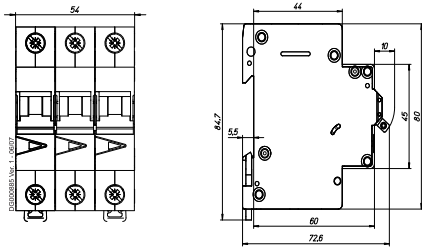


3+N-pole, 4-pole

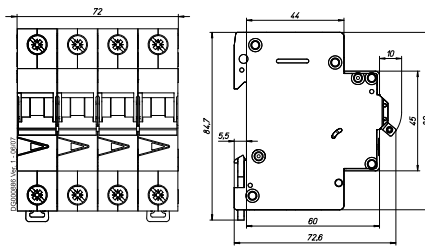


Tripping Characteristic FAZ


Characteristics B, C and D - IEC/EN60898-1

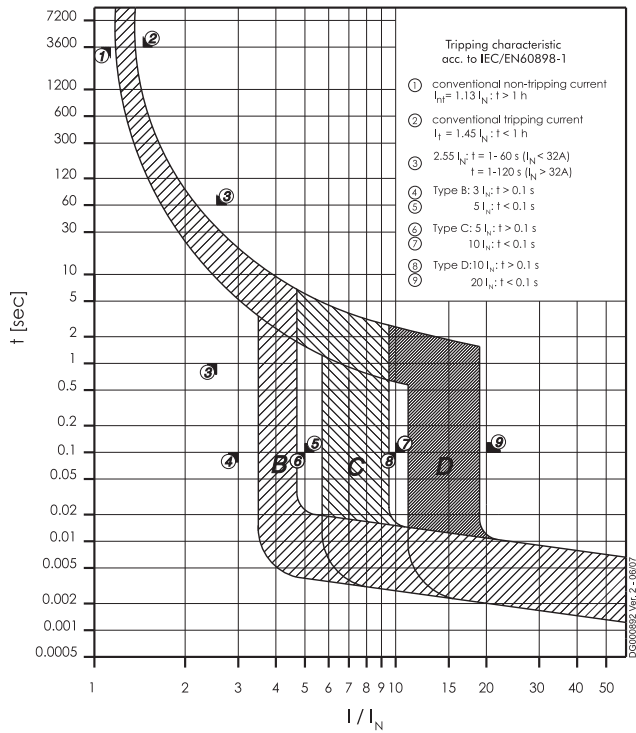


Characteristic K - IEC/EN 60947-2

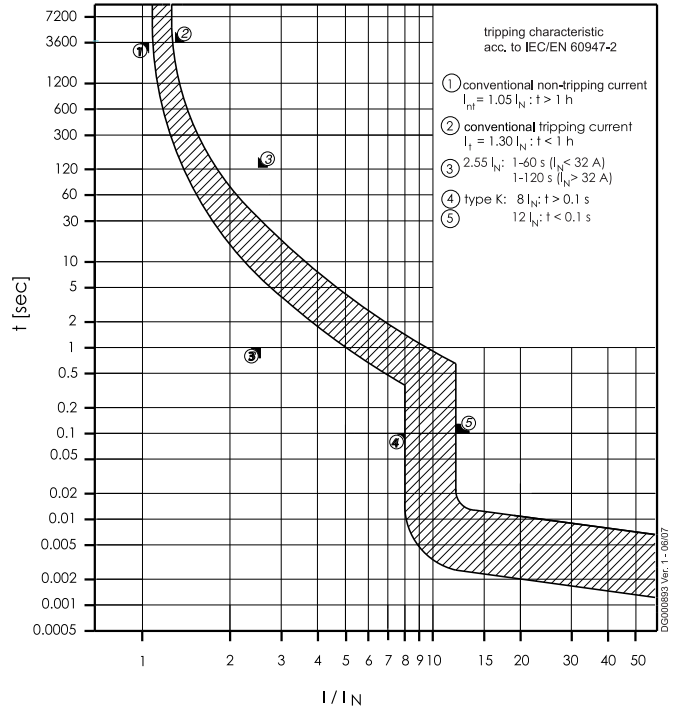

Characteristic S - IEC/EN 60947-2

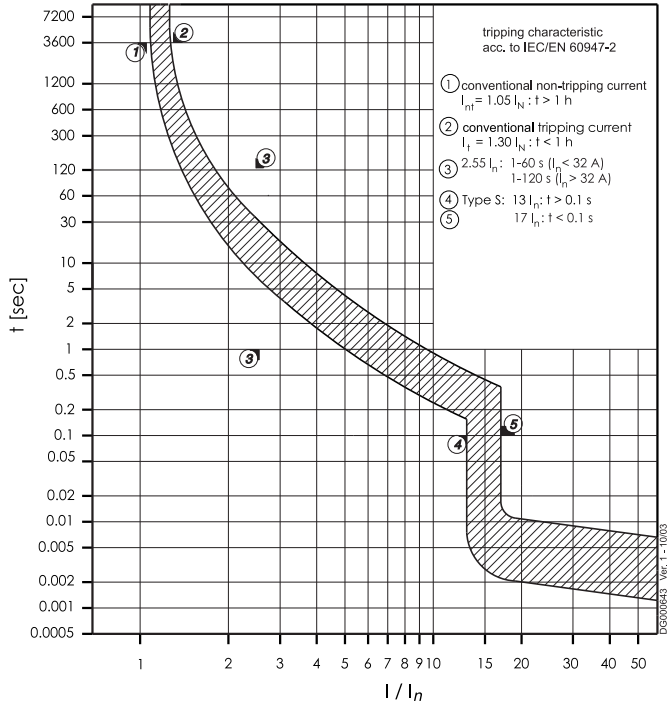


Characteristic S - UL1077

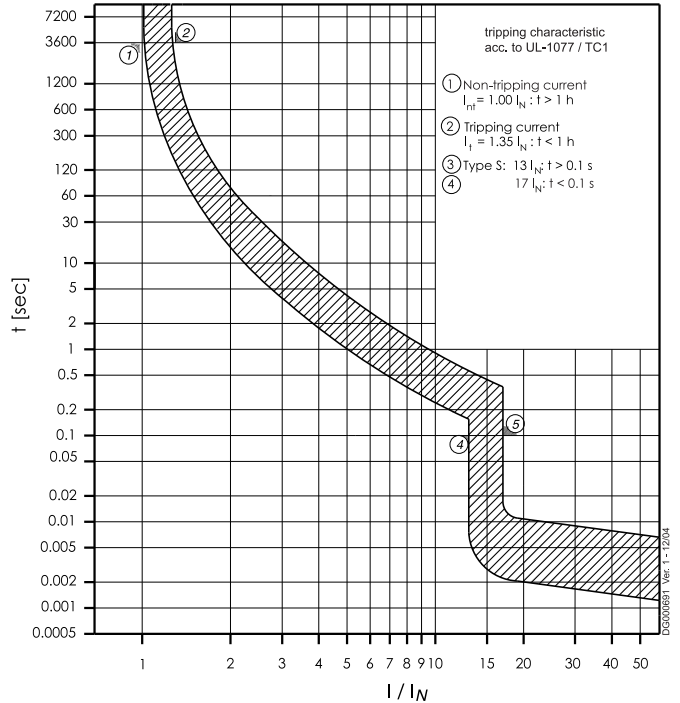


Tripping Characteristic FAZ

Characteristic Z - IEC/EN 60947-2

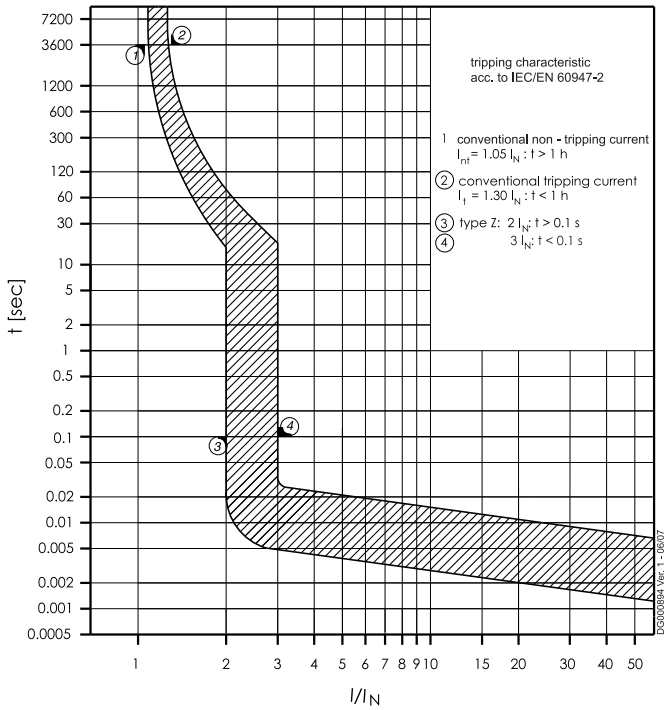

Characteristic Z - UL1077

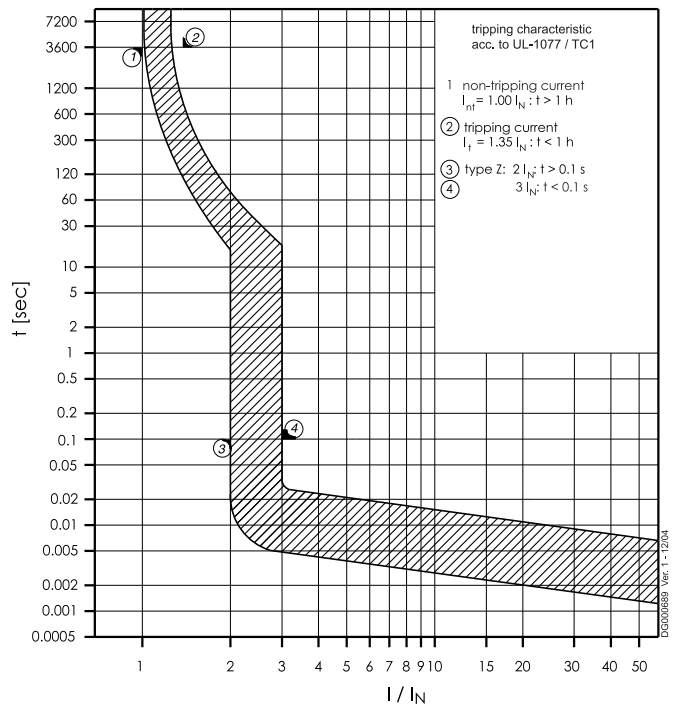

Internal Resistance FAZ

Type B

At room temperature (single pole)

| In [A] | Z* [mΩ] | R [mΩ] |
|--------|---------|--------|
| 1 | 1120 | 1102 |
| 1.5 | 922 | 912 |
| 1.6 | 922 | 912 |
| 2 | 335 | 333 |
| 2.5 | 234 | 230 |
| 3 | 211 | 208 |
| 3.5 | 184 | 180 |
| 4 | 87.7 | 87.2 |
| 5 | 73.5 | 72.8 |
| 6 | 46.8 | 46.3 |
| 8 | 30.5 | 30.4 |
| 10 | 17.5 | 17.4 |
| 12 | 16.9 | 16.8 |
| 13 | 13.4 | 13.3 |
| 15 | 8.0 | 7.9 |
| 16 | 8.0 | 7.9 |
| 20 | 7.2 | 7.1 |
| 25 | 5.0 | 4.9 |
| 32 | 3.7 | 3.7 |
| 40 | 2.6 | 2.5 |
| 50 | 2.1 | 2.1 |
| 63 | 2.0 | 2.0 |

* 50Hz

Type C

At room temperature (single pole)

| In [A] | Z* [mΩ] | R [mΩ] |
|--------|---------|--------|
| 0.16 | 68500 | 68300 |
| 0.25 | 27500 | 27400 |
| 0.5 | 4680 | 4670 |
| 0.75 | 2280 | 2250 |
| 1 | 1120 | 1100 |
| 1.5 | 589 | 587 |
| 1.6 | 589 | 587 |
| 2 | 335 | 333 |
| 2.5 | 234 | 230 |
| 3 | 131 | 130 |
| 3.5 | 143 | 141 |
| 4 | 87.7 | 87.2 |
| 5 | 73.5 | 72.8 |
| 6 | 39.3 | 39.1 |
| 8 | 30.5 | 30.4 |
| 10 | 14.1 | 14.0 |
| 12 | 13.5 | 13.4 |
| 13 | 13.4 | 13.3 |
| 15 | 8.0 | 7.9 |
| 16 | 8.0 | 7.9 |
| 20 | 7.2 | 7.1 |
| 25 | 5.0 | 4.9 |
| 32 | 3.7 | 3.7 |
| 40 | 2.6 | 2.5 |
| 50 | 2.1 | 2.1 |
| 63 | 2.0 | 2.0 |

* 50Hz

Type D

At room temperature (single pole)

| In [A] | Z* [mΩ] | R [mΩ] |
|--------|---------|--------|
| 0.5 | 4680 | 4670 |
| 1 | 772 | 770 |
| 1.5 | 512 | 508 |
| 1.6 | 512 | 508 |
| 2 | 250 | 249 |
| 2.5 | 153 | 153 |
| 3 | 131 | 130 |
| 3.5 | 143 | 141 |
| 4 | 87.7 | 87.2 |
| 5 | 65.4 | 65.1 |
| 6 | 39.3 | 39.1 |
| 8 | 19.5 | 19.5 |
| 10 | 14.1 | 14.0 |
| 12 | 11.3 | 11.2 |
| 13 | 10.1 | 10.1 |
| 15 | 8.0 | 7.9 |
| 16 | 8.0 | 7.9 |
| 20 | 4.9 | 4.9 |
| 25 | 3.9 | 3.8 |
| 32 | 3.5 | 3.4 |
| 40 | 2.7 | 2.6 |

* 50Hz

Fault Loop Impedance FAZ

Max. allowed value for the Fault Loop Impedance Z_s
(acc. to DIN VDE 0100, part 410)

$$U_0 = 230 \text{ V}$$

| Tripping time I_n/A | Type B | | Type C | | Type D | |
|--------------------------|------------------------|----------------------|------------------------|----------------------|------------------------|----------------------|
| | 0,4s $Z_s (\Omega)$ | 5s $Z_s (\Omega)$ | 0,4s $Z_s (\Omega)$ | 5s $Z_s (\Omega)$ | 0,4s $Z_s (\Omega)$ | 5s $Z_s (\Omega)$ |
| 1 | 40,4 | 40,4 | 24,3 | 40,4 | 12,4 | 40,4 |
| 1.5 | 26,9 | 26,9 | 16,2 | 26,9 | 8,3 | 26,9 |
| 2 | 20,2 | 20,2 | 12,2 | 20,2 | 6,2 | 20,2 |
| 2.5 | 16,1 | 16,1 | 9,7 | 16,1 | 5,0 | 16,1 |
| 3 | 13,5 | 13,5 | 8,1 | 13,5 | 4,1 | 13,5 |
| 3.5 | 11,5 | 11,5 | 7,0 | 11,5 | 3,6 | 11,5 |
| 4 | 10,1 | 10,1 | 6,1 | 10,1 | 3,1 | 10,1 |
| 5 | 8,1 | 8,1 | 4,9 | 8,1 | 2,5 | 8,1 |
| 6 | 6,7 | 6,7 | 4,1 | 6,7 | 2,1 | 6,7 |
| 8 | 5,0 | 5,0 | 3,0 | 5,0 | 1,6 | 5,0 |
| 10 | 4,0 | 4,0 | 2,4 | 4,0 | 1,2 | 4,0 |
| 12 | 3,4 | 3,4 | 2,0 | 3,4 | 1,0 | 3,4 |
| 13 | 3,1 | 3,1 | 1,9 | 3,1 | 1,0 | 3,1 |
| 15 | 2,7 | 2,7 | 1,6 | 2,7 | 0,8 | 2,7 |
| 16 | 2,5 | 2,5 | 1,5 | 2,5 | 0,8 | 2,5 |
| 20 | 2,0 | 2,0 | 1,2 | 2,0 | 0,6 | 2,0 |
| 25 | 1,6 | 1,6 | 1,0 | 1,6 | 0,5 | 1,6 |
| 32 | 1,3 | 1,3 | 0,8 | 1,3 | 0,4 | 1,3 |
| 40 | 1,0 | 1,0 | 0,6 | 1,0 | 0,3 | 1,0 |
| 50 | 0,8 | 0,8 | 0,5 | 0,8 | 0,2 | 0,8 |
| 63 | 0,6 | 0,6 | 0,4 | 0,6 | 0,2 | 0,6 |

$$Z_s = R_{M.C.B.} + R_{Loop}$$

Data/factors taken from the time-current characteristic FAZ

For other rated voltages U_0 :

$$U_0 = 240 \text{ V: } Z_s * 1,04 \text{ applies}$$

$$U_0 = 127 \text{ V: } Z_s * 0,55 \text{ applies}$$

Power Loss at I_n FAZ

Type B

| I_n [A] | 1p P [W] | 1pN P [W] | 2p P [W] | 3p P [W] | 3pN* P [W] |
|-----------|-------------|--------------|-------------|-------------|---------------|
| 1 | 1.6 | 1.7 | 3.1 | 4.7 | 4.8 |
| 1.5 | 2.3 | 2.5 | 4.6 | 6.9 | 7.2 |
| 1.6 | 2.5 | 2.7 | 4.9 | 7.4 | 7.6 |
| 2 | 1.4 | 1.5 | 2.8 | 4.1 | 4.3 |
| 2.5 | 1.5 | 1.7 | 3.1 | 4.6 | 4.7 |
| 3 | 2.5 | 2.7 | 5.0 | 7.6 | 7.8 |
| 3.5 | 2.5 | 2.8 | 5.1 | 7.8 | 8.0 |
| 4 | 1.4 | 1.6 | 2.9 | 4.4 | 4.5 |
| 5 | 1.9 | 2.1 | 3.8 | 5.8 | 6.0 |
| 6 | 1.8 | 2.0 | 3.6 | 5.5 | 5.6 |
| 8 | 2.1 | 2.3 | 4.1 | 6.3 | 6.5 |
| 10 | 1.9 | 2.1 | 3.9 | 5.9 | 6.1 |
| 12 | 2.8 | 3.2 | 5.9 | 8.7 | 9.0 |
| 13 | 2.5 | 2.9 | 5.3 | 7.8 | 8.1 |
| 15 | 2.1 | 2.4 | 4.4 | 6.5 | 6.7 |
| 16 | 2.2 | 2.6 | 4.7 | 6.9 | 7.2 |
| 20 | 3.2 | 3.6 | 6.6 | 9.8 | 10.1 |
| 25 | 3.0 | 3.5 | 6.4 | 9.4 | 9.7 |
| 32 | 3.7 | 4.4 | 8.1 | 12.1 | 12.5 |
| 40 | 3.4 | 4.1 | 7.5 | 11.2 | 11.5 |
| 50 | 4.5 | 5.4 | 9.9 | 14.9 | 15.3 |
| 63 | 5.2 | 6.3 | 11.5 | 17.2 | 17.7 |

*symmetrical load

Type C

| I_n [A] | 1p P [W] | 1pN P [W] | 2p P [W] | 3p P [W] | 3pN* P [W] |
|-----------|-------------|--------------|-------------|-------------|---------------|
| 0.16 | 2.2 | 2.4 | 4.4 | 6.7 | 6.9 |
| 0.25 | 2.0 | 2.2 | 4.0 | 6.1 | 6.3 |
| 0.5 | 1.2 | 1.3 | 2.4 | 3.5 | 3.7 |
| 0.75 | 1.3 | 1.4 | 2.6 | 3.9 | 4.1 |
| 1 | 1.6 | 1.7 | 3.1 | 4.7 | 4.8 |
| 1.5 | 1.5 | 1.6 | 2.9 | 4.4 | 4.6 |
| 1.6 | 1.6 | 1.7 | 3.1 | 4.7 | 4.9 |
| 2 | 1.4 | 1.5 | 2.8 | 4.1 | 4.3 |
| 2.5 | 1.5 | 1.7 | 3.1 | 4.6 | 4.7 |
| 3 | 1.2 | 1.3 | 2.4 | 3.6 | 3.7 |
| 3.5 | 1.3 | 1.4 | 2.6 | 3.9 | 4.0 |
| 4 | 1.4 | 1.6 | 2.9 | 4.4 | 4.5 |
| 5 | 1.9 | 2.1 | 3.8 | 5.8 | 6.0 |
| 6 | 1.5 | 1.6 | 2.9 | 4.4 | 4.6 |
| 8 | 2.1 | 2.3 | 4.1 | 6.3 | 6.5 |
| 10 | 1.5 | 1.7 | 3.0 | 4.6 | 4.7 |
| 12 | 2.1 | 2.4 | 4.4 | 6.5 | 6.8 |
| 13 | 2.5 | 2.9 | 5.3 | 7.8 | 8.1 |
| 15 | 2.1 | 2.4 | 4.4 | 6.5 | 6.7 |
| 16 | 2.2 | 2.6 | 4.7 | 6.9 | 7.2 |
| 20 | 3.2 | 3.6 | 6.6 | 9.8 | 10.1 |
| 25 | 3.0 | 3.5 | 6.4 | 9.4 | 9.7 |
| 32 | 3.7 | 4.4 | 8.1 | 12.1 | 12.5 |
| 40 | 3.4 | 4.1 | 7.5 | 11.2 | 11.5 |
| 50 | 4.5 | 5.4 | 9.9 | 14.9 | 15.3 |
| 63 | 5.2 | 6.3 | 11.5 | 17.2 | 17.7 |

*symmetrical load

Type D

| I_n [A] | 1p P [W] | 1pN P [W] | 2p P [W] | 3p P [W] | 3pN* P [W] |
|-----------|-------------|--------------|-------------|-------------|---------------|
| 0.5 | 1.2 | 1.3 | 2.4 | 3.5 | 3.7 |
| 1 | 0.8 | 0.9 | 1.6 | 2.4 | 2.5 |
| 1.5 | 1.2 | 1.3 | 2.3 | 3.5 | 3.6 |
| 1.6 | 1.3 | 1.4 | 2.5 | 3.8 | 3.9 |
| 2 | 1.0 | 1.1 | 2.0 | 3.0 | 3.1 |
| 2.5 | 1.0 | 1.1 | 1.9 | 2.9 | 3.0 |
| 3 | 1.2 | 1.3 | 2.4 | 3.6 | 3.7 |
| 3.5 | 1.3 | 1.4 | 2.6 | 3.9 | 4.0 |
| 4 | 1.4 | 1.6 | 2.9 | 4.4 | 4.5 |
| 5 | 1.7 | 1.8 | 3.3 | 5.1 | 5.3 |
| 6 | 1.5 | 1.6 | 2.9 | 4.4 | 4.6 |
| 8 | 1.3 | 1.5 | 2.6 | 4.0 | 4.2 |
| 10 | 1.5 | 1.7 | 3.0 | 4.6 | 4.7 |
| 12 | 1.7 | 2.0 | 3.6 | 5.3 | 5.4 |
| 13 | 1.9 | 2.2 | 4.0 | 5.9 | 6.1 |
| 15 | 2.1 | 2.4 | 4.4 | 6.5 | 6.7 |
| 16 | 2.2 | 2.6 | 4.7 | 6.9 | 7.2 |
| 20 | 2.0 | 2.2 | 4.1 | 6.1 | 6.2 |
| 25 | 2.5 | 2.9 | 5.2 | 7.7 | 7.9 |
| 32 | 3.4 | 4.0 | 7.4 | 11.1 | 11.4 |
| 40 | 3.2 | 3.8 | 7.0 | 10.4 | 10.7 |

*symmetrical load


Influence of Ambient Temperature FAZ

On Load Carrying Capacity (temperature derating)


| I_N [A] | Ambient temperature T [°C] | | | | | | | | | | | | | | | | |
|-----------|----------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| | -40 | -30 | -20 | -10 | 0 | 10 | 20 | 30 | 35 | 40 | 45 | 50 | 55 | 60 | 65 | 70 | 75 |
| 0.16 | 0.2 | 0.2 | 0.19 | 0.19 | 0.18 | 0.17 | 0.17 | 0.16 | 0.16 | 0.15 | 0.15 | 0.15 | 0.14 | 0.14 | 0.14 | 0.14 | 0.13 |
| 0.25 | 0.32 | 0.31 | 0.3 | 0.29 | 0.28 | 0.27 | 0.26 | 0.25 | 0.25 | 0.24 | 0.24 | 0.23 | 0.23 | 0.22 | 0.22 | 0.21 | 0.21 |
| 0.5 | 0.64 | 0.62 | 0.6 | 0.58 | 0.56 | 0.54 | 0.52 | 0.5 | 0.49 | 0.48 | 0.47 | 0.46 | 0.45 | 0.44 | 0.43 | 0.42 | 0.41 |
| 0.75 | 0.96 | 0.93 | 0.9 | 0.87 | 0.84 | 0.81 | 0.78 | 0.75 | 0.74 | 0.73 | 0.71 | 0.69 | 0.68 | 0.66 | 0.65 | 0.64 | 0.62 |
| 1 | 1.3 | 1.2 | 1.2 | 1.2 | 1.1 | 1.1 | 1 | 1 | 0.99 | 0.97 | 0.95 | 0.93 | 0.9 | 0.89 | 0.87 | 0.85 | 0.83 |
| 1.5 | 1.9 | 1.9 | 1.8 | 1.7 | 1.7 | 1.6 | 1.6 | 1.5 | 1.5 | 1.5 | 1.4 | 1.4 | 1.4 | 1.3 | 1.3 | 1.3 | 1.2 |
| 1.6 | 2 | 2 | 1.9 | 1.9 | 1.8 | 1.7 | 1.7 | 1.6 | 1.6 | 1.5 | 1.5 | 1.5 | 1.4 | 1.4 | 1.4 | 1.4 | 1.3 |
| 2 | 2.6 | 2.5 | 2.4 | 2.3 | 2.2 | 2.2 | 2.1 | 2 | 2 | 1.9 | 1.9 | 1.9 | 1.8 | 1.8 | 1.7 | 1.7 | 1.7 |
| 2.5 | 3.2 | 3.1 | 3 | 2.9 | 2.8 | 2.7 | 2.6 | 2.5 | 2.5 | 2.4 | 2.4 | 2.3 | 2.3 | 2.2 | 2.2 | 2.1 | 2.1 |
| 3 | 3.8 | 3.7 | 3.6 | 3.5 | 3.4 | 3.3 | 3.1 | 3 | 3 | 2.9 | 2.8 | 2.8 | 2.7 | 2.7 | 2.6 | 2.5 | 2.5 |
| 3.5 | 4.5 | 4.4 | 4.2 | 4.1 | 3.9 | 3.8 | 3.7 | 3.5 | 3.4 | 3.4 | 3.3 | 3.2 | 3.2 | 3.1 | 3 | 3 | 2.9 |
| 4 | 5.1 | 5 | 4.8 | 4.7 | 4.5 | 4.3 | 4.2 | 4 | 3.9 | 3.9 | 3.8 | 3.7 | 3.6 | 3.5 | 3.5 | 3.4 | 3.3 |
| 5 | 6.4 | 6.2 | 6 | 5.8 | 5.6 | 5.4 | 5.2 | 5 | 4.9 | 4.8 | 4.7 | 4.6 | 4.5 | 4.4 | 4.3 | 4.2 | 4.1 |
| 6 | 7.7 | 7.5 | 7.2 | 7 | 6.7 | 6.5 | 6.3 | 6 | 5.9 | 5.8 | 5.7 | 5.6 | 5.4 | 5.3 | 5.2 | 5.1 | 5 |
| 8 | 10.2 | 9.9 | 9.6 | 9.3 | 9 | 8.7 | 8.4 | 8 | 7.9 | 7.7 | 7.6 | 7.4 | 7.2 | 7.1 | 6.9 | 6.8 | 6.6 |
| 10 | 13 | 12 | 12 | 12 | 11 | 11 | 10 | 10 | 9.9 | 9.7 | 9.5 | 9.3 | 9 | 8.9 | 8.7 | 8.5 | 8.3 |
| 12 | 15 | 15 | 14 | 14 | 13 | 13 | 13 | 12 | 12 | 12 | 11 | 11 | 11 | 11 | 10 | 10 | 10 |
| 13 | 17 | 16 | 16 | 15 | 15 | 14 | 14 | 13 | 13 | 13 | 12 | 12 | 12 | 12 | 11 | 11 | 11 |
| 15 | 19 | 19 | 18 | 17 | 17 | 16 | 16 | 15 | 15 | 15 | 14 | 14 | 14 | 13 | 13 | 13 | 12 |
| 16 | 20 | 20 | 19 | 19 | 18 | 17 | 17 | 16 | 16 | 15 | 15 | 15 | 14 | 14 | 14 | 14 | 13 |
| 20 | 26 | 25 | 24 | 23 | 22 | 22 | 21 | 20 | 20 | 19 | 19 | 19 | 18 | 18 | 17 | 17 | 17 |
| 25 | 32 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 25 | 24 | 24 | 23 | 23 | 22 | 22 | 21 | 21 |
| 32 | 41 | 40 | 38 | 37 | 36 | 35 | 33 | 32 | 32 | 31 | 30 | 30 | 29 | 28 | 28 | 27 | 26 |
| 40 | 51 | 50 | 48 | 47 | 45 | 43 | 42 | 40 | 39 | 39 | 38 | 37 | 36 | 35 | 35 | 34 | 33 |
| 50 | 64 | 62 | 60 | 58 | 56 | 54 | 52 | 50 | 49 | 48 | 47 | 46 | 45 | 44 | 43 | 42 | 41 |
| 63 | 81 | 78 | 76 | 73 | 71 | 68 | 66 | 63 | 62 | 61 | 60 | 58 | 57 | 56 | 55 | 53 | 52 |

Maximum Let-Through Energy FAZ


Type S

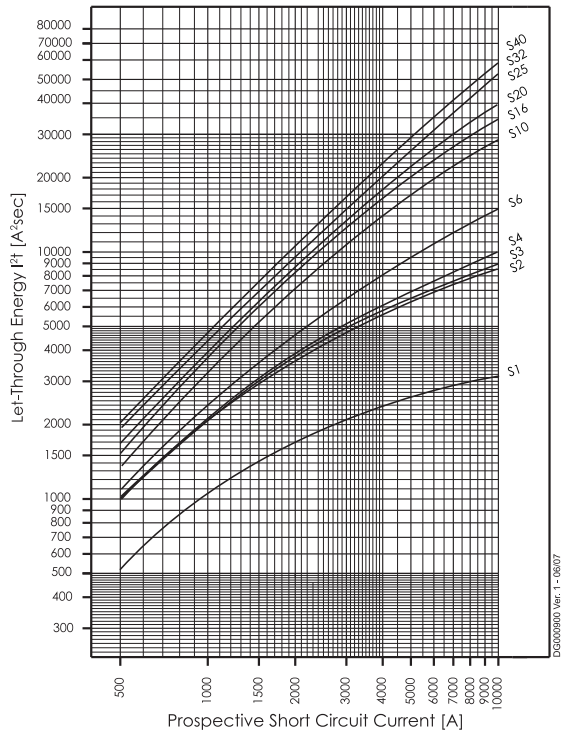

Type Z

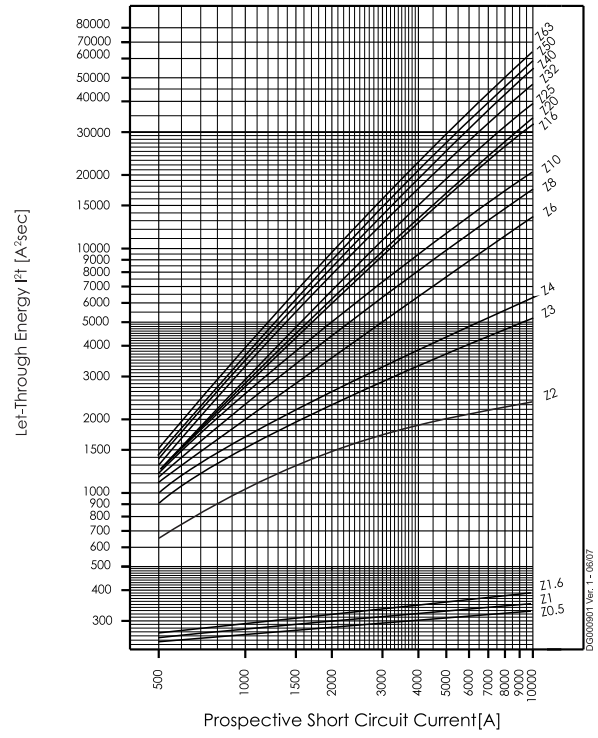


Type FAZ...-HS

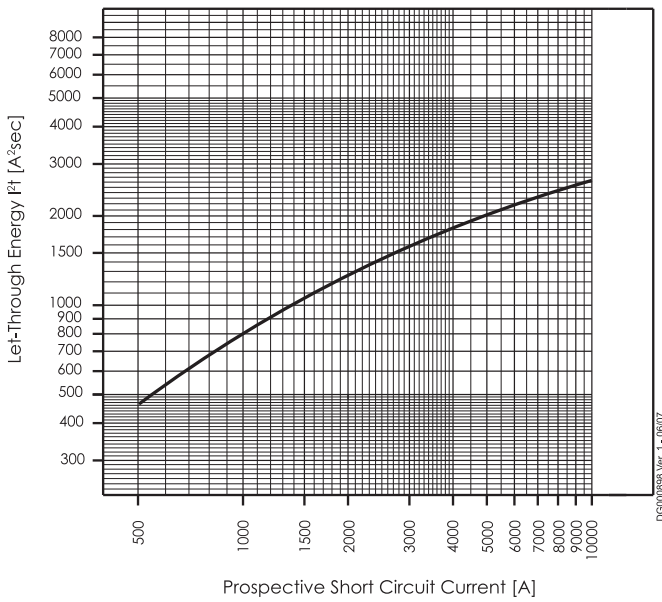


Maximum Let-Through Current FAZ


Type B (IEC/EN60898)

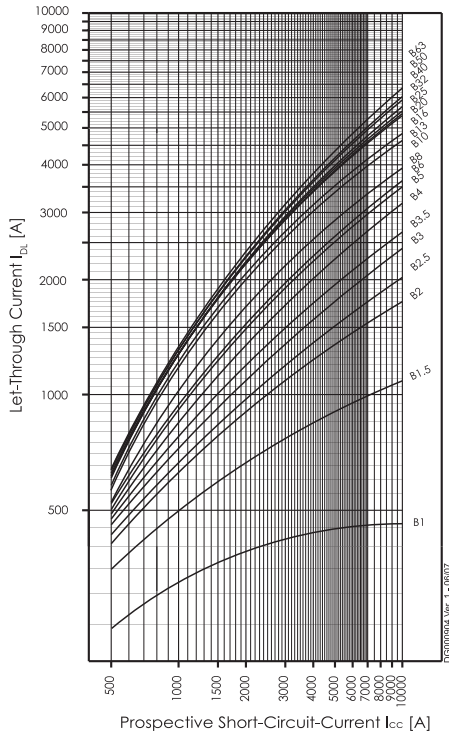


Type C (IEC/EN60898)

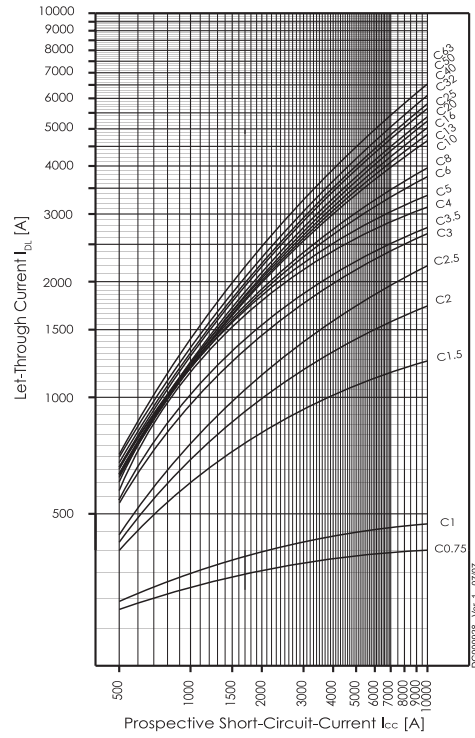

Type D (IEC/EN60898)

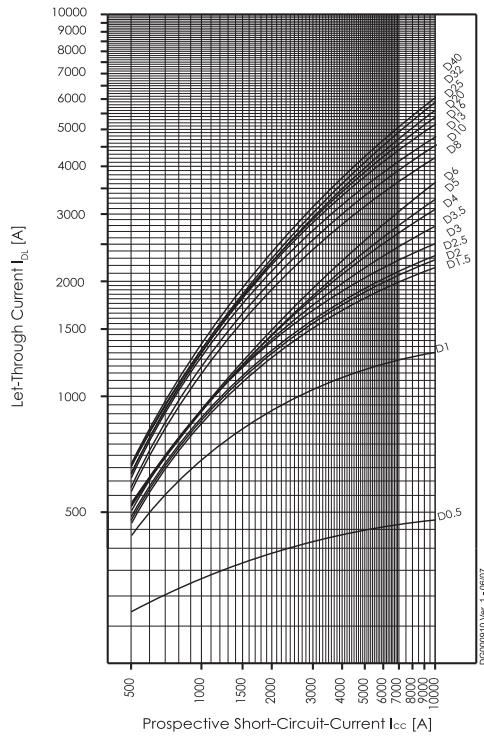


Type K

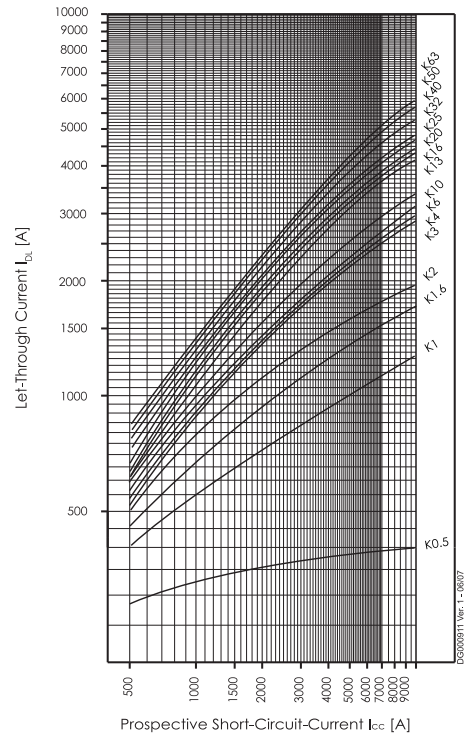


Maximum Let-Through Current FAZ


Type S

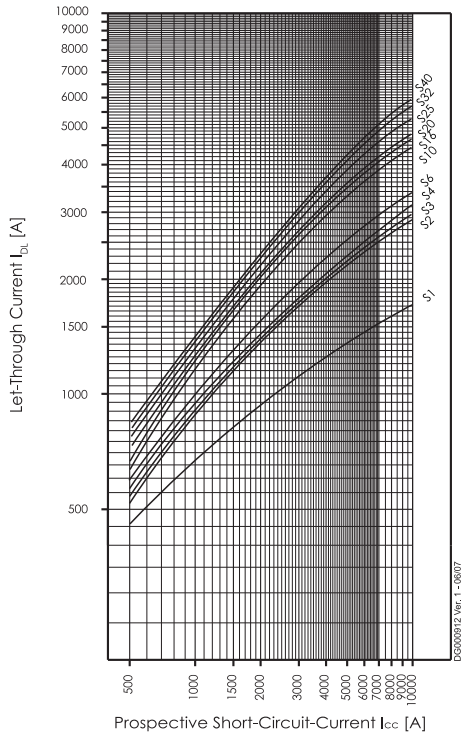


Type B (IEC/EN60947-2)

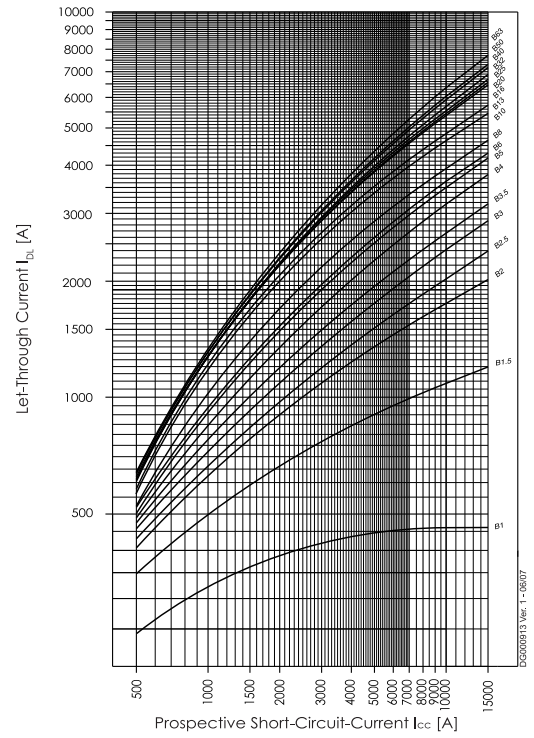

Type C (IEC/EN60947-2)

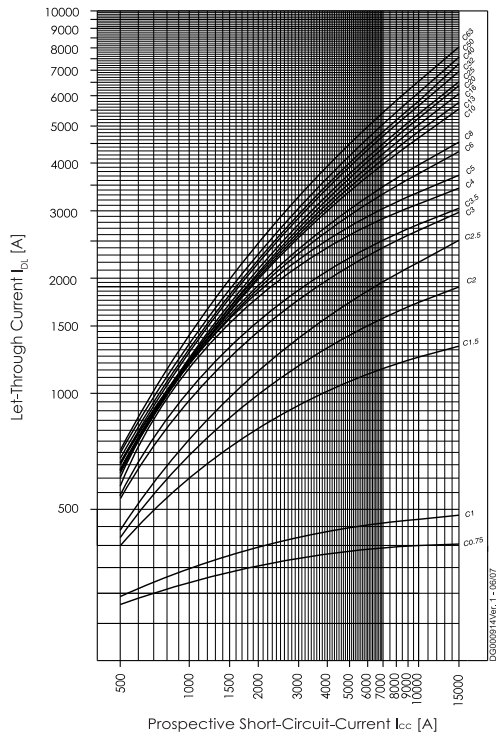

Type D (IEC/EN60947-2)

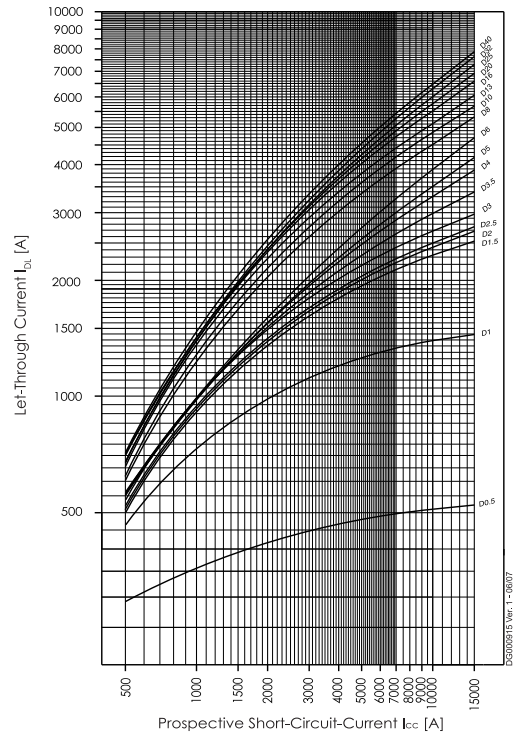

Short Circuit Selectivity FAZ

In case of short circuit, there is selectivity between the miniature circuit breakers FAZ and the upstream protection devices up to the specified values of the selectivity limit current I_s [kA] (i. e. in case of short-circuit currents I_{ks} under I_s , only the MCB will trip, in case of short circuit currents above this value both protective devices will respond).

*) basically in accordance with EN 60898-1 D.5.2.b

FAZ towards NH-00 Fuses

Short circuit selectivity **characteristic B** towards fuse link **NH-00***)

| FAZ | NH-00 gL/gG | | | | | | | | | | | |
|-----------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| I_n [A] | 16 | 20 | 25 | 32 | 35 | 40 | 50 | 63 | 80 | 100 | 125 | 160 |
| 1.0 | 0.9 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 1.5 | 0.8 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 2.0 | <0.5 ¹⁾ | 0.5 | 1.0 | 2.5 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 2.5 | <0.5 ¹⁾ | 0.5 | 1.0 | 2.3 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 3.0 | <0.5 ¹⁾ | 0.5 | 0.9 | 2.1 | 8.0 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 3.5 | <0.5 ¹⁾ | 0.5 | 0.9 | 1.8 | 5.5 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 4 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.8 | 1.3 | 2.3 | 4.3 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 5 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.7 | 1.1 | 1.6 | 2.2 | 3.6 | 4.8 | 8.9 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 6 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.7 | 1.1 | 1.5 | 2.0 | 3.3 | 4.3 | 7.6 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 8 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.6 | 1.0 | 1.3 | 1.7 | 2.6 | 3.3 | 5.2 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 10 | | <0.5 ¹⁾ | 0.6 | 0.9 | 1.2 | 1.5 | 2.2 | 2.7 | 4.0 | 9.0 | 10.0 ²⁾ | 10.0 ²⁾ |
| 13 | | <0.5 ¹⁾ | 0.6 | 0.8 | 1.1 | 1.4 | 2.1 | 2.6 | 3.8 | 7.9 | 10.0 ²⁾ | 10.0 ²⁾ |
| 16 | | | 0.5 | 0.7 | 1.0 | 1.3 | 1.9 | 2.4 | 3.4 | 6.4 | 9.3 | 10.0 ²⁾ |
| 20 | | | | 0.7 | 1.0 | 1.3 | 1.9 | 2.4 | 3.3 | 6.0 | 8.7 | 10.0 ²⁾ |
| 25 | | | | 0.7 | 1.0 | 1.3 | 1.8 | 2.3 | 3.2 | 5.7 | 8.0 | 10.0 ²⁾ |
| 32 | | | | | 0.9 | 1.2 | 1.7 | 2.2 | 3.1 | 5.4 | 7.6 | 10.0 ²⁾ |
| 40 | | | | | | | | 2.1 | 3.0 | 5.1 | 7.2 | 10.0 ²⁾ |
| 50 | | | | | | | | 1.9 | 2.8 | 4.7 | 6.6 | 9.5 |
| 63 | | | | | | | | | | 4.4 | 6.3 | 8.6 |

Short circuit selectivity **characteristic C** towards fuse link **NH-00***)

| FAZ | NH-00 gL/gG | | | | | | | | | | | |
|-----------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| I_n [A] | 16 | 20 | 25 | 32 | 35 | 40 | 50 | 63 | 80 | 100 | 125 | 160 |
| 0.75 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 1.0 | 0.9 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 1.5 | <0.5 ¹⁾ | 0.6 | 1.3 | 4.2 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 2.0 | <0.5 ¹⁾ | 0.6 | 1.0 | 2.5 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 2.5 | <0.5 ¹⁾ | 0.5 | 1.0 | 2.1 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 3.0 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.7 | 1.2 | 1.8 | 2.6 | 4.7 | 6.6 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 3.5 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.7 | 1.1 | 1.7 | 2.4 | 4.2 | 6.0 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 4 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.7 | 1.0 | 1.5 | 2.1 | 3.6 | 5.0 | 10.0 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 5 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.6 | 0.8 | 1.2 | 1.7 | 2.8 | 3.8 | 8.7 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 6 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.5 | 0.8 | 1.2 | 1.5 | 2.5 | 3.3 | 5.7 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 8 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.5 | 0.8 | 1.1 | 1.5 | 2.3 | 2.9 | 4.9 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 10 | | | 0.5 | 0.7 | 1.0 | 1.4 | 2.0 | 2.5 | 3.8 | 8.0 | 10.0 ²⁾ | 10.0 ²⁾ |
| 13 | | | | | 1.0 | 1.3 | 1.9 | 2.4 | 3.6 | 7.0 | 10.0 ²⁾ | 10.0 ²⁾ |
| 16 | | | | | 1.0 | 1.3 | 1.8 | 2.3 | 3.3 | 6.0 | 8.8 | 10.0 ²⁾ |
| 20 | | | | | 1.0 | 1.2 | 1.7 | 2.2 | 3.2 | 5.5 | 7.7 | 10.0 ²⁾ |
| 25 | | | | | | | 1.6 | 2.1 | 3.0 | 5.2 | 7.3 | 10.0 ²⁾ |
| 32 | | | | | | | | 2.1 | 2.9 | 5.0 | 7.0 | 10.0 ²⁾ |
| 40 | | | | | | | | | 2.8 | 4.8 | 6.7 | 10.0 |
| 50 | | | | | | | | | | 4.5 | 6.3 | 9.5 |
| 63 | | | | | | | | | | | 5.9 | 8.4 |

Short circuit selectivity **characteristic D** towards fuse link **NH-00***)

| FAZ | NH-00 gL/gG | | | | | | | | | | | |
|-----------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| I_n [A] | 16 | 20 | 25 | 32 | 35 | 40 | 50 | 63 | 80 | 100 | 125 | 160 |
| 0.5 | 2.1 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 1.0 | <0.5 ¹⁾ | 0.6 | 1.4 | 4.3 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 1.5 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.9 | 1.6 | 2.7 | 4.0 | 8.0 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 2.0 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.8 | 1.3 | 2.1 | 3.1 | 6.0 | 8.6 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 2.5 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.7 | 1.2 | 1.8 | 2.6 | 4.8 | 6.9 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 3.0 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.7 | 1.1 | 1.7 | 2.4 | 4.3 | 6.0 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 3.5 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.7 | 1.1 | 1.7 | 2.4 | 4.2 | 5.6 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 4 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.7 | 1.0 | 1.6 | 2.2 | 3.8 | 5.2 | 10.0 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 5 | | <0.5 ¹⁾ | 0.6 | 0.9 | 1.4 | 1.9 | 3.2 | 4.1 | 7.1 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 6 | | <0.5 ¹⁾ | 0.5 | 0.8 | 1.2 | 1.6 | 2.6 | 3.3 | 5.5 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 8 | | | 0.5 | 0.8 | 1.1 | 1.5 | 2.2 | 2.7 | 4.1 | 8.7 | 10.0 ²⁾ | 10.0 ²⁾ |
| 10 | | | 0.5 | 0.7 | 1.0 | 1.3 | 1.9 | 2.5 | 3.6 | 7.2 | 10.0 ²⁾ | 10.0 ²⁾ |
| 13 | | | | 1.0 | 1.3 | 1.9 | 2.3 | 3.4 | 6.5 | 9.5 | 10.0 ²⁾ | |
| 16 | | | | | 1.1 | 1.6 | 2.0 | 3.0 | 5.5 | 8.0 | 10.0 ²⁾ | |
| 20 | | | | | | 1.4 | 1.8 | 2.8 | 5.0 | 7.5 | 10.0 ²⁾ | |
| 25 | | | | | | | 1.8 | 2.7 | 4.8 | 7.0 | 10.0 ²⁾ | |
| 32 | | | | | | | | 2.4 | 4.1 | 6.2 | 9.3 | |
| 40 | | | | | | | | | 4.0 | 6.0 | 9.0 | |

1) Selectivity limit current I_s under 0.5 kA

2) Selectivity limit current I_s = rated breaking capacity I_{cn} of the MCB

Shaded fields: no selectivity

FAZ towards D01-D03 fuse link

Short circuit selectivity **characteristic B** towards fuse link **D01-D03***)

| FAZ | D01-D03 gL/gG | | | | | | | | | |
|-----|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| | I _n [A] | 10 | 16 | 20 | 25 | 35 | 50 | 63 | 80 | 100 |
| 1.0 | <0.5 ¹⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 1.5 | <0.5 ¹⁾ | 4.1 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 2.0 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.6 | 1.0 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 2.5 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.6 | 1.0 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 3.0 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.5 | 1.0 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 3.5 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.5 | 0.9 | 7.0 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 4 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.5 | 0.9 | 2.5 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 5 | | <0.5 ¹⁾ | 0.5 | 0.8 | 1.7 | 4.0 | 7.0 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 6 | | <0.5 ¹⁾ | 0.5 | 0.8 | 1.6 | 3.6 | 6.0 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 8 | | | 0.5 | 0.8 | 1.4 | 2.8 | 4.3 | 8.2 | 10.0 ²⁾ | 10.0 ²⁾ |
| 10 | | | 0.5 | 0.7 | 1.3 | 2.4 | 3.4 | 6.0 | 10.0 ²⁾ | 10.0 ²⁾ |
| 13 | | | <0.5 ¹⁾ | 0.7 | 1.2 | 2.3 | 3.2 | 5.3 | 10.0 ²⁾ | 10.0 ²⁾ |
| 16 | | | | 0.6 | 1.1 | 2.2 | 2.9 | 4.6 | 10.0 | 10.0 |
| 20 | | | | | 1.1 | 2.1 | 2.8 | 4.4 | 9.3 | 9.3 |
| 25 | | | | | 1.1 | 2.0 | 2.7 | 4.2 | 8.7 | 8.7 |
| 32 | | | | | | 2.0 | 2.6 | 4.0 | 8.0 | 8.0 |
| 40 | | | | | | | 2.5 | 3.8 | 7.5 | 7.5 |
| 50 | | | | | | | 2.3 | 3.4 | 6.7 | 6.7 |
| 63 | | | | | | | | | 6.2 | 6.2 |

Short circuit selectivity **characteristic C** towards fuse link **D01-D03***)

| FAZ | D01-D03 gL/gG | | | | | | | | | |
|------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| | I _n [A] | 10 | 16 | 20 | 25 | 35 | 50 | 63 | 80 | 100 |
| 0.75 | <0.5 ¹⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 1.0 | <0.5 ¹⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 1.5 | <0.5 ¹⁾ | 0.5 | 0.6 | 0.9 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 2.0 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.5 | 0.7 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 2.5 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.5 | 0.7 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 3.0 | <0.5 ¹⁾ | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.6 | 1.9 | 5.2 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 3.5 | <0.5 ¹⁾ | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.6 | 1.8 | 4.7 | 9.5 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 4 | <0.5 ¹⁾ | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.6 | 1.6 | 4.0 | 7.6 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 5 | | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.5 | 1.3 | 3.1 | 5.7 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 6 | | <0.5 ¹⁾ | <0.5 ¹⁾ | <0.5 ¹⁾ | 1.2 | 2.7 | 4.5 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 8 | | <0.5 ¹⁾ | <0.5 ¹⁾ | <0.5 ¹⁾ | 1.2 | 2.5 | 4.0 | 8.6 | 10.0 ²⁾ | 10.0 ²⁾ |
| 10 | | | <0.5 ¹⁾ | <0.5 ¹⁾ | 1.2 | 2.3 | 3.1 | 5.4 | 10.0 ²⁾ | 10.0 ²⁾ |
| 13 | | | | | 1.1 | 2.2 | 3.0 | 4.9 | 10.0 ²⁾ | 10.0 ²⁾ |
| 16 | | | | | 1.1 | 2.1 | 2.8 | 4.4 | 9.5 | 9.5 |
| 20 | | | | | 1.0 | 2.0 | 2.6 | 4.0 | 8.3 | 8.3 |
| 25 | | | | | | 1.9 | 2.5 | 3.8 | 7.8 | 7.8 |
| 32 | | | | | | | 2.5 | 3.7 | 7.3 | 7.3 |
| 40 | | | | | | | | 3.5 | 7.0 | 7.0 |
| 50 | | | | | | | | | 6.5 | 6.5 |
| 63 | | | | | | | | | | 6.2 |

Short circuit selectivity **characteristic D** towards fuse link **D01-D03***)

| FAZ | D01-D03 gL/gG | | | | | | | | | |
|-----|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| | I _n [A] | 10 | 16 | 20 | 25 | 35 | 50 | 63 | 80 | 100 |
| 0.5 | <0.5 ¹⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 1.0 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.7 | 1.3 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 1.5 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.6 | 0.9 | 2.8 | 9.0 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 2.0 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.6 | 0.8 | 2.2 | 6.7 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 2.5 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.5 | 0.7 | 1.9 | 5.4 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 3.0 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.5 | 0.7 | 1.8 | 4.8 | 9.3 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 3.5 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.5 | 0.7 | 1.7 | 4.7 | 8.6 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 4 | | <0.5 ¹⁾ | 0.5 | 0.7 | 1.7 | 4.6 | 7.7 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 5 | | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.6 | 1.5 | 3.5 | 5.8 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 6 | | | <0.5 ¹⁾ | 0.5 | 1.3 | 2.9 | 4.5 | 9.0 | 10.0 ²⁾ | 10.0 ²⁾ |
| 8 | | | <0.5 ¹⁾ | 0.5 | 1.2 | 2.4 | 3.5 | 6.0 | 10.0 ²⁾ | 10.0 ²⁾ |
| 10 | | | | 0.5 | 1.1 | 2.2 | 3.0 | 5.0 | 10.0 ²⁾ | 10.0 ²⁾ |
| 13 | | | | | 1.1 | 2.1 | 2.9 | 4.6 | 10.0 ²⁾ | 10.0 ²⁾ |
| 16 | | | | | | 1.9 | 2.6 | 3.9 | 9.0 | 9.0 |
| 20 | | | | | | 1.7 | 2.3 | 3.5 | 8.0 | 8.0 |
| 25 | | | | | | | 2.2 | 3.4 | 7.5 | 7.5 |
| 32 | | | | | | | | 2.9 | 6.0 | 6.0 |
| 40 | | | | | | | | | 5.7 | 5.7 |

¹⁾ Selectivity limit current I_s under 0.5 kA

²⁾ Selectivity limit current I_s = rated breaking capacity I_{cn} of the MCB

Shaded fields: no selectivity

FAZ towards DII-DIV fuse link

Short circuit selectivity **characteristic B** towards fuse link **DII-DIV***)

| FAZ | DII-DIV gL/gG | | | | | | | | |
|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| I _n [A] | 10 | 16 | 20 | 25 | 35 | 50 | 63 | 80 | 100 |
| 1.0 | <0.5 ¹⁾ | 1.2 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 1.5 | <0.5 ¹⁾ | 1.0 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 2.0 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.8 | 1.6 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 2.5 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.8 | 1.5 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 3.0 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.8 | 1.4 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 3.5 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.7 | 1.3 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 4 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.6 | 1.0 | 3.6 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 5 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.6 | 0.9 | 2.0 | 3.5 | 8.5 | 10.0 ²⁾ | 10.0 ²⁾ |
| 6 | | <0.5 ¹⁾ | 0.6 | 0.9 | 1.8 | 3.2 | 7.4 | 10.0 ²⁾ | 10.0 ²⁾ |
| 8 | | <0.5 ¹⁾ | 0.5 | 0.8 | 1.6 | 2.6 | 5.2 | 8.3 | 10.0 ²⁾ |
| 10 | | | 0.5 | 0.8 | 1.4 | 2.2 | 3.9 | 6.0 | 10.0 ²⁾ |
| 13 | | | 0.5 | 0.7 | 1.3 | 2.0 | 3.6 | 5.4 | 10.0 ²⁾ |
| 16 | | | | 0.6 | 1.2 | 1.9 | 3.2 | 4.6 | 8.4 |
| 20 | | | | | 1.2 | 1.8 | 3.1 | 4.4 | 7.8 |
| 25 | | | | | 1.2 | 1.8 | 3.0 | 4.2 | 7.3 |
| 32 | | | | | | 1.7 | 2.8 | 3.9 | 6.8 |
| 40 | | | | | | | 2.7 | 3.8 | 6.5 |
| 50 | | | | | | | 2.5 | 3.5 | 5.7 |
| 63 | | | | | | | | | 5.3 |

Short circuit selectivity **characteristic C** towards fuse link **DII-DIV***)

| FAZ | DII-DIV gL/gG | | | | | | | | |
|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| I _n [A] | 10 | 16 | 20 | 25 | 35 | 50 | 63 | 80 | 100 |
| 0.75 | 1.0 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 1.0 | <0.5 ¹⁾ | 1.2 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 1.5 | <0.5 ¹⁾ | <0.5 ¹⁾ | 1.0 | 2.2 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 2.0 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.8 | 1.6 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 2.5 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.8 | 1.4 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 3.0 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.8 | 0.9 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 3.5 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.6 | 0.9 | 2.2 | 4.5 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 4 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.6 | 0.8 | 1.8 | 3.6 | 9.7 | 10.0 ²⁾ | 10.0 ²⁾ |
| 5 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.6 | 0.7 | 1.5 | 2.7 | 7.3 | 10.0 ²⁾ | 10.0 ²⁾ |
| 6 | | <0.5 ¹⁾ | 0.5 | 0.6 | 1.4 | 2.4 | 5.5 | 10.0 ²⁾ | 10.0 ²⁾ |
| 8 | | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.6 | 1.3 | 2.2 | 4.7 | 8.7 | 10.0 ²⁾ |
| 10 | | | <0.5 ¹⁾ | 0.6 | 1.3 | 2.0 | 3.6 | 5.4 | 10.0 ²⁾ |
| 13 | | | | | 1.3 | 1.9 | 3.3 | 5.0 | 9.4 |
| 16 | | | | | 1.2 | 1.8 | 3.2 | 4.4 | 8.0 |
| 20 | | | | | 1.2 | 1.8 | 3.1 | 4.1 | 7.0 |
| 25 | | | | | | 1.7 | 2.8 | 3.8 | 6.5 |
| 32 | | | | | | | 2.7 | 3.7 | 6.2 |
| 40 | | | | | | | | 3.5 | 5.9 |
| 50 | | | | | | | | | 5.5 |
| 63 | | | | | | | | | |

Short circuit selectivity **characteristic D** towards fuse link **DII-DIV***)

| FAZ | DII-DIV gL/gG | | | | | | | | |
|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| I _n [A] | 10 | 16 | 20 | 25 | 35 | 50 | 63 | 80 | 100 |
| 0.5 | 0.5 | 3.0 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 1.0 | <0.5 ¹⁾ | <0.5 ¹⁾ | 1.0 | 2.4 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 1.5 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.7 | 1.2 | 3.5 | 7.7 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 2.0 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.6 | 1.0 | 2.8 | 5.8 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 2.5 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.6 | 1.4 | 2.3 | 4.6 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 3.0 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.6 | 0.9 | 2.3 | 4.3 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 3.5 | <0.5 ¹⁾ | <0.5 ¹⁾ | 0.6 | 0.9 | 2.1 | 4.0 | 10.0 ²⁾ | 10.0 ²⁾ | 10.0 ²⁾ |
| 4 | | <0.5 ¹⁾ | 0.6 | 0.9 | 2.0 | 3.8 | 9.5 | 10.0 ²⁾ | 10.0 ²⁾ |
| 5 | | <0.5 ¹⁾ | 0.5 | 0.7 | 1.7 | 3.1 | 7.0 | 10.0 ²⁾ | 10.0 ²⁾ |
| 6 | | | 0.5 | 0.7 | 1.5 | 2.6 | 5.3 | 9.1 | 10.0 ²⁾ |
| 8 | | | <0.5 ¹⁾ | 0.7 | 1.4 | 2.2 | 3.9 | 6.0 | 10.0 ²⁾ |
| 10 | | | | 0.7 | 1.2 | 1.9 | 3.4 | 5.0 | 9.5 |
| 13 | | | | | 1.2 | 1.8 | 3.2 | 4.6 | 8.6 |
| 16 | | | | | | 1.6 | 2.7 | 4.0 | 7.4 |
| 20 | | | | | | 1.5 | 2.5 | 3.5 | 6.7 |
| 25 | | | | | | | 2.4 | 3.4 | 6.2 |
| 32 | | | | | | | | 2.8 | 5.0 |
| 40 | | | | | | | | | 4.8 |

¹⁾ Selectivity limit current I_s under 0.5 kA

²⁾ Selectivity limit current I_s = rated breaking capacity I_{cn} of the MCB

Shaded fields: no selectivity

FAZ-B and NZM 1/2

Selectivity-limit current I_g [kA] for selectivity between FAZ-B and NZM (overload and short-circuit release unit NZM at max. value).

| I_n [A] | NZM...1-A... | | | | | | NZM...2-A... | | | | | | | | |
|--------------|-------------------------------|-----------|-----------|-----------|------------|------------|---|-----------|-----------|-----------|------------|------------|------------|------------|------------|
| | $I_{cu} = 25 (50) \text{ kA}$ | | | | | | $I_{cu} = 25 (50)(100)(150) \text{ kA}$ | | | | | | | | |
| FAZ-B | 40 | 50 | 63 | 80 | 100 | 125 | 40 | 50 | 63 | 80 | 100 | 125 | 160 | 200 | 250 |
| 1 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 |
| 2 | 2 | 15 | 15 | 15 | 15 | 15 | 3 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 |
| 3 | 1.2 | 2 | 3 | 3 | 10 | 15 | 1.5 | 1.5 | 3 | 5 | 15 | 15 | 15 | 15 | 15 |
| 4 | 1.2 | 2 | 3 | 3 | 8 | 15 | 1.2 | 1.5 | 3 | 4 | 15 | 15 | 15 | 15 | 15 |
| 6 | 1.2 | 2 | 2.5 | 3 | 5 | 10 | 1.2 | 1.5 | 2.5 | 3 | 15 | 15 | 15 | 15 | 15 |
| 10 | 1.2 | 1.5 | 2 | 2 | 4 | 10 | 1 | 1.5 | 2.5 | 3 | 10 | 10 | 10 | 10 | 10 |
| 13 | 1 | 1.5 | 2 | 2 | 4 | 10 | 1 | 1.2 | 2 | 3 | 10 | 10 | 10 | 10 | 10 |
| 16 | 1 | 1.2 | 1.5 | 2 | 3 | 8 | 1 | 1.2 | 1.5 | 2.5 | 10 | 10 | 10 | 10 | 10 |
| 20 | 0.8 | 1.2 | 1.5 | 1.5 | 3 | 8 | 1 | 1.2 | 1.5 | 1.5 | 10 | 10 | 10 | 10 | 10 |
| 25 | 0.7 | 1.2 | 1.5 | 1.5 | 3 | 7 | 0.8 | 1 | 1.5 | 2 | 10 | 10 | 10 | 10 | 10 |
| 32 | - | 1.2 | 1 | 1.5 | 2 | 6 | - | 1 | 1.5 | 2 | 8 | 8 | 8 | 8 | 10 |
| 40 | - | - | 1 | 1.5 | 2 | 5 | - | - | 1.2 | 1.5 | 7 | 7 | 7 | 7 | 10 |
| 50 | - | - | - | 1.2 | 1.5 | 4 | - | - | - | 1.5 | 6 | 6 | 6 | 6 | 10 |
| 63 | - | - | - | - | 1.5 | 3 | - | - | - | - | 6 | 6 | 6 | 6 | 10 |

FAZ-C and NZM 1/2

Selectivity-limit current I_g [kA] for selectivity between FAZ-C and NZM (overload and short-circuit release unit NZM at max. value).

| I_n [A] | NZM...1-A... | | | | | | NZM...2-A... | | | | | | | | |
|--------------|-------------------------------|-----------|-----------|-----------|------------|------------|---|-----------|-----------|-----------|------------|------------|------------|------------|------------|
| | $I_{cu} = 25 (50) \text{ kA}$ | | | | | | $I_{cu} = 25 (50)(100)(150) \text{ kA}$ | | | | | | | | |
| FAZ-C | 40 | 50 | 63 | 80 | 100 | 125 | 40 | 50 | 63 | 80 | 100 | 125 | 160 | 200 | 250 |
| 0.5 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 |
| 1 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 |
| 2 | 2 | 15 | 15 | 15 | 15 | 15 | 3 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 |
| 3 | 1.2 | 2 | 3 | 3 | 10 | 15 | 1.5 | 1.5 | 3 | 5 | 15 | 15 | 15 | 15 | 15 |
| 4 | 1.2 | 2 | 3 | 3 | 8 | 15 | 1.2 | 1.5 | 3 | 4 | 15 | 15 | 15 | 15 | 15 |
| 6 | 1.2 | 2 | 2.5 | 3 | 5 | 10 | 1.2 | 1.5 | 2.5 | 3 | 15 | 15 | 15 | 15 | 15 |
| 10 | 1.2 | 1.5 | 2 | 2 | 4 | 10 | 1 | 1.5 | 2.5 | 3 | 10 | 10 | 10 | 10 | 10 |
| 13 | 1 | 1.5 | 2 | 2 | 4 | 10 | 1 | 1.2 | 2 | 3 | 10 | 10 | 10 | 10 | 10 |
| 16 | 1 | 1.2 | 1.5 | 2 | 3 | 8 | 1 | 1.2 | 1.5 | 2.5 | 10 | 10 | 10 | 10 | 10 |
| 20 | 0.8 | 1.2 | 1.5 | 1.5 | 3 | 8 | 1 | 1.2 | 1.5 | 1.5 | 10 | 10 | 10 | 10 | 10 |
| 25 | 0.7 | 1.2 | 1.5 | 1.5 | 3 | 7 | 0.8 | 1 | 1.5 | 2 | 10 | 10 | 10 | 10 | 10 |
| 32 | - | 1.2 | 1 | 1.5 | 2 | 6 | - | 1 | 1.5 | 2 | 8 | 8 | 8 | 8 | 10 |
| 40 | - | - | 1 | 1.5 | 2 | 5 | - | - | 1.2 | 1.5 | 7 | 7 | 7 | 7 | 10 |
| 50 | - | - | - | 1.2 | 1.5 | 4 | - | - | - | 1.5 | 6 | 6 | 6 | 6 | 10 |
| 63 | - | - | - | - | 1.5 | 3 | - | - | - | - | 6 | 6 | 6 | 6 | 10 |

FAZ-D and NZM 1/2

Selectivity-limit current I_s [kA] for selectivity between FAZ-D and NZM (overload and short-circuit release unit NZM at max. value).

| I_n [A] | NZM...1-A... | | | | | | NZM...2-A... | | | | | | | | |
|--------------|-------------------------------|-----------|-----------|-----------|------------|------------|---|-----------|-----------|-----------|------------|------------|------------|------------|------------|
| | $I_{cu} = 25 (50) \text{ kA}$ | | | | | | $I_{cu} = 25 (50)(100)(150) \text{ kA}$ | | | | | | | | |
| FAZ-D | 40 | 50 | 63 | 80 | 100 | 125 | 40 | 50 | 63 | 80 | 100 | 125 | 160 | 200 | 250 |
| 0.5 | 9 | 15 | 15 | 15 | 15 | 15 | 9 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 |
| 1 | 0.5 | 0.7 | 1.1 | 1.9 | 4.2 | 15 | 0.5 | 0.7 | 1.1 | 1.9 | 4.2 | 15 | 15 | 15 | 15 |
| 1.5 | 0.3 | 0.6 | 0.8 | 1.1 | 1.6 | 2.6 | 0.3 | 0.6 | 0.8 | 1.1 | 1.6 | 2.6 | 5 | 15 | 15 |
| 2 | 0.3 | 0.5 | 0.75 | 0.95 | 1.4 | 2.4 | 0.3 | 0.5 | 0.75 | 0.95 | 1.4 | 2.4 | 4.5 | 10 | 15 |
| 2.5 | 0.3 | 0.5 | 0.75 | 0.95 | 1.3 | 2.3 | 0.3 | 0.5 | 0.75 | 0.95 | 1.3 | 2.3 | 4.2 | 9 | 15 |
| 3 | 0.3 | 0.5 | 0.7 | 0.9 | 1.3 | 2.1 | 0.3 | 0.5 | 0.7 | 0.9 | 1.3 | 2.1 | 3.6 | 7 | 15 |
| 3.5 | 0.3 | 0.5 | 0.7 | 0.9 | 1.3 | 2 | 0.3 | 0.5 | 0.7 | 0.9 | 1.3 | 2 | 3.3 | 5.6 | 10 |
| 4 | 0.3 | 0.5 | 0.7 | 0.9 | 1.3 | 1.9 | 0.3 | 0.5 | 0.7 | 0.9 | 1.3 | 1.9 | 3 | 4.7 | 8 |
| 5 | 0.3 | 0.5 | 0.7 | 0.9 | 1.3 | 1.9 | 0.3 | 0.5 | 0.7 | 0.9 | 1.3 | 1.9 | 3 | 4.4 | 7 |
| 6 | 0.3 | 0.5 | 0.6 | 0.9 | 1.3 | 1.8 | 0.3 | 0.5 | 0.6 | 0.9 | 1.3 | 1.8 | 2.8 | 4 | 6 |
| 8 | 0.3 | 0.3 | 0.6 | 0.75 | 1 | 1.3 | 0.3 | 0.3 | 0.6 | 0.75 | 1 | 1.3 | 1.8 | 2.7 | 4 |
| 10 | 0.3 | 0.3 | 0.6 | 0.75 | 0.95 | 1.2 | 0.3 | 0.3 | 0.6 | 0.75 | 0.95 | 1.2 | 1.7 | 2.4 | 3.6 |
| 13 | 0.3 | 0.3 | 0.5 | 0.7 | 0.9 | 1.1 | 0.3 | 0.3 | 0.5 | 0.7 | 0.9 | 1.1 | 1.6 | 2.2 | 3.2 |
| 16 | - | 0.3 | 0.5 | 0.65 | 0.8 | 1.1 | - | 0.3 | 0.5 | 0.65 | 0.8 | 1.1 | 1.5 | 2.1 | 3 |
| 20 | - | - | 0.5 | 0.65 | 0.8 | 1.1 | - | - | 0.5 | 0.65 | 0.8 | 1.1 | 1.4 | 2.1 | 3 |
| 25 | - | - | 0.5 | 0.65 | 0.8 | 1.1 | - | - | 0.5 | 0.65 | 0.8 | 1.1 | 1.4 | 1.9 | 2.7 |
| 32 | - | - | - | - | 0.8 | 1.1 | - | - | - | - | 0.8 | 1.1 | 1.4 | 1.9 | 2.7 |
| 40 | - | - | - | - | - | 1 | - | - | - | - | - | 1 | 1.4 | 1.8 | 2.6 |

Back-up Protection FAZ

The up-stream protective devices will protect the down-stream FAZ up to the short-circuit current specified.

FAZ/C and AZ/C

| I_n [A] | AZ/C | | | | | | | | |
|-----------|-----------|----|----|----|----|----|----|-----|-------|
| | I_n [A] | | | | | | | | |
| FAZ/C | 20 | 25 | 32 | 40 | 50 | 63 | 80 | 100 | 125 |
| 1 | 25 | 25 | 25 | 25 | 25 | 25 | 20 | 20 | 15 kA |
| 2 | 25 | 25 | 25 | 25 | 25 | 25 | 20 | 20 | 15 kA |
| 4 | 25 | 25 | 25 | 25 | 25 | 25 | 20 | 20 | 15 kA |
| 6 | 25 | 25 | 25 | 25 | 25 | 25 | 20 | 20 | 15 kA |
| 10 | 25 | 25 | 25 | 25 | 25 | 25 | 20 | 20 | 15 kA |
| 13 | 25 | 25 | 25 | 25 | 25 | 25 | 20 | 20 | 15 kA |
| 16 | 25 | 25 | 25 | 25 | 25 | 25 | 20 | 20 | 15 kA |
| 20 | 1) | 25 | 25 | 25 | 25 | 25 | 20 | 20 | 15 kA |
| 25 | 1) | 1) | 25 | 25 | 25 | 25 | 20 | 20 | 15 kA |
| 32 | 1) | 1) | 1) | 25 | 25 | 25 | 20 | 20 | - |
| 40 | 1) | 1) | 1) | 1) | 25 | 25 | 20 | 20 | - |
| 50 | 1) | 1) | 1) | 1) | 1) | 25 | 20 | 20 | - |
| 63 | 1) | 1) | 1) | 1) | 1) | 1) | - | - | - |

1) I_n (AZ) \leq I_n (FAZ)

FAZ and CL-PKZ0

Back-up tests acc. to EN/IEC 60947-2, App. A: $U = 1.05 U_e$, (O - t - CO)

| I_n [A] | FAZ- I_n /1(2,3,4)/B(C) + CL-PKZ0 $U_e = 230/400$ V |
|-----------|--|
| 0.16 | 65 kA |
| 0.25 | 65 kA |
| 0.5 | 65 kA |
| 0.75 | 65 kA |
| 1 | 65 kA |
| 1.5 | 65 kA |
| 2 | 65 kA |
| 2.5 | 65 kA |
| 3 | 65 kA |
| 3.5 | 65 kA |
| 4 | 65 kA |
| 5 | 45 kA |
| 6 | 45 kA |
| 8 | 45 kA |
| 10 | 45 kA |
| 12 | 45 kA |
| 13 | 45 kA |
| 15 | 45 kA |
| 16 | 45 kA |
| 20 | 45 kA |
| 25 | 45 kA |
| 32 | 45 kA |
| 40 | 25 kA |
| 50 | 25 kA |
| 63 | 25 kA |

FAZ and NZM7

| I_n [A] | FAZ- I_n /1(2,3,4)/B(C) + NZM7-40(...100) $U_e = 230/400$ V |
|-----------|--|
| 0.16 | 25 kA |
| 0.25 | 25 kA |
| 0.5 | 25 kA |
| 0.75 | 25 kA |
| 1 | 25 kA |
| 1.5 | 25 kA |
| 2 | 25 kA |
| 2.5 | 25 kA |
| 3 | 25 kA |
| 3.5 | 25 kA |
| 4 | 25 kA |
| 5 | 20 kA |
| 6 | 20 kA |
| 8 | 20 kA |
| 10 | 20 kA |
| 12 | 20 kA |
| 13 | 20 kA |
| 15 | 20 kA |
| 16 | 20 kA |
| 20 | 18 kA |
| 25 | 18 kA |
| 32 | 18 kA |
| 40 | 18 kA |
| 50 | 15 kA |
| 63 | 15 kA |

FAZ and NZMB1

$U_e = 230/400\text{ V}$: I_{cu} (FAZ) = 15 kA

$U_e = 230/400\text{ V}$: I_{cu} (NZMB1) = 25 kA

Back-up test acc. EN/IEC 60947-2, app. A: $U = 1.05U_e$, (O - t - CO)

(Settings NZMB1: I_r , I_{rm} at max. volumes)

| I_n [A] | FAZ-$I_n/1(2,3,4)/B(C)$ + NZMB1 $U_e = 230/400\text{ V}$ |
|-----------|---|
| 0.16 | 25 kA |
| 0.25 | 25 kA |
| 0.5 | 25 kA |
| 0.75 | 25 kA |
| 1 | 25 kA |
| 1.5 | 25 kA |
| 2 | 25 kA |
| 2.5 | 25 kA |
| 3 | 25 kA |
| 3.5 | 25 kA |
| 4 | 25 kA |
| 5 | 25 kA |
| 6 | 25 kA |
| 8 | 25 kA |
| 10 | 25 kA |
| 12 | 25 kA |
| 13 | 25 kA |
| 15 | 25 kA |
| 16 | 25 kA |
| 20 | 20 kA |
| 25 | 20 kA |
| 32 | 20 kA |
| 40 | 20 kA |
| 50 | 15 kA |
| 63 | 15 kA |

FAZ and NZMN1

$U_e = 230/400\text{ V}$: I_{cu} (FAZ) = 15 kA

$U_e = 230/400\text{ V}$: I_{cu} (NZMN1) = 25 kA

Back-up test acc. EN/IEC 60947-2, app. A: $U = 1.05U_e$, (O - t - CO)

(Settings NZM at max. values)

| I_n [A] | FAZ-$I_n/1(2,3,4)/B(C)$ + NZMN1 $U_e = 230/400\text{ V}$ |
|-----------|---|
| 0.16 | 25 kA |
| 0.25 | 25 kA |
| 0.5 | 25 kA |
| 0.75 | 25 kA |
| 1 | 25 kA |
| 1.5 | 25 kA |
| 2 | 25 kA |
| 2.5 | 25 kA |
| 3 | 25 kA |
| 3.5 | 25 kA |
| 4 | 25 kA |
| 5 | 25 kA |
| 6 | 25 kA |
| 8 | 25 kA |
| 10 | 25 kA |
| 12 | 25 kA |
| 13 | 25 kA |
| 15 | 25 kA |
| 16 | 25 kA |
| 20 | 20 kA |
| 25 | 20 kA |
| 32 | 20 kA |
| 40 | 20 kA |
| 50 | 15 kA |
| 63 | 15 kA |

FAZ and NZMB2

$U_e = 230/400\text{ V}$: I_{cu} (FAZ) = 15 kA
 $U_e = 230/400\text{ V}$: I_{cu} (NZMB2) = 25 kA
 $U_e = 133/230\text{ V}$: I_{cu} (FAZ) = 20 kA
 $U_e = 133/230\text{ V}$: I_{cu} (NZMB2) = 30 kA
 Back-up test acc. EN/IEC 60947-2, app. A: $U = 1.05U_e$, (O - t - CO)
 (Settings NZM at max. values)

| I_n [A] | FAZ-$I_n/1(2,3,4)/B(C)$ + NZMB2 | |
|-----------|---|--------------------------|
| | $U_e = 230/400\text{ V}$ | $U_e = 133/230\text{ V}$ |
| 0.16 | 25 kA | 30 kA |
| 0.25 | 25 kA | 30 kA |
| 0.5 | 25 kA | 30 kA |
| 0.75 | 25 kA | 30 kA |
| 1 | 25 kA | 30 kA |
| 1.5 | 25 kA | 30 kA |
| 2 | 25 kA | 30 kA |
| 2.5 | 25 kA | 30 kA |
| 3 | 25 kA | 30 kA |
| 3.5 | 25 kA | 30 kA |
| 4 | 25 kA | 30 kA |
| 5 | 25 kA | 25 kA |
| 6 | 25 kA | 25 kA |
| 8 | 25 kA | 25 kA |
| 10 | 25 kA | 25 kA |
| 12 | 20 kA | 25 kA |
| 13 | 20 kA | 25 kA |
| 15 | 20 kA | 25 kA |
| 16 | 20 kA | 25 kA |
| 20 | 20 kA | 25 kA |
| 25 | 20 kA | 25 kA |
| 32 | 20 kA | 25 kA |
| 40 | 15 kA | 20 kA |
| 50 | 15 kA | 20 kA |
| 63 | 15 kA | 20 kA |

FAZ and NZMN2

$U_e = 230/400\text{ V}$: I_{cu} (FAZ) = 15 kA
 $U_e = 230/400\text{ V}$: I_{cu} (NZMN2) = 50 kA
 $U_e = 133/230\text{ V}$: I_{cu} (FAZ) = 20 kA
 $U_e = 133/230\text{ V}$: I_{cu} (NZMN2) = 85 kA
 Back-up test acc. EN/IEC 60947-2, app. A: $U = 1.05U_e$, (O - t - CO)
 (Settings NZM at max. values)

| I_n [A] | FAZ-$I_n/1(2,3,4)/B(C)$ + NZMN2 | |
|-----------|---|--------------------------|
| | $U_e = 230/400\text{ V}$ | $U_e = 133/230\text{ V}$ |
| 0.16 | 50 kA | 85 kA |
| 0.25 | 50 kA | 85 kA |
| 0.5 | 50 kA | 85 kA |
| 0.75 | 50 kA | 85 kA |
| 1 | 50 kA | 85 kA |
| 1.5 | 50 kA | 85 kA |
| 2 | 50 kA | 85 kA |
| 2.5 | 50 kA | 85 kA |
| 3 | 50 kA | 85 kA |
| 3.5 | 50 kA | 85 kA |
| 4 | 50 kA | 85 kA |
| 5 | 50 kA | 80 kA |
| 6 | 50 kA | 80 kA |
| 8 | 50 kA | 80 kA |
| 10 | 50 kA | 80 kA |
| 12 | 30 kA | 60 kA |
| 13 | 30 kA | 60 kA |
| 15 | 30 kA | 60 kA |
| 16 | 30 kA | 60 kA |
| 20 | 30 kA | 60 kA |
| 25 | 30 kA | 60 kA |
| 32 | 30 kA | 60 kA |
| 40 | 20 kA | 40 kA |
| 50 | 20 kA | 40 kA |
| 63 | 20 kA | 40 kA |

FAZ and NZMH2

$U_e = 230/400\text{ V}$: I_{cu} (FAZ) = 15 kA
 $U_e = 230/400\text{ V}$: I_{cu} (NZMH2) = 150 kA
 $U_e = 133/230\text{ V}$: I_{cu} (FAZ) = 20 kA
 $U_e = 133/230\text{ V}$: I_{cu} (NZMH2) = 150 kA
 Back-up test acc. EN/IEC 60947-2, app. A: $U = 1.05U_e$, (O - t - CO)
 (Settings NZM at max. values)

| I_n [A] | FAZ-$I_n/1(2,3,4)/B(C)$ + NZMH2 | |
|-----------|---|--------------------------|
| | $U_e = 230/400\text{ V}$ | $U_e = 133/230\text{ V}$ |
| 0.16 | 50 kA | 85 kA |
| 0.25 | 50 kA | 85 kA |
| 0.5 | 50 kA | 85 kA |
| 0.75 | 50 kA | 85 kA |
| 1 | 50 kA | 85 kA |
| 1.5 | 50 kA | 85 kA |
| 2 | 50 kA | 85 kA |
| 2.5 | 50 kA | 85 kA |
| 3 | 50 kA | 85 kA |
| 3.5 | 50 kA | 85 kA |
| 4 | 50 kA | 85 kA |
| 5 | 50 kA | 80 kA |
| 6 | 50 kA | 80 kA |
| 8 | 50 kA | 80 kA |
| 10 | 50 kA | 80 kA |
| 12 | 30 kA | 60 kA |
| 13 | 30 kA | 60 kA |
| 15 | 30 kA | 60 kA |
| 16 | 30 kA | 60 kA |
| 20 | 30 kA | 60 kA |
| 25 | 30 kA | 60 kA |
| 32 | 30 kA | 60 kA |
| 40 | 20 kA | 40 kA |
| 50 | 20 kA | 40 kA |
| 63 | 20 kA | 40 kA |

FAZ and NZML2

$U_e = 230/400\text{ V}$: I_{cu} (FAZ) = 15 kA
 $U_e = 230/400\text{ V}$: I_{cu} (NZML2) = 150 kA
 $U_e = 133/230\text{ V}$: I_{cu} (FAZ) = 20 kA
 $U_e = 133/230\text{ V}$: I_{cu} (NZML2) = 150 kA
 Back-up test acc. EN/IEC 60947-2, app. A: $U = 1.05U_e$, (O - t - CO)
 (Settings NZM at max. values)

| I_n [A] | FAZ-$I_n/1(2,3,4)/B(C)$ + NZML2 | |
|-----------|---|--------------------------|
| | $U_e = 230/400\text{ V}$ | $U_e = 133/230\text{ V}$ |
| 0.16 | 50 kA | 85 kA |
| 0.25 | 50 kA | 85 kA |
| 0.5 | 50 kA | 85 kA |
| 0.75 | 50 kA | 85 kA |
| 1 | 50 kA | 85 kA |
| 1.5 | 50 kA | 85 kA |
| 2 | 50 kA | 85 kA |
| 2.5 | 50 kA | 85 kA |
| 3 | 50 kA | 85 kA |
| 3.5 | 50 kA | 85 kA |
| 4 | 50 kA | 85 kA |
| 5 | 50 kA | 80 kA |
| 6 | 50 kA | 80 kA |
| 8 | 50 kA | 80 kA |
| 10 | 50 kA | 80 kA |
| 12 | 30 kA | 60 kA |
| 13 | 30 kA | 60 kA |
| 15 | 30 kA | 60 kA |
| 16 | 30 kA | 60 kA |
| 20 | 30 kA | 60 kA |
| 25 | 30 kA | 60 kA |
| 32 | 30 kA | 60 kA |
| 40 | 20 kA | 40 kA |
| 50 | 20 kA | 40 kA |
| 63 | 20 kA | 40 kA |

FAZ and NH


$U_e = 230\text{ V}$: I_{cu} (FAZ) = 15 (10) kA (acc. to IEC/EN 60947)

$U_e = 500\text{ V}$: I_{cu} (NH00 125 A gL / gG) = 120kA

| I_n [A] | FAZ-I_n/B,(C),(D)... + NH00 125 A gL/gG IT-system U = 230 V |
|-----------|---|
| 0.5 | 50 kA |
| 1 | 50 kA |
| 2 | 50 kA |
| 3 | 50 kA |
| 4 | 50 kA |
| 6 | 50 kA |
| 10 | 50 kA |
| 13 | 50 kA |
| 16 | 50 kA |
| 20 | 50 kA |
| 25 | 50 kA |
| 32 | 50 kA |
| 40 | 50 kA |
| 50 | 50 kA |
| 63 | 50 kA |

Overload Selectivity FAZ

FAZ-B(C)(D) to FAZ-B



Upstream side FAZ, Characteristic B
Downstream side FAZ, Characteristic B, C, D

x ... Selectivity range (i.e. only the downstream switch drops in case $I < I_g$)


| Upstream side | FAZ Characteristic B | | | | | | | | | | | | | |
|---|----------------------|---|------|----|----|----|------|----|----|------|-----|-----|-----|-------|
| Type B rated current I_n [A] | | 2 | 3 | 4 | 6 | 10 | 13 | 16 | 20 | 25 | 32 | 40 | 50 | 63 |
| Selectivity limiting current I_g [A] | | 7 | 10.5 | 14 | 21 | 35 | 45.5 | 56 | 70 | 87.5 | 112 | 140 | 175 | 220.5 |
| Downstream side FAZ Characteristic B | 2 | | x | x | x | x | x | x | x | x | x | x | x | x |
| | 3 | | | x | x | x | x | x | x | x | x | x | x | x |
| | 4 | | | | x | x | x | x | x | x | x | x | x | x |
| | 6 | | | | | x | x | x | x | x | x | x | x | x |
| | 10 | | | | | | x | x | x | x | x | x | x | x |
| | 13 | | | | | | | x | x | x | x | x | x | x |
| | 16 | | | | | | | | x | x | x | x | x | x |
| | 20 | | | | | | | | | x | x | x | x | x |
| | 25 | | | | | | | | | | x | x | x | x |
| | 32 | | | | | | | | | | | x | x | x |
| | 40 | | | | | | | | | | | | x | x |
| | 50 | | | | | | | | | | | | | x |
| | 63 | | | | | | | | | | | | | |

| Upstream side | FAZ Characteristic B | | | | | | | | | | | | | | | |
|---|----------------------|---|------|----|----|----|------|----|----|------|-----|-----|-----|-------|---|---|
| Type B rated current I_n [A] | | 2 | 3 | 4 | 6 | 10 | 13 | 16 | 20 | 25 | 32 | 40 | 50 | 63 | | |
| Selectivity limiting current I_g [A] | | 7 | 10.5 | 14 | 21 | 35 | 45.5 | 56 | 70 | 87.5 | 112 | 140 | 175 | 220.5 | | |
| Downstream side FAZ Characteristic C | 0.5 | x | x | x | x | x | x | x | x | x | x | x | x | x | | |
| | 1 | x | x | x | x | x | x | x | x | x | x | x | x | x | | |
| | 2 | | | x | x | x | x | x | x | x | x | x | x | x | | |
| | 3 | | | | x | x | x | x | x | x | x | x | x | x | | |
| | 4 | | | | | x | x | x | x | x | x | x | x | x | | |
| | 6 | | | | | | x | x | x | x | x | x | x | x | | |
| | 8 | | | | | | | x | x | x | x | x | x | x | | |
| | 10 | | | | | | | | x | x | x | x | x | x | | |
| | 13 | | | | | | | | | x | x | x | x | x | | |
| | 16 | | | | | | | | | | x | x | x | x | | |
| | 20 | | | | | | | | | | | x | x | x | | |
| | 25 | | | | | | | | | | | | x | x | | |
| | 32 | | | | | | | | | | | | | x | | |
| | 40 | | | | | | | | | | | | | | x | |
| | 50 | | | | | | | | | | | | | | | x |
| 63 | | | | | | | | | | | | | | | | x |

| Upstream side | FAZ Characteristic B | | | | | | | | | | | | | | | |
|---|----------------------|---|------|----|----|----|------|----|----|------|-----|-----|-----|-------|---|---|
| Type B rated current I_n [A] | | 2 | 3 | 4 | 6 | 10 | 13 | 16 | 20 | 25 | 32 | 40 | 50 | 63 | | |
| Selectivity limiting current I_g [A] | | 7 | 10.5 | 14 | 21 | 35 | 45.5 | 56 | 70 | 87.5 | 112 | 140 | 175 | 220.5 | | |
| Downstream side FAZ Characteristic D | 2 | | | | | x | x | x | x | x | x | x | x | x | | |
| | 4 | | | | | | | x | x | x | x | x | x | x | | |
| | 6 | | | | | | | | x | x | x | x | x | x | | |
| | 10 | | | | | | | | | | x | x | x | x | | |
| | 13 | | | | | | | | | | | x | x | x | | |
| | 16 | | | | | | | | | | | | x | x | | |
| | 20 | | | | | | | | | | | | | x | | |
| | 25 | | | | | | | | | | | | | | x | |
| | 32 | | | | | | | | | | | | | | | x |
| 40 | | | | | | | | | | | | | | | | x |

Overload Selectivity FAZ

FAZ-B(C)(D) to FAZ-C



Upstream side FAZ, Characteristic C
Downstream side FAZ, Characteristic B, C, D

x ... Selectivity range (i.e. only the downstream switch drops in case $I < I_g$)


| Upstream side → | | FAZ Characteristic C | | | | | | | | | | | | | | | |
|---|----|----------------------|-----|------|------|------|------|------|----|------|------|-----|-------|-------|-----|-----|-------|
| Type B rated current I_n [A] | | 0.5 | 1 | 2 | 3 | 4 | 6 | 8 | 10 | 13 | 16 | 20 | 25 | 32 | 40 | 50 | 63 |
| Selectivity limiting current I_g [A] | | 2.85 | 5.7 | 11.4 | 17.1 | 22.8 | 34.2 | 45.6 | 57 | 74.1 | 91.2 | 114 | 142.5 | 182.4 | 228 | 285 | 359.1 |
| Downstream side FAZ Characteristic B | 2 | | | | x | x | x | x | x | x | x | x | x | x | x | x | x |
| | 3 | | | | | x | x | x | x | x | x | x | x | x | x | x | x |
| | 4 | | | | | | x | x | x | x | x | x | x | x | x | x | x |
| | 6 | | | | | | | x | x | x | x | x | x | x | x | x | x |
| | 10 | | | | | | | | | x | x | x | x | x | x | x | x |
| | 13 | | | | | | | | | | x | x | x | x | x | x | x |
| | 16 | | | | | | | | | | | x | x | x | x | x | x |
| | 20 | | | | | | | | | | | | x | x | x | x | x |
| | 25 | | | | | | | | | | | | | x | x | x | x |
| | 32 | | | | | | | | | | | | | | x | x | x |
| | 40 | | | | | | | | | | | | | | | x | x |
| | 50 | | | | | | | | | | | | | | | | x |
| 63 | | | | | | | | | | | | | | | | | x |

| Upstream side → | | FAZ Characteristic C | | | | | | | | | | | | | | | |
|---|-----|----------------------|-----|------|------|------|------|------|----|------|------|-----|-------|-------|-----|-----|-------|
| Type B rated current I_n [A] | | 0.5 | 1 | 2 | 3 | 4 | 6 | 8 | 10 | 13 | 16 | 20 | 25 | 32 | 40 | 50 | 63 |
| Selectivity limiting current I_g [A] | | 2.85 | 5.7 | 11.4 | 17.1 | 22.8 | 34.2 | 45.6 | 57 | 74.1 | 91.2 | 114 | 142.5 | 182.4 | 228 | 285 | 359.1 |
| Downstream side FAZ Characteristic C | 0.5 | | x | x | x | x | x | x | x | x | x | x | x | x | x | x | x |
| | 1 | | | x | x | x | x | x | x | x | x | x | x | x | x | x | x |
| | 2 | | | | x | x | x | x | x | x | x | x | x | x | x | x | x |
| | 3 | | | | | x | x | x | x | x | x | x | x | x | x | x | x |
| | 4 | | | | | | x | x | x | x | x | x | x | x | x | x | x |
| | 6 | | | | | | | x | x | x | x | x | x | x | x | x | x |
| | 8 | | | | | | | | x | x | x | x | x | x | x | x | x |
| | 10 | | | | | | | | | x | x | x | x | x | x | x | x |
| | 13 | | | | | | | | | | x | x | x | x | x | x | x |
| | 16 | | | | | | | | | | | x | x | x | x | x | x |
| | 20 | | | | | | | | | | | | x | x | x | x | x |
| | 25 | | | | | | | | | | | | | x | x | x | x |
| | 32 | | | | | | | | | | | | | | x | x | x |
| | 40 | | | | | | | | | | | | | | | x | x |
| | 50 | | | | | | | | | | | | | | | | x |
| 63 | | | | | | | | | | | | | | | | | x |

| Upstream side → | | FAZ Characteristic C | | | | | | | | | | | | | | | |
|---|----|----------------------|-----|------|------|------|------|------|----|------|------|-----|-------|-------|-----|-----|-------|
| Type B rated current I_n [A] | | 0.5 | 1 | 2 | 3 | 4 | 6 | 8 | 10 | 13 | 16 | 20 | 25 | 32 | 40 | 50 | 63 |
| Selectivity limiting current I_g [A] | | 2.85 | 5.7 | 11.4 | 17.1 | 22.8 | 34.2 | 45.6 | 57 | 74.1 | 91.2 | 114 | 142.5 | 182.4 | 228 | 285 | 359.1 |
| Downstream side FAZ Characteristic D | 2 | | | | | | x | x | x | x | x | x | x | x | x | x | x |
| | 4 | | | | | | | x | x | x | x | x | x | x | x | x | x |
| | 6 | | | | | | | | x | x | x | x | x | x | x | x | x |
| | 10 | | | | | | | | | x | x | x | x | x | x | x | x |
| | 13 | | | | | | | | | | x | x | x | x | x | x | x |
| | 16 | | | | | | | | | | | x | x | x | x | x | x |
| | 20 | | | | | | | | | | | | x | x | x | x | x |
| | 25 | | | | | | | | | | | | | x | x | x | x |
| | 32 | | | | | | | | | | | | | | x | x | x |
| 40 | | | | | | | | | | | | | | | x | x | |

Overload Selectivity FAZ

FAZ-B(C)(D) to FAZ-D



Upstream side FAZ, Characteristic D
Downstream side FAZ, Characteristic B, C, D

x ... Selectivity range (i.e. only the downstream switch drops in case $I < I_g$)


| Upstream side | FAZ Characteristic D | | | | | | | | | | |
|---|----------------------|----|----|----|-----|-------|-----|-----|-------|-----|-----|
| Type B rated current I_n [A] | | 2 | 4 | 6 | 10 | 13 | 16 | 20 | 25 | 32 | 40 |
| Selectivity limiting current I_g [A] | | 21 | 42 | 63 | 105 | 136.5 | 168 | 210 | 262.5 | 336 | 420 |
| Downstream side FAZ Characteristic B | 2 | x | x | x | x | x | x | x | x | x | x |
| | 3 | | x | x | x | x | x | x | x | x | x |
| | 4 | | | x | x | x | x | x | x | x | x |
| | 6 | | | | x | x | x | x | x | x | x |
| | 10 | | | | | x | x | x | x | x | x |
| | 13 | | | | | | x | x | x | x | x |
| | 16 | | | | | | | x | x | x | x |
| | 20 | | | | | | | | x | x | x |
| | 25 | | | | | | | | | x | x |
| | 32 | | | | | | | | | | x |
| | 40 | | | | | | | | | | |
| | 50 | | | | | | | | | | |
| 63 | | | | | | | | | | | |

| Upstream side | FAZ Characteristic D | | | | | | | | | | |
|---|----------------------|----|----|----|-----|-------|-----|-----|-------|-----|-----|
| Type B rated current I_n [A] | | 2 | 4 | 6 | 10 | 13 | 16 | 20 | 25 | 32 | 40 |
| Selectivity limiting current I_g [A] | | 21 | 42 | 63 | 105 | 136.5 | 168 | 210 | 262.5 | 336 | 420 |
| Downstream side FAZ Characteristic C | 0.5 | x | x | x | x | x | x | x | x | x | x |
| | 1 | x | x | x | x | x | x | x | x | x | x |
| | 2 | | x | x | x | x | x | x | x | x | x |
| | 3 | | | x | x | x | x | x | x | x | x |
| | 4 | | | | x | x | x | x | x | x | x |
| | 6 | | | | | x | x | x | x | x | x |
| | 8 | | | | | | x | x | x | x | x |
| | 10 | | | | | | | x | x | x | x |
| | 13 | | | | | | | | x | x | x |
| | 16 | | | | | | | | | x | x |
| | 20 | | | | | | | | | | x |
| | 25 | | | | | | | | | | |
| | 32 | | | | | | | | | | |
| | 40 | | | | | | | | | | |
| | 50 | | | | | | | | | | |
| 63 | | | | | | | | | | | |

| Upstream side | FAZ Characteristic D | | | | | | | | | | |
|---|----------------------|----|----|----|-----|-------|-----|-----|-------|-----|-----|
| Type B rated current I_n [A] | | 2 | 4 | 6 | 10 | 13 | 16 | 20 | 25 | 32 | 40 |
| Selectivity limiting current I_g [A] | | 21 | 42 | 63 | 105 | 136.5 | 168 | 210 | 262.5 | 336 | 420 |
| Downstream side FAZ Characteristic D | 2 | x | x | x | x | x | x | x | x | x | x |
| | 4 | | x | x | x | x | x | x | x | x | x |
| | 6 | | | x | x | x | x | x | x | x | x |
| | 10 | | | | x | x | x | x | x | x | x |
| | 13 | | | | | x | x | x | x | x | x |
| | 16 | | | | | | x | x | x | x | x |
| | 20 | | | | | | | x | x | x | x |
| | 25 | | | | | | | | x | x | x |
| | 32 | | | | | | | | | | x |
| 40 | | | | | | | | | | | |

Overload Selectivity FAZ

FAZ-B(C)(D) to AZ-C



Upstream side AZ, Characteristic C
Downstream side FAZ, Characteristic B, C, D

x ... Selectivity range (i.e. only the downstream switch drops in case $I < I_g$)


| Upstream side → | | AZ Characteristic C | | | | | | | | | | |
|---|----|---------------------|-----|-----|-----|-----|-----|-----|-----|-----|---|--|
| Type B rated current I_n [A] | | 20 | 25 | 32 | 40 | 50 | 63 | 80 | 100 | 125 | | |
| Selectivity limiting current I_g [A] | | 130 | 163 | 208 | 260 | 325 | 410 | 520 | 650 | 813 | | |
| Downstream side FAZ Characteristic B | 2 | x | x | x | x | x | x | x | x | x | x | |
| | 3 | x | x | x | x | x | x | x | x | x | x | |
| | 4 | x | x | x | x | x | x | x | x | x | x | |
| | 6 | x | x | x | x | x | x | x | x | x | x | |
| | 10 | x | x | x | x | x | x | x | x | x | x | |
| | 13 | x | x | x | x | x | x | x | x | x | x | |
| | 16 | x | x | x | x | x | x | x | x | x | x | |
| | 20 | | x | x | x | x | x | x | x | x | x | |
| | 25 | | | x | x | x | x | x | x | x | x | |
| | 32 | | | | x | x | x | x | x | x | x | |
| | 40 | | | | | x | x | x | x | x | x | |
| | 50 | | | | | | x | x | x | x | x | |
| 63 | | | | | | | x | x | x | x | | |

| Upstream side → | | AZ Characteristic C | | | | | | | | | | |
|---|-----|---------------------|-----|-----|-----|-----|-----|-----|-----|-----|---|--|
| Type B rated current I_n [A] | | 20 | 25 | 32 | 40 | 50 | 63 | 80 | 100 | 125 | | |
| Selectivity limiting current I_g [A] | | 130 | 163 | 208 | 260 | 325 | 410 | 520 | 650 | 813 | | |
| Downstream side FAZ Characteristic C | 0.5 | x | x | x | x | x | x | x | x | x | x | |
| | 1 | x | x | x | x | x | x | x | x | x | x | |
| | 2 | x | x | x | x | x | x | x | x | x | x | |
| | 3 | x | x | x | x | x | x | x | x | x | x | |
| | 4 | x | x | x | x | x | x | x | x | x | x | |
| | 6 | x | x | x | x | x | x | x | x | x | x | |
| | 8 | x | x | x | x | x | x | x | x | x | x | |
| | 10 | x | x | x | x | x | x | x | x | x | x | |
| | 13 | x | x | x | x | x | x | x | x | x | x | |
| | 16 | x | x | x | x | x | x | x | x | x | x | |
| | 20 | | x | x | x | x | x | x | x | x | x | |
| | 25 | | | x | x | x | x | x | x | x | x | |
| | 32 | | | | x | x | x | x | x | x | x | |
| | 40 | | | | | x | x | x | x | x | x | |
| 50 | | | | | | x | x | x | x | x | | |
| 63 | | | | | | | x | x | x | x | | |

| Upstream side → | | AZ Characteristic C | | | | | | | | | | |
|---|----|---------------------|-----|-----|-----|-----|-----|-----|-----|-----|---|--|
| Type B rated current I_n [A] | | 20 | 25 | 32 | 40 | 50 | 63 | 80 | 100 | 125 | | |
| Selectivity limiting current I_g [A] | | 130 | 163 | 208 | 260 | 325 | 410 | 520 | 650 | 813 | | |
| Downstream side FAZ Characteristic D | 2 | x | x | x | x | x | x | x | x | x | x | |
| | 4 | x | x | x | x | x | x | x | x | x | x | |
| | 6 | x | x | x | x | x | x | x | x | x | x | |
| | 10 | x | x | x | x | x | x | x | x | x | x | |
| | 13 | | x | x | x | x | x | x | x | x | x | |
| | 16 | | | x | x | x | x | x | x | x | x | |
| | 20 | | | | x | x | x | x | x | x | x | |
| | 25 | | | | | x | x | x | x | x | x | |
| | 32 | | | | | | x | x | x | x | x | |
| | 40 | | | | | | | x | x | x | x | |

Overload Selectivity FAZ

FAZ-B(C)(D) to AZ-D



Upstream side AZ, Characteristic D
Downstream side FAZ, Characteristic B, C, D

x ... Selectivity range (i.e. only the downstream switch drops in case $I < I_g$)

| Upstream side → | | AZ Characteristic D | | | | | | | |
|---|----|---------------------|-----|-----|-----|-----|-----|-----|------|
| Type B rated current I_n [A] | | 20 | 25 | 32 | 40 | 50 | 63 | 80 | 100 |
| Selectivity limiting current I_g [A] | | 230 | 285 | 365 | 450 | 550 | 680 | 850 | 1020 |
| Downstream side FAZ Characteristic B | 2 | x | x | x | x | x | x | x | x |
| | 3 | x | x | x | x | x | x | x | x |
| | 4 | x | x | x | x | x | x | x | x |
| | 6 | x | x | x | x | x | x | x | x |
| | 10 | x | x | x | x | x | x | x | x |
| | 13 | x | x | x | x | x | x | x | x |
| | 16 | x | x | x | x | x | x | x | x |
| | 20 | | x | x | x | x | x | x | x |
| | 25 | | | x | x | x | x | x | x |
| | 32 | | | | x | x | x | x | x |
| | 40 | | | | | x | x | x | x |
| | 50 | | | | | | x | x | x |
| | 63 | | | | | | | x | x |

| Upstream side → | | AZ Characteristic D | | | | | | | |
|---|-----|---------------------|-----|-----|-----|-----|-----|-----|------|
| Type B rated current I_n [A] | | 20 | 25 | 32 | 40 | 50 | 63 | 80 | 100 |
| Selectivity limiting current I_g [A] | | 230 | 285 | 365 | 450 | 550 | 680 | 850 | 1020 |
| Downstream side FAZ Characteristic C | 0.5 | x | x | x | x | x | x | x | x |
| | 1 | x | x | x | x | x | x | x | x |
| | 2 | x | x | x | x | x | x | x | x |
| | 3 | x | x | x | x | x | x | x | x |
| | 4 | x | x | x | x | x | x | x | x |
| | 6 | x | x | x | x | x | x | x | x |
| | 8 | x | x | x | x | x | x | x | x |
| | 10 | x | x | x | x | x | x | x | x |
| | 13 | x | x | x | x | x | x | x | x |
| | 16 | x | x | x | x | x | x | x | x |
| | 20 | | x | x | x | x | x | x | x |
| | 25 | | | x | x | x | x | x | x |
| | 32 | | | | x | x | x | x | x |
| | 40 | | | | | x | x | x | x |
| | 50 | | | | | | x | x | x |
| 63 | | | | | | | x | x | |

| Upstream side → | | AZ Characteristic D | | | | | | | |
|---|----|---------------------|-----|-----|-----|-----|-----|-----|------|
| Type B rated current I_n [A] | | 20 | 25 | 32 | 40 | 50 | 63 | 80 | 100 |
| Selectivity limiting current I_g [A] | | 230 | 285 | 365 | 450 | 550 | 680 | 850 | 1020 |
| Downstream side FAZ Characteristic D | 2 | x | x | x | x | x | x | x | x |
| | 4 | x | x | x | x | x | x | x | x |
| | 6 | x | x | x | x | x | x | x | x |
| | 10 | x | x | x | x | x | x | x | x |
| | 13 | x | x | x | x | x | x | x | x |
| | 16 | x | x | x | x | x | x | x | x |
| | 20 | | x | x | x | x | x | x | x |
| | 25 | | | x | x | x | x | x | x |
| | 32 | | | | x | x | x | x | x |
| 40 | | | | | x | x | x | x | |

Influence of the Line Frequency FAZ

On the Instantaneous Tripping Current I_{MA}

| | Line Frequency f [Hz] | | | | | | |
|-------------------------------------|--------------------------------|-----|-----|-----|-----|-----|-----|
| | 16 ² / ₃ | 50 | 60 | 100 | 200 | 300 | 400 |
| $I_{MA}(f)/I_{MA}(50\text{Hz})$ [%] | 91 | 100 | 101 | 106 | 115 | 134 | 141 |

Miniature Circuit Breakers FAZ-T

SG56012



FAZ-T

- High-quality miniature circuit breakers for industrial and commercial applications
- Contact position indicator red - green
- Accessories suitable for subsequent installation
- Rated currents up to 40 A
- Tripping characteristics B, C, D
- Rated breaking capacity up to 25 kA according to EN 60947-2

FAZ-T Miniature Circuit Breakers (MCBs)

Characteristic B

| Rated current I_n (A) | Rated voltage IEC/EN 60898-1 (V) | Breaking capacity acc. to IEC/EN 60898-1 (kA) | Rated voltage IEC/EN 60947-2 (V) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Type Designation | Article No. | Units per package |
|----------------------------|---|---|---|---|---------------------|-------------|-------------------------|
|----------------------------|---|---|---|---|---------------------|-------------|-------------------------|

SG53212



1-pole

| | | | | | | | |
|----|---------|----|-----|----|------------|--------|--------|
| 1 | 240/415 | 15 | 240 | 25 | FAZT-B1/1 | 240770 | 12/120 |
| 2 | 240/415 | 15 | 240 | 25 | FAZT-B2/1 | 240771 | 12/120 |
| 3 | 240/415 | 15 | 240 | 25 | FAZT-B3/1 | 240772 | 12/120 |
| 4 | 240/415 | 15 | 240 | 25 | FAZT-B4/1 | 240777 | 12/120 |
| 6 | 240/415 | 15 | 240 | 25 | FAZT-B6/1 | 240782 | 12/120 |
| 10 | 240/415 | 15 | 240 | 25 | FAZT-B10/1 | 240787 | 12/120 |
| 12 | 240/415 | 15 | 240 | 25 | FAZT-B12/1 | 240792 | 12/120 |
| 13 | 240/415 | 15 | 240 | 25 | FAZT-B13/1 | 240793 | 12/120 |
| 15 | 240/415 | 15 | 240 | 25 | FAZT-B15/1 | 240794 | 12/120 |
| 16 | 240/415 | 15 | 240 | 25 | FAZT-B16/1 | 240795 | 12/120 |
| 20 | 240/415 | 15 | 240 | 25 | FAZT-B20/1 | 240796 | 12/120 |
| 25 | 240/415 | 15 | 240 | 25 | FAZT-B25/1 | 240797 | 12/120 |
| 32 | 240/415 | 10 | 240 | 20 | FAZT-B32/1 | 141907 | 12/120 |
| 40 | 240/415 | 10 | 240 | 20 | FAZT-B40/1 | 141908 | 12/120 |

SG55412



1+N-pole

| | | | | | | | |
|----|-----|----|-----|----|-------------|--------|------|
| 1 | 240 | 15 | 240 | 25 | FAZT-B1/1N | 240994 | 1/60 |
| 2 | 240 | 15 | 240 | 25 | FAZT-B2/1N | 240995 | 1/60 |
| 3 | 240 | 15 | 240 | 25 | FAZT-B3/1N | 240996 | 1/60 |
| 4 | 240 | 15 | 240 | 25 | FAZT-B4/1N | 240997 | 1/60 |
| 6 | 240 | 15 | 240 | 25 | FAZT-B6/1N | 240998 | 1/60 |
| 10 | 240 | 15 | 240 | 25 | FAZT-B10/1N | 240999 | 1/60 |
| 12 | 240 | 15 | 240 | 25 | FAZT-B12/1N | 241000 | 1/60 |
| 13 | 240 | 15 | 240 | 25 | FAZT-B13/1N | 241001 | 1/60 |
| 15 | 240 | 15 | 240 | 25 | FAZT-B15/1N | 241005 | 1/60 |
| 16 | 240 | 15 | 240 | 25 | FAZT-B16/1N | 241009 | 1/60 |
| 20 | 240 | 15 | 240 | 25 | FAZT-B20/1N | 241015 | 1/60 |
| 25 | 240 | 15 | 240 | 25 | FAZT-B25/1N | 241019 | 1/60 |
| 32 | 240 | 10 | 240 | 20 | FAZT-B32/1N | 142509 | 1/60 |
| 40 | 240 | 10 | 240 | 20 | FAZT-B40/1N | 142510 | 1/60 |

SG55212



2-pole

| | | | | | | | |
|----|-----|----|---------|----|------------|--------|------|
| 1 | 415 | 15 | 240/415 | 25 | FAZT-B1/2 | 240820 | 1/60 |
| 2 | 415 | 15 | 240/415 | 25 | FAZT-B2/2 | 240821 | 1/60 |
| 3 | 415 | 15 | 240/415 | 25 | FAZT-B3/2 | 240822 | 1/60 |
| 4 | 415 | 15 | 240/415 | 25 | FAZT-B4/2 | 240823 | 1/60 |
| 6 | 415 | 15 | 240/415 | 25 | FAZT-B6/2 | 240824 | 1/60 |
| 10 | 415 | 15 | 240/415 | 25 | FAZT-B10/2 | 240825 | 1/60 |
| 12 | 415 | 15 | 240/415 | 25 | FAZT-B12/2 | 240826 | 1/60 |
| 13 | 415 | 15 | 240/415 | 25 | FAZT-B13/2 | 240827 | 1/60 |
| 15 | 415 | 15 | 240/415 | 25 | FAZT-B15/2 | 240828 | 1/60 |
| 16 | 415 | 15 | 240/415 | 25 | FAZT-B16/2 | 240829 | 1/60 |
| 20 | 415 | 15 | 240/415 | 25 | FAZT-B20/2 | 240830 | 1/60 |
| 25 | 415 | 15 | 240/415 | 25 | FAZT-B25/2 | 240831 | 1/60 |
| 32 | 415 | 10 | 240/415 | 20 | FAZT-B32/2 | 142485 | 1/60 |
| 40 | 415 | 10 | 240/415 | 20 | FAZT-B40/2 | 142486 | 1/60 |

| Rated current I_n (A) | Rated voltage IEC/EN 60898-1 (V) | Breaking capacity acc. to IEC/EN 60898-1 (kA) | Rated voltage IEC/EN 60947-2 (V) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Type Designation | Article No. | Units per package |
|----------------------------|---|---|---|---|---------------------|-------------|-------------------------|
|----------------------------|---|---|---|---|---------------------|-------------|-------------------------|

SG53512



3-pole

| | | | | | | | |
|----|-----|----|---------|----|------------|--------|------|
| 1 | 415 | 15 | 240/415 | 25 | FAZT-B1/3 | 240874 | 1/40 |
| 2 | 415 | 15 | 240/415 | 25 | FAZT-B2/3 | 240875 | 1/40 |
| 3 | 415 | 15 | 240/415 | 25 | FAZT-B3/3 | 240876 | 1/40 |
| 4 | 415 | 15 | 240/415 | 25 | FAZT-B4/3 | 240877 | 1/40 |
| 6 | 415 | 15 | 240/415 | 25 | FAZT-B6/3 | 240878 | 1/40 |
| 10 | 415 | 15 | 240/415 | 25 | FAZT-B10/3 | 240879 | 1/40 |
| 12 | 415 | 15 | 240/415 | 25 | FAZT-B12/3 | 240880 | 1/40 |
| 13 | 415 | 15 | 240/415 | 25 | FAZT-B13/3 | 240881 | 1/40 |
| 15 | 415 | 15 | 240/415 | 25 | FAZT-B15/3 | 240882 | 1/40 |
| 16 | 415 | 15 | 240/415 | 25 | FAZT-B16/3 | 240883 | 1/40 |
| 20 | 415 | 15 | 240/415 | 25 | FAZT-B20/3 | 240884 | 1/40 |
| 25 | 415 | 15 | 240/415 | 25 | FAZT-B25/3 | 240885 | 1/40 |
| 32 | 415 | 10 | 240/415 | 20 | FAZT-B32/3 | 142493 | 1/40 |
| 40 | 415 | 10 | 240/415 | 20 | FAZT-B40/3 | 142494 | 1/40 |

SG55912



3+N-pole

| | | | | | | | |
|----|-----|----|---------|----|-------------|--------|------|
| 1 | 415 | 15 | 240/415 | 25 | FAZT-B1/3N | 241060 | 1/30 |
| 2 | 415 | 15 | 240/415 | 25 | FAZT-B2/3N | 241065 | 1/30 |
| 3 | 415 | 15 | 240/415 | 25 | FAZT-B3/3N | 241070 | 1/30 |
| 4 | 415 | 15 | 240/415 | 25 | FAZT-B4/3N | 241075 | 1/30 |
| 6 | 415 | 15 | 240/415 | 25 | FAZT-B6/3N | 241080 | 1/30 |
| 10 | 415 | 15 | 240/415 | 25 | FAZT-B10/3N | 241085 | 1/30 |
| 12 | 415 | 15 | 240/415 | 25 | FAZT-B12/3N | 241090 | 1/30 |
| 13 | 415 | 15 | 240/415 | 25 | FAZT-B13/3N | 241095 | 1/30 |
| 15 | 415 | 15 | 240/415 | 25 | FAZT-B15/3N | 241100 | 1/30 |
| 16 | 415 | 15 | 240/415 | 25 | FAZT-B16/3N | 241105 | 1/30 |
| 20 | 415 | 15 | 240/415 | 25 | FAZT-B20/3N | 241110 | 1/30 |
| 25 | 415 | 15 | 240/415 | 25 | FAZT-B25/3N | 241115 | 1/30 |
| 32 | 415 | 10 | 240/415 | 20 | FAZT-B32/3N | 142517 | 1/30 |
| 40 | 415 | 10 | 240/415 | 20 | FAZT-B40/3N | 142518 | 1/30 |

SG56012



4-pole

| | | | | | | | |
|----|-----|----|---------|----|------------|--------|------|
| 1 | 415 | 15 | 240/415 | 25 | FAZT-B1/4 | 240922 | 1/30 |
| 2 | 415 | 15 | 240/415 | 25 | FAZT-B2/4 | 240927 | 1/30 |
| 3 | 415 | 15 | 240/415 | 25 | FAZT-B3/4 | 240930 | 1/30 |
| 4 | 415 | 15 | 240/415 | 25 | FAZT-B4/4 | 240931 | 1/30 |
| 6 | 415 | 15 | 240/415 | 25 | FAZT-B6/4 | 240932 | 1/30 |
| 10 | 415 | 15 | 240/415 | 25 | FAZT-B10/4 | 240933 | 1/30 |
| 12 | 415 | 15 | 240/415 | 25 | FAZT-B12/4 | 240934 | 1/30 |
| 13 | 415 | 15 | 240/415 | 25 | FAZT-B13/4 | 240935 | 1/30 |
| 15 | 415 | 15 | 240/415 | 25 | FAZT-B15/4 | 240936 | 1/30 |
| 16 | 415 | 15 | 240/415 | 25 | FAZT-B16/4 | 240937 | 1/30 |
| 20 | 415 | 15 | 240/415 | 25 | FAZT-B20/4 | 240938 | 1/30 |
| 25 | 415 | 15 | 240/415 | 25 | FAZT-B25/4 | 240939 | 1/30 |
| 32 | 415 | 10 | 240/415 | 20 | FAZT-B32/4 | 142501 | 1/30 |
| 40 | 415 | 10 | 240/415 | 20 | FAZT-B40/4 | 142502 | 1/30 |

FAZ-T Miniature Circuit Breakers (MCBs)

Characteristic C

| Rated current I_n (A) | Rated voltage IEC/EN 60898-1 (V) | Breaking capacity acc. to IEC/EN 60898-1 (kA) | Rated voltage IEC/EN 60947-2 (V) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Type Designation | Article No. | Units per package |
|----------------------------|---|---|---|---|---------------------|-------------|-------------------------|
|----------------------------|---|---|---|---|---------------------|-------------|-------------------------|

SG53212



1-pole

| | | | | | | | |
|----|---------|----|-----|----|------------|--------|--------|
| 1 | 240/415 | 15 | 240 | 25 | FAZT-C1/1 | 240798 | 12/120 |
| 2 | 240/415 | 15 | 240 | 25 | FAZT-C2/1 | 240799 | 12/120 |
| 3 | 240/415 | 15 | 240 | 25 | FAZT-C3/1 | 240800 | 12/120 |
| 4 | 240/415 | 15 | 240 | 25 | FAZT-C4/1 | 240801 | 12/120 |
| 6 | 240/415 | 15 | 240 | 25 | FAZT-C6/1 | 240802 | 12/120 |
| 10 | 240/415 | 15 | 240 | 25 | FAZT-C10/1 | 240803 | 12/120 |
| 12 | 240/415 | 15 | 240 | 25 | FAZT-C12/1 | 240804 | 12/120 |
| 13 | 240/415 | 15 | 240 | 25 | FAZT-C13/1 | 240805 | 12/120 |
| 15 | 240/415 | 15 | 240 | 25 | FAZT-C15/1 | 240806 | 12/120 |
| 16 | 240/415 | 15 | 240 | 25 | FAZT-C16/1 | 240807 | 12/120 |
| 20 | 240/415 | 15 | 240 | 25 | FAZT-C20/1 | 240808 | 12/120 |
| 25 | 240/415 | 15 | 240 | 25 | FAZT-C25/1 | 240809 | 12/120 |
| 32 | 240/415 | 10 | 240 | 20 | FAZT-C32/1 | 141909 | 12/120 |
| 40 | 240/415 | 10 | 240 | 20 | FAZT-C40/1 | 142480 | 12/120 |

SG55412



1+N-pole

| | | | | | | | |
|----|-----|----|-----|----|-------------|--------|------|
| 1 | 240 | 15 | 240 | 25 | FAZT-C1/1N | 241022 | 1/60 |
| 2 | 240 | 15 | 240 | 25 | FAZT-C2/1N | 241023 | 1/60 |
| 3 | 240 | 15 | 240 | 25 | FAZT-C3/1N | 241024 | 1/60 |
| 4 | 240 | 15 | 240 | 25 | FAZT-C4/1N | 241025 | 1/60 |
| 6 | 240 | 15 | 240 | 25 | FAZT-C6/1N | 241026 | 1/60 |
| 10 | 240 | 15 | 240 | 25 | FAZT-C10/1N | 241027 | 1/60 |
| 12 | 240 | 15 | 240 | 25 | FAZT-C12/1N | 241028 | 1/60 |
| 13 | 240 | 15 | 240 | 25 | FAZT-C13/1N | 241029 | 1/60 |
| 15 | 240 | 15 | 240 | 25 | FAZT-C15/1N | 241030 | 1/60 |
| 16 | 240 | 15 | 240 | 25 | FAZT-C16/1N | 241034 | 1/60 |
| 20 | 240 | 15 | 240 | 25 | FAZT-C20/1N | 241038 | 1/60 |
| 25 | 240 | 15 | 240 | 25 | FAZT-C25/1N | 241044 | 1/60 |
| 32 | 240 | 10 | 240 | 20 | FAZT-C32/1N | 142511 | 1/60 |
| 40 | 240 | 10 | 240 | 20 | FAZT-C40/1N | 142512 | 1/60 |

SG55212



2-pole

| | | | | | | | |
|----|-----|----|---------|----|------------|--------|------|
| 1 | 415 | 15 | 240/415 | 25 | FAZT-C1/2 | 240832 | 1/60 |
| 2 | 415 | 15 | 240/415 | 25 | FAZT-C2/2 | 240833 | 1/60 |
| 3 | 415 | 15 | 240/415 | 25 | FAZT-C3/2 | 240838 | 1/60 |
| 4 | 415 | 15 | 240/415 | 25 | FAZT-C4/2 | 240843 | 1/60 |
| 6 | 415 | 15 | 240/415 | 25 | FAZT-C6/2 | 240850 | 1/60 |
| 10 | 415 | 15 | 240/415 | 25 | FAZT-C10/2 | 240855 | 1/60 |
| 12 | 415 | 15 | 240/415 | 25 | FAZT-C12/2 | 240858 | 1/60 |
| 13 | 415 | 15 | 240/415 | 25 | FAZT-C13/2 | 240859 | 1/60 |
| 15 | 415 | 15 | 240/415 | 25 | FAZT-C15/2 | 240860 | 1/60 |
| 16 | 415 | 15 | 240/415 | 25 | FAZT-C16/2 | 240861 | 1/60 |
| 20 | 415 | 15 | 240/415 | 25 | FAZT-C20/2 | 240862 | 1/60 |
| 25 | 415 | 15 | 240/415 | 25 | FAZT-C25/2 | 240863 | 1/60 |
| 32 | 415 | 10 | 240/415 | 20 | FAZT-C32/2 | 142487 | 1/60 |
| 40 | 415 | 10 | 240/415 | 20 | FAZT-C40/2 | 142488 | 1/60 |

SG53512



3-pole

| | Rated current I_n (A) | Rated voltage IEC/EN 60898-1 (V) | Breaking capacity acc. to IEC/EN 60898-1 (kA) | Rated voltage IEC/EN 60947-2 (V) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Type Designation | Article No. | Units per package |
|----|----------------------------|---|---|---|---|---------------------|-------------|-------------------------|
| 1 | 415 | 15 | 240/415 | 25 | | FAZT-C1/3 | 240886 | 1/40 |
| 2 | 415 | 15 | 240/415 | 25 | | FAZT-C2/3 | 240887 | 1/40 |
| 3 | 415 | 15 | 240/415 | 25 | | FAZT-C3/3 | 240888 | 1/40 |
| 4 | 415 | 15 | 240/415 | 25 | | FAZT-C4/3 | 240889 | 1/40 |
| 6 | 415 | 15 | 240/415 | 25 | | FAZT-C6/3 | 240890 | 1/40 |
| 10 | 415 | 15 | 240/415 | 25 | | FAZT-C10/3 | 240891 | 1/40 |
| 12 | 415 | 15 | 240/415 | 25 | | FAZT-C12/3 | 240892 | 1/40 |
| 13 | 415 | 15 | 240/415 | 25 | | FAZT-C13/3 | 240893 | 1/40 |
| 15 | 415 | 15 | 240/415 | 25 | | FAZT-C15/3 | 240894 | 1/40 |
| 16 | 415 | 15 | 240/415 | 25 | | FAZT-C16/3 | 240895 | 1/40 |
| 20 | 415 | 15 | 240/415 | 25 | | FAZT-C20/3 | 240896 | 1/40 |
| 25 | 415 | 15 | 240/415 | 25 | | FAZT-C25/3 | 240897 | 1/40 |
| 32 | 415 | 10 | 240/415 | 20 | | FAZT-C32/3 | 142495 | 1/40 |
| 40 | 415 | 10 | 240/415 | 20 | | FAZT-C40/3 | 142496 | 1/40 |

SG55912



3+N-pole

| | | | | | | | | |
|----|-----|----|---------|----|--|-------------|--------|------|
| 1 | 415 | 15 | 240/415 | 25 | | FAZT-C1/3N | 241120 | 1/30 |
| 2 | 415 | 15 | 240/415 | 25 | | FAZT-C2/3N | 241125 | 1/30 |
| 3 | 415 | 15 | 240/415 | 25 | | FAZT-C3/3N | 241130 | 1/30 |
| 4 | 415 | 15 | 240/415 | 25 | | FAZT-C4/3N | 241135 | 1/30 |
| 6 | 415 | 15 | 240/415 | 25 | | FAZT-C6/3N | 241140 | 1/30 |
| 10 | 415 | 15 | 240/415 | 25 | | FAZT-C10/3N | 241145 | 1/30 |
| 12 | 415 | 15 | 240/415 | 25 | | FAZT-C12/3N | 241150 | 1/30 |
| 13 | 415 | 15 | 240/415 | 25 | | FAZT-C13/3N | 241155 | 1/30 |
| 15 | 415 | 15 | 240/415 | 25 | | FAZT-C15/3N | 241160 | 1/30 |
| 16 | 415 | 15 | 240/415 | 25 | | FAZT-C16/3N | 241165 | 1/30 |
| 20 | 415 | 15 | 240/415 | 25 | | FAZT-C20/3N | 241170 | 1/30 |
| 25 | 415 | 15 | 240/415 | 25 | | FAZT-C25/3N | 241175 | 1/30 |
| 32 | 415 | 10 | 240/415 | 20 | | FAZT-C32/3N | 142519 | 1/30 |
| 40 | 415 | 10 | 240/415 | 20 | | FAZT-C40/3N | 142520 | 1/30 |

SG56012



4-pole

| | | | | | | | | |
|----|-----|----|---------|----|--|------------|--------|------|
| 1 | 415 | 15 | 240/415 | 25 | | FAZT-C1/4 | 240940 | 1/30 |
| 2 | 415 | 15 | 240/415 | 25 | | FAZT-C2/4 | 240941 | 1/30 |
| 3 | 415 | 15 | 240/415 | 25 | | FAZT-C3/4 | 240945 | 1/30 |
| 4 | 415 | 15 | 240/415 | 25 | | FAZT-C4/4 | 240949 | 1/30 |
| 6 | 415 | 15 | 240/415 | 25 | | FAZT-C6/4 | 240955 | 1/30 |
| 10 | 415 | 15 | 240/415 | 25 | | FAZT-C10/4 | 240959 | 1/30 |
| 12 | 415 | 15 | 240/415 | 25 | | FAZT-C12/4 | 240962 | 1/30 |
| 13 | 415 | 15 | 240/415 | 25 | | FAZT-C13/4 | 240963 | 1/30 |
| 15 | 415 | 15 | 240/415 | 25 | | FAZT-C15/4 | 240964 | 1/30 |
| 16 | 415 | 15 | 240/415 | 25 | | FAZT-C16/4 | 240965 | 1/30 |
| 20 | 415 | 15 | 240/415 | 25 | | FAZT-C20/4 | 240966 | 1/30 |
| 25 | 415 | 15 | 240/415 | 25 | | FAZT-C25/4 | 240967 | 1/30 |
| 32 | 415 | 10 | 240/415 | 20 | | FAZT-C32/4 | 142503 | 1/30 |
| 40 | 415 | 10 | 240/415 | 20 | | FAZT-C40/4 | 142504 | 1/30 |

FAZ-T Miniature Circuit Breakers (MCBs)

Characteristic D

| | Rated current I_n (A) | Rated voltage IEC/EN 60898-1 (V) | Breaking capacity acc. to IEC/EN 60898-1 (kA) | Rated voltage IEC/EN 60947-2 (V) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Type Designation | Article No. | Units per package |
|-----------------|----------------------------|---|---|---|---|---------------------|-------------|-------------------------|
| 1-pole | | | | | | | | |
| 1 | 240/415 | 15 | 240 | 25 | FAZT-D1/1 | 240810 | 12/120 | |
| 2 | 240/415 | 15 | 240 | 25 | FAZT-D2/1 | 240811 | 12/120 | |
| 3 | 240/415 | 15 | 240 | 25 | FAZT-D3/1 | 240812 | 12/120 | |
| 4 | 240/415 | 15 | 240 | 25 | FAZT-D4/1 | 240813 | 12/120 | |
| 6 | 240/415 | 15 | 240 | 25 | FAZT-D6/1 | 240814 | 12/120 | |
| 10 | 240/415 | 15 | 240 | 25 | FAZT-D10/1 | 240815 | 12/120 | |
| 12 | 240/415 | 15 | 240 | 25 | FAZT-D12/1 | 240816 | 12/120 | |
| 13 | 240/415 | 15 | 240 | 25 | FAZT-D13/1 | 240817 | 12/120 | |
| 15 | 240/415 | 15 | 240 | 20 | FAZT-D15/1 | 240818 | 12/120 | |
| 16 | 240/415 | 15 | 240 | 20 | FAZT-D16/1 | 240819 | 12/120 | |
| 20 | 240/415 | 10 | 240 | 20 | FAZT-D20/1 | 142481 | 12/120 | |
| 25 | 240/415 | 10 | 240 | 15 | FAZT-D25/1 | 142482 | 12/120 | |
| 32 | 240/415 | 10 | 240 | 15 | FAZT-D32/1 | 142483 | 12/120 | |
| 40 | 240/415 | 10 | 240 | 15 | FAZT-D40/1 | 142484 | 12/120 | |
| 1+N-pole | | | | | | | | |
| 1 | 240 | 15 | 240 | 25 | FAZT-D1/1N | 241048 | 1/60 | |
| 2 | 240 | 15 | 240 | 25 | FAZT-D2/1N | 241051 | 1/60 | |
| 3 | 240 | 15 | 240 | 25 | FAZT-D3/1N | 241052 | 1/60 | |
| 4 | 240 | 15 | 240 | 25 | FAZT-D4/1N | 241053 | 1/60 | |
| 6 | 240 | 15 | 240 | 25 | FAZT-D6/1N | 241054 | 1/60 | |
| 10 | 240 | 15 | 240 | 25 | FAZT-D10/1N | 241055 | 1/60 | |
| 12 | 240 | 15 | 240 | 25 | FAZT-D12/1N | 241056 | 1/60 | |
| 13 | 240 | 15 | 240 | 25 | FAZT-D13/1N | 241057 | 1/60 | |
| 15 | 240 | 15 | 240 | 20 | FAZT-D15/1N | 241058 | 1/60 | |
| 16 | 240 | 15 | 240 | 20 | FAZT-D16/1N | 241059 | 1/60 | |
| 20 | 240 | 10 | 240 | 20 | FAZT-D20/1N | 142513 | 1/60 | |
| 25 | 240 | 10 | 240 | 15 | FAZT-D25/1N | 142514 | 1/60 | |
| 32 | 240 | 10 | 240 | 15 | FAZT-D32/1N | 142515 | 1/60 | |
| 40 | 240 | 10 | 240 | 15 | FAZT-D40/1N | 142516 | 1/60 | |
| 2-pole | | | | | | | | |
| 1 | 415 | 15 | 240/415 | 25 | FAZT-D1/2 | 240864 | 1/60 | |
| 2 | 415 | 15 | 240/415 | 25 | FAZT-D2/2 | 240865 | 1/60 | |
| 3 | 415 | 15 | 240/415 | 25 | FAZT-D3/2 | 240866 | 1/60 | |
| 4 | 415 | 15 | 240/415 | 25 | FAZT-D4/2 | 240867 | 1/60 | |
| 6 | 415 | 15 | 240/415 | 25 | FAZT-D6/2 | 240868 | 1/60 | |
| 10 | 415 | 15 | 240/415 | 25 | FAZT-D10/2 | 240869 | 1/60 | |
| 12 | 415 | 15 | 240/415 | 25 | FAZT-D12/2 | 240870 | 1/60 | |
| 13 | 415 | 15 | 240/415 | 25 | FAZT-D13/2 | 240871 | 1/60 | |
| 15 | 415 | 15 | 240/415 | 20 | FAZT-D15/2 | 240872 | 1/60 | |
| 16 | 415 | 15 | 240/415 | 20 | FAZT-D16/2 | 240873 | 1/60 | |
| 20 | 415 | 10 | 240/415 | 20 | FAZT-D20/2 | 142489 | 1/60 | |
| 25 | 415 | 10 | 240/415 | 15 | FAZT-D25/2 | 142490 | 1/60 | |
| 32 | 415 | 10 | 240/415 | 15 | FAZT-D32/2 | 142491 | 1/60 | |
| 40 | 415 | 10 | 240/415 | 15 | FAZT-D40/2 | 142492 | 1/60 | |

SG53212



SG55412



SG55212



SG53512



3-pole

| | Rated current I_n (A) | Rated voltage IEC/EN 60898-1 (V) | Breaking capacity acc. to IEC/EN 60898-1 (kA) | Rated voltage IEC/EN 60947-2 (V) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Type Designation | Article No. | Units per package |
|----|----------------------------|---|---|---|---|---------------------|-------------|-------------------------|
| 1 | 415 | 15 | 240/415 | 25 | | FAZT-D1/3 | 240898 | 1/40 |
| 2 | 415 | 15 | 240/415 | 25 | | FAZT-D2/3 | 240899 | 1/40 |
| 3 | 415 | 15 | 240/415 | 25 | | FAZT-D3/3 | 240900 | 1/40 |
| 4 | 415 | 15 | 240/415 | 25 | | FAZT-D4/3 | 240901 | 1/40 |
| 6 | 415 | 15 | 240/415 | 25 | | FAZT-D6/3 | 240902 | 1/40 |
| 10 | 415 | 15 | 240/415 | 25 | | FAZT-D10/3 | 240903 | 1/40 |
| 12 | 415 | 15 | 240/415 | 25 | | FAZT-D12/3 | 240904 | 1/40 |
| 13 | 415 | 15 | 240/415 | 25 | | FAZT-D13/3 | 240905 | 1/40 |
| 15 | 415 | 15 | 240/415 | 25 | | FAZT-D15/3 | 240910 | 1/40 |
| 16 | 415 | 15 | 240/415 | 25 | | FAZT-D16/3 | 240915 | 1/40 |
| 20 | 415 | 10 | 240/415 | 20 | | FAZT-D20/3 | 142497 | 1/40 |
| 25 | 415 | 10 | 240/415 | 15 | | FAZT-D25/3 | 142498 | 1/40 |
| 32 | 415 | 10 | 240/415 | 15 | | FAZT-D32/3 | 142499 | 1/40 |
| 40 | 415 | 10 | 240/415 | 15 | | FAZT-D40/3 | 142500 | 1/40 |

SG55912



3+N-pole

| | | | | | | | | |
|----|-----|----|---------|----|--|-------------|--------|------|
| 1 | 415 | 15 | 240/415 | 25 | | FAZT-D1/3N | 241180 | 1/30 |
| 2 | 415 | 15 | 240/415 | 25 | | FAZT-D2/3N | 241181 | 1/30 |
| 3 | 415 | 15 | 240/415 | 25 | | FAZT-D3/3N | 241182 | 1/30 |
| 4 | 415 | 15 | 240/415 | 25 | | FAZT-D4/3N | 241183 | 1/30 |
| 6 | 415 | 15 | 240/415 | 25 | | FAZT-D6/3N | 241184 | 1/30 |
| 10 | 415 | 15 | 240/415 | 25 | | FAZT-D10/3N | 241185 | 1/30 |
| 12 | 415 | 15 | 240/415 | 25 | | FAZT-D12/3N | 241186 | 1/30 |
| 13 | 415 | 15 | 240/415 | 25 | | FAZT-D13/3N | 241187 | 1/30 |
| 15 | 415 | 15 | 240/415 | 25 | | FAZT-D15/3N | 241188 | 1/30 |
| 16 | 415 | 15 | 240/415 | 25 | | FAZT-D16/3N | 241189 | 1/30 |
| 20 | 415 | 10 | 240/415 | 20 | | FAZT-D20/3N | 142521 | 1/30 |
| 25 | 415 | 10 | 240/415 | 15 | | FAZT-D25/3N | 142522 | 1/30 |
| 32 | 415 | 10 | 240/415 | 15 | | FAZT-D32/3N | 142523 | 1/30 |
| 40 | 415 | 10 | 240/415 | 15 | | FAZT-D40/3N | 142524 | 1/30 |

SG56012



4-pole

| | | | | | | | | |
|----|-----|----|---------|----|--|------------|--------|------|
| 1 | 415 | 15 | 240/415 | 25 | | FAZT-D1/4 | 240968 | 1/30 |
| 2 | 415 | 15 | 240/415 | 25 | | FAZT-D2/4 | 240969 | 1/30 |
| 3 | 415 | 15 | 240/415 | 25 | | FAZT-D3/4 | 240970 | 1/30 |
| 4 | 415 | 15 | 240/415 | 25 | | FAZT-D4/4 | 240971 | 1/30 |
| 6 | 415 | 15 | 240/415 | 25 | | FAZT-D6/4 | 240975 | 1/30 |
| 10 | 415 | 15 | 240/415 | 25 | | FAZT-D10/4 | 240979 | 1/30 |
| 12 | 415 | 15 | 240/415 | 25 | | FAZT-D12/4 | 240985 | 1/30 |
| 13 | 415 | 15 | 240/415 | 25 | | FAZT-D13/4 | 240989 | 1/30 |
| 15 | 415 | 15 | 240/415 | 25 | | FAZT-D15/4 | 240992 | 1/30 |
| 16 | 415 | 15 | 240/415 | 25 | | FAZT-D16/4 | 240993 | 1/30 |
| 20 | 415 | 10 | 240/415 | 20 | | FAZT-D20/4 | 142505 | 1/30 |
| 25 | 415 | 10 | 240/415 | 15 | | FAZT-D25/4 | 142506 | 1/30 |
| 32 | 415 | 10 | 240/415 | 15 | | FAZT-D32/4 | 142507 | 1/30 |
| 40 | 415 | 10 | 240/415 | 15 | | FAZT-D40/4 | 142508 | 1/30 |

Specifications FAZ-T

Technical data

| | FAZ-T |
|-----------------|----------------------------------|
| Productstandard | IEC/EN 60947-2 IEC/EN 60898-1 |
| Number of poles | 1, 1p+N, 2, 3, 3p+N, 4 |

Mechanical specifications

| | |
|---|--|
| Device width | 17.7 mm (1p), 27 mm (1p+N), 36 mm (2p), 54 mm (3p), 72mm (3p+N), 72 mm (4p) |
| Frame size | 45 mm |
| Socket size | 80 mm |
| Device depth | 60 mm |
| Terminals | lift terminal |
| Terminal capacity rigid solid/stranded wire | 1-25 mm ² |
| Terminal screw | M5 (with slotted screw acc. to EN ISO 4757-Z2, PZ2) |
| Terminal torque | max. 2.4 Nm |
| Snap on fixing | tristable (on DIN rail acc. to EN 50022) |
| Finger proof | acc. to VBG4, ÖVE EN-6 |
| Degree of Protection (DIN VDE 0470) | |
| Surface mounted | IP 20 |
| Built-in behind panel | IP 40 |
| Contact position indicator | red / green |

Electrical specifications

| | | |
|---------------------------------|-----------|---|
| Rated voltage | U_n | 240/415Vac 60Vdc per pole |
| Rated current | I_n | Type B, C, D: 1, 2, 3, 4, 6, 10, 12, 13, 15, 16, 20, 25, 32, 40 A |
| Rated insulation voltage | U_i | 440 V |
| Rated impulse withstand voltage | U_{imp} | 4 kV (1.2/50) μ sec |

Tripping characteristic

| | | |
|-----------------------------------|----------|--|
| Conventional non-tripping current | I_{nt} | $1.13 I_n$ |
| Conventional tripping current | I_t | $1.45 I_n$ |
| Reference temperature | | 30 °C |
| Temperature factor | | 0.4% /K |
| Instantaneous tripping current | I_{mt} | type B: $3 I_n < I_{mt} = 5 I_n \cdot t (I_{mt}) < 0.1$ sec type C: $5 I_n < I_{mt} = 10 I_n \cdot t (I_{mt}) < 0.1$ sec type D: $10 I_n < I_{mt} = 20 I_n \cdot t (I_{mt}) < 0.1$ sec |


| | | |
|---|--------|---|
| Rated ultimate short-circuit braking capacity I_{cu} (IEC/EN 60947-2) | | |
| | type B | 1-25 A: 25 kA, 32-40 A: 20 kA |
| | type C | 1-25 A: 25 kA, 32-40 A: 20 kA |
| | type D | 1p/1p+N/2p - 1-13 A: 25 kA, 15-20 A: 20 kA, 25-40 A: 15 kA 3p/3p+N/4p - 1-16 A: 25 kA, 20 A: 20 kA, 25-40 A: 15 kA |

| | | |
|--|--|--|
| Rated service short-circuit braking capacity I_{cs} (IEC/EN 60947-2) | | for $I_{cu} = 25$ kA $\rightarrow I_{cs} = 12.5$ kA for $I_{cu} = 20$ kA $\rightarrow I_{cs} = 10$ kA for $I_{cu} = 15$ kA $\rightarrow I_{cs} = 7.5$ kA |
|--|--|--|

| | | |
|--|--------|-------------------------------|
| Rated short-circuit braking capacity I_{cn} (IEC/EN 60898-1) | | |
| | type B | 1-25 A: 15 kA, 32-40 A: 10 kA |
| | type C | 1-25 A: 15 kA, 32-40 A: 10 kA |
| | type D | 1-16 A: 15 kA, 20-40 A: 10 kA |


| | | |
|---------------------------------|--|--|
| Selectivity class | | 3 (acc. to EN 60898) |
| Number of electrical operations | | > 4000 (IEC/EN 60898) |
| Number of mechanical operations | | > 10000 (IEC/EN 60947) |
| Climatic conditions | | acc. to IEC 68-2 (25..55°C / 90..95% RH) |
| Operating temperature range | | -40°C to +75°C |

Connection diagram

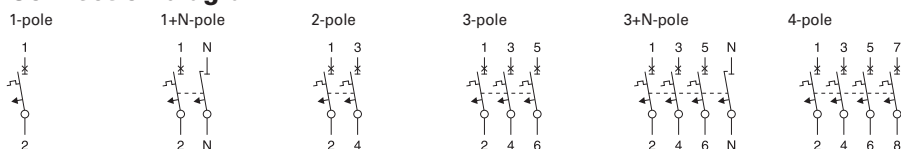


Dimensions (mm) FAZ-T


1-pole

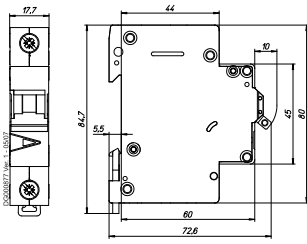


1+N-pole

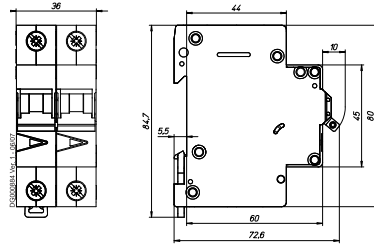


2-pole

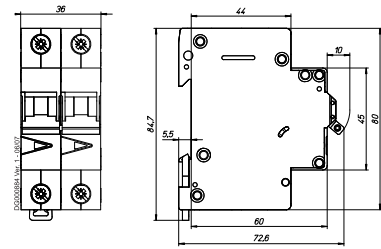

3-pole

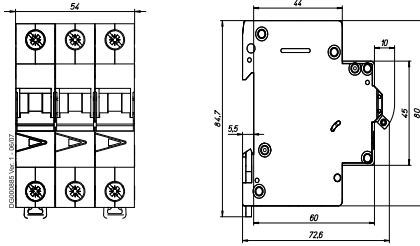


3+N-pole, 4-pole

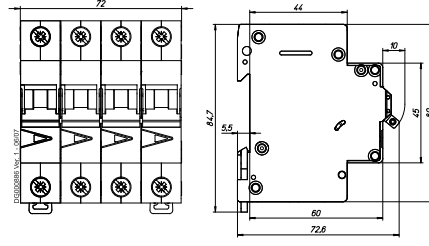

Tripping Characteristic FAZ-T

Characteristics B, C and D - EN60898

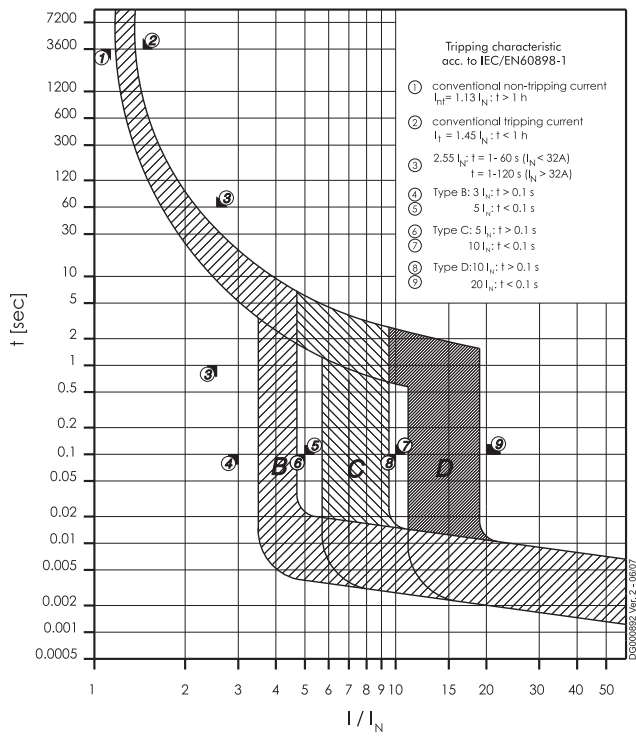

Power Loss at I_n FAZ-T

Type B

| | 1p | 1pN | 2p | 3p | 3pN* | 4p |
|-----------|-------|-------|-------|-------|-------|-------|
| I_n [A] | P [W] | P [W] | P [W] | P [W] | P [W] | P [W] |
| 1 | 1.6 | 1.7 | 3.1 | 4.7 | 4.8 | 6.3 |
| 2 | 1.4 | 1.5 | 2.8 | 4.1 | 4.3 | 5.5 |
| 3 | 2.5 | 2.7 | 5.0 | 7.6 | 7.8 | 10.1 |
| 4 | 1.4 | 1.6 | 2.9 | 4.4 | 4.5 | 5.8 |
| 6 | 1.8 | 2.0 | 3.6 | 5.5 | 5.6 | 7.3 |
| 10 | 1.9 | 2.1 | 3.9 | 5.9 | 6.1 | 7.8 |
| 12 | 2.8 | 3.2 | 5.9 | 8.7 | 9.0 | 11.5 |
| 13 | 2.5 | 2.9 | 5.3 | 7.8 | 8.1 | 10.3 |
| 15 | 2.1 | 2.4 | 4.4 | 6.5 | 6.7 | 8.6 |
| 16 | 2.2 | 2.6 | 4.7 | 6.9 | 7.2 | 9.1 |
| 20 | 3.2 | 3.6 | 6.6 | 9.8 | 10.1 | 13.0 |
| 25 | 3.0 | 3.5 | 6.4 | 9.4 | 9.7 | 12.4 |
| 32 | 3.7 | 4.4 | 8.1 | 12.1 | 12.5 | 15.8 |
| 40 | 3.4 | 4.1 | 7.5 | 11.2 | 11.5 | 14.6 |

*symmetrical load

Type C

| | 1p | 1pN | 2p | 3p | 3pN* | 4p |
|-----------|-------|-------|-------|-------|-------|-------|
| I_n [A] | P [W] | P [W] | P [W] | P [W] | P [W] | P [W] |
| 1 | 1.6 | 1.7 | 3.1 | 4.7 | 4.8 | 6.3 |
| 2 | 1.4 | 1.5 | 2.8 | 4.1 | 4.3 | 5.5 |
| 3 | 1.2 | 1.3 | 2.4 | 3.6 | 3.7 | 4.8 |
| 4 | 1.4 | 1.6 | 2.9 | 4.4 | 4.5 | 5.8 |
| 6 | 1.5 | 1.6 | 2.9 | 4.4 | 4.6 | 5.9 |
| 10 | 1.5 | 1.7 | 3.0 | 4.6 | 4.7 | 6.1 |
| 12 | 2.1 | 2.4 | 4.4 | 6.5 | 6.8 | 8.6 |
| 13 | 2.5 | 2.9 | 5.3 | 7.8 | 8.1 | 10.3 |
| 15 | 2.1 | 2.4 | 4.4 | 6.5 | 6.7 | 8.6 |
| 16 | 2.2 | 2.6 | 4.7 | 6.9 | 7.2 | 9.1 |
| 20 | 3.2 | 3.6 | 6.6 | 9.8 | 10.1 | 13.0 |
| 25 | 3.0 | 3.5 | 6.4 | 9.4 | 9.7 | 12.4 |
| 32 | 3.7 | 4.4 | 8.1 | 12.1 | 12.5 | 15.8 |
| 40 | 3.4 | 4.1 | 7.5 | 11.2 | 11.5 | 14.6 |

*symmetrical load

Type D

| | 1p | 1pN | 2p | 3p | 3pN* | 4p |
|-----------|-------|-------|-------|-------|-------|-------|
| I_n [A] | P [W] | P [W] | P [W] | P [W] | P [W] | P [W] |
| 1 | 0.8 | 0.9 | 1.6 | 2.4 | 2.5 | 3.2 |
| 2 | 1.0 | 1.1 | 2.0 | 3.0 | 3.1 | 4.0 |
| 3 | 1.2 | 1.3 | 2.4 | 3.6 | 3.7 | 4.8 |
| 4 | 1.4 | 1.6 | 2.9 | 4.4 | 4.5 | 5.8 |
| 6 | 1.5 | 1.6 | 2.9 | 4.4 | 4.6 | 5.9 |
| 10 | 1.5 | 1.7 | 3.0 | 4.6 | 4.7 | 6.1 |
| 12 | 1.7 | 2.0 | 3.6 | 5.3 | 5.4 | 7.0 |
| 13 | 1.9 | 2.2 | 4.0 | 5.9 | 6.1 | 7.8 |
| 15 | 2.1 | 2.4 | 4.4 | 6.5 | 6.7 | 8.6 |
| 16 | 2.2 | 2.6 | 4.7 | 6.9 | 7.2 | 9.1 |
| 20 | 2.0 | 2.2 | 4.1 | 6.1 | 6.2 | 8.1 |
| 25 | 2.5 | 2.9 | 5.2 | 7.7 | 7.9 | 10.2 |
| 32 | 3.4 | 4.0 | 7.4 | 11.1 | 11.4 | 14.5 |
| 40 | 3.2 | 3.8 | 7.0 | 10.4 | 10.7 | 13.6 |

*symmetrical load


Influence of Ambient Temperature FAZ-T

On Load Carrying Capacity (temperature derating)


| I_N [A] | Ambient temperature T [°C] | | | | | | | | | | | | | | | | |
|-----------|----------------------------|-----|-----|-----|-----|-----|-----|----|------|------|------|------|-----|------|------|------|------|
| | -40 | -30 | -20 | -10 | 0 | 10 | 20 | 30 | 35 | 40 | 45 | 50 | 55 | 60 | 65 | 70 | 75 |
| 1 | 1.3 | 1.2 | 1.2 | 1.2 | 1.1 | 1.1 | 1 | 1 | 0.99 | 0.97 | 0.95 | 0.93 | 0.9 | 0.89 | 0.87 | 0.85 | 0.83 |
| 2 | 2.6 | 2.5 | 2.4 | 2.3 | 2.2 | 2.2 | 2.1 | 2 | 2 | 1.9 | 1.9 | 1.9 | 1.8 | 1.8 | 1.7 | 1.7 | 1.7 |
| 3 | 3.8 | 3.7 | 3.6 | 3.5 | 3.4 | 3.3 | 3.1 | 3 | 3 | 2.9 | 2.8 | 2.8 | 2.7 | 2.7 | 2.6 | 2.5 | 2.5 |
| 4 | 5.1 | 5 | 4.8 | 4.7 | 4.5 | 4.3 | 4.2 | 4 | 3.9 | 3.9 | 3.8 | 3.7 | 3.6 | 3.5 | 3.5 | 3.4 | 3.3 |
| 6 | 7.7 | 7.5 | 7.2 | 7 | 6.7 | 6.5 | 6.3 | 6 | 5.9 | 5.8 | 5.7 | 5.6 | 5.4 | 5.3 | 5.2 | 5.1 | 5 |
| 10 | 13 | 12 | 12 | 12 | 11 | 11 | 10 | 10 | 9.9 | 9.7 | 9.5 | 9.3 | 9 | 8.9 | 8.7 | 8.5 | 8.3 |
| 12 | 15 | 15 | 14 | 14 | 13 | 13 | 13 | 12 | 12 | 12 | 11 | 11 | 11 | 11 | 10 | 10 | 10 |
| 13 | 17 | 16 | 16 | 15 | 15 | 14 | 14 | 13 | 13 | 13 | 12 | 12 | 12 | 12 | 11 | 11 | 11 |
| 15 | 19 | 19 | 18 | 17 | 17 | 16 | 16 | 15 | 15 | 15 | 14 | 14 | 14 | 13 | 13 | 13 | 12 |
| 16 | 20 | 20 | 19 | 19 | 18 | 17 | 17 | 16 | 16 | 15 | 15 | 15 | 14 | 14 | 14 | 14 | 13 |
| 20 | 26 | 25 | 24 | 23 | 22 | 22 | 21 | 20 | 20 | 19 | 19 | 19 | 18 | 18 | 17 | 17 | 17 |
| 25 | 32 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 25 | 24 | 24 | 23 | 23 | 22 | 22 | 21 | 21 |
| 32 | 41 | 40 | 38 | 37 | 36 | 35 | 33 | 32 | 32 | 31 | 30 | 30 | 29 | 28 | 28 | 27 | 26 |
| 40 | 51 | 50 | 48 | 47 | 45 | 43 | 42 | 40 | 39 | 39 | 38 | 37 | 36 | 35 | 35 | 34 | 33 |

Maximum Let-Through Energy FAZ-T


Type B

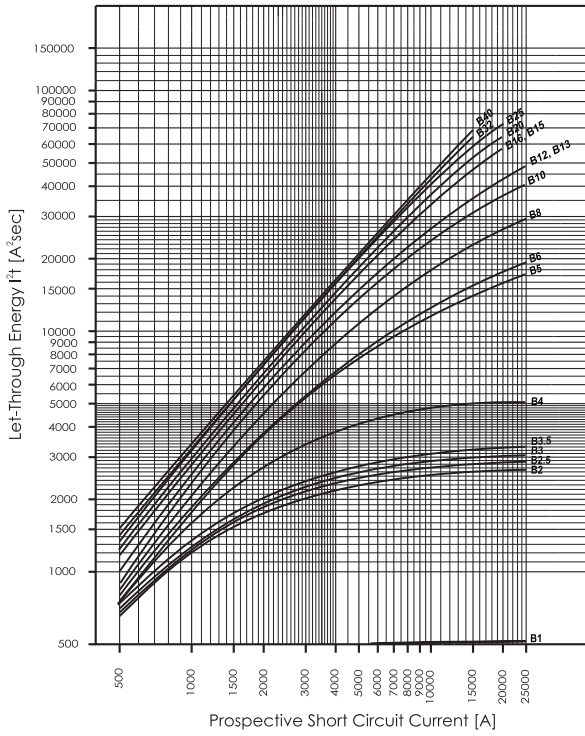

Type C

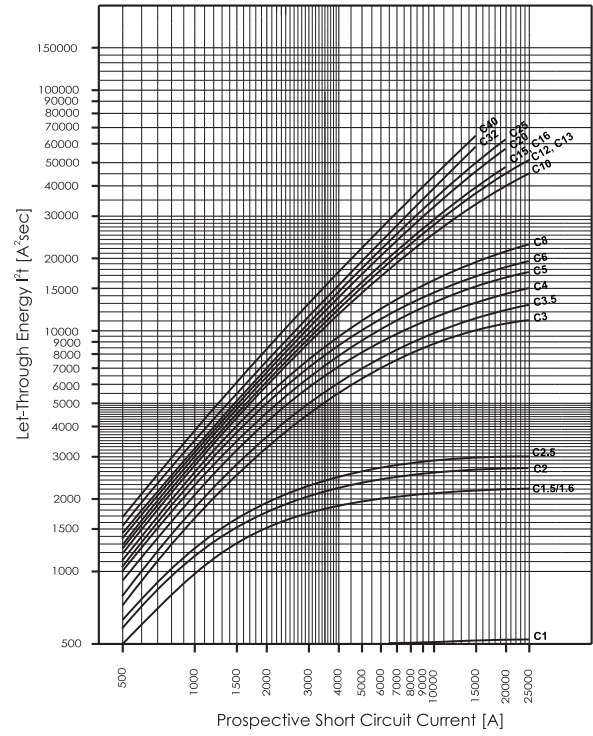


Type D

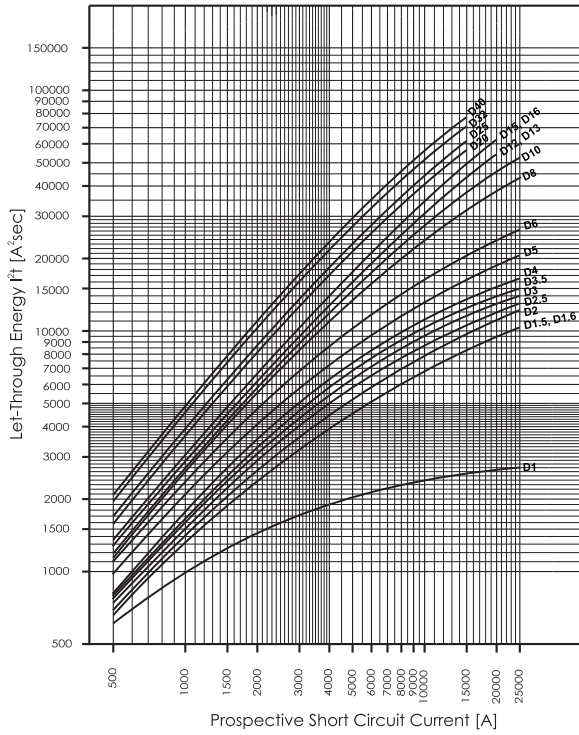


Maximum Let-Through Current FAZ-T


Type B

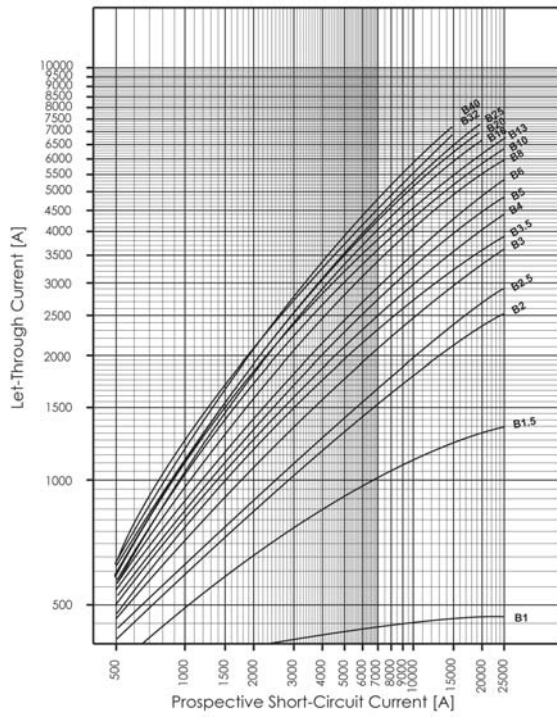

Type C

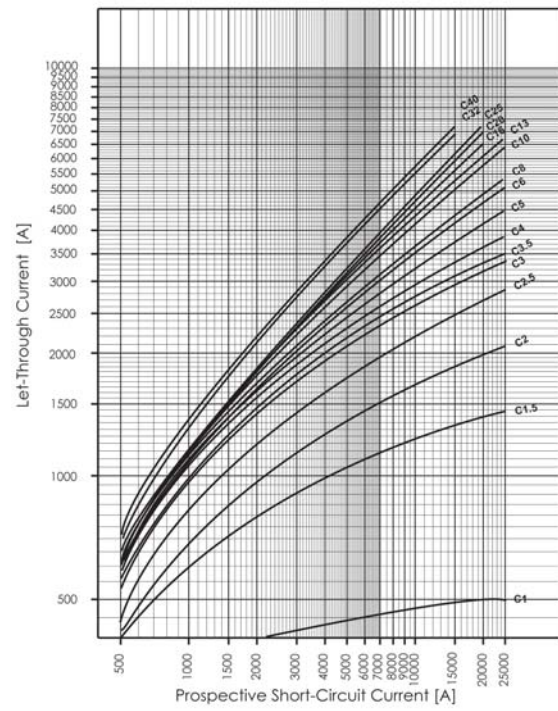

Type D

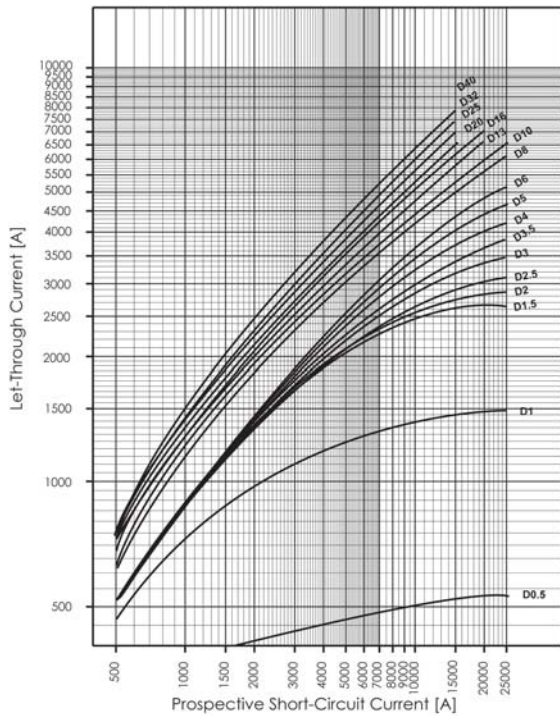


Influence of the Line Frequency FAZ-T

On the Instantaneous Tripping Current I_{MA}

| | Line Frequency f [Hz] | | | | | | |
|-------------------------------------|-----------------------|-----|-----|-----|-----|-----|-----|
| | $16\frac{2}{3}$ | 50 | 60 | 100 | 200 | 300 | 400 |
| $I_{MA}(f)/I_{MA}(50\text{Hz})$ [%] | 91 | 100 | 101 | 106 | 115 | 134 | 141 |

Load rating in case of circuit breakers arranged one next to the other FAZ-T

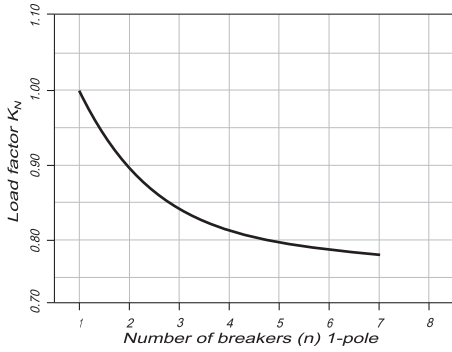

Miniature Circuit Breakers FAZ-DC

SG53312





FAZ-DC

- High-quality miniature circuit breakers for DC-applications
- Contact position indicator red - green
- Guide for secure terminal connection (not for FAZ-NA)
- 3-position DIN rail clip, permits removal from existing busbar system
- Comprehensive range of accessories suitable for subsequent installation
- Rated currents up to 50 A
- Tripping characteristic C
- Rated breaking capacity 10 kA according to IEC/EN 60947-2
- Up to 250 V DC pro pole

FAZ...-DC Miniature Circuit Breakers (MCBs)

Characteristic C

| | Rated current I_n (A) | Rated voltage IEC/EN 60947-2 (V DC) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Type Designation | Article No. | Units per package |
|--|----------------------------|--|---|---------------------|-------------|-------------------------|
| 1-pole | | | | | | |
|  | 2 | 220 | 10 | FAZ-C2/1-DC | 279122 | 12/120 |
| | 3 | 250 | 10 | FAZ-C3/1-DC | 279123 | 12/120 |
| | 4 | 250 | 10 | FAZ-C4/1-DC | 279124 | 12/120 |
| | 6 | 250 | 10 | FAZ-C6/1-DC | 279125 | 12/120 |
| | 10 | 250 | 10 | FAZ-C10/1-DC | 279126 | 12/120 |
| | 13 | 250 | 10 | FAZ-C13/1-DC | 279127 | 12/120 |
| | 16 | 250 | 10 | FAZ-C16/1-DC | 279128 | 12/120 |
| | 20 | 250 | 10 | FAZ-C20/1-DC | 279129 | 12/120 |
| | 25 | 250 | 10 | FAZ-C25/1-DC | 279130 | 12/120 |
| | 32 | 250 | 10 | FAZ-C32/1-DC | 279131 | 12/120 |
| | 40 | 250 | 10 | FAZ-C40/1-DC | 279132 | 12/120 |
| | 50 | 250 | 10 | FAZ-C50/1-DC | 279133 | 12/120 |
| 2-pole | | | | | | |
|  | 2 | 440 | 10 | FAZ-C2/2-DC | 279134 | 1/60 |
| | 3 | 500 | 10 | FAZ-C3/2-DC | 279135 | 1/60 |
| | 4 | 500 | 10 | FAZ-C4/2-DC | 279136 | 1/60 |
| | 6 | 500 | 10 | FAZ-C6/2-DC | 279137 | 1/60 |
| | 10 | 500 | 10 | FAZ-C10/2-DC | 279138 | 1/60 |
| | 13 | 500 | 10 | FAZ-C13/2-DC | 279139 | 1/60 |
| | 16 | 500 | 10 | FAZ-C16/2-DC | 279140 | 1/60 |
| | 20 | 500 | 10 | FAZ-C20/2-DC | 279141 | 1/60 |
| | 25 | 500 | 10 | FAZ-C25/2-DC | 279142 | 1/60 |
| | 32 | 500 | 10 | FAZ-C32/2-DC | 279143 | 1/60 |
| | 40 | 500 | 10 | FAZ-C40/2-DC | 279144 | 1/60 |
| | 50 | 500 | 10 | FAZ-C50/2-DC | 279145 | 1/60 |

Specifications FAZ-DC

Technical data

| | FAZ-DC *) |
|-----------------|----------------|
| Productstandard | IEC/EN 60947-2 |
| Number of poles | 1, 2 |

Mechanical specifications

| | |
|---|---|
| Device width | 17.7 mm (1p), 36 mm (2p) |
| Frame size | 45 mm |
| Socket size | 80 mm |
| Device depth | 60 mm |
| Terminals | lift terminal |
| Terminal capacity rigid solid/stranded wire | 1-25 mm ² |
| Terminal screw | M5 (with slotted screw acc. to EN ISO 4757-Z2, PZ2) |
| Terminal torque | max. 2.4 Nm |
| Snap on fixing | tristable (on DIN rail acc. to EN 50022) |
| Finger proof | acc. to VBG4, ÖVE EN-6 |
| Degree of Protection (DIN VDE 0470) | |
| Surface mounted | IP 20 |
| Built-in behind panel | IP 40 |
| Contact position indicator | red / green |

Electrical specifications


| | | |
|---------------------------------|-----------|--|
| Rated voltage DC | U_n | 2 A type: 220V (per pole) 3-50 A types: 250V (per pole) |
| Rated current | I_n | Type C: 2, 3, 4, 6, 10, 13, 16, 20, 25, 32, 40, 50 A |
| Rated insulation voltage | U_i | 440 V |
| Rated impulse withstand voltage | U_{imp} | 4 kV (1.2/50)µsec |

Tripping characteristic

| | | |
|--------------------------------------|----------|---|
| Conventional non-tripping current | | $I_{nt}=1.13 I_n$ |
| Conventional tripping current | | $I_t=1.45 I_n$ |
| Reference temperature | | 30 °C |
| Temperature factor | | 0.4% /K |
| Instantaneous tripping current | I_{mt} | type C: $7 I_n < I_{mt} = 15 I_n$; $t(I_{mt}) < 0.1$ sec |
| Rated short-circuit braking capacity | I_{cu} | 10 kA |
| Selectivity class | | 3 |
| Number of electrical operations | | > 4000 |
| Number of mechanical operations | | > 20000 |
| Climatic conditions | | acc. to IEC 68-2 (25..55°C / 90..95% RH) |
| Operating temperature range | | -40°C to +75°C |


*) not for PV string protection!

Connection diagram




Dimensions (mm) FAZ-...-DC

1-pole

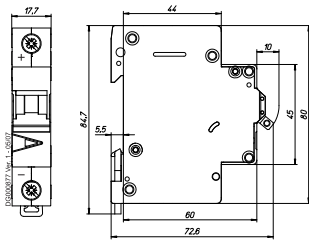


2-pole

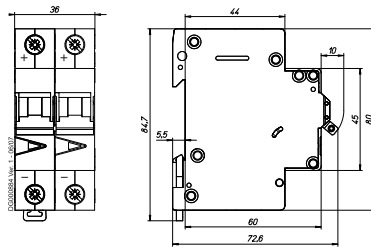


Connection examples FAZ-...-DC

Connection example at 250V=, 1-pole

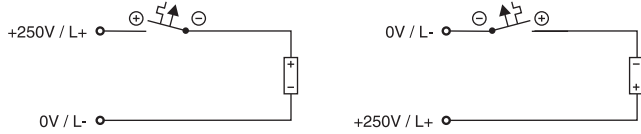


Connection example at 500V=, 2-pole

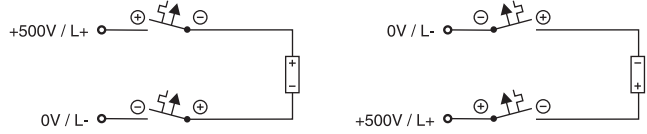


Tripping Characteristic FAZ-...-DC

Characteristics C - IEC/EN 60947-2

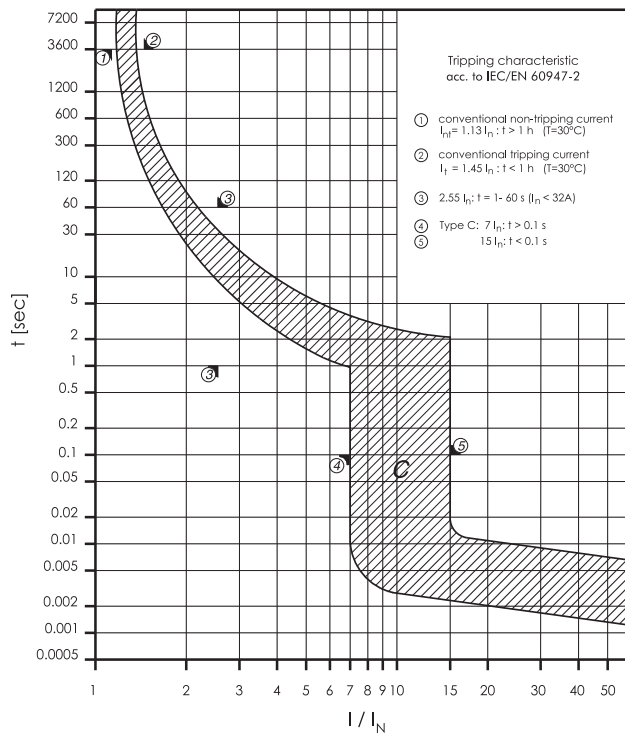

Maximum Let-Through Energy FAZ-...-DC

Type C

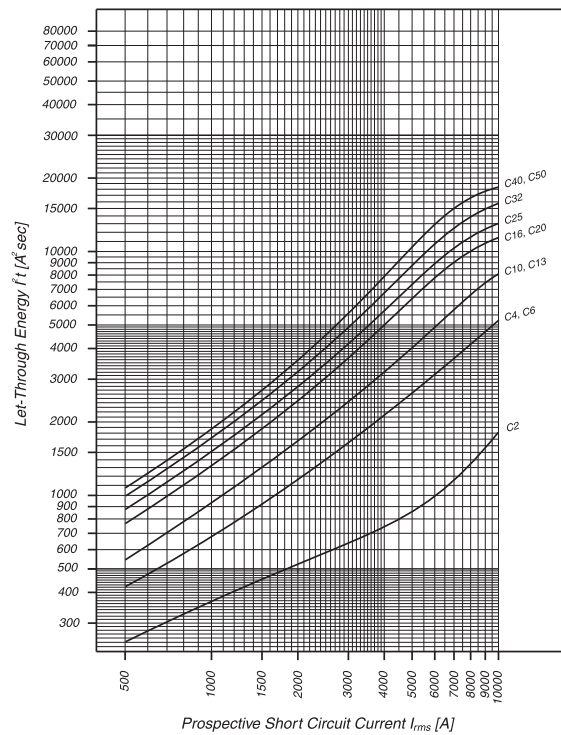

Miniature Circuit Breakers FAZ-NA, FAZ-RT, FAZ-DU

SG56912



FAZ-NA/-RT/-DU

- According to UL 489, CSA C22.2 No. 5 and also IEC 60947-2 standard
- For Applications, which are permitted for UL 1077 or CSA C22.2 No. 235
- Auxiliary switch and voltage trips suitable for subsequent installation
- Series with removable terminal screws (Type FAZ-...-RT/-DU), for use with ring cable lug
- Contact position indicator red - green
- Easy mounting at DIN-rail

FAZ-...-NA Miniature Circuit Breakers (MCBs)

Characteristic B

| | Rated current I_n (A) | Rated voltage IEC/EN 60947-2 (V) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Rated voltage UL489 (V) | Breaking capacity acc. to UL489 (kA) | SWD | NFPA 79 | Type Designation | Article No. | Units per package |
|---------------|----------------------------|---|---|-------------------------------|---|--------|---------------|---------------------|-------------|-------------------------|
| 1-pole | | | | | | | | | | |
| 1 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-B1/1-NA | 132414 | 12/120 | |
| 1.5 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-B1,5/1-NA | 132415 | 12/120 | |
| 2 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-B2/1-NA | 132416 | 12/120 | |
| 3 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-B3/1-NA | 132417 | 12/120 | |
| 4 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-B4/1-NA | 132418 | 12/120 | |
| 5 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-B5/1-NA | 132419 | 12/120 | |
| 6 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-B6/1-NA | 132680 | 12/120 | |
| 7 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-B7/1-NA | 132681 | 12/120 | |
| 8 | 240/415 | 15 | 277 | 10 | SWD | AWG 16 | FAZ-B8/1-NA | 132682 | 12/120 | |
| 10 | 240/415 | 15 | 277 | 10 | SWD | AWG 16 | FAZ-B10/1-NA | 132683 | 12/120 | |
| 13 | 240/415 | 15 | 277 | 10 | SWD | | FAZ-B13/1-NA | 132684 | 12/120 | |
| 15 | 240/415 | 15 | 277 | 14 | SWD | | FAZ-B15/1-NA | 132685 | 12/120 | |
| 16 | 240/415 | 15 | 277 | 14 | SWD | | FAZ-B16/1-NA | 132686 | 12/120 | |
| 20 | 240/415 | 15 | 277 | 14 | SWD | | FAZ-B20/1-NA | 132687 | 12/120 | |
| 25 | 240/415 | 15 | 277 | 14 | | | FAZ-B25/1-NA | 132688 | 12/120 | |
| 30 | 240/415 | 15 | 277 | 10 | | | FAZ-B30/1-NA | 132689 | 12/120 | |
| 32 | 240/415 | 15 | 277 | 10 | | | FAZ-B32/1-NA | 132690 | 12/120 | |
| 35 | 240/415 | 15 | 240 | 10 | | | FAZ-B35/1-NA | 132691 | 12/120 | |
| 40 | 240/415 | 15 | 240 | 10 | | | FAZ-B40/1-NA | 132692 | 12/120 | |
| 2-pole | | | | | | | | | | |
| 1 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B1/2-NA | 132693 | 1/60 | |
| 1.5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B1,5/2-NA | 132694 | 1/60 | |
| 2 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B2/2-NA | 132695 | 1/60 | |
| 3 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B3/2-NA | 132696 | 1/60 | |
| 4 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B4/2-NA | 132697 | 1/60 | |
| 5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B5/2-NA | 132698 | 1/60 | |
| 6 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B6/2-NA | 132699 | 1/60 | |
| 7 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B7/2-NA | 132700 | 1/60 | |
| 8 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 16 | FAZ-B8/2-NA | 132701 | 1/60 | |
| 10 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 16 | FAZ-B10/2-NA | 132702 | 1/60 | |
| 13 | 415 | 15 | 480Y/277 | 10 | SWD | | FAZ-B13/2-NA | 132703 | 1/60 | |
| 15 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-B15/2-NA | 132704 | 1/60 | |
| 16 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-B16/2-NA | 132705 | 1/60 | |
| 20 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-B20/2-NA | 132706 | 1/60 | |
| 25 | 415 | 15 | 480Y/277 | 14 | | | FAZ-B25/2-NA | 132707 | 1/60 | |
| 30 | 415 | 15 | 480Y/277 | 10 | | | FAZ-B30/2-NA | 132708 | 1/60 | |
| 32 | 415 | 15 | 480Y/277 | 10 | | | FAZ-B32/2-NA | 132709 | 1/60 | |
| 35 | 415 | 15 | 240 | 10 | | | FAZ-B35/2-NA | 132710 | 1/60 | |
| 40 | 415 | 15 | 240 | 10 | | | FAZ-B40/2-NA | 132711 | 1/60 | |
| 3-pole | | | | | | | | | | |
| 1 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B1/3-NA | 132712 | 1/40 | |
| 1.5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B1,5/3-NA | 132713 | 1/40 | |
| 2 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B2/3-NA | 132714 | 1/40 | |
| 3 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B3/3-NA | 132715 | 1/40 | |
| 4 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B4/3-NA | 132716 | 1/40 | |
| 5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B5/3-NA | 132717 | 1/40 | |
| 6 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B6/3-NA | 132718 | 1/40 | |
| 7 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B7/3-NA | 132719 | 1/40 | |
| 8 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 16 | FAZ-B8/3-NA | 132720 | 1/40 | |
| 10 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 16 | FAZ-B10/3-NA | 132721 | 1/40 | |
| 13 | 415 | 15 | 480Y/277 | 10 | SWD | | FAZ-B13/3-NA | 132722 | 1/40 | |
| 15 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-B15/3-NA | 132723 | 1/40 | |
| 16 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-B16/3-NA | 132724 | 1/40 | |
| 20 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-B20/3-NA | 132725 | 1/40 | |
| 25 | 415 | 15 | 480Y/277 | 14 | | | FAZ-B25/3-NA | 132726 | 1/40 | |
| 30 | 415 | 15 | 480Y/277 | 10 | | | FAZ-B30/3-NA | 132727 | 1/40 | |
| 32 | 415 | 15 | 480Y/277 | 10 | | | FAZ-B32/3-NA | 132728 | 1/40 | |
| 35 | 415 | 15 | 240 | 10 | | | FAZ-B35/3-NA | 132729 | 1/40 | |
| 40 | 415 | 15 | 240 | 10 | | | FAZ-B40/3-NA | 132730 | 1/40 | |

SG53012



SG56812



SG56912



FAZ...-NA Miniature Circuit Breakers (MCBs)

Characteristic C

| | Rated current I_n (A) | Rated voltage IEC/EN 60947-2 (V) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Rated voltage UL489 (V) | Breaking capacity acc. to UL489 (kA) | SWD | NFPA 79 | Type Designation | Article No. | Units per package |
|---------------|----------------------------|---|---|-------------------------------|---|--------|---------------|---------------------|-------------|-------------------------|
| 1-pole | | | | | | | | | | |
| 0.5 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-C0,5/1-NA | 181883 | 12/120 | |
| 1 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-C1/1-NA | 181885 | 12/120 | |
| 1.5 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-C1,5/1-NA | 181887 | 12/120 | |
| 2 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-C2/1-NA | 181889 | 12/120 | |
| 3 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-C3/1-NA | 181891 | 12/120 | |
| 4 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-C4/1-NA | 181893 | 12/120 | |
| 5 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-C5/1-NA | 181895 | 12/120 | |
| 6 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-C6/1-NA | 181897 | 12/120 | |
| 7 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-C7/1-NA | 181899 | 12/120 | |
| 8 | 240/415 | 15 | 277 | 10 | SWD | AWG 16 | FAZ-C8/1-NA | 181901 | 12/120 | |
| 10 | 240/415 | 15 | 277 | 10 | SWD | AWG 16 | FAZ-C10/1-NA | 181903 | 12/120 | |
| 13 | 240/415 | 15 | 277 | 10 | SWD | | FAZ-C13/1-NA | 181905 | 12/120 | |
| 15 | 240/415 | 15 | 277 | 14 | SWD | | FAZ-C15/1-NA | 181907 | 12/120 | |
| 16 | 240/415 | 15 | 277 | 14 | SWD | | FAZ-C16/1-NA | 181909 | 12/120 | |
| 20 | 240/415 | 15 | 277 | 14 | SWD | | FAZ-C20/1-NA | 181911 | 12/120 | |
| 25 | 240/415 | 15 | 277 | 14 | | | FAZ-C25/1-NA | 181913 | 12/120 | |
| 30 | 240/415 | 15 | 277 | 10 | | | FAZ-C30/1-NA | 181915 | 12/120 | |
| 32 | 240/415 | 15 | 277 | 10 | | | FAZ-C32/1-NA | 181917 | 12/120 | |
| 35 | 240/415 | 15 | 240 | 10 | | | FAZ-C35/1-NA | 181919 | 12/120 | |
| 40 | 240/415 | 15 | 240 | 10 | | | FAZ-C40/1-NA | 181921 | 12/120 | |
| 2-pole | | | | | | | | | | |
| 0.5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C0,5/2-NA | 181923 | 1/60 | |
| 1 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C1/2-NA | 181925 | 1/60 | |
| 1.5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C1,5/2-NA | 181927 | 1/60 | |
| 2 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C2/2-NA | 181929 | 1/60 | |
| 3 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C3/2-NA | 181931 | 1/60 | |
| 4 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C4/2-NA | 181933 | 1/60 | |
| 5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C5/2-NA | 181935 | 1/60 | |
| 6 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C6/2-NA | 181937 | 1/60 | |
| 7 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C7/2-NA | 181939 | 1/60 | |
| 8 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 16 | FAZ-C8/2-NA | 181941 | 1/60 | |
| 10 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 16 | FAZ-C10/2-NA | 181943 | 1/60 | |
| 13 | 415 | 15 | 480Y/277 | 10 | SWD | | FAZ-C13/2-NA | 181945 | 1/60 | |
| 15 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-C15/2-NA | 181947 | 1/60 | |
| 16 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-C16/2-NA | 181949 | 1/60 | |
| 20 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-C20/2-NA | 181951 | 1/60 | |
| 25 | 415 | 15 | 480Y/277 | 14 | | | FAZ-C25/2-NA | 181953 | 1/60 | |
| 30 | 415 | 15 | 480Y/277 | 10 | | | FAZ-C30/2-NA | 181955 | 1/60 | |
| 32 | 415 | 15 | 480Y/277 | 10 | | | FAZ-C32/2-NA | 181957 | 1/60 | |
| 35 | 415 | 15 | 240 | 10 | | | FAZ-C35/2-NA | 181959 | 1/60 | |
| 40 | 415 | 15 | 240 | 10 | | | FAZ-C40/2-NA | 181961 | 1/60 | |
| 3-pole | | | | | | | | | | |
| 0.5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C0,5/3-NA | 181963 | 1/40 | |
| 1 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C1/3-NA | 181965 | 1/40 | |
| 1.5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C1,5/3-NA | 181967 | 1/40 | |
| 2 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C2/3-NA | 181969 | 1/40 | |
| 3 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C3/3-NA | 181971 | 1/40 | |
| 4 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C4/3-NA | 181973 | 1/40 | |
| 5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C5/3-NA | 181975 | 1/40 | |
| 6 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C6/3-NA | 181977 | 1/40 | |
| 7 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C7/3-NA | 181979 | 1/40 | |
| 8 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 16 | FAZ-C8/3-NA | 181981 | 1/40 | |
| 10 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 16 | FAZ-C10/3-NA | 181983 | 1/40 | |
| 13 | 415 | 15 | 480Y/277 | 10 | SWD | | FAZ-C13/3-NA | 181985 | 1/40 | |
| 15 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-C15/3-NA | 181987 | 1/40 | |
| 16 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-C16/3-NA | 181989 | 1/40 | |
| 20 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-C20/3-NA | 181991 | 1/40 | |
| 25 | 415 | 15 | 480Y/277 | 14 | | | FAZ-C25/3-NA | 181993 | 1/40 | |
| 30 | 415 | 15 | 480Y/277 | 10 | | | FAZ-C30/3-NA | 181995 | 1/40 | |
| 32 | 415 | 15 | 480Y/277 | 10 | | | FAZ-C32/3-NA | 181997 | 1/40 | |
| 35 | 415 | 15 | 240 | 10 | | | FAZ-C35/3-NA | 181999 | 1/40 | |
| 40 | 415 | 15 | 240 | 10 | | | FAZ-C40/3-NA | 182001 | 1/40 | |

SG53012



SG56812



SG56912



FAZ-...-NA Miniature Circuit Breakers (MCBs)

Characteristic D

| | Rated current I_n (A) | Rated voltage IEC/EN 60947-2 (V) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Rated voltage UL489 (V) | Breaking capacity acc. to UL489 (kA) | SWD | NFPA 79 | Type Designation | Article No. | Units per package |
|---------------|----------------------------|---|---|-------------------------------|---|--------|---------------|---------------------|-------------|-------------------------|
| 1-pole | | | | | | | | | | |
| 0.5 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-D0,5/1-NA | 182003 | 12/120 | |
| 1 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-D1/1-NA | 182005 | 12/120 | |
| 1.5 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-D1,5/1-NA | 182007 | 12/120 | |
| 2 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-D2/1-NA | 182009 | 12/120 | |
| 3 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-D3/1-NA | 182011 | 12/120 | |
| 4 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-D4/1-NA | 182013 | 12/120 | |
| 5 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-D5/1-NA | 182015 | 12/120 | |
| 6 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-D6/1-NA | 182017 | 12/120 | |
| 7 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-D7/1-NA | 182019 | 12/120 | |
| 8 | 240/415 | 15 | 277 | 10 | SWD | AWG 16 | FAZ-D8/1-NA | 182021 | 12/120 | |
| 10 | 240/415 | 15 | 277 | 10 | SWD | AWG 16 | FAZ-D10/1-NA | 181831 | 12/120 | |
| 13 | 240/415 | 15 | 277 | 14 | SWD | | FAZ-D13/1-NA | 181833 | 12/120 | |
| 15 | 240/415 | 15 | 277 | 14 | SWD | | FAZ-D15/1-NA | 181835 | 12/120 | |
| 16 | 240/415 | 15 | 277 | 14 | SWD | | FAZ-D16/1-NA | 181837 | 12/120 | |
| 20 | 240/415 | 15 | 277 | 14 | SWD | | FAZ-D20/1-NA | 181839 | 12/120 | |
| 25 | 240/415 | 15 | 277 | 10 | | | FAZ-D25/1-NA | 181841 | 12/120 | |
| 30 | 240/415 | 15 | 277 | 10 | | | FAZ-D30/1-NA | 182023 | 12/120 | |
| 32 | 240/415 | 15 | 277 | 10 | | | FAZ-D32/1-NA | 182025 | 12/120 | |
| 35 | 240/415 | 15 | 240 | 10 | | | FAZ-D35/1-NA | 182027 | 12/120 | |
| 40 | 240/415 | 15 | 240 | 10 | | | FAZ-D40/1-NA | 182029 | 12/120 | |
| 2-pole | | | | | | | | | | |
| 0.5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D0,5/2-NA | 182031 | 1/60 | |
| 1 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D1/2-NA | 182033 | 1/60 | |
| 1.5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D1,5/2-NA | 182035 | 1/60 | |
| 2 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D2/2-NA | 182037 | 1/60 | |
| 3 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D3/2-NA | 182039 | 1/60 | |
| 4 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D4/2-NA | 182041 | 1/60 | |
| 5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D5/2-NA | 182043 | 1/60 | |
| 6 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D6/2-NA | 182045 | 1/60 | |
| 7 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D7/2-NA | 182047 | 1/60 | |
| 8 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 16 | FAZ-D8/2-NA | 182049 | 1/60 | |
| 10 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 16 | FAZ-D10/2-NA | 182051 | 1/60 | |
| 13 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-D13/2-NA | 182053 | 1/60 | |
| 15 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-D15/2-NA | 182055 | 1/60 | |
| 16 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-D16/2-NA | 182057 | 1/60 | |
| 20 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-D20/2-NA | 182059 | 1/60 | |
| 25 | 415 | 15 | 480Y/277 | 10 | | | FAZ-D25/2-NA | 182061 | 1/60 | |
| 30 | 415 | 15 | 480Y/277 | 10 | | | FAZ-D30/2-NA | 182063 | 1/60 | |
| 32 | 415 | 15 | 480Y/277 | 10 | | | FAZ-D32/2-NA | 182065 | 1/60 | |
| 35 | 415 | 15 | 240 | 10 | | | FAZ-D35/2-NA | 182067 | 1/60 | |
| 40 | 415 | 15 | 240 | 10 | | | FAZ-D40/2-NA | 182069 | 1/60 | |
| 3-pole | | | | | | | | | | |
| 0.5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D0,5/3-NA | 182071 | 1/40 | |
| 1 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D1/3-NA | 182073 | 1/40 | |
| 1.5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D1,5/3-NA | 182075 | 1/40 | |
| 2 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D2/3-NA | 182077 | 1/40 | |
| 3 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D3/3-NA | 182079 | 1/40 | |
| 4 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D4/3-NA | 182081 | 1/40 | |
| 5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D5/3-NA | 182083 | 1/40 | |
| 6 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D6/3-NA | 182085 | 1/40 | |
| 7 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D7/3-NA | 182087 | 1/40 | |
| 8 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 16 | FAZ-D8/3-NA | 182089 | 1/40 | |
| 10 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 16 | FAZ-D10/3-NA | 182091 | 1/40 | |
| 13 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-D13/3-NA | 182093 | 1/40 | |
| 15 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-D15/3-NA | 182095 | 1/40 | |
| 16 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-D16/3-NA | 182097 | 1/40 | |
| 20 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-D20/3-NA | 182099 | 1/40 | |
| 25 | 415 | 15 | 480Y/277 | 10 | | | FAZ-D25/3-NA | 182101 | 1/40 | |
| 30 | 415 | 15 | 480Y/277 | 10 | | | FAZ-D30/3-NA | 182103 | 1/40 | |
| 32 | 415 | 15 | 480Y/277 | 10 | | | FAZ-D32/3-NA | 182105 | 1/40 | |
| 35 | 415 | 15 | 240 | 10 | | | FAZ-D35/3-NA | 182107 | 1/40 | |
| 40 | 415 | 15 | 240 | 10 | | | FAZ-D40/3-NA | 182109 | 1/40 | |

SG53012



SG56812



SG56912



FAZ...-RT/-DU Miniature Circuit Breakers (MCBs)

Characteristic B

| | Rated current I_n (A) | Rated voltage IEC/EN 60947-2 (V) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Rated voltage UL489 (V) | Breaking capacity acc. to UL489 (kA) | SWD | NFPA 79 | Type Designation | Article No. | Units per package |
|---------------|----------------------------|---|---|-------------------------------|---|--------|---------------|---------------------|-------------|-------------------------|
| 1-pole | | | | | | | | | | |
| 1 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-B1/1-RT | 132731 | 12/120 | |
| 1.5 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-B1,5/1-RT | 132732 | 12/120 | |
| 2 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-B2/1-RT | 132733 | 12/120 | |
| 3 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-B3/1-RT | 132734 | 12/120 | |
| 4 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-B4/1-RT | 132735 | 12/120 | |
| 5 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-B5/1-RT | 132736 | 12/120 | |
| 6 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-B6/1-RT | 132737 | 12/120 | |
| 7 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-B7/1-RT | 132738 | 12/120 | |
| 8 | 240/415 | 15 | 277 | 10 | SWD | AWG 16 | FAZ-B8/1-RT | 132739 | 12/120 | |
| 10 | 240/415 | 15 | 277 | 10 | SWD | AWG 16 | FAZ-B10/1-RT | 132740 | 12/120 | |
| 13 | 240/415 | 15 | 277 | 10 | SWD | | FAZ-B13/1-RT | 132741 | 12/120 | |
| 15 | 240/415 | 15 | 277 | 14 | SWD | | FAZ-B15/1-RT | 132742 | 12/120 | |
| 16 | 240/415 | 15 | 277 | 14 | SWD | | FAZ-B16/1-RT | 132743 | 12/120 | |
| 20 | 240/415 | 15 | 277 | 14 | SWD | | FAZ-B20/1-RT | 132744 | 12/120 | |
| 25 | 240/415 | 15 | 277 | 14 | | | FAZ-B25/1-RT | 132745 | 12/120 | |
| 30 | 240/415 | 15 | 277 | 10 | | | FAZ-B30/1-RT | 132746 | 12/120 | |
| 32 | 240/415 | 15 | 277 | 10 | | | FAZ-B32/1-RT | 132747 | 12/120 | |
| 35 | 240/415 | 15 | 240 | 10 | | | FAZ-B35/1-RT | 132748 | 12/120 | |
| 40 | 240/415 | 15 | 240 | 10 | | | FAZ-B40/1-RT | 132749 | 12/120 | |
| 2-pole | | | | | | | | | | |
| 1 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B1/2-RT | 132750 | 1/60 | |
| 1.5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B1,5/2-RT | 132751 | 1/60 | |
| 2 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B2/2-RT | 132752 | 1/60 | |
| 3 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B3/2-RT | 132753 | 1/60 | |
| 4 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B4/2-RT | 132754 | 1/60 | |
| 5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B5/2-RT | 132755 | 1/60 | |
| 6 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B6/2-RT | 132756 | 1/60 | |
| 7 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B7/2-RT | 132757 | 1/60 | |
| 8 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 16 | FAZ-B8/2-RT | 132758 | 1/60 | |
| 10 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 16 | FAZ-B10/2-RT | 132759 | 1/60 | |
| 13 | 415 | 15 | 480Y/277 | 10 | SWD | | FAZ-B13/2-RT | 132760 | 1/60 | |
| 15 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-B15/2-RT | 132761 | 1/60 | |
| 16 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-B16/2-RT | 132762 | 1/60 | |
| 20 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-B20/2-RT | 132763 | 1/60 | |
| 25 | 415 | 15 | 480Y/277 | 14 | | | FAZ-B25/2-RT | 132764 | 1/60 | |
| 30 | 415 | 15 | 480Y/277 | 10 | | | FAZ-B30/2-RT | 132765 | 1/60 | |
| 32 | 415 | 15 | 480Y/277 | 10 | | | FAZ-B32/2-RT | 132766 | 1/60 | |
| 35 | 415 | 15 | 240 | 10 | | | FAZ-B35/2-RT | 132767 | 1/60 | |
| 40 | 415 | 15 | 240 | 10 | | | FAZ-B40/2-RT | 132768 | 1/60 | |
| 3-pole | | | | | | | | | | |
| 1 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B1/3-RT | 132769 | 1/40 | |
| 1.5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B1,5/3-RT | 132770 | 1/40 | |
| 2 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B2/3-RT | 132771 | 1/40 | |
| 3 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B3/3-RT | 132772 | 1/40 | |
| 4 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B4/3-RT | 132773 | 1/40 | |
| 5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B5/3-RT | 132774 | 1/40 | |
| 6 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B6/3-RT | 132775 | 1/40 | |
| 7 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-B7/3-RT | 132776 | 1/40 | |
| 8 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 16 | FAZ-B8/3-RT | 132777 | 1/40 | |
| 10 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 16 | FAZ-B10/3-RT | 132778 | 1/40 | |
| 13 | 415 | 15 | 480Y/277 | 10 | SWD | | FAZ-B13/3-RT | 132779 | 1/40 | |
| 15 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-B15/3-RT | 132780 | 1/40 | |
| 16 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-B16/3-RT | 132781 | 1/40 | |
| 20 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-B20/3-RT | 132782 | 1/40 | |
| 25 | 415 | 15 | 480Y/277 | 14 | | | FAZ-B25/3-RT | 132783 | 1/40 | |
| 30 | 415 | 15 | 480Y/277 | 10 | | | FAZ-B30/3-RT | 132784 | 1/40 | |
| 32 | 415 | 15 | 480Y/277 | 10 | | | FAZ-B32/3-RT | 132785 | 1/40 | |
| 35 | 415 | 15 | 240 | 10 | | | FAZ-B35/3-RT | 132786 | 1/40 | |
| 40 | 415 | 15 | 240 | 10 | | | FAZ-B40/3-RT | 132787 | 1/40 | |

SG56412



SG56712



SG57012



FAZ...-RT/-DU Miniature Circuit Breakers (MCBs)

Characteristic C



FAZ-RT has the plastic limiter at both terminals, as showed in red circle; While FAZ-DU doesn't have

SG56412



| Rated current I_n (A) | Rated voltage IEC/EN 60947-2 (V) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Rated voltage UL489 (V) | Breaking capacity acc. to UL489 (kA) | SWD | NFPA 79 | RT Type Designation | RT Article No. | DU Type Designation | DU Article No. | Units per package |
|----------------------------|---|---|-------------------------------|---|-----|---------|------------------------|-------------------|------------------------|-------------------|-------------------------|
|----------------------------|---|---|-------------------------------|---|-----|---------|------------------------|-------------------|------------------------|-------------------|-------------------------|

1-pole

| | | | | | | | | | | | |
|-----|---------|----|-----|----|-----|--------|---------------|--------|---------------|--------|--------|
| 0.5 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-C0,5/1-RT | 181884 | FAZ-C0,5/1-DU | 185095 | 12/120 |
| 1 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-C1/1-RT | 181886 | FAZ-C1/1-DU | 185096 | 12/120 |
| 1.5 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-C1,5/1-RT | 181888 | FAZ-C1,5/1-DU | 185097 | 12/120 |
| 2 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-C2/1-RT | 181890 | FAZ-C2/1-DU | 185098 | 12/120 |
| 3 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-C3/1-RT | 181892 | FAZ-C3/1-DU | 185099 | 12/120 |
| 4 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-C4/1-RT | 181894 | FAZ-C4/1-DU | 185100 | 12/120 |
| 5 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-C5/1-RT | 181896 | FAZ-C5/1-DU | 185101 | 12/120 |
| 6 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-C6/1-RT | 181898 | FAZ-C6/1-DU | 185102 | 12/120 |
| 7 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-C7/1-RT | 181900 | FAZ-C7/1-DU | 185103 | 12/120 |
| 8 | 240/415 | 15 | 277 | 10 | SWD | AWG 16 | FAZ-C8/1-RT | 181902 | FAZ-C8/1-DU | 184990 | 12/120 |
| 10 | 240/415 | 15 | 277 | 10 | SWD | AWG 16 | FAZ-C10/1-RT | 181904 | FAZ-C10/1-DU | 184991 | 12/120 |
| 13 | 240/415 | 15 | 277 | 10 | SWD | | FAZ-C13/1-RT | 181906 | FAZ-C13/1-DU | 184992 | 12/120 |
| 15 | 240/415 | 15 | 277 | 14 | SWD | | FAZ-C15/1-RT | 181908 | FAZ-C15/1-DU | 184993 | 12/120 |
| 16 | 240/415 | 15 | 277 | 14 | SWD | | FAZ-C16/1-RT | 181910 | FAZ-C16/1-DU | 184994 | 12/120 |
| 20 | 240/415 | 15 | 277 | 14 | SWD | | FAZ-C20/1-RT | 181912 | FAZ-C20/1-DU | 184995 | 12/120 |
| 25 | 240/415 | 15 | 277 | 14 | | | FAZ-C25/1-RT | 181914 | FAZ-C25/1-DU | 184996 | 12/120 |
| 30 | 240/415 | 15 | 277 | 10 | | | FAZ-C30/1-RT | 181916 | FAZ-C30/1-DU | 184997 | 12/120 |
| 32 | 240/415 | 15 | 277 | 10 | | | FAZ-C32/1-RT | 181918 | FAZ-C32/1-DU | 184998 | 12/120 |
| 35 | 240/415 | 15 | 240 | 10 | | | FAZ-C35/1-RT | 181920 | FAZ-C35/1-DU | 184999 | 12/120 |
| 40 | 240/415 | 15 | 240 | 10 | | | FAZ-C40/1-RT | 181922 | FAZ-C40/1-DU | 185000 | 12/120 |

SG56712



2-pole

| | | | | | | | | | | | |
|-----|-----|----|----------|----|-----|--------|---------------|--------|---------------|--------|------|
| 0.5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C0,5/2-RT | 181924 | FAZ-C0,5/2-DU | 185021 | 1/60 |
| 1 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C1/2-RT | 181926 | FAZ-C1/2-DU | 185022 | 1/60 |
| 1.5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C1,5/2-RT | 181928 | FAZ-C1,5/2-DU | 185023 | 1/60 |
| 2 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C2/2-RT | 181930 | FAZ-C2/2-DU | 185024 | 1/60 |
| 3 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C3/2-RT | 181932 | FAZ-C3/2-DU | 185025 | 1/60 |
| 4 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C4/2-RT | 181934 | FAZ-C4/2-DU | 185026 | 1/60 |
| 5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C5/2-RT | 181936 | FAZ-C5/2-DU | 185027 | 1/60 |
| 6 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C6/2-RT | 181938 | FAZ-C6/2-DU | 185028 | 1/60 |
| 7 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C7/2-RT | 181940 | FAZ-C7/2-DU | 185029 | 1/60 |
| 8 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 16 | FAZ-C8/2-RT | 181942 | FAZ-C8/2-DU | 185030 | 1/60 |
| 10 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 16 | FAZ-C10/2-RT | 181944 | FAZ-C10/2-DU | 185031 | 1/60 |
| 13 | 415 | 15 | 480Y/277 | 10 | SWD | | FAZ-C13/2-RT | 181946 | FAZ-C13/2-DU | 185032 | 1/60 |
| 15 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-C15/2-RT | 181948 | FAZ-C15/2-DU | 185033 | 1/60 |
| 16 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-C16/2-RT | 181950 | FAZ-C16/2-DU | 185034 | 1/60 |
| 20 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-C20/2-RT | 181952 | FAZ-C20/2-DU | 185035 | 1/60 |
| 25 | 415 | 15 | 480Y/277 | 14 | | | FAZ-C25/2-RT | 181954 | FAZ-C25/2-DU | 185036 | 1/60 |
| 30 | 415 | 15 | 480Y/277 | 10 | | | FAZ-C30/2-RT | 181956 | FAZ-C30/2-DU | 185037 | 1/60 |
| 32 | 415 | 15 | 480Y/277 | 10 | | | FAZ-C32/2-RT | 181958 | FAZ-C32/2-DU | 185038 | 1/60 |
| 35 | 415 | 15 | 240 | 10 | | | FAZ-C35/2-RT | 181960 | FAZ-C35/2-DU | 185039 | 1/60 |
| 40 | 415 | 15 | 240 | 10 | | | FAZ-C40/2-RT | 181962 | FAZ-C40/2-DU | 185040 | 1/60 |

SG57012



3-pole

| | | | | | | | | | | | |
|-----|-----|----|----------|----|-----|--------|---------------|--------|---------------|--------|------|
| 0.5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C0,5/3-RT | 181964 | FAZ-C0,5/3-DU | 185061 | 1/40 |
| 1 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C1/3-RT | 181966 | FAZ-C1/3-DU | 185062 | 1/40 |
| 1.5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C1,5/3-RT | 181968 | FAZ-C1,5/3-DU | 185063 | 1/40 |
| 2 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C2/3-RT | 181970 | FAZ-C2/3-DU | 185064 | 1/40 |
| 3 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C3/3-RT | 181972 | FAZ-C3/3-DU | 185065 | 1/40 |
| 4 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C4/3-RT | 181974 | FAZ-C4/3-DU | 185066 | 1/40 |
| 5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C5/3-RT | 181976 | FAZ-C5/3-DU | 185067 | 1/40 |
| 6 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C6/3-RT | 181978 | FAZ-C6/3-DU | 185068 | 1/40 |
| 7 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-C7/3-RT | 181980 | FAZ-C7/3-DU | 185069 | 1/40 |
| 8 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 16 | FAZ-C8/3-RT | 181982 | FAZ-C8/3-DU | 185070 | 1/40 |
| 10 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 16 | FAZ-C10/3-RT | 181984 | FAZ-C10/3-DU | 185071 | 1/40 |
| 13 | 415 | 15 | 480Y/277 | 10 | SWD | | FAZ-C13/3-RT | 181986 | FAZ-C13/3-DU | 185072 | 1/40 |
| 15 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-C15/3-RT | 181988 | FAZ-C15/3-DU | 185073 | 1/40 |
| 16 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-C16/3-RT | 181990 | FAZ-C16/3-DU | 185074 | 1/40 |
| 20 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-C20/3-RT | 181992 | FAZ-C20/3-DU | 185075 | 1/40 |
| 25 | 415 | 15 | 480Y/277 | 14 | | | FAZ-C25/3-RT | 181994 | FAZ-C25/3-DU | 185076 | 1/40 |
| 30 | 415 | 15 | 480Y/277 | 10 | | | FAZ-C30/3-RT | 181996 | FAZ-C30/3-DU | 185077 | 1/40 |
| 32 | 415 | 15 | 480Y/277 | 10 | | | FAZ-C32/3-RT | 181998 | FAZ-C32/3-DU | 185078 | 1/40 |
| 35 | 415 | 15 | 240 | 10 | | | FAZ-C35/3-RT | 182000 | FAZ-C35/3-DU | 185079 | 1/40 |
| 40 | 415 | 15 | 240 | 10 | | | FAZ-C40/3-RT | 182002 | FAZ-C40/3-DU | 185080 | 1/40 |

FAZ-...-RT/-DU Miniature Circuit Breakers (MCBs)

Characteristic D

| | Rated current I_n (A) | Rated voltage IEC/EN 60947-2 (V) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Rated voltage UL489 (V) | Breaking capacity acc. to UL489 (kA) | SWD | NFPA 79 AWG | RT Type Designation | RT Article No. | DU Type Designation | DU Article No. | Units per package |
|---------------|----------------------------|---|---|-------------------------------|---|--------|----------------|------------------------|-------------------|------------------------|-------------------|-------------------------|
| 1-pole | | | | | | | | | | | | |
| 0.5 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-D0,5/1-RT | 182004 | FAZ-D0,5/1-DU | 185001 | 12/120 | |
| 1 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-D1/1-RT | 182006 | FAZ-D1/1-DU | 185002 | 12/120 | |
| 1.5 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-D1,5/1-RT | 182008 | FAZ-D1,5/1-DU | 185003 | 12/120 | |
| 2 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-D2/1-RT | 182010 | FAZ-D2/1-DU | 185004 | 12/120 | |
| 3 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-D3/1-RT | 182012 | FAZ-D3/1-DU | 185005 | 12/120 | |
| 4 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-D4/1-RT | 182014 | FAZ-D4/1-DU | 185006 | 12/120 | |
| 5 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-D5/1-RT | 182016 | FAZ-D5/1-DU | 185007 | 12/120 | |
| 6 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-D6/1-RT | 182018 | FAZ-D6/1-DU | 185008 | 12/120 | |
| 7 | 240/415 | 15 | 277 | 10 | SWD | AWG 18 | FAZ-D7/1-RT | 182020 | FAZ-D7/1-DU | 185009 | 12/120 | |
| 8 | 240/415 | 15 | 277 | 10 | SWD | AWG 16 | FAZ-D8/1-RT | 182022 | FAZ-D8/1-DU | 185010 | 12/120 | |
| 10 | 240/415 | 15 | 277 | 10 | SWD | AWG 16 | FAZ-D10/1-RT | 181832 | FAZ-D10/1-DU | 185011 | 12/120 | |
| 13 | 240/415 | 15 | 277 | 14 | SWD | | FAZ-D13/1-RT | 181834 | FAZ-D13/1-DU | 185012 | 12/120 | |
| 15 | 240/415 | 15 | 277 | 14 | SWD | | FAZ-D15/1-RT | 181836 | FAZ-D15/1-DU | 185013 | 12/120 | |
| 16 | 240/415 | 15 | 277 | 14 | SWD | | FAZ-D16/1-RT | 181838 | FAZ-D16/1-DU | 185014 | 12/120 | |
| 20 | 240/415 | 15 | 277 | 14 | SWD | | FAZ-D20/1-RT | 181840 | FAZ-D20/1-DU | 185015 | 12/120 | |
| 25 | 240/415 | 15 | 277 | 10 | | | FAZ-D25/1-RT | 181842 | FAZ-D25/1-DU | 185016 | 12/120 | |
| 30 | 240/415 | 15 | 277 | 10 | | | FAZ-D30/1-RT | 182024 | FAZ-D30/1-DU | 185017 | 12/120 | |
| 32 | 240/415 | 15 | 277 | 10 | | | FAZ-D32/1-RT | 182026 | FAZ-D32/1-DU | 185018 | 12/120 | |
| 35 | 240/415 | 15 | 240 | 10 | | | FAZ-D35/1-RT | 182028 | FAZ-D35/1-DU | 185019 | 12/120 | |
| 40 | 240/415 | 15 | 240 | 10 | | | FAZ-D40/1-RT | 182030 | FAZ-D40/1-DU | 185020 | 12/120 | |
| 2-pole | | | | | | | | | | | | |
| 0.5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D0,5/2-RT | 182032 | FAZ-D0,5/2-DU | 185041 | 1/60 | |
| 1 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D1/2-RT | 182034 | FAZ-D1/2-DU | 185042 | 1/60 | |
| 1.5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D1,5/2-RT | 182036 | FAZ-D1,5/2-DU | 185043 | 1/60 | |
| 2 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D2/2-RT | 182038 | FAZ-D2/2-DU | 185044 | 1/60 | |
| 3 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D3/2-RT | 182040 | FAZ-D3/2-DU | 185045 | 1/60 | |
| 4 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D4/2-RT | 182042 | FAZ-D4/2-DU | 185046 | 1/60 | |
| 5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D5/2-RT | 182044 | FAZ-D5/2-DU | 185047 | 1/60 | |
| 6 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D6/2-RT | 182046 | FAZ-D6/2-DU | 185048 | 1/60 | |
| 7 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D7/2-RT | 182048 | FAZ-D7/2-DU | 185049 | 1/60 | |
| 8 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 16 | FAZ-D8/2-RT | 182050 | FAZ-D8/2-DU | 185050 | 1/60 | |
| 10 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 16 | FAZ-D10/2-RT | 182052 | FAZ-D10/2-DU | 185051 | 1/60 | |
| 13 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-D13/2-RT | 182054 | FAZ-D13/2-DU | 185052 | 1/60 | |
| 15 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-D15/2-RT | 182056 | FAZ-D15/2-DU | 185053 | 1/60 | |
| 16 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-D16/2-RT | 182058 | FAZ-D16/2-DU | 185054 | 1/60 | |
| 20 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-D20/2-RT | 182060 | FAZ-D20/2-DU | 185055 | 1/60 | |
| 25 | 415 | 15 | 480Y/277 | 10 | | | FAZ-D25/2-RT | 182062 | FAZ-D25/2-DU | 185056 | 1/60 | |
| 30 | 415 | 15 | 480Y/277 | 10 | | | FAZ-D30/2-RT | 182064 | FAZ-D30/2-DU | 185057 | 1/60 | |
| 32 | 415 | 15 | 480Y/277 | 10 | | | FAZ-D32/2-RT | 182066 | FAZ-D32/2-DU | 185058 | 1/60 | |
| 35 | 415 | 15 | 240 | 10 | | | FAZ-D35/2-RT | 182068 | FAZ-D35/2-DU | 185059 | 1/60 | |
| 40 | 415 | 15 | 240 | 10 | | | FAZ-D40/2-RT | 182070 | FAZ-D40/2-DU | 185060 | 1/60 | |
| 3-pole | | | | | | | | | | | | |
| 0.5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D0,5/3-RT | 182072 | FAZ-D0,5/3-DU | 185081 | 1/40 | |
| 1 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D1/3-RT | 182074 | FAZ-D1/3-DU | 185082 | 1/40 | |
| 1.5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D1,5/3-RT | 182076 | FAZ-D1,5/3-DU | 185083 | 1/40 | |
| 2 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D2/3-RT | 182078 | FAZ-D2/3-DU | 185084 | 1/40 | |
| 3 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D3/3-RT | 182080 | FAZ-D3/3-DU | 185085 | 1/40 | |
| 4 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D4/3-RT | 182082 | FAZ-D4/3-DU | 185086 | 1/40 | |
| 5 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D5/3-RT | 182084 | FAZ-D5/3-DU | 185087 | 1/40 | |
| 6 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D6/3-RT | 182086 | FAZ-D6/3-DU | 185088 | 1/40 | |
| 7 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 18 | FAZ-D7/3-RT | 182088 | FAZ-D7/3-DU | 185089 | 1/40 | |
| 8 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 16 | FAZ-D8/3-RT | 182090 | FAZ-D8/3-DU | 185090 | 1/40 | |
| 10 | 415 | 15 | 480Y/277 | 10 | SWD | AWG 16 | FAZ-D10/3-RT | 182092 | FAZ-D10/3-DU | 185091 | 1/40 | |
| 13 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-D13/3-RT | 182094 | FAZ-D13/3-DU | 185092 | 1/40 | |
| 15 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-D15/3-RT | 182096 | FAZ-D15/3-DU | 185093 | 1/40 | |
| 16 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-D16/3-RT | 182098 | FAZ-D16/3-DU | 185094 | 1/40 | |
| 20 | 415 | 15 | 480Y/277 | 14 | SWD | | FAZ-D20/3-RT | 182100 | FAZ-D20/3-DU | 184984 | 1/40 | |
| 25 | 415 | 15 | 480Y/277 | 10 | | | FAZ-D25/3-RT | 182102 | FAZ-D25/3-DU | 184985 | 1/40 | |
| 30 | 415 | 15 | 480Y/277 | 10 | | | FAZ-D30/3-RT | 182104 | FAZ-D30/3-DU | 184986 | 1/40 | |
| 32 | 415 | 15 | 480Y/277 | 10 | | | FAZ-D32/3-RT | 182106 | FAZ-D32/3-DU | 184987 | 1/40 | |
| 35 | 415 | 15 | 240 | 10 | | | FAZ-D35/3-RT | 182108 | FAZ-D35/3-DU | 184988 | 1/40 | |
| 40 | 415 | 15 | 240 | 10 | | | FAZ-D40/3-RT | 182110 | FAZ-D40/3-DU | 184989 | 1/40 | |

FAZ-NA, -RT, -DU Miniature Circuit Breakers

Accessories:


| | | |
|---|----------------------|--------|
| Auxiliary switch for subsequent installation | Z-IHK-NA | 113895 |
| Tripping signal contact for subsequent installation | Z-NHK | 248434 |
| Shunt trip release | FAZ-XAA-NA12-110VAC | 102037 |
| | FAZ-XAA-NA110-415VAC | 102036 |
| Switching interlock | IS/SPE-1TE | 101911 |
| | Z-IS/SPE-1TE | 274418 |

Specifications FAZ-NA, -RT, -DU

Technical data IEC/EN

| | FAZ-...-NA, -RT, -DU | |
|---|---|--|
| Productstandard | IEC/EN 60947-2 | |
| Number of poles | 1, 2, 3 | |
| Mechanical specifications | | |
| Device width | 17.7mm (1-pole), 35.4 mm (2-poles), 53.1 mm (3-poles) | |
| Frame size | 45 mm | |
| Socket size | 105 mm | |
| Device depth | 60 mm | |
| Terminals | lift terminal / ring-tongue | |
| Terminal capacity rigid solid/stranded wire | 1-25 mm ² | |
| Terminal screw | M5 (with slotted screw Pozidriv PZ2) | |
| Terminal torque | max. 2.4 Nm | |
| Snap on fixing | tristable (on DIN Rail acc. to IEC/EN 60715) | |
| Degree of Protection (DIN VDE 0470) | | |
| Surface mounted | IP 20 | |
| Built-in behind panel | IP 40 | |
| Contact position indicator | red / green | |
| Electrical specifications | | |
| Rated voltage | U_n | 240/415 V AC |
| Rated current | I_n | 0.5, 1, 1.5, 2, 3, 4, 5, 6, 7, 8, 10, 13, 15, 16, 20, 25, 30, 32, 35, 40 A |
| Rated insulation voltage | U_i | 440 V AC |
| Rated impulse withstand voltage | U_{imp} | 4 kV (1.2/50)µsec |
| Tripping characteristic | | |
| Conventional non-tripping current | I_{nt} | $I_{nt}=1.05 I_n$ |
| Conventional tripping current | I_t | $I_t=1.30 I_n$ |
| Reference temperature | 30 °C | |
| Temperature factor | 0.5% /K | |
| Instantaneous tripping current | I_{mt} | type B: $3 I_n < I_{mt} = 5 I_n$; $t(I_{mt}) < 0.1$ sec (IEC/EN 60898-1) type C: $5 I_n < I_{mt} = 10 I_n$; $t(I_{mt}) < 0.1$ sec (IEC/EN 60898-1) type D: $10 I_n < I_{mt} = 20 I_n$; $t(I_{mt}) < 0.1$ sec (IEC/EN 60898-1) |
| Rated short-circuit braking capacity | I_{cu} | 15 kA |
| Service short circuit capacity | I_{cs} | 7.5 kA |
| Selectivity class | 3 (acc. to EN 60898) | |
| Number of electrical operations | > 1500 | |
| Number of mechanical operations | > 10000 | |
| Climatic conditions | acc. to IEC 68-2 (25..55°C / 90..95% RH) | |
| Operating temperature range | -40°C to +75°C | |

Connection diagram

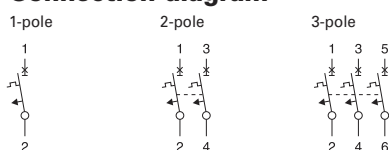


Specifications FAZ-NA, -RT, -DU

Technical data UL


| | | FAZ-...-NA, -RT, -DU |
|--|----------|---|
| Productstandard | | UL 489 CSA C22.2 No. 5-02 |
| Number of poles | | 1, 2, 3 |
| Mechanical specifications | | |
| Device width | | 0.697 in. (1-pole), 1.394 in. (2-poles), 2.090 in. (3-poles) |
| Frame size | | 1.772 in. |
| Socket size | | 4.134 in. |
| Device depth | | 2.362 in. |
| Terminals | | lift terminal / ring-tongue |
| Terminal capacity | | 1 Wire: #18-6 AWG (Cu only) 2 Wires: #18-10 AWG (Cu only) |
| Terminal screw | | M5 (with slotted screw Pozidriv PZ2) |
| Terminal torque | | #18-12 AWG: 21 lb-in #10-8 AWG: 25 lb-in #6 AWG: 36 lb-in |
| Snap on fixing | | tristable (on DIN Rail acc. to IEC/EN 60715) |
| Contact position indicator | | red / green |
| Electrical specifications | | |
| Rated voltage | U_n | 0.5-32 A: 480Y/277 V AC, 35-40 A: 240 V AC |
| Rated current | I_n | 0.5, 1, 1.5, 2, 3, 4, 5, 6, 7, 8, 10, 13, 15, 16, 20, 25, 30, 32, 35, 40 A |
| Tripping characteristic | | |
| Conventional non-tripping current | | $I_{nt}=1.00 I_n$ |
| Conventional tripping current | | $I_t=1.35 I_n$ |
| Reference temperature | | 40 °C |
| Temperature factor | | 0.5% /K |
| Instantaneous tripping current | I_{mt} | type C: $5 I_n < I_{mt} = 10 I_n$; $t(I_{mt}) < 0.1$ sec type D: $10 I_n < I_{mt} = 20 I_n$; $t(I_{mt}) < 0.1$ sec |
| Current interrupting rating | | 10 kA, 14 kA (types D13, B/C/D15, 16, 20, B/C25 A) |
| Current-Limiting at 240 V / 10 kA | | 1p, 2p, 3p to $I^2t = 43 \text{ kA}^2\text{s}$ and $I_{peak} = 6.2 \text{ kA}$ |
| Current-Limiting at 480Y/277 V / 10 kA | | 1p, 2p, 3p to $I^2t = 60 \text{ kA}^2\text{s}$ and $I_{peak} = 6.2 \text{ kA}$ |
| Current-Limiting at 480Y/277 V / 14 kA | | 1p, 2p, 3p to $I^2t = 65 \text{ kA}^2\text{s}$ and $I_{peak} = 7.5 \text{ kA}$ |
| Selectivity class | | 3 (acc. to EN 60898) |
| Number of electrical operations | | 6000 |
| Number of mechanical operations | | 10000 |
| Climatic conditions | | acc. to IEC 68-2 (25..55°C / 90..95% RH) |
| Operating temperature range | | -5°C to +40°C |

Connection diagram

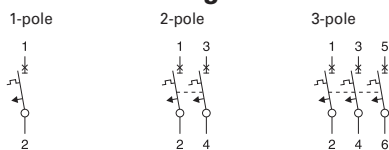


Dimensions (mm) FAZ-...-NA, -RT, -DU


1-pole



2-pole




3-pole

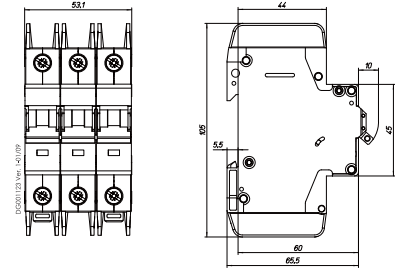


Tripping Characteristic FAZ-...-NA, -RT, -DU

Characteristics C and D - EN/IEC 60947-2

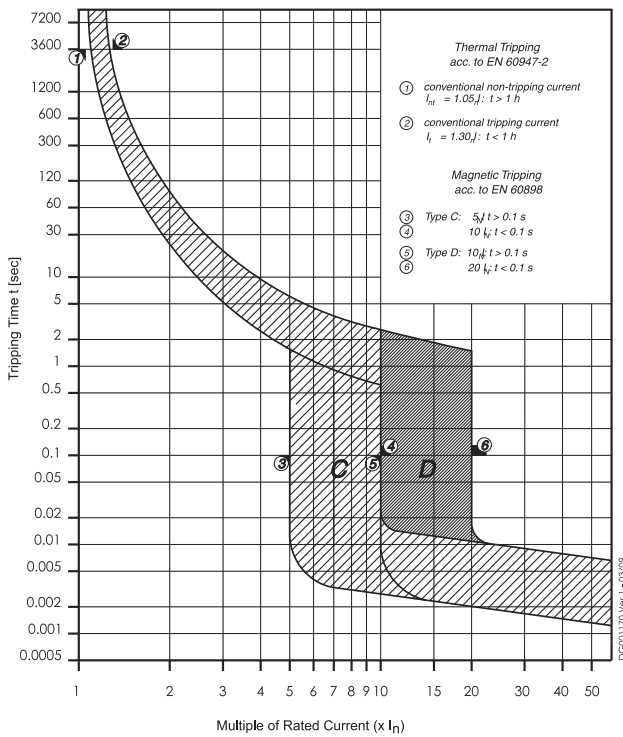

Characteristics C and D - UL 489

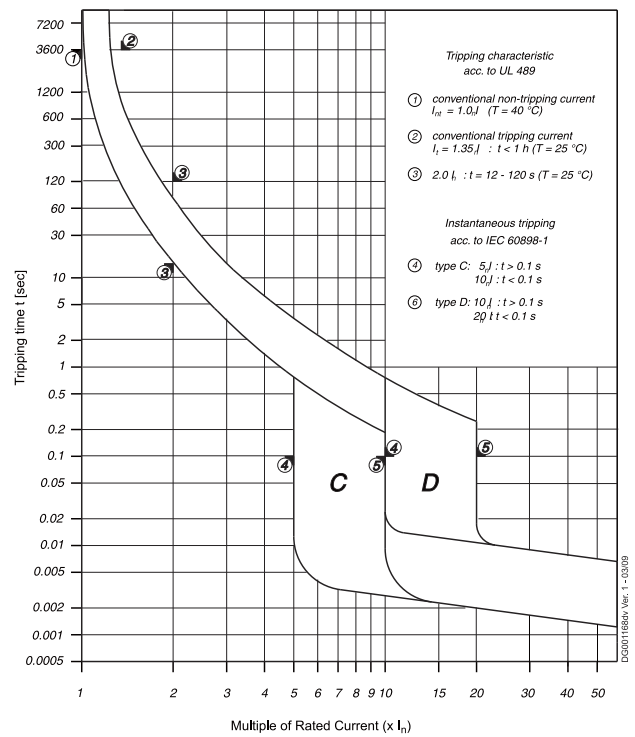

Internal Resistance FAZ-...-NA, -RT, -DU

Type C

At room temperature (single pole)

| I_n [A] | Z^* [m Ω] | R [m Ω] |
|-----------|---------------------|-------------------|
| 0.5 | 6400 | 6300 |
| 1 | 1100 | 1080 |
| 1.5 | 560 | 550 |
| 2 | 340 | 330 |
| 3 | 132 | 130 |
| 4 | 86 | 85 |
| 5 | 70 | 69 |
| 6 | 31 | 30 |
| 7 | 28 | 27 |
| 8 | 20 | 19.6 |
| 10 | 15.8 | 15.5 |
| 13 | 12.3 | 12.1 |
| 15 | 7.1 | 7.0 |
| 16 | 7.1 | 7.0 |
| 20 | 6.0 | 5.9 |
| 25 | 4.1 | 4.0 |
| 30 | 2.8 | 2.7 |
| 32 | 2.8 | 2.7 |
| 35 | 2.5 | 2.5 |
| 40 | 2.1 | 2.1 |

* 50Hz

Type D

At room temperature (single pole)

| I_n [A] | Z^* [m Ω] | R [m Ω] |
|-----------|---------------------|-------------------|
| 0.5 | 6400 | 6300 |
| 1 | 770 | 755 |
| 1.5 | 460 | 450 |
| 2 | 250 | 245 |
| 3 | 132 | 130 |
| 4 | 86 | 85 |
| 5 | 57 | 56 |
| 6 | 31 | 30 |
| 7 | 28 | 27 |
| 8 | 18 | 17.6 |
| 10 | 13.5 | 13.2 |
| 13 | 10.5 | 10.3 |
| 15 | 5.9 | 5.8 |
| 16 | 5.9 | 5.8 |
| 20 | 4.0 | 3.9 |
| 25 | 3.4 | 3.3 |
| 30 | 2.5 | 2.5 |
| 32 | 2.5 | 2.5 |
| 35 | 2.5 | 2.5 |
| 40 | 2.0 | 2.0 |

* 50Hz

Power Loss at I_n FAZ-...-NA, -RT, -DU

Type C

| I_n [A] | 1p | 2p | 3p |
|-----------|-----------|-----------|-----------|
| | P^* [W] | P^* [W] | P^* [W] |
| 0.5 | 1.6 | 3.2 | 4.7 |
| 1 | 1.1 | 2.2 | 3.4 |
| 1.5 | 1.3 | 2.6 | 3.9 |
| 2 | 1.4 | 2.8 | 4.3 |
| 3 | 1.2 | 2.4 | 3.6 |
| 4 | 1.4 | 2.9 | 4.3 |
| 5 | 1.9 | 3.7 | 5.6 |
| 6 | 1.2 | 2.3 | 3.5 |
| 7 | 1.4 | 2.8 | 4.3 |
| 8 | 1.4 | 2.8 | 4.2 |
| 10 | 1.8 | 3.6 | 5.3 |
| 13 | 2.4 | 4.7 | 7.1 |
| 15 | 1.9 | 3.8 | 5.6 |
| 16 | 2.1 | 4.3 | 6.4 |
| 20 | 2.9 | 5.8 | 8.7 |
| 25 | 3.1 | 6.2 | 9.3 |
| 30 | 3.0 | 6.0 | 9.0 |
| 32 | 3.4 | 6.8 | 10.2 |
| 35 | 3.7 | 7.4 | 11.0 |
| 40 | 4.0 | 8.1 | 12.1 |

*50Hz


Type D

| I_n [A] | 1p | 2p | 3p |
|-----------|-----------|-----------|-----------|
| | P^* [W] | P^* [W] | P^* [W] |
| 0.5 | 1.6 | 3.2 | 4.8 |
| 1 | 0.8 | 1.5 | 2.3 |
| 1.5 | 1.0 | 2.1 | 3.1 |
| 2 | 1.0 | 2.1 | 3.1 |
| 3 | 1.2 | 2.4 | 3.6 |
| 4 | 1.4 | 2.9 | 4.3 |
| 5 | 1.5 | 2.9 | 4.4 |
| 6 | 1.2 | 2.3 | 3.5 |
| 7 | 1.4 | 2.8 | 4.3 |
| 8 | 1.2 | 2.4 | 3.7 |
| 10 | 1.5 | 3.0 | 4.5 |
| 13 | 2.0 | 4.1 | 6.1 |
| 15 | 1.5 | 3.1 | 4.6 |
| 16 | 1.7 | 3.5 | 5.2 |
| 20 | 1.8 | 3.7 | 5.5 |
| 25 | 2.6 | 5.1 | 7.7 |
| 30 | 2.7 | 5.4 | 8.1 |
| 32 | 3.1 | 6.2 | 9.3 |
| 35 | 3.8 | 7.6 | 11.3 |
| 40 | 3.9 | 7.8 | 11.6 |


*50Hz

Maximum Let-Through Energy FAZ-...-NA, -RT, -DU


Type C (0.5 - 32 A), 277 V

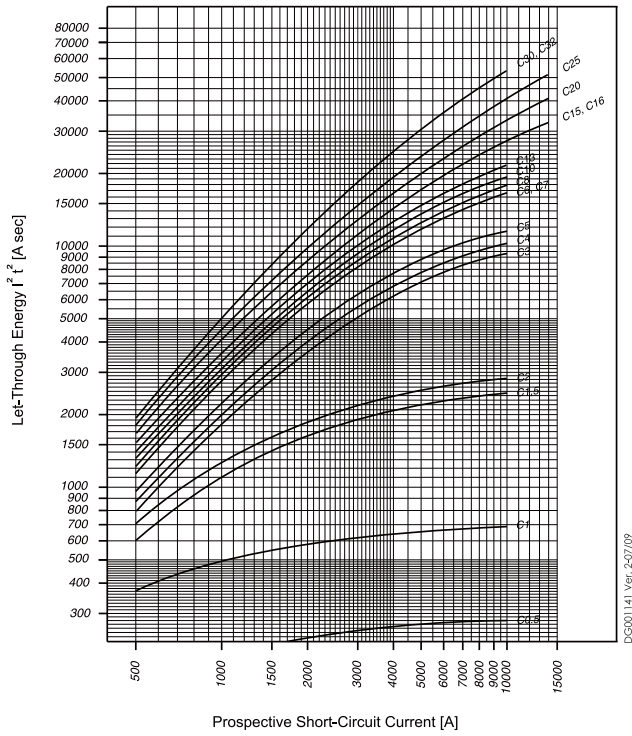


Type C (35 - 40 A), 240 V

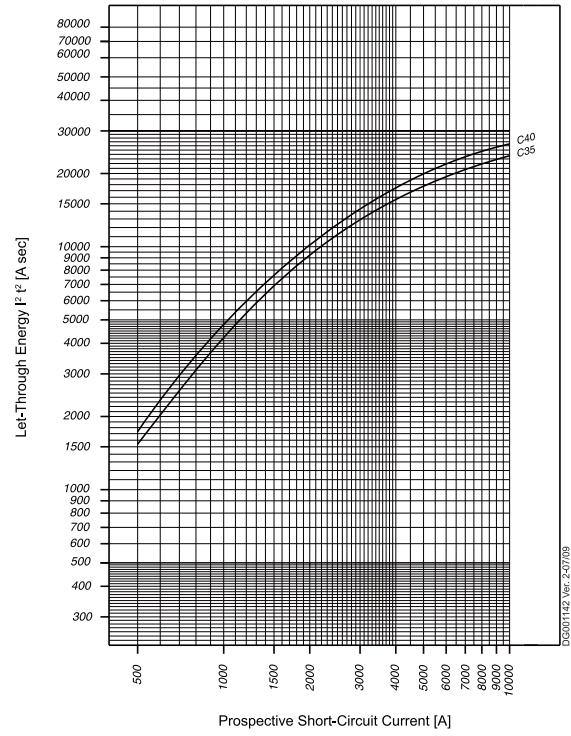

Type D (0.5 - 32 A), 277 V

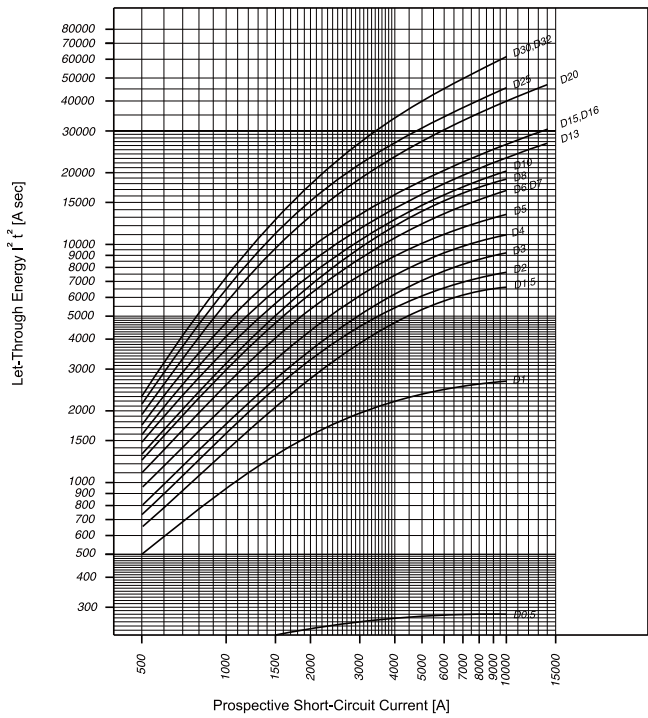


Type D (35 - 40 A), 240 V

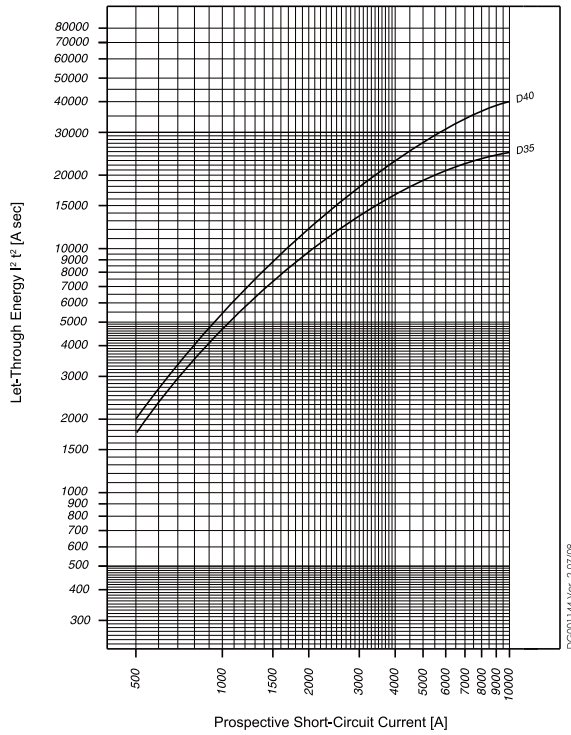


Maximum Let-Through Current FAZ-...-NA, -RT, -DU


Type C (0.5 - 32 A), 277 V

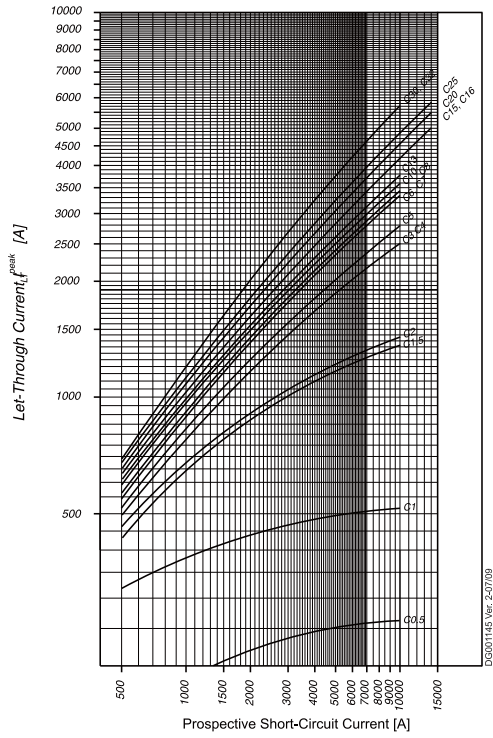


Type C (35 - 40 A), 240 V

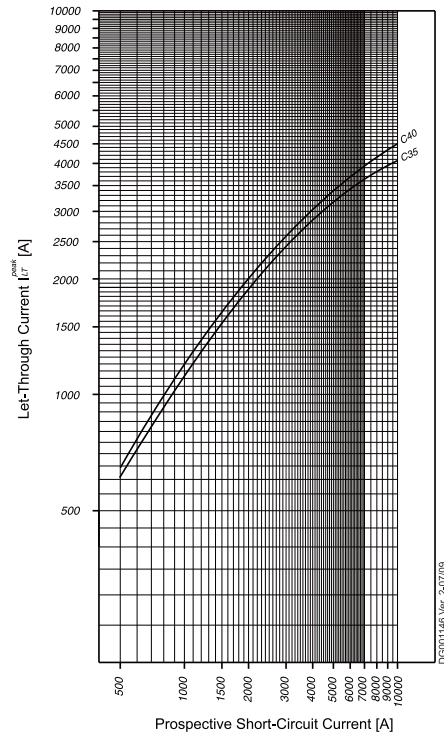

Type D (0.5 - 32 A), 277 V

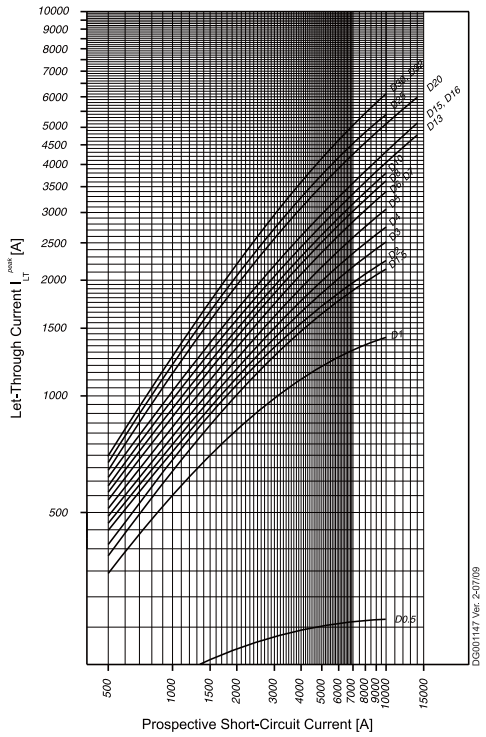

Type D (35 - 40 A), 240 V

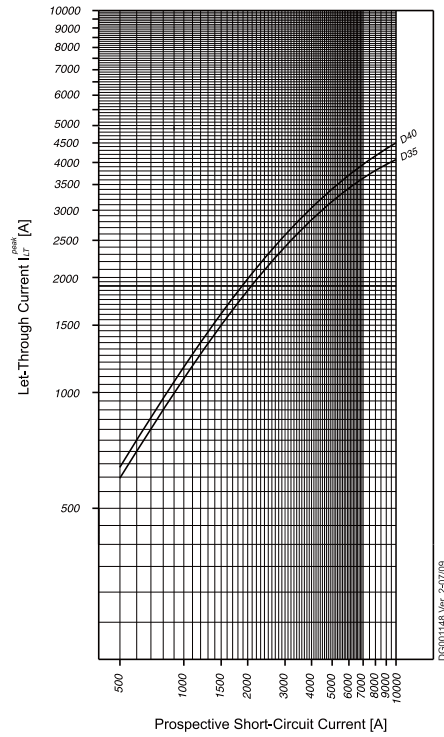

Miniature Circuit Breakers FAZ-NA-DC

SG56612



FAZ-NA-DC

- High-quality miniature circuit breakers for DC-applications
- Contact position indicator red - green
- Guide for secure terminal connection (not for FAZ-NA)
- 3-position DIN rail clip, permits removal from existing busbar system
- Comprehensive range of accessories suitable for subsequent installation
- Rated currents up to 40 A
- Tripping characteristic C
- Rated breaking capacity 10 kA according to IEC/EN 60947-2
- Up to 125 V DC per pole

FAZ-...-NA-DC Miniature Circuit Breakers (MCBs)

Characteristic C

| Rated current I_n (A) | Rated voltage IEC/EN 60947-2 (V DC) | Breaking capacity acc. to IEC/EN 60947-2 (kA) | Rated voltage UL489 (V) | Breaking capacity acc. to UL489 (kA) | SWD | NFPA 79 | Type Designation | Article No. | Units per package |
|----------------------------|--|---|-------------------------------|---|-----|---------|---------------------|-------------|-------------------------|
| 1-pole | | | | | | | | | |
| 2 | 220 | 10 | 125 | 10 | | | FAZ-C2/1-NA-DC | 113752 | 12/120 |
| 3 | 250 | 10 | 125 | 10 | | | FAZ-C3/1-NA-DC | 113753 | 12/120 |
| 4 | 250 | 10 | 125 | 10 | | | FAZ-C4/1-NA-DC | 113754 | 12/120 |
| 5 | 250 | 10 | 125 | 10 | | | FAZ-C5/1-NA-DC | 113755 | 12/120 |
| 6 | 250 | 10 | 125 | 10 | | | FAZ-C6/1-NA-DC | 113756 | 12/120 |
| 7 | 250 | 10 | 125 | 10 | | | FAZ-C7/1-NA-DC | 113757 | 12/120 |
| 8 | 250 | 10 | 125 | 10 | | | FAZ-C8/1-NA-DC | 113758 | 12/120 |
| 10 | 250 | 10 | 125 | 10 | | | FAZ-C10/1-NA-DC | 113759 | 12/120 |
| 13 | 250 | 10 | 125 | 10 | | | FAZ-C13/1-NA-DC | 113760 | 12/120 |
| 15 | 250 | 10 | 125 | 10 | | | FAZ-C15/1-NA-DC | 113761 | 12/120 |
| 16 | 250 | 10 | 125 | 10 | | | FAZ-C16/1-NA-DC | 113762 | 12/120 |
| 20 | 250 | 10 | 125 | 10 | | | FAZ-C20/1-NA-DC | 113763 | 12/120 |
| 25 | 250 | 10 | 125 | 10 | | | FAZ-C25/1-NA-DC | 113764 | 12/120 |
| 30 | 250 | 10 | 125 | 10 | | | FAZ-C30/1-NA-DC | 113765 | 12/120 |
| 32 | 250 | 10 | 125 | 10 | | | FAZ-C32/1-NA-DC | 113766 | 12/120 |
| 35 | 250 | 10 | 125 | 10 | | | FAZ-C35/1-NA-DC | 113767 | 12/120 |
| 40 | 250 | 10 | 125 | 10 | | | FAZ-C40/1-NA-DC | 113768 | 12/120 |

SG56512



SG56612




| | | | | | | | | | |
|---------------|-----|----|-----|----|--|--|-----------------|--------|------|
| 2-pole | | | | | | | | | |
| 2 | 440 | 10 | 250 | 10 | | | FAZ-C2/2-NA-DC | 137239 | 1/60 |
| 3 | 500 | 10 | 250 | 10 | | | FAZ-C3/2-NA-DC | 137250 | 1/60 |
| 4 | 500 | 10 | 250 | 10 | | | FAZ-C4/2-NA-DC | 137251 | 1/60 |
| 5 | 500 | 10 | 250 | 10 | | | FAZ-C5/2-NA-DC | 137252 | 1/60 |
| 6 | 500 | 10 | 250 | 10 | | | FAZ-C6/2-NA-DC | 120638 | 1/60 |
| 7 | 500 | 10 | 250 | 10 | | | FAZ-C7/2-NA-DC | 120639 | 1/60 |
| 8 | 500 | 10 | 250 | 10 | | | FAZ-C8/2-NA-DC | 120640 | 1/60 |
| 10 | 500 | 10 | 250 | 10 | | | FAZ-C10/2-NA-DC | 120641 | 1/60 |
| 13 | 500 | 10 | 250 | 10 | | | FAZ-C13/2-NA-DC | 120642 | 1/60 |
| 15 | 500 | 10 | 250 | 10 | | | FAZ-C15/2-NA-DC | 120643 | 1/60 |
| 16 | 500 | 10 | 250 | 10 | | | FAZ-C16/2-NA-DC | 120644 | 1/60 |
| 20 | 500 | 10 | 250 | 10 | | | FAZ-C20/2-NA-DC | 120645 | 1/60 |
| 25 | 500 | 10 | 250 | 10 | | | FAZ-C25/2-NA-DC | 120646 | 1/60 |
| 30 | 500 | 10 | 250 | 10 | | | FAZ-C30/2-NA-DC | 120647 | 1/60 |
| 32 | 500 | 10 | 250 | 10 | | | FAZ-C32/2-NA-DC | 120648 | 1/60 |
| 35 | 500 | 10 | 250 | 10 | | | FAZ-C35/2-NA-DC | 120649 | 1/60 |
| 40 | 500 | 10 | 250 | 10 | | | FAZ-C40/2-NA-DC | 120650 | 1/60 |

Specifications FAZ-NA-DC

Technical data


| | | FAZ-NA-DC |
|---|-----------|---|
| Productstandard | | UL 489, CSA C22.2 No 5-02 |
| Number of poles | | 1, 2 |
| Mechanical specifications | | |
| Device width | | 1 pole = 0.697 inch, 2 poles = 1.394 inch |
| Frame size | | 1.772 inch |
| Socket size | | 4.134 inch |
| Device depth | | 2.362 inch |
| Terminals | | lift terminal / ring-tongue |
| Terminal capacity rigid solid/stranded wire | | 1 Wire: AWG 18-6 (Cu only) 2 Wires: AWG 18-10 (Cu only) |
| Terminal screw | | M5 (with slotted screw Pozidriv PZ2) |
| Terminal torque | | #18-12 AWG: 21 lb-in #10-8 AWG: 25 lb-in #6 AWG: 36 lb-in |
| Snap on fixing | | tristable (on DIN Rail acc. to IEC/EN 60715) |
| Finger proof | | acc.to VBG4, ÖVE EN-6 |
| Contact position indicator | | red / green |
| Electrical specifications | | |
| Rated voltage DC | U_n | 125 V d.c. (1p) 250 V d.c. (2p) |
| Rated current | I_n | 2, 3, 4, 5, 6, 7, 8, 10, 13, 15, 16, 20, 25, 30, 32, 35, 40 A |
| Rated impulse withstand voltage | U_{imp} | 4 kV (1.2/50) μ sec |
| Tripping characteristic | | |
| Conventional non-tripping current | | $I_{nt}=1.0 I_n$ |
| Conventional tripping current | | $I_t=1.35 I_n$ |
| Reference temperature | | 40 °C |
| Temperature factor | | 0.5% /K |
| Instantaneous tripping current | I_{mt} | $7 I_n < I_{mt} = 15 I_n \cdot t (I_{mt}) < 0.1 \text{ sec}$ |
| Current interrupting rating | | 10 kA |
| Number of electrical operating cycles | | 6000 |
| Number of mechanical operating cycles | | 10000 |
| Climatic conditions | | acc. to IEC 68-2 (25..55°C / 90..95% RH) |
| Operating temperature range | | -25°C to +55°C |

Connection diagram




Dimensions (mm) FAZ-NA-DC

1-pole

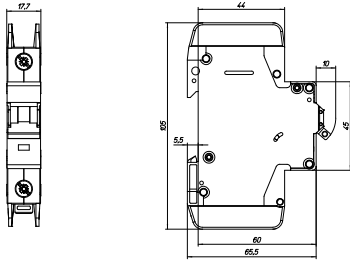


2-pole

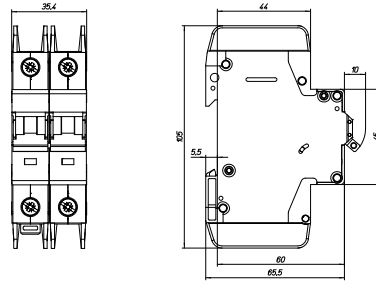

Tripping Characteristic FAZ-NA-DC

Characteristics C - UL 489

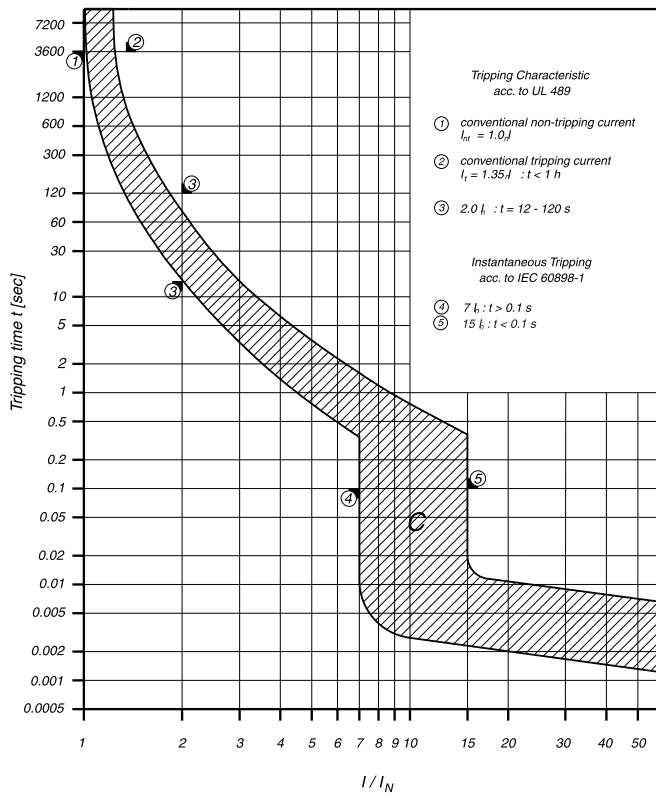






Miniature Circuit Breakers AZ

SG51412







- High-quality miniature circuit breakers for commercial and industrial applications
- Contact position indicator red - green
- Accessories suitable for subsequent installation
- Rated currents up to 125 A
- Tripping characteristics C, D
- Rated breaking capacity up to 25 kA according to EN 60947-2

AZ Miniature Circuit Breakers (MCBs) Characteristic C


| | Rated current I_n (A) | Type Designation | Article No. | Units per package |
|---|----------------------------|------------------|-------------|-------------------|
| SG51212  | 1-pole | | | |
| | 20 | AZ-C20 | 211769 | 12 |
| | 25 | AZ-C25 | 211774 | 12 |
| | 32 | AZ-C32 | 211779 | 12 |
| | 40 | AZ-C40 | 211784 | 12 |
| | 50 | AZ-C50 | 211789 | 12 |
| | 63 | AZ-C63 | 211794 | 12 |
| | 80 | AZ-C80 | 211799 | 12 |
| | 100 | AZ-C100 | 211804 | 12 |
| 125 | AZ-C125 | 211809 | 12 | |
| SG51312  | 2-pole | | | |
| | 20 | AZ-2-C20 | 211770 | 2 |
| | 25 | AZ-2-C25 | 211775 | 2 |
| | 32 | AZ-2-C32 | 211780 | 2 |
| | 40 | AZ-2-C40 | 211785 | 2 |
| | 50 | AZ-2-C50 | 211790 | 2 |
| | 63 | AZ-2-C63 | 211795 | 2 |
| | 80 | AZ-2-C80 | 211800 | 2 |
| | 100 | AZ-2-C100 | 211805 | 2 |
| 125 | AZ-2-C125 | 211810 | 2 | |
| wa_sg00314  | 3-pole | | | |
| | 20 | AZ-3-C20 | 211771 | 1 |
| | 25 | AZ-3-C25 | 211776 | 1 |
| | 32 | AZ-3-C32 | 211781 | 1 |
| | 40 | AZ-3-C40 | 211786 | 1 |
| | 50 | AZ-3-C50 | 211791 | 1 |
| | 63 | AZ-3-C63 | 211796 | 1 |
| | 80 | AZ-3-C80 | 211801 | 1 |
| | 100 | AZ-3-C100 | 211806 | 1 |
| 125 | AZ-3-C125 | 211811 | 1 | |
| wa_sg00214  | 3+N-pole | | | |
| | 20 | AZ-3N-C20 | 211773 | 1 |
| | 25 | AZ-3N-C25 | 211778 | 1 |
| | 32 | AZ-3N-C32 | 211783 | 1 |
| | 40 | AZ-3N-C40 | 211788 | 1 |
| | 50 | AZ-3N-C50 | 211793 | 1 |
| | 63 | AZ-3N-C63 | 211798 | 1 |
| | 80 | AZ-3N-C80 | 211803 | 1 |
| | 100 | AZ-3N-C100 | 211808 | 1 |
| 125 | AZ-3N-C125 | 211813 | 1 | |
| SG51412  | 4-pole | | | |
| | 20 | AZ-4-C20 | 211772 | 1 |
| | 25 | AZ-4-C25 | 211777 | 1 |
| | 32 | AZ-4-C32 | 211782 | 1 |
| | 40 | AZ-4-C40 | 211787 | 1 |
| | 50 | AZ-4-C50 | 211792 | 1 |
| | 63 | AZ-4-C63 | 211797 | 1 |
| | 80 | AZ-4-C80 | 211802 | 1 |
| | 100 | AZ-4-C100 | 211807 | 1 |
| 125 | AZ-4-C125 | 211812 | 1 | |

AZ Miniature Circuit Breakers (MCBs) Characteristic D


| | Rated current I_n (A) | Type Designation | Article No. | Units per package |
|---|----------------------------|------------------|-------------|-------------------|
| SG51212  | 1-pole | | | |
| | 50 | AZ-D50 | 211814 | 12 |
| | 63 | AZ-D63 | 211818 | 12 |
| | 80 | AZ-D80 | 211822 | 12 |
| | 100 | AZ-D100 | 211826 | 12 |
| SG51312  | 2-pole | | | |
| | 50 | AZ-2-D50 | 211815 | 2 |
| | 63 | AZ-2-D63 | 211819 | 2 |
| | 80 | AZ-2-D80 | 211823 | 2 |
| | 100 | AZ-2-D100 | 211827 | 2 |
| wa_sg00314  | 3-pole | | | |
| | 50 | AZ-3-D50 | 211816 | 1 |
| | 63 | AZ-3-D63 | 211820 | 1 |
| | 80 | AZ-3-D80 | 211824 | 1 |
| | 100 | AZ-3-D100 | 211828 | 1 |
| wa_sg00214  | 3+N-pole | | | |
| | 50 | AZ-3N-D50 | 211817 | 1 |
| | 63 | AZ-3N-D63 | 211821 | 1 |
| | 80 | AZ-3N-D80 | 211825 | 1 |
| | 100 | AZ-3N-D100 | 211829 | 1 |

Maximum Let-Through Current AZ


Type C

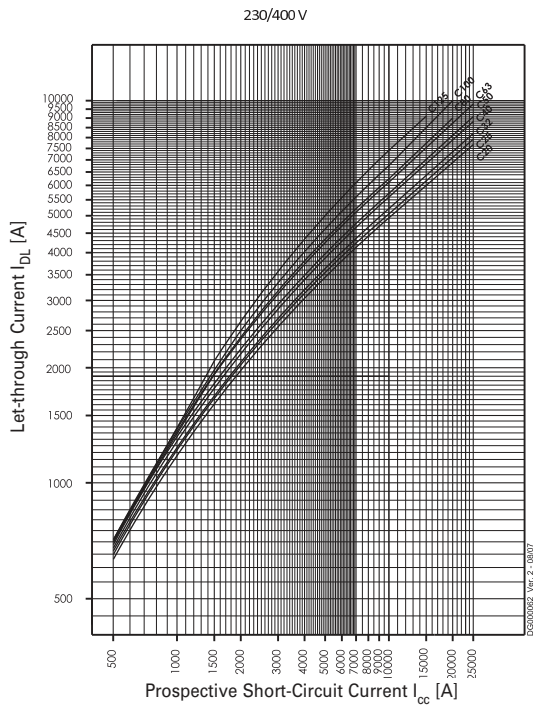


Type D

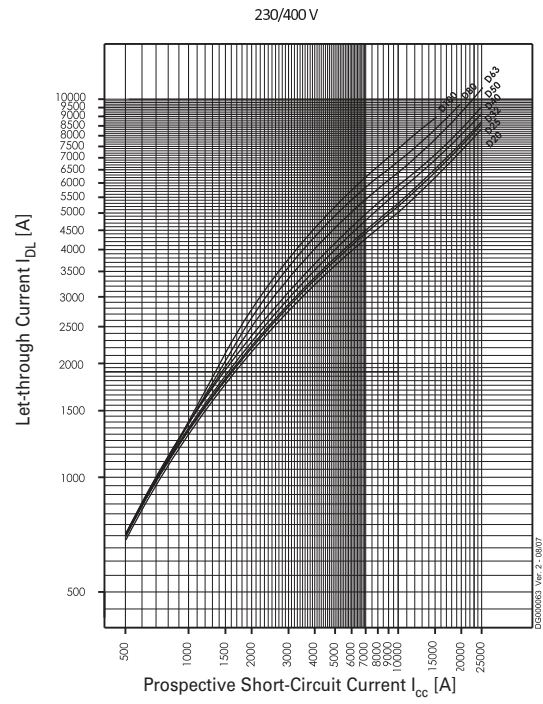

Dimensions (mm)

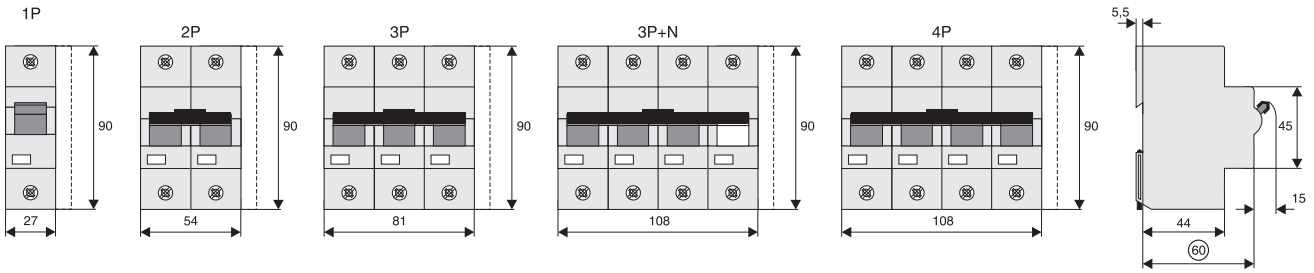


Effect of ambient temperature AZ

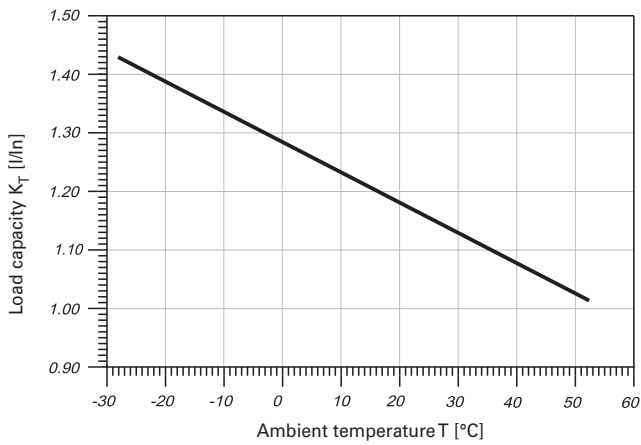


Permitted permanent load at ambient temperature T [°C] with n devices: $I_{DL} = I_n K_T(T) K_N(N)$.

Maximum Let-Through Current AZ

Type C

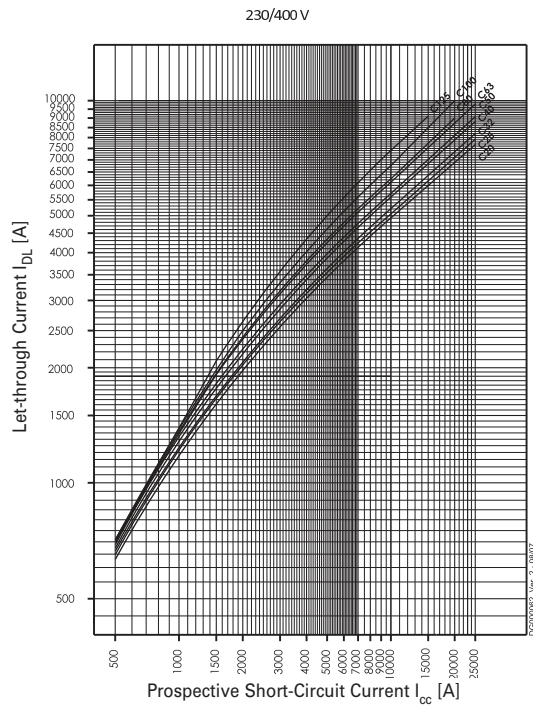

Type D

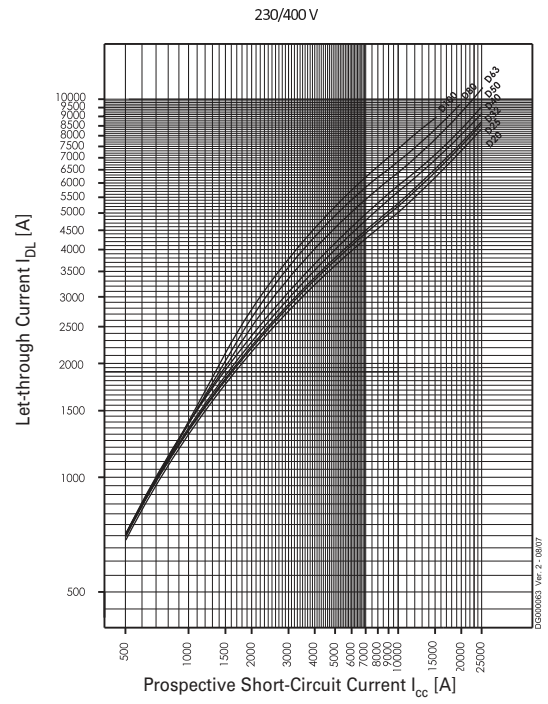

Short Circuit Selectivity AZ

In case of short circuit, there is selectivity between the miniature circuit breakers AZ and the upstream protection devices up to the specified values of the selectivity limit current I_s [kA] (i. e. in case of short-circuit currents I_{ks} under I_s , only the MCB will trip, in case of short circuit currents above this value both protective devices will respond).

AZ towards back-up fuses D01, D02, D03

| Rated current I_n AZ in A | Rated current of the back-up fuse in A | | | | | | |
|--------------------------------|--|-----|-----|-----|-----|-----|-----|
| | 25 | 35 | 50 | 63 | 80 | 100 | |
| C Characteristic | 20 | 0,5 | 1,0 | 2,0 | 2,9 | 3,9 | 7,6 |
| | 25 | | 1,0 | 1,9 | 2,8 | 3,8 | 7,3 |
| | 32 | | 1,0 | 1,8 | 2,7 | 3,6 | 7,0 |
| | 40 | | | 1,6 | 2,2 | 3,0 | 5,6 |
| | 50 | | | | 2,1 | 2,8 | 5,2 |
| | 63 | | | | | 2,7 | 4,8 |
| | 80 | | | | | | 4,3 |
| | 100 | | | | | | |
| | 125 | | | | | | |
| | D -Characteristic | 20 | 0,5 | 0,9 | 1,7 | 2,5 | 3,4 |
| 25 | | | 0,9 | 1,6 | 2,3 | 3,2 | 6,2 |
| 32 | | | 0,9 | 1,5 | 2,3 | 3,0 | 6,0 |
| 40 | | | | 1,4 | 2,0 | 2,6 | 4,7 |
| 50 | | | | | 1,8 | 2,3 | 4,3 |
| 63 | | | | | | 2,1 | 3,7 |
| 80 | | | | | | | 3,1 |
| 100 | | | | | | | |
| 125 | | | | | | | |

AZ towards back-up fuses NH Gr. 00

| Rated current I_n AZ in A | Rated current of the back-up fuse in A | | | | | | | | | | |
|--------------------------------|--|-----|------|-----|-----|-----|-----|-----|------|------|------|
| | 25 | 35 | 40 | 50 | 63 | 80 | 100 | 125 | 160 | 200 | |
| C Characteristic | 20 | 0,5 | 1,0 | 1,3 | 1,9 | 2,7 | 3,7 | 6,7 | 17,0 | 25,0 | 25,0 |
| | 25 | | 0,9 | 1,3 | 1,8 | 2,6 | 3,5 | 6,5 | 17,0 | 25,0 | 25,0 |
| | 32 | | 0,9 | 1,2 | 1,7 | 2,4 | 3,3 | 6,0 | 15,0 | 23,0 | 25,0 |
| | 40 | | | | 1,4 | 2,1 | 2,9 | 4,8 | 12,0 | 18,0 | 25,0 |
| | 50 | | | | | 1,9 | 2,7 | 4,5 | 11,0 | 17,0 | 25,0 |
| | 63 | | | | | | | 4,2 | 10,0 | 15,0 | 25,0 |
| | 80 | | | | | | | 3,8 | 8,5 | 12,0 | 25,0 |
| | 100 | | | | | | | | 7,0 | 10,0 | 25,0 |
| | 125 | | | | | | | | | 7,5 | 25,0 |
| | D -Characteristic | 20 | <0,5 | 0,8 | 1,1 | 1,5 | 2,3 | 3,1 | 5,6 | 16,0 | 25,0 |
| 25 | | | 0,7 | 1,0 | 1,4 | 2,1 | 3,0 | 5,3 | 14,0 | 23,0 | 25,0 |
| 32 | | | 0,7 | 1,0 | 1,3 | 2,1 | 2,9 | 5,0 | 13,0 | 22,0 | 25,0 |
| 40 | | | | | 1,1 | 1,8 | 2,5 | 4,2 | 10,0 | 15,0 | 25,0 |
| 50 | | | | | | 1,6 | 2,3 | 3,8 | 8,5 | 13,0 | 22,0 |
| 63 | | | | | | | 2,1 | 3,2 | 7,0 | 10,5 | 18,0 |
| 80 | | | | | | | | 2,8 | 5,5 | 8,4 | 15,0 |
| 100 | | | | | | | | | 4,8 | 7,5 | 12,5 |
| 125 | | | | | | | | | | | |


AZ towards NZM 1

Short circuit selectivity **characteristic C** towards **NZM***)

| AZ | NZM...1-A gL/gG | | | | | |
|--------------------|-----------------|-----|-----|------|------|------|
| I _n [A] | 40 | 50 | 63 | 80 | 100 | 125 |
| 20 | 0.3 | 0.4 | 0.5 | 0.75 | 0.9 | 1.25 |
| 25 | 0.3 | 0.4 | 0.5 | 0.7 | 0.9 | 1.2 |
| 32 | | 0.4 | 0.5 | 0.7 | 0.85 | 1.2 |
| 40 | | | 0.5 | 0.6 | 0.85 | 1.1 |
| 50 | | | | 0.6 | 0.85 | 1.1 |
| 63 | | | | | 0.8 | 1 |
| 80 | | | | | | 1 |
| 100 | | | | | | |
| 125 | | | | | | |

Short circuit selectivity **characteristic D** towards **NZM***)

| AZ | NZM...1-A gL/gG | | | | | |
|--------------------|-----------------|----|----|----|-----|-----|
| I _n [A] | 40 | 50 | 63 | 80 | 100 | 125 |
| 50 | | | | | | |
| 63 | | | | | | |
| 80 | | | | | | |
| 100 | | | | | | |

 no selectivity


AZ towards NZM 2

Short circuit selectivity **characteristic C** towards **NZM***)

| AZ | NZM...2-A gL/gG | | | | | | | | |
|--------------------|-----------------|-----|-----|------|------|------|------|-----|-----|
| I _n [A] | 40 | 50 | 63 | 80 | 100 | 125 | 160 | 200 | 250 |
| 20 | 0.3 | 0.4 | 0.5 | 0.75 | 0.9 | 1.25 | 1.8 | 2.5 | 3.5 |
| 25 | 0.3 | 0.4 | 0.5 | 0.7 | 0.9 | 1.2 | 1.7 | 2.4 | 3.3 |
| 32 | | 0.4 | 0.5 | 0.7 | 0.85 | 1.2 | 1.65 | 2.3 | 3.2 |
| 40 | | | 0.5 | 0.6 | 0.85 | 1.1 | 1.5 | 2.1 | 2.9 |
| 50 | | | | 0.6 | 0.85 | 1.1 | 1.5 | 2 | 2.8 |
| 63 | | | | | 0.8 | 1 | 1.4 | 1.8 | 2.5 |
| 80 | | | | | | 1 | 1.4 | 1.8 | 2.4 |
| 100 | | | | | | | 1.3 | 1.7 | 2.3 |
| 125 | | | | | | | | 1.6 | 2.1 |

Short circuit selectivity **characteristic D** towards **NZM***)

| AZ | NZM...2-A gL/gG | | | | | | | | |
|--------------------|-----------------|----|----|----|-----|-----|-----|-----|-----|
| I _n [A] | 40 | 50 | 63 | 80 | 100 | 125 | 160 | 200 | 250 |
| 50 | | | | | | | 1 | 1.4 | 2.6 |
| 63 | | | | | | | 1 | 1.3 | 2.3 |
| 80 | | | | | | | | | 2.1 |
| 100 | | | | | | | | | |

 no selectivity

Back-up Protection AZ

The up-stream protective devices will protect the down-stream AZ up to the short-circuit current specified.

AZ and NZM(B)(C)(N)(H)1

| I_n [A] | AZ-$I_n/1(2,3,4)$ / C(D) + NZMB1 $U_e = 230/400$ V |
|-----------|---|
| 20 | 25 kA |
| 25 | 25 kA |
| 32 | 25 kA |
| 40 | 25 kA |
| 50 | 25 kA |
| 63 | 25 kA |
| 80 | 25 kA |
| 100 | 25 kA |
| 125 | 25 kA |

| I_n [A] | AZ-$I_n/1(2,3,4)$ / C(D) + NZMC1 $U_e = 230/400$ V |
|-----------|---|
| 20 | 36 kA |
| 25 | 36 kA |
| 32 | 36 kA |
| 40 | 36 kA |
| 50 | 36 kA |
| 63 | 36 kA |
| 80 | 36 kA |
| 100 | 36 kA |
| 125 | 36 kA |

| I_n [A] | AZ-$I_n/1(2,3,4)$ / C(D) + NZMN1 $U_e = 230/400$ V |
|-----------|---|
| 20 | 50 kA |
| 25 | 50 kA |
| 32 | 50 kA |
| 40 | 50 kA |
| 50 | 50 kA |
| 63 | 50 kA |
| 80 | 50 kA |
| 100 | 50 kA |
| 125 | 50 kA |

| I_n [A] | AZ-$I_n/1(2,3,4)$ / C(D) + NZMH1 $U_e = 230/400$ V |
|-----------|---|
| 20 | 80 kA |
| 25 | 80 kA |
| 32 | 80 kA |
| 40 | 80 kA |
| 50 | 80 kA |
| 63 | 80 kA |
| 80 | 80 kA |
| 100 | 80 kA |
| 125 | 80 kA |

AZ and NZM(B)(C)(N)(H)2


| I_n [A] | AZ-$I_n/1(2,3,4)$ / C(D) + NZMB2 $U_e = 230/400$ V |
|-----------|---|
| 20 | 25 kA |
| 25 | 25 kA |
| 32 | 25 kA |
| 40 | 25 kA |
| 50 | 25 kA |
| 63 | 25 kA |
| 80 | 25 kA |
| 100 | 25 kA |
| 125 | 25 kA |

| I_n [A] | AZ-$I_n/1(2,3,4)$ / C(D) + NZMC2 $U_e = 230/400$ V |
|-----------|---|
| 20 | 36 kA |
| 25 | 36 kA |
| 32 | 36 kA |
| 40 | 36 kA |
| 50 | 36 kA |
| 63 | 36 kA |
| 80 | 36 kA |
| 100 | 36 kA |
| 125 | 36 kA |

| I_n [A] | AZ-$I_n/1(2,3,4)$ / C(D) + NZMN2 $U_e = 230/400$ V |
|-----------|---|
| 20 | 50 kA |
| 25 | 50 kA |
| 32 | 50 kA |
| 40 | 50 kA |
| 50 | 50 kA |
| 63 | 50 kA |
| 80 | 50 kA |
| 100 | 50 kA |
| 125 | 50 kA |

| I_n [A] | AZ-$I_n/1(2,3,4)$ / C(D) + NZMH2 $U_e = 230/400$ V |
|-----------|---|
| 20 | 65 kA |
| 25 | 65 kA |
| 32 | 65 kA |
| 40 | 65 kA |
| 50 | 65 kA |
| 63 | 65 kA |
| 80 | 65 kA |
| 100 | 65 kA |
| 125 | 65 kA |

Load capacity in case of block installation AZ

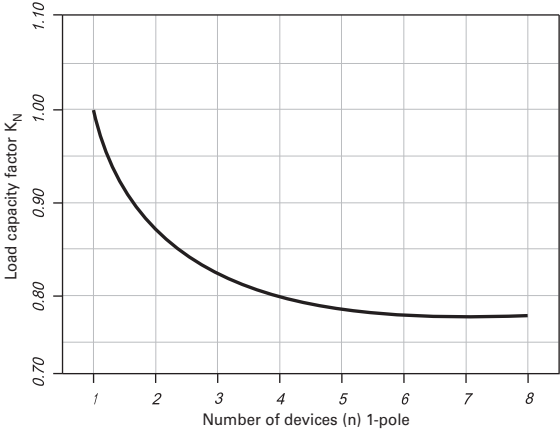




Main Load Disconnecter Switch (Isolator) IS

SG10911




- Load circuit breaker with isolating function
- Highly wear resistant contacts
- Quick make
- Terminal capacity 50 mm²
- Compatible busbars
- 1-, 2-, 3-, 4-pole

Main Load Disconnect Switch (Isolator) IS

| | Rated Current (A) | Poles | Type Designation | Article No. | Units per package |
|--|-------------------|-------|------------------|-------------|-------------------|
|  SG10611 | 16 | 1 | IS-16/1 | 276254 | 12/120 |
| | 16 | 2 | IS-16/2 | 276255 | 1/60 |
| | 16 | 3 | IS-16/3 | 276256 | 1/40 |
| | 16 | 4 | IS-16/4 | 276257 | 1/30 |
| | 20 | 1 | IS-20/1 | 276258 | 12/120 |
| | 20 | 2 | IS-20/2 | 276259 | 1/60 |
| | 20 | 3 | IS-20/3 | 276260 | 1/40 |
| | 20 | 4 | IS-20/4 | 276261 | 1/30 |
|  SG10711 | 25 | 1 | IS-25/1 | 276262 | 12/120 |
| | 25 | 2 | IS-25/2 | 276263 | 1/60 |
| | 25 | 3 | IS-25/3 | 276264 | 1/40 |
| | 25 | 4 | IS-25/4 | 276265 | 1/30 |
| | 32 | 1 | IS-32/1 | 276266 | 12/120 |
| | 32 | 2 | IS-32/2 | 276267 | 1/60 |
| | 32 | 3 | IS-32/3 | 276268 | 1/40 |
| | 32 | 4 | IS-32/4 | 276269 | 1/30 |
| | 40 | 1 | IS-40/1 | 276270 | 12/120 |
| | 40 | 2 | IS-40/2 | 276271 | 1/60 |
|  SG10811 | 40 | 3 | IS-40/3 | 276272 | 1/40 |
| | 40 | 4 | IS-40/4 | 276273 | 1/30 |
| | 63 | 1 | IS-63/1 | 276274 | 12/120 |
| | 63 | 2 | IS-63/2 | 276275 | 1/60 |
| | 63 | 3 | IS-63/3 | 276276 | 1/40 |
| | 63 | 4 | IS-63/4 | 276277 | 1/30 |
| | 80 | 1 | IS-80/1 | 276278 | 12/120 |
| | 80 | 2 | IS-80/2 | 276279 | 1/60 |
| | 80 | 3 | IS-80/3 | 276280 | 1/40 |
| | 80 | 4 | IS-80/4 | 276281 | 1/30 |
|  SG10911 | 100 | 1 | IS-100/1 | 276282 | 12/120 |
| | 100 | 2 | IS-100/2 | 276283 | 1/60 |
| | 100 | 3 | IS-100/3 | 276284 | 1/40 |
| | 100 | 4 | IS-100/4 | 276285 | 1/30 |
| | 125 | 1 | IS-125/1 | 276286 | 12/120 |
| | 125 | 2 | IS-125/2 | 276287 | 1/60 |
| | 125 | 3 | IS-125/3 | 276288 | 1/40 |
| | 125 | 4 | IS-125/4 | 276289 | 1/30 |

Accessories

| | Description | Type Designation | Article No. | Units per package |
|--|--|------------------|-------------|-------------------|
|  SG47812 | Switching interlock without lock for Isolators, RCDs, combined RCD/MCBs, ... | IS/SPE-1TE | 101911 | 5/30 |
| | Terminal cover | Z-IS/AK-1TE | 276290 | 10/600 |

Switching interlock IS/SPE-1TE

- Without lock
- Also suitable for PFIM, CF16, PKNM, CKN6

Terminal Cover Caps Z-IS/AK-1TE

- Can be sealed with leads
- Modular design, width 1 MU

Specifications | Main Load Disconnecter Switch (Isolator) IS


Description

- Load circuit breaker with isolating function
- Design according to IEC/EN 60947-3
- Highly wear resistant contacts
- Quick make, black toggle
- Terminal capacity 50 mm²
- Compatible busbars with switchgear series Xpole by use of the mouth terminal in combination with standard fork busbar


Technical Data

| | IS-16 | IS-20 | IS-25 | IS-32 | IS-40 | IS-63 | IS-80 | IS-100 | IS-125 |
|---|---|---------|---------|---------|---------|---------|---------|---------|---------|
| Electrical | | | | | | | | | |
| Design | according to IEC/EN 60947-3 | | | | | | | | |
| Rated voltage | 240/415 V | | | | | | | | |
| Frequency | 50/60 Hz | | | | | | | | |
| Rated insulation voltage | U_i | 690 V~ | | | | | | | |
| Rated peak withstand voltage | U_{imp} | 6 kV | | | | | | | |
| Pollution degree | 3 | | | | | | | | |
| Rated short-time withstand current | I_{cw} | 2 kA | | | | | | | |
| Rated short-circuit making capacity | I_{cm} | 2.8 kA | | | | | | | |
| Rated current | | | | | | | | | |
| 240/415V, AC23A | 16 A | 20 A | 25 A | 32 A | 40 A | 63 A | 80 A | 100 A | 125 A |
| Number of poles | 1-, 2-, 3-, 4-pole | | | | | | | | |
| Maximum back-up fuse | 125 A gG | | | | | | | | |
| Short circuit strength - with back-up fuse acc. to the applicable rules | | | | | | | | | |
| IEC/EN 60947-3 | 12.5 kA | 12.5 kA | 12.5 kA | 12.5 kA | 12.5 kA | 12.5 kA | 12.5 kA | 10 kA | 10 kA |
| Endurance | | | | | | | | | |
| electrical components operation cycles | ≥3.000 | ≥3.000 | ≥3.000 | ≥3.000 | ≥3.000 | ≥3.000 | ≥3.000 | ≥3.000 | ≥2.000 |
| mechanical components operation cycles | ≥16.000 | ≥16.000 | ≥16.000 | ≥16.000 | ≥16.000 | ≥16.000 | ≥16.000 | ≥16.000 | ≥14.000 |
| Mechanical | | | | | | | | | |
| Frame size | 45 mm | | | | | | | | |
| Device height | 80 mm | | | | | | | | |
| Device width | 17.5mm/pole | | | | | | | | |
| Mounting | quick fastening with 2 lock-in positions on DIN rail IEC/EN 60715 | | | | | | | | |
| Degree of protection, built-in | IP40 | | | | | | | | |
| Terminal protection | finger and hand touch safe according to BGV A3 | | | | | | | | |
| Terminals | open mouthed/lift terminals | | | | | | | | |
| Terminal capacity | 2.5 - 50 mm ² | | | | | | | | |
| Busbar thickness | 0.8 - 2 mm | | | | | | | | |
| Fastening torque of terminal screws | 2.5 - 5 Nm | | | | | | | | |
| Function | irrespective of the position of installation | | | | | | | | |

Connection diagram

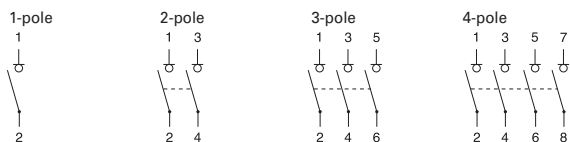


Dimensions (mm)

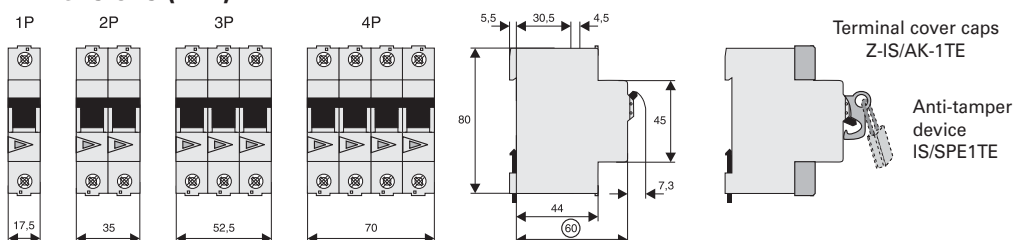

Busbar System xEffect BB-EV

SG13113

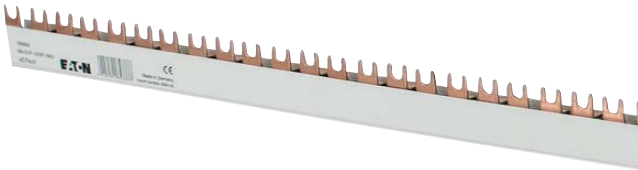

Busbar System xEffect is the modular design system for busbars. xEffect busbars are available as yard goods with 1, 2 or 3 poles. Now, there is a special feature: each bar can easily be extended by one-pole bar as you like. The additional pole can be added completely without tools by easy clamping technique. The lugs or forks in the xEffect bars - available in 10 and 16 mm² and all common distances - can be broken out at a predetermined breaking point. There is actually no more flexibility available.

Busbar System xEffect saves time and material

The yard good can be cut with a saw of course. However, there is no need neither for deburring nor for cutting the conductor. Just cut to the required dimension and close with the fitting end cap -ready! The end caps have also breakable edges, which enable further connecting of the Busbar System xEffect. By overlapping assembly, doubling the cross section can be achieved.

Busbar System xEffect in use

Busbar System xEffect is especially well suited for solving flexible busbar applications rack-mounted models in series. Fork-pin combinations for 1+N applications can be realized by individual combinations - for this also the one-pole version with blue isolation is available besides the one with grey isolation. Even different cross sections can be combined in this case.

Accessories, such as feeder terminals and self adhesive phase marking labels will complete the comfortable total package. Existing contact prevention caps can be used.

Busbar System xEffect at a glance:

- Yard goods can be cut
- No cutting back of copper required
- No deburring required
- Almost no waste during cutting
- End caps available with 1- to 4-poles, end caps can be broken out for further extensions
- 4-pole end cap molded in pairs (left and right)
- Overlapping rail extension possible
- Rails can be extended on demand by 1-pole rails (plug-in technology)
- All step distances
- 10 and 16 mm²
- Fork and stud
- Lugs can be broken out at any predetermined breaking point
- Self adhesive phase indication labels available
- Contact preventing caps (ZV-BS-G) can be used
- Simple, flexible handling
- All assembly requirements can be covered by the Busbar System xEffect
- Low storage space requirements due to modular system
- Less time consuming (no deburring, no cutting back)
- Individual and self configurable
- Fork-pin combination for 1+N application possible, feeding through rail (terminal clamp) not possible.
- Protected technology

| Description | Step Distance (mm) | Cu-factor | Type Designation | Article No. | Units per package |
|-------------|--------------------|-----------|------------------|-------------|-------------------|
|-------------|--------------------|-----------|------------------|-------------|-------------------|

xEffect busbar 1m 10mm², 16mm² (Fork) BB-EVF


for MCBs, RCCBs, RCBOs, SPDs

- Delivered without end caps

SG13113



SG13413

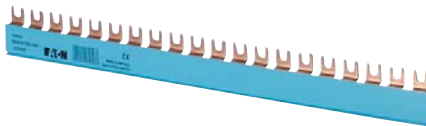


10 mm², Rated Current 63 A

| | | | | | |
|---------------|------------|------|----------------------|--------|----|
| 1-phase | 17.8 | 0.22 | BB-EVF-10/1P-1MU | 168826 | 10 |
| | 27 | 0.24 | BB-EVF-10/1P-2MU | 168830 | 10 |
| | 36 | 0.24 | BB-EVF-10/1P-3MU | 168834 | 10 |
| 2-phase | 17.8 | 0.31 | BB-EVF-10/2P-1MU | 168838 | 10 |
| | 27 | 0.36 | BB-EVF-10/2P-2MU | 168840 | 10 |
| 3-phase | 17.8 | 0.46 | BB-EVF-10/3P-1MU | 168842 | 10 |
| | 27 | 0.58 | BB-EVF-10/3P-2MU | 168844 | 10 |
| | 36 | 0.56 | BB-EVF-10/3P-3MU | 168850 | 10 |
| 3-phase + AUX | 3x17.5+1x9 | 0.58 | BB-EVF-10/3P-1MU/AUX | 168846 | 10 |
| | 3x17.5+2x9 | 0.57 | BB-EVF-10/3P-1MU2AUX | 168848 | 10 |
| Neutral | 17.8 | 0.22 | BB-EVF-10/N-1MU | 168828 | 10 |
| | 27 | 0.24 | BB-EVF-10/N-2MU | 168832 | 10 |
| | 36 | 0.24 | BB-EVF-10/N-3MU | 168836 | 10 |

SG13213



SG13613

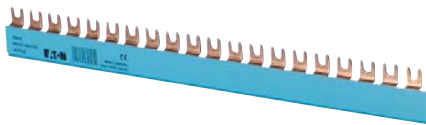

16 mm², Rated Current 80 A

| | | | | | |
|---------------|------------|------|----------------------|--------|----|
| 1-phase | 17.8 | 0.33 | BB-EVF-16/1P-1MU | 168827 | 10 |
| | 27 | 0.36 | BB-EVF-16/1P-2MU | 168831 | 10 |
| | 36 | 0.32 | BB-EVF-16/1P-3MU | 168835 | 10 |
| 2-phase | 17.8 | 0.46 | BB-EVF-16/2P-1MU | 168839 | 10 |
| | 27 | 0.54 | BB-EVF-16/2P-2MU | 168841 | 10 |
| 3-phase | 17.8 | 0.69 | BB-EVF-16/3P-1MU | 168843 | 10 |
| | 27 | 0.87 | BB-EVF-16/3P-2MU | 168845 | 10 |
| | 36 | 0.84 | BB-EVF-16/3P-3MU | 168851 | 10 |
| 3-phase + AUX | 3x17.5+1x9 | 0.87 | BB-EVF-16/3P-1MU/AUX | 168847 | 10 |
| | 3x17.5+2x9 | 0.86 | BB-EVF-16/3P-1MU2AUX | 168849 | 10 |
| Neutral | 17.8 | 0.33 | BB-EVF-16/N-1MU | 168829 | 10 |
| | 27 | 0.36 | BB-EVF-16/N-2MU | 168833 | 10 |
| | 36 | 0.32 | BB-EVF-16/N-3MU | 168837 | 10 |

| Description | Step Distance (mm) | Cu-factor | Type Designation | Article No. | Units per package |
|-------------|--------------------|-----------|------------------|-------------|-------------------|
|-------------|--------------------|-----------|------------------|-------------|-------------------|

xEffect busbar 1m 10mm², 16mm² (Pin) BB-EVP


for MCBs, RCCBs, RCBOs, SPDs

- Delivered without end caps

SG13013



SG13513

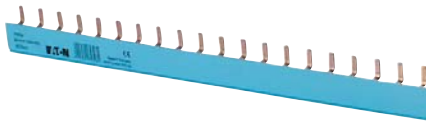


10 mm², Rated Current 63 A

| | | | | | |
|---------------|------------|------|----------------------|--------|----|
| 1-phase | 17.8 | 0.22 | BB-EVP-10/1P-1MU | 168852 | 10 |
| | 27 | 0.24 | BB-EVP-10/1P-2MU | 168856 | 10 |
| | 36 | 0.24 | BB-EVP-10/1P-3MU | 168860 | 10 |
| 2-phase | 17.8 | 0.31 | BB-EVP-10/2P-1MU | 168864 | 10 |
| | 27 | 0.36 | BB-EVP-10/2P-2MU | 168866 | 10 |
| 3-phase | 17.8 | 0.46 | BB-EVP-10/3P-1MU | 168868 | 10 |
| | 27 | 0.58 | BB-EVP-10/3P-2MU | 168870 | 10 |
| 3-phase + AUX | 3x17.5+1x9 | 0.58 | BB-EVP-10/3P-1MU/AUX | 168872 | 10 |
| | 3x17.5+2x9 | 0.57 | BB-EVP-10/3P-1MU2AUX | 168874 | 10 |
| Neutral | 17.8 | 0.22 | BB-EVP-10/N-1MU | 168854 | 10 |
| | 27 | 0.24 | BB-EVP-10/N-2MU | 168858 | 10 |
| | 36 | 0.24 | BB-EVP-10/N-3MU | 168862 | 10 |

SG12913



SG13313

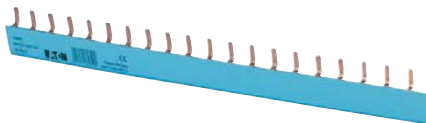

16 mm², Rated Current 80 A

| | | | | | |
|---------------|------------|------|----------------------|--------|----|
| 1-phase | 17.8 | 0.33 | BB-EVP-16/1P-1MU | 168853 | 10 |
| | 27 | 0.36 | BB-EVP-16/1P-2MU | 168857 | 10 |
| | 36 | 0.32 | BB-EVP-16/1P-3MU | 168861 | 10 |
| 2-phase | 17.8 | 0.46 | BB-EVP-16/2P-1MU | 168865 | 10 |
| | 27 | 0.54 | BB-EVP-16/2P-2MU | 168867 | 10 |
| 3-phase | 17.8 | 0.69 | BB-EVP-16/3P-1MU | 168869 | 10 |
| | 27 | 0.87 | BB-EVP-16/3P-2MU | 168871 | 10 |
| | 36 | 0.84 | BB-EVP-16/3P-3MU | 168877 | 10 |
| 3-phase + AUX | 3x17.5+1x9 | 0.87 | BB-EVP-16/3P-1MU/AUX | 168873 | 10 |
| | 3x17.5+2x9 | 0.86 | BB-EVP-16/3P-1MU2AUX | 168875 | 10 |
| Neutral | 17.8 | 0.33 | BB-EVP-16/N-1MU | 168855 | 10 |
| | 27 | 0.36 | BB-EVP-16/N-2MU | 168859 | 10 |
| | 36 | 0.32 | BB-EVP-16/N-3MU | 168863 | 10 |

| Description | Cu-factor | Type Designation | Article No. | Units per package |
|-------------|-----------|------------------|-------------|-------------------|
|-------------|-----------|------------------|-------------|-------------------|

Accessories

End caps BB-EV-EC

wa_sg05612



| | | | | |
|-----------|---|---------------|--------|----|
| 1-phase | - | BB-EV-EC/1P | 168878 | 40 |
| 2+3-phase | - | BB-EV-EC/2-3P | 168823 | 40 |
| 4-phase | - | BB-EV-EC/4P | 168824 | 20 |
| Neutral | - | BB-EV-EC/N | 168879 | 20 |

Terminal BB-EV-TE/35

wa_sg05312



| | | | | |
|--|------|-------------|--------|---|
| | 0.04 | BB-EV-TE/35 | 168825 | 3 |
|--|------|-------------|--------|---|

Sticker phase sequence

SG08713



| | | | | |
|--|---|---------|--------|---|
| | - | BB-S-PS | 169831 | 5 |
|--|---|---------|--------|---|

Busbar Tag Shrouds ZV-BS-G

SG05705






| | | | | |
|--|---|---------|--------|--------|
| | - | ZV-BS-G | 104903 | 10/600 |
|--|---|---------|--------|--------|

Technical Data






| BB-EV. | |
|--------------------------------------|---|
| General | |
| Heat deflection temperature | ≥80°C UL94 V0 |
| Standards | EN 60947-1:2007 / IEC 60947-1:2007 / IEC 60999:2000 |
| Climate stability | according to DIN EN 60068 |
| Insulation coordination | Overvoltage category III / Degree of pollution 2 |
| Electrical | |
| Impulse voltage strenght | ≥4.5 kV |
| Min. air distance | >5.5 mm |
| Min. creeping distance | >5 mm |
| Max. operating voltage | 690 V AC/DC 1,000 V DC 1-pole only |
| Max. current I _g /Phase | |
| 10 mm ² | 63 A |
| 16 mm ² | 80 A |
| Protection class | IP20 |
| Short circuit rating I _{CC} | 25kA - NH3 355A gC500V JM |
| Dielectric strenght | PC - ABS >32 kV / mm |

Assembly instruction:




Cutting

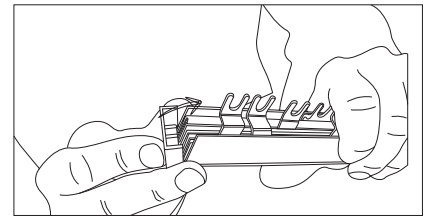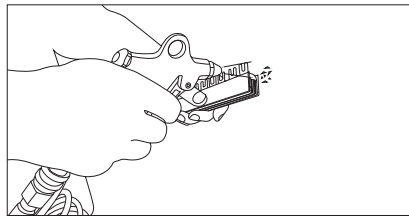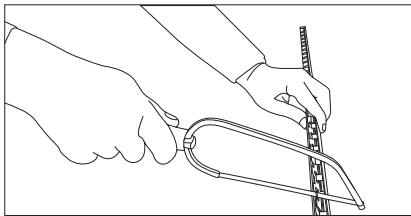


Mounting of an extension busbar

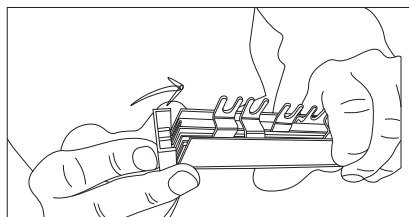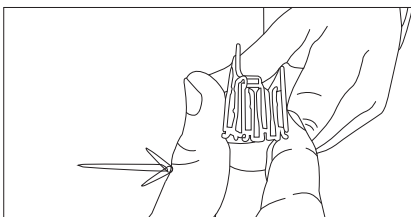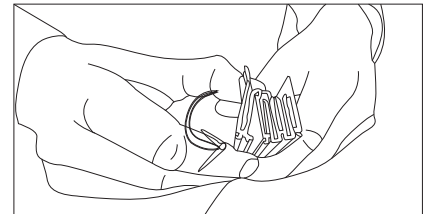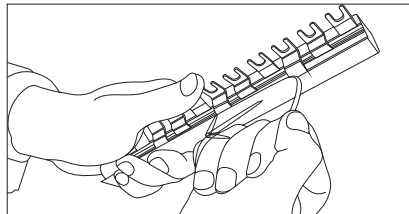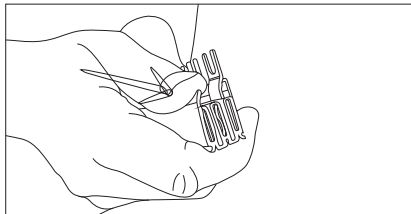


Overlapping mounting or further connection, resp.

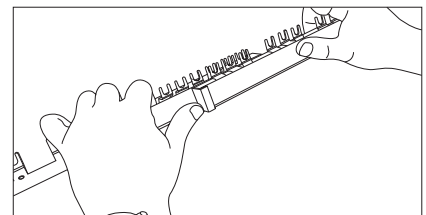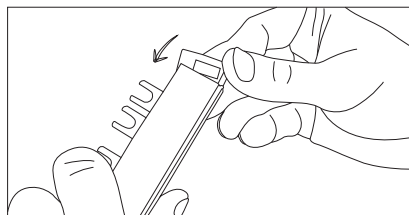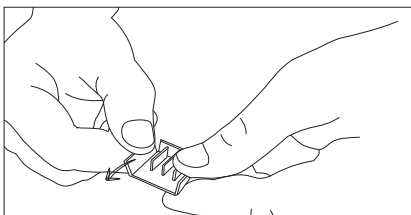

Bracking out of connection lugs

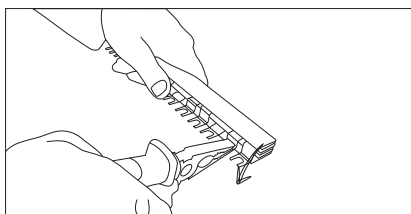

Sticking on phase marking

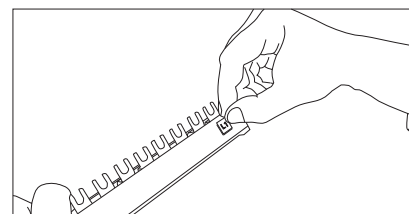

Busbar UL489 Z-BB/UL

SG13713



- For MCB FAZ-NA/RT/DU
- Sliceable
- 18 and 25 mm²
- Pin busbar
- Accessories available:
 - End cap
 - Terminal
 - Busbar tag shrouds
- Length 1 m

| Description | Step Distance (mm) | Cu-factor | Type Designation | Article No. | Units per package |
|-------------|--------------------|-----------|------------------|-------------|-------------------|
|-------------|--------------------|-----------|------------------|-------------|-------------------|

Busbar UL489 sliceable 1m 18mm², 25mm² (Pin), Z-BB/UL

for FAZ-NA/RT/DU

- Delivered without end caps

SG13713



18 mm², Rated Current 80 A

| | | | | | |
|------------------|----------------|-------|--------------------------|--------|----|
| 1-phase | 17.6 | 0.39 | Z-BB/UL18/1P1MU/57 | 171128 | 10 |
| 1-phase + AUX | 26.4 | 0.378 | Z-BB/UL18/1P1MU+AUX/37 | 171134 | 10 |
| 2x 1-phase + AUX | 26.4 | 0.56 | Z-BB/UL18/2X1P1MU+AUX/38 | 171142 | 10 |
| 3x 1-phase + AUX | 26.4 | 0.945 | Z-BB/UL18/3X1P1MU+AUX/39 | 171140 | 10 |
| 2-phase | 17.6 | 0.625 | Z-BB/UL18/2P1MU/56 | 171129 | 10 |
| 2-phase + AUX | 17.6 + 26.4 | 0.625 | Z-BB/UL18/2P1MU+AUX/46 | 171135 | 10 |
| 3-phase | 17.6 | 0.95 | Z-BB/UL18/3P1MU/57 | 171130 | 10 |
| 3-phase + AUX | 2x 17.6 + 26.4 | 0.93 | Z-BB/UL18/3P1MU+AUX/48 | 171136 | 10 |

SG14213



25 mm², Rated Current 100 A

| | | | | | |
|------------------|----------------|-------|--------------------------|--------|----|
| 1-phase | 17.6 | 0.535 | Z-BB/UL25/1P1MU/57 | 171131 | 10 |
| 1-phase + AUX | 26.4 | 0.745 | Z-BB/UL25/1P1MU+AUX/37 | 171137 | 10 |
| 2x 1-phase + AUX | 26.4 | 0.78 | Z-BB/UL25/2X1P1MU+AUX/38 | 171143 | 10 |
| 3x 1-phase + AUX | 26.4 | 1.315 | Z-BB/UL25/3X1P1MU+AUX/39 | 171141 | 10 |
| 2-phase | 17.6 | 0.888 | Z-BB/UL25/2P1MU/56 | 171132 | 10 |
| 2-phase + AUX | 17.6 + 26.4 | 0.87 | Z-BB/UL25/2P1MU+AUX/46 | 171138 | 10 |
| 3-phase | 17.6 | 1.31 | Z-BB/UL25/3P1MU/57 | 171133 | 10 |
| 3-phase + AUX | 2x 17.6 + 26.4 | 1.28 | Z-BB/UL25/3P1MU+AUX/48 | 171139 | 10 |

| Description | Cu-factor | Type Designation | Article No. | Units per package |
|-------------|-----------|------------------|-------------|-------------------|
|-------------|-----------|------------------|-------------|-------------------|

Accessories

End cap Z-ECUL

| | | | | |
|---|---|--------|--------|----|
| - | - | Z-ECUL | 171145 | 10 |
|---|---|--------|--------|----|

Terminal Z-TEUL35

| | | | | |
|-------|---|----------|--------|----|
| 0,038 | - | Z-TEUL35 | 171144 | 10 |
|-------|---|----------|--------|----|










Busbar Tag Shrouds Z-FPUL

SG08613



| | | | | |
|---|---|--------|--------|----|
| - | - | Z-FPUL | 171146 | 10 |
|---|---|--------|--------|----|

Description of the Busbar UL489, Z-BB/UL for FAZ-NA, -RT, -DU


| | |  |  |  |  |  |  |  |  |  |
|------------------------|--------|---|---|---|---|---|--|---|---|---|
| Z-BB/UL18/1P1MU/57 | 171128 | 57 | - | - | - | - | - | - | - | - |
| Z-BB/UL18/2P1MU/56 | 171129 | - | 56 | - | - | - | - | - | - | - |
| Z-BB/UL18/3P1MU/57 | 171130 | - | - | 57 | - | - | - | - | - | - |
| Z-BB/UL25/1P1MU/57 | 171131 | 57 | - | - | - | - | - | - | - | - |
| Z-BB/UL25/2P1MU/56 | 171132 | - | 56 | - | - | - | - | - | - | - |
| Z-BB/UL25/3P1MU/57 | 171133 | - | - | 57 | - | - | - | - | - | - |
| Z-BB/UL18/1P1MU+AUX/37 | 171134 | - | - | - | 37 | - | - | - | - | - |
| Z-BB/UL18/2P1MU+AUX/46 | 171135 | - | - | - | - | - | - | 46 | - | - |
| Z-BB/UL18/3P1MU+AUX/48 | 171136 | - | - | - | - | - | - | - | 48 | - |
| Z-BB/UL25/1P1MU+AUX/37 | 171137 | - | - | - | 37 | - | - | - | - | - |
| Z-BB/UL25/2P1MU+AUX/46 | 171138 | - | - | - | - | - | - | 46 | - | - |
| Z-BB/UL25/3P1MU+AUX/48 | 171139 | - | - | - | - | - | - | - | 48 | - |
| Z-BB/UL18/3X1MU+AUX/39 | 171140 | - | - | - | - | - | 39 | - | - | - |
| Z-BB/UL25/3X1MU+AUX/39 | 171141 | - | - | - | - | - | 39 | - | - | - |
| Z-BB/UL18/2X1MU+AUX/38 | 171142 | - | - | - | - | 38 | - | - | - | - |
| Z-BB/UL25/2X1MU+AUX/38 | 171143 | - | - | - | - | 38 | - | - | - | - |
| Z-TEUL35 | 171144 | - | - | - | - | - | - | - | - | - |
| Z-ECUL | 171145 | - | - | - | - | - | - | - | - | - |
| Z-FPUL | 171146 | - | - | - | - | - | - | - | - | - |

Technical Data

| | | Z-BB/UL |
|--------------------------------------|--|--|
| General | | |
| Heat deflection temperature | | >100°C - UL94 V0 |
| Standards | | UL489, EN 60947-1, IEC 60947-1:2004 |
| Climate stability | | according to DIN EN 60068 |
| Insulation coordination | | Overvoltage category III / Degree of pollution 2 |
| Electrical | | |
| Impulse voltage strenght | | ≥10 kV |
| Min. air distance | | ≥1" ext. |
| Min. creeping distance | | ≥2" ext. |
| Max. operating voltage | | |
| 1-pole | | 1,000 V AC/DC |
| 2-, 3-pole | | 600 V AC/DC |
| Max. current I _g /Phase | | |
| 18 mm ² | | 80 A |
| 25 mm ² | | 100 A |
| Protection class | | IP20 |
| Short circuit rating I _{CC} | | 10 kA |
| Dielectric strenght | | PA66-V0, >35 kV |

Mounting example of busbar UL489, Z-BB/UL for FAZ-NA, -RT, -DU

Z-BB/UL18/XX
Z-BB/UL25/XX

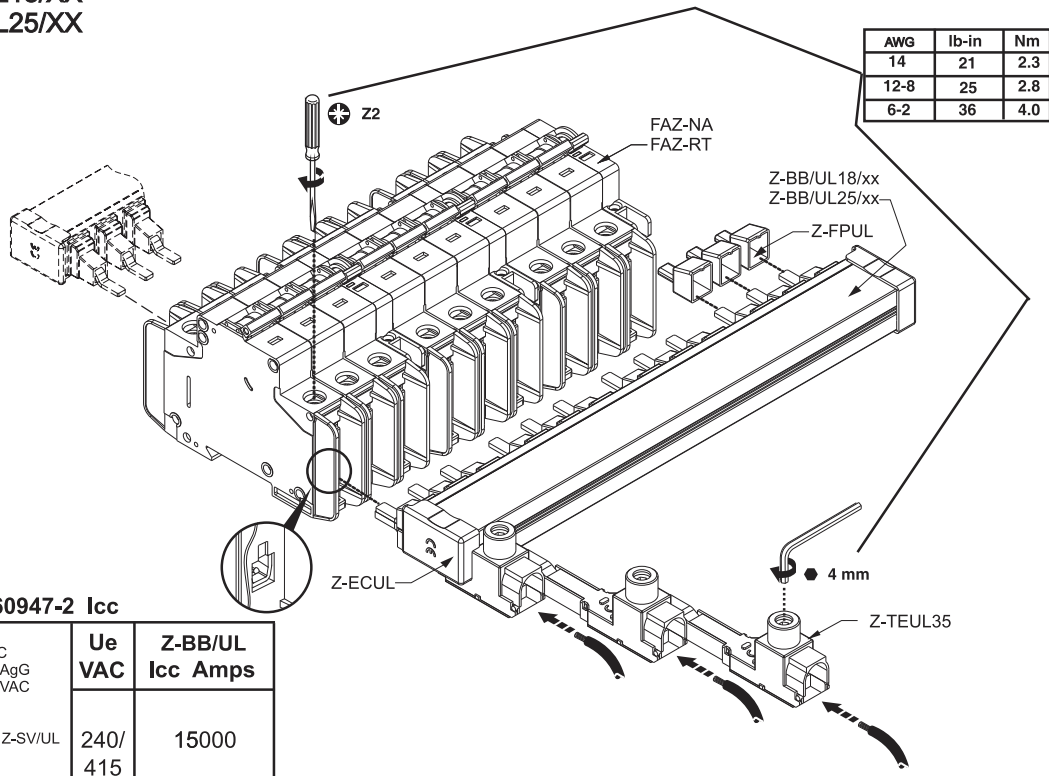

IEC/EN 60947-2 Icc

| Ue HRC 315AgG 500VAC | Ue VAC | Z-BB/UL Icc Amps |
|-------------------------------|-------------|---------------------|
| Z-SV/UL | 240/ 415 | 15000 |

UL SCCR

| Ue Z-SV/UL | FAZ-NA FAZ-RT In Amps | Ue VAC | Z-BB/UL SCCR RMS Sym Amps |
|------------------|--------------------------------|--------------|---------------------------------|
| FAZ-NA FAZ-RT | 0.5-32 | 480Y/ 277 | 10000 |
| | 35-40 | 240 | 10000 |

Busbar UL508 BB/UL

- For MCB FAZ
- Sliceable
- 18 and 25 mm²
- Pin busbar
- Accessories available:
 - End caps
 - Terminals
 - Busbar tag shrouds
- Length 1 m

| Description | Step Distance (mm) | Cu-factor | Type Designation | Article No. | Units per package |
|-------------|--------------------|-----------|------------------|-------------|-------------------|
|-------------|--------------------|-----------|------------------|-------------|-------------------|

Busbar UL508 sliceable 1m 18mm², 25mm² (Pin), BB/UL

for FAZ

- Delivered without end caps

18 mm², Rated Current 80 A

| | | | | | |
|---------------|----------------|-------|------------------------|--------|----|
| 1-phase | 17.8 | 0.33 | BB-UL-18/1P-1M/57 | 121981 | 10 |
| 2-phase | 17.8 | 0.508 | BB-UL-18/2P-2M/56 | 121982 | 10 |
| 3-phase | 17.8 | 0.8 | BB-UL-18/3P-3M/57 | 121983 | 10 |
| 1-phase + AUX | 27 | 0.33 | BB-UL-18/1P-1,5M/37 | 121984 | 10 |
| 2-phase + AUX | 17.8 + 26.7 | 0.52 | BB-UL-18/2P+AS-2,5M/46 | 121987 | 10 |
| 3-phase + AUX | 2x 17.8 + 26.7 | 0.8 | BB-UL-18/3P+AS-3,5M/48 | 121988 | 10 |

25 mm², Rated Current 100 A

| | | | | | |
|---------------|----------------|------|------------------------|--------|----|
| 1-phase | 17.8 | 0.45 | BB-UL-25/1P-1M/57 | 121989 | 10 |
| 2-phase | 17.8 | 0.68 | BB-UL-25/2P-2M/56 | 121990 | 10 |
| 3-phase | 17.8 | 1.07 | BB-UL-25/3P-3M/57 | 121991 | 10 |
| 1-phase + AUX | 27 | 0.45 | BB-UL-25/1P-1,5M/37 | 121992 | 10 |
| 2-phase + AUX | 17.8 + 26.7 | 0.69 | BB-UL-25/2P+AS-2,5M/46 | 121995 | 10 |
| 3-phase + AUX | 2x 17.8 + 26.7 | 1.03 | BB-UL-25/3P+AS-3,5M/48 | 121996 | 10 |

| Description | Cu-factor | Type Designation | Article No. | Units per package |
|-------------|-----------|------------------|-------------|-------------------|
|-------------|-----------|------------------|-------------|-------------------|

Accessories

End caps BB-UL-EC

| | | | | |
|----------|---|------------|--------|----|
| 1-phasig | - | BB-UL-EC/1 | 122000 | 10 |
| 3-phasig | - | BB-UL-EC/3 | 122001 | 10 |








Terminals BB-UL-TE

| | | | | |
|---|-------|---------------|--------|----|
| 6 - 35mm ² (single and multi wire) | 0,035 | BB-UL-TEP/35 | 121997 | 10 |
| 6 - 50mm ² | 0,038 | BB-UL-TEPA/35 | 169823 | 10 |
| 6 - 50mm ² (single and multi wire) | 0,038 | BB-UL-TE/50 | 121998 | 10 |

Busbar Tag Shrouds BB-IP/5

| | | | | |
|------------|---|---------|--------|----|
| for 5 pins | - | BB-IP/5 | 121999 | 10 |
|------------|---|---------|--------|----|


Description of the Busbar UL508, BB/UL for FAZ

| Article No. |  |  |  |  |  |  |  |
|-------------|---|---|---|---|---|---|---|
| 121981 | BB-UL-18/1P-1M/57 | 57 | - | - | - | - | - |
| 121982 | BB-UL-18/2P-2M/56 | - | 28 | - | - | - | - |
| 121983 | BB-UL-18/3P-3M/57 | - | - | 19 | - | - | - |
| 121984 | BB-UL-18/1P-1,5M/37 | - | - | - | 37 | - | - |
| 121987 | BB-UL-18/2P+AS-2,5M/46 | - | - | - | - | 23 | - |
| 121988 | BB-UL-18/3P+AS-3,5M/48 | - | - | - | - | - | 16 |
| 121989 | BB-UL-25/1P-1M/57 | 57 | - | - | - | - | - |
| 121990 | BB-UL-25/2P-2M/56 | - | 28 | - | - | - | - |
| 121991 | BB-UL-25/3P-3M/57 | - | - | 19 | - | - | - |
| 121992 | BB-UL-25/1P-1,5M/37 | - | - | - | 37 | - | - |
| 121995 | BB-UL-25/2P+AS-2,5M/46 | - | - | - | - | 23 | - |
| 121996 | BB-UL-25/3P+AS-3,5M/48 | - | - | - | - | - | 16 |
| 121997 | BB-UL-TEP/35 | - | - | - | - | - | - |
| 169823 | BB-UL-TEPA/35 | - | - | - | - | - | - |
| 121998 | BB-UL-TE/50 | - | - | - | - | - | - |
| 121999 | BB-IP/5 | - | - | - | - | - | - |
| 122000 | BB-UL-EC/1 | - | - | - | - | - | - |
| 122001 | BB-UL-EC/3 | - | - | - | - | - | - |

Technical Data

| Z-BB/UL | |
|------------------------------------|---|
| General | |
| Heat deflection temperature | 125°C - UL94 V0 |
| Standards | DIN EN 60947-2, VDE 0660 - 101 = IEC 60947-2, IEC 60999:2000, UL508, UL486A, CSA C22.2 |
| Climate stability | according to DIN EN 60068 |
| Insulation coordination | Overvoltage category III / Degree of pollution 2 |
| Electrical | |
| Impulse voltage strenght | ≥9.5 kV |
| Min. air distance | >9.5 mm |
| Min. creeping distance | >12.7 mm |
| Max. operating voltage | |
| 1-pole | 1,000 V AC/DC |
| 2-, 3-pole | IEC/EN 690 V AC/DC 600 V AC/DC UL Fuse 480 V AC/DC UL-SP |
| Terminals | 1, 000 V AC/DC |
| Max. current I _g /Phase | |
| 18 mm ² | 80 A (feed in the center: 160 A) |
| 25 mm ² | 100 A (feed in the center: 200 A) |
| Protection class | IP20 |
| Short circuit rating | 10kA 3 cycles@480V / 100 kA Fuse Class J 175A@18mm ² - 200A@25mm ² |
| Dielectric strenght | >32 kV/mm |

Mounting example of busbar UL508, BB/UL for FAZ

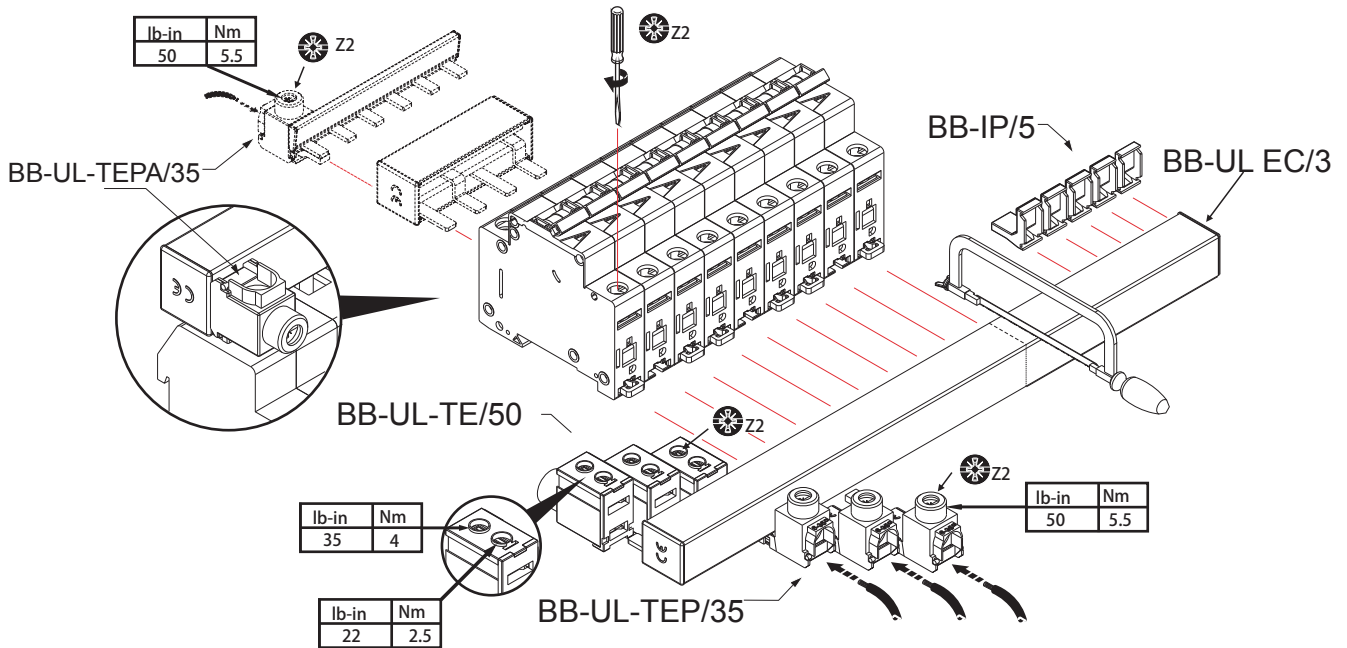

| | | |
|-------------|--------------------------|--------------------------------|
| BB-UL-TE/50 | | |
| | UL508 | EN/IEC 60947-2 |
| U_e | 480 V AC | 240/690V AC |
| f | 50/60 Hz | 50/60 Hz |
| I_e | 115 A @ 40° C | 160 A @ 30° C |
| | #1-14 AWG 60/75° C Cu | 1.5 – 50 mm ² Cu |
| | 0.56 in | 14 mm |

| | | |
|------------------------------------|------------------|------------------|
| BB-UL | | |
| | UL508 | EN/IEC 60947-2 |
| U_e | 480 V AC | 690V AC |
| f | 50/60 Hz | |
| I_{pk} | 10kA | 15kA |
| I_e | 18mm \boxtimes | 25mm \boxtimes |
| Infeed at the start of the busbar | 80A@40° C | 100A@30° C |
| Infeed at the center of the busbar | 160A@40° C | 200A@30° C |

| | | |
|---------------------------------|--------------------------|--------------------------------|
| BB-UL-TEP/35 / BB-UL-TEPA/35 | | |
| | UL508 | EN/IEC 60947-2 |
| U_e | 480 V AC | 240/690V AC |
| f | 50/60 Hz | 50/60 Hz |
| I_e | 115 A@40° C | 80 A@30° C |
| | #2-14 AWG 60/75° C Cu | 2.5 – 35 mm ² Cu |
| | 0.56 in | 14 mm |

*-UL508 SHORT CIRCUIT RATINGS

-SUITABLE FOR USE ON A CIRCUIT CAPABLE OF DELIVERING NOT MORE THAN 10,000 RMS SYMMETRICAL AMPERES, 600 VOLTS MAXIMUM.

-SUITABLE FOR USE ON A CIRCUIT CAPABLE OF DELIVERING NOT MORE THAN 100,000 RMS SYMMETRICAL AMPERES, 600 VOLTS MAXIMUM WHEN PROTECTED BY A CLASS J FUSE RATED 175A.

Busbar UL489 Z-SV/UL16

wa_sg03511



- For MCB FAZ-NA/RT/DU
- 16 mm²
- Pin busbar
- Accessories available:
 - Terminals
 - Busbar tag shrouds
- Several length

| Description | Step Distance (mm) | Cu-factor | Type Designation | Article No. | Units per package |
|-------------|--------------------|-----------|------------------|-------------|-------------------|
|-------------|--------------------|-----------|------------------|-------------|-------------------|

Busbar UL489 16mm² (Pin), Z-SV/UL16

for FAZ-NA/RT/DU, not sliceable!!

- Delivered with end caps

wa_sg03511



16 mm², Rated Current 80 A

| | | | | | |
|---------------|------|-------|----------------------|--------|----|
| 1-phase, 6MU | 17.6 | 0.035 | Z-SV/UL-16/1P-1MU/6 | 104892 | 10 |
| 1-phase, 12MU | 17.6 | 0.07 | Z-SV/UL-16/1P-1MU/12 | 104893 | 10 |
| 1-phase, 18MU | 17.6 | 0.105 | Z-SV/UL-16/1P-1MU/18 | 104894 | 10 |
| 2-phase, 6MU | 17.6 | 0.07 | Z-SV/UL-16/2P-2MU/6 | 104895 | 10 |
| 2-phase, 12MU | 17.6 | 0.14 | Z-SV/UL-16/2P-2MU/12 | 104896 | 10 |
| 2-phase, 18MU | 17.6 | 0.21 | Z-SV/UL-16/2P-2MU/18 | 104897 | 10 |
| 3-phase, 6MU | 17.6 | 0.14 | Z-SV/UL-16/3P-3MU/6 | 104898 | 10 |
| 3-phase, 12MU | 17.6 | 0.221 | Z-SV/UL-16/3P-3MU/12 | 104899 | 10 |
| 3-phase, 18MU | 17.6 | 0.332 | Z-SV/UL-16/3P-3MU/18 | 104900 | 10 |

| Description | Cu-factor | Type Designation | Article No. | Units per package |
|-------------|-----------|------------------|-------------|-------------------|
|-------------|-----------|------------------|-------------|-------------------|

Accessories

Terminals Z-TEUL35

SG07506



| | | | | |
|-------------------------|-------|------------|--------|---|
| 2.5 - 35mm ² | 0.035 | Z-EK/35/UL | 104901 | 3 |
| 1.5 - 50mm ² | 0.038 | Z-EB/50/UL | 104902 | 3 |





Busbar Tag Shrouds Z-FPUL

SG07706



| | | | | |
|------------|---|----------|--------|----|
| for 3 pins | - | ZV-BS-UL | 104904 | 10 |
|------------|---|----------|--------|----|

Description of the Busbar UL489, Z-SV/UL-16 for FAZ-NA/RT/DU

| Article No. |  |  |  |  |
|-------------|---|---|---|--|
| 104892 | Z-SV/UL-16/1P-1TE/6 | 6 | - | - |
| 104893 | Z-SV/UL-16/1P-1TE/12 | 12 | - | - |
| 104894 | Z-SV/UL-16/1P-1TE/18 | 18 | - | - |
| 104895 | Z-SV/UL-16/2P-2TE/6 | - | 3 | - |
| 104896 | Z-SV/UL-16/2P-2TE/12 | - | 6 | - |
| 104897 | Z-SV/UL-16/2P-2TE/18 | - | 9 | - |
| 104898 | Z-SV/UL-16/3P-3TE/6 | - | - | 2 |
| 104899 | Z-SV/UL-16/3P-3TE/12 | - | - | 4 |
| 104900 | Z-SV/UL-16/3P-3TE/18 | - | - | 6 |
| 104901 | Z-EK/35/UL | - | - | - |
| 104902 | Z-EB/50/UL | - | - | - |
| 104904 | ZV-BS-UL | - | - | - |

Technical Data

| Z-SV/UL16 | |
|------------------------------------|---|
| General | |
| Heat deflection temperature | 125°C - UL94 V0 |
| Standards | |
| Busbar | UL489, DIN EN 60947-1, VDE 0660 part 100 = IEC 60947-1:2004, IEC 60947-2:2003 |
| Terminal | IEC 60999:2000, UL489, UL486A, CSA C22.2 |
| Climate stability | according to DIN EN 60068 |
| Insulation coordination | Overvoltage category III / Degree of pollution 2 |
| Electrical | |
| Impulse voltage strenght | ≥9.5 kV (1kV / mmLS) |
| Min. air distance | >9.5mm/25.4mm (intern/external) |
| Min. creeping distance | >12.7mm/50.8mm (intern/external) |
| Max. operating voltage | |
| 1-, 3-phase | 690 V IEC 480Y/277V & 240V AC |
| Terminals | 1,000 V AC/DC |
| Max. current I _g /Phase | 80 A |
| Protection class | IP20 |
| Short circuit rating | 15kA with NH3 355 A gL 500V JM / 7.5kA 3 cycles @ 600V |
| Dielectric strenght | >30 kV/mm |

Mounting example of busbar UL489, Z-SV/UL-16 for FAZ-NA, -RT, -DU



ATTENTION: Maximum of 3 commoning links allowed. Any combination of same pole configuration.

ATTENTION: 3 liaisons communes autorisées au maximum. Toute combinaison de configurations de polarité identiques.

ACHTUNG: Maximal 3 Schienenblöcke. Beliebige Kombination gleichpoliger Konfigurationen.

ATTENZIONE: Sono consentiti al massimo 3 pettini di collegamento in qualsiasi combinazione della stessa configurazione di poli.

ATENCIÓN: Se permite un máximo de 3 enlaces comunes. Cualquier combinación del mismo tipo de configuración de polo




ATTENTION: Do not cut.


ATTENTION: Ne pas couper.




ACHTUNG: Nicht durchschneiden.

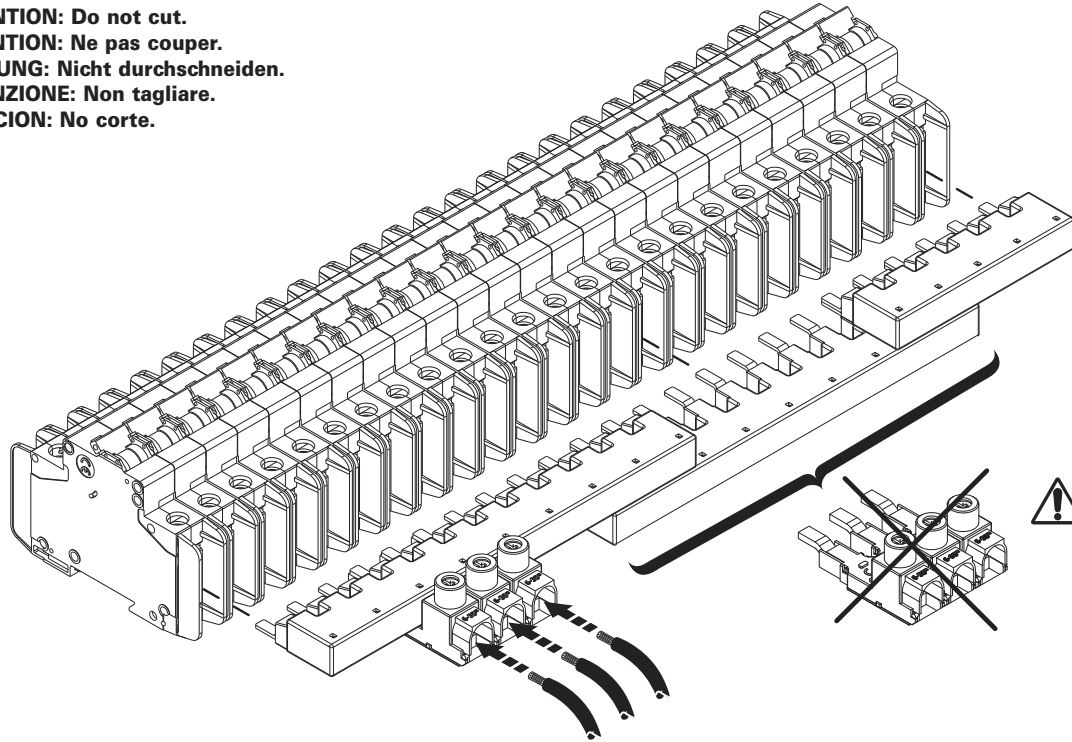


ATTENZIONE: Non tagliare.

ATENCIÓN: No corte.




| | | | |
|---|-------------|---------|--------------------|
|  | UL489 | | EN/IEC 00947-2 |
| U_e | 480 V AC | 96 V DC | 240/415 V AC |
| f | 50/60 Hz | ----- | 50/60 Hz |
| U_{imp} | ----- | | 9.5 kV |
| I_e | 80 A @ 40°C | | 80 A @ 30°C |
| Cross section | ----- | | 16 mm ² |

| | | | |
|---|------------|------------------------|----------------|
|  | UL489 | | EN/IEC 00947-2 |
| U_e | 480 V AC | 96 V DC | 240/415 V AC |
| f | 50/60 Hz | ----- | 50/60 Hz |
| U_{imp} | ----- | | 9.5 kV |
|  | #1-14 AWG | 1.5-50 mm ² | |
| | 60/75°C Cu | Cu | |
|  | 0.56 in | 14 mm | |

| | | | |
|--|-------------|------------------------|----------------|
|  | UL489 | | EN/IEC 00947-2 |
| U_e | 480 V AC | 96 V DC | 240/415 V AC |
| f | 50/60 Hz | ----- | 50/60 Hz |
| U_{imp} | ----- | | 9.5 kV |
| I_e | 80 A @ 40°C | | 80 A @ 30°C |
|  | #2-14 AWG | 2.5-35 mm ² | |
| | 60/75°C Cu | Cu | |
|  | 0.56 in | 14 mm | |

Mounting example of busbar UL489, Z-SV/UL-16 for FAZ-NA, -RT, -DU

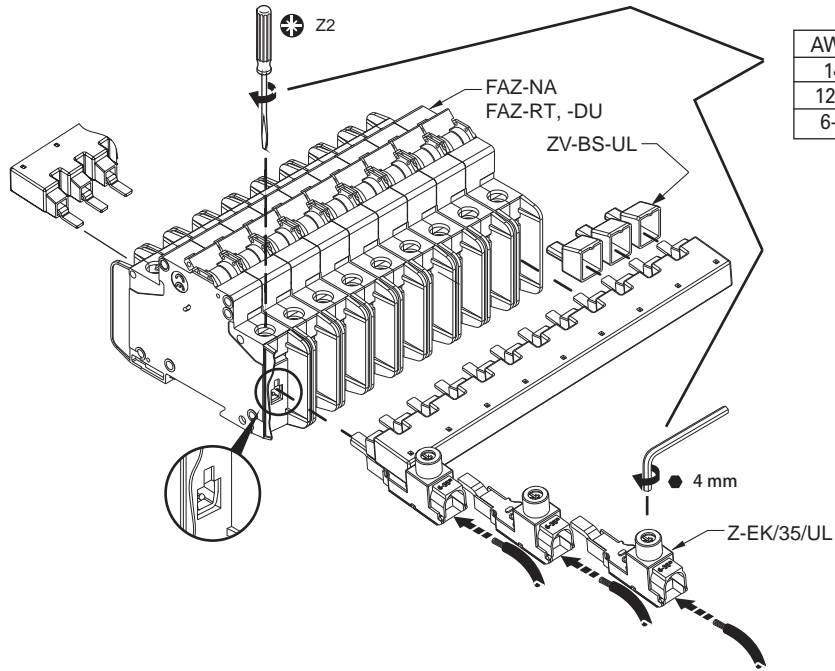

| AWG | lb-in | Nm |
|------|-------|-----|
| 14 | 21 | 2.3 |
| 12-8 | 25 | 2.8 |
| 6-2 | 36 | 4.0 |

IEC/EN 60947-2 Icc

| | Ue | Z-SV/UL |
|--|-------------|----------|
| | VAC | Icc Amps |
| | 240/ 415 | 15000 |

UL SCCR

| | FAZ-NA FAZ-RT/-DU | Ue | Z-SV/UL |
|--|----------------------|--------------|----------------------|
| | In Amps | VAC | SCCR RMS Sym Amps |
| | 0.5-32 | 480Y/ 277 | 10000 |
| | 35-40 | 240 | 10000 |

Accessories for RCDs, MCBs, Combined RCD/MCB Devices

SG60811







- Auxiliary Switch
- RCD-Tripping Module
- Shunt Trip Release
- Undervoltage Release
- Remote Control and Automatic Switching Device
- Switching Interlocks
- Terminal Covers

SG60811



Auxiliary Switch Z-HK, Z-AHK, Z-HD; Tripping Signal Switch Z-NHK

Design: for screwing

| | For Protective Device / Function | Type Designation | Article No. | Units per package |
|--|----------------------------------|------------------|-------------|-------------------|
| SG34812  | RCCB / 1NO+1NC | Z-HK | 248432 | 4/120 |
| SG60911  | MCB, RCBO, RCCB / 1NO+1NC | Z-AHK | 248433 | 4/120 |
| SG61011  | MCB, RCBO, RCCB / 2CO | Z-NHK | 248434 | 4/120 |
| SG34412  | RCCB / 1CO+1NC | Z-HD | 265620 | 1 |

Specifications | Auxiliary Switch Z-HK, Z-AHK; Tripping Signal Switch Z-NHK


Description

- Design according to IEC/EN 60947-5-1, IEC/EN 62019
- Can be mounted subsequently (screws) onto FRCmM, FRCdM
- The specified minimum voltages are per contact.
Take into account particularly in case of series connection!
- **Z-AHK, Z-NHK:** Contact function with relative movement (self-cleaning contacts)
- Contact material and design particularly suitable for extra low voltage
- **Z-NHK:** The function of one of the two change-over contacts can be switched from "auxiliary switch" to "tripping signal switch"
- Tripping signal contact transmits message of electric tripping, not mechanical switch-off
- Test key for contact function "electrical tripping"


Technical Data

| | Z-HK | Z-AHK | Z-NHK |
|---|--|-------------------------|-------------------------|
| Electrical | | | |
| Contact function | 1NO + 1NC | 1NO + 1NC | 2CO |
| Rated voltage | 250 V | 250 V | 250 V |
| Frequency | 50/60 Hz | 50/60 Hz | 50/60 Hz |
| Rated current | 8 A | 4 A | 4 A |
| Rated thermal current | I_{th} 8 A | 4 A | 4 A |
| Utilisation category AC13 | | | |
| Rated operational current | I_e 6A/250V AC 2A/440V AC | 3A/250V AC - | 3A/250V AC - |
| Utilisation category AC15 | | | |
| Rated operational current | I_e - | 2A/250V AC | 2A/250V AC |
| Utilisation category DC12 | | | |
| Rated operational current | I_e - | 0.5A/110V DC | 0.5A/110V DC |
| Utilisation category DC13 | | | |
| Rated operational current | I_e 0.5A/230V DC 2A/110V DC 4A/60V DC | - - - | - - - |
| Rated insulation voltage | U_i 250 V AC | 250 V AC | 250 V AC |
| Minimum operational voltage per contact | U_{min} 24 V AC/DC | 5 V DC | 5 V DC |
| Minimum operational current | I_{min} 50 mA AC/DC | 10 mA DC | 10 mA DC |
| Rated peak withstand voltage | U_{imp} (1.2/50 μ) 2.5 kV | 2.5 kV | 2.5 kV |
| Conditional short circuit current | I_k | | |
| with back-up fuse 6A or FAZ-B4-HS | 1 kA | 1 kA | 1 kA |
| Max. back-up fuse, overload and short circuit | 6 A gL / FAZ-4/..B-HS | 4 A gL / FAZ-4/..B-HS | 4 A gL / FAZ-4/..B-HS |
| Mechanical | | | |
| Can be mounted from the left onto | RCCB | MCB, RCBO | MCB, RCBO |
| Can be mounted from the right onto | - | - | RCCB |
| Tripping indicator "electrical tripping" | - | - | blue/white |
| Frame size | 45 mm | 45 mm | 45 mm |
| Device height | 80 mm | 80 mm | 80 mm |
| Device width | 8.8 mm (0.5MU) | 8.8 mm (0.5MU) | 8.8 mm (0.5MU) |
| Mounting | onto switching device | onto switching device | onto switching device |
| Degree of protection, built-in | IP40 | IP40 | IP40 |
| Terminal protection | finger and hand touch safe according to BGV A3, ÖVE-EN 6 | | |
| Terminals | lift terminals | lift terminals | lift terminals |
| Terminal capacity | 0.5-2.5 mm ² | 0.5-2.5 mm ² | 0.5-2.5 mm ² |
| Terminal screws | M3 (Pozidrive Z0) | M3 (Pozidrive Z0) | M3 (Pozidrive Z0) |
| Fastening torque of terminal screws | max. 0.8-1.0 Nm | max.0.8-1.0 Nm | max. 0.8-1.0 Nm |


Connection diagram



Dimensions (mm)

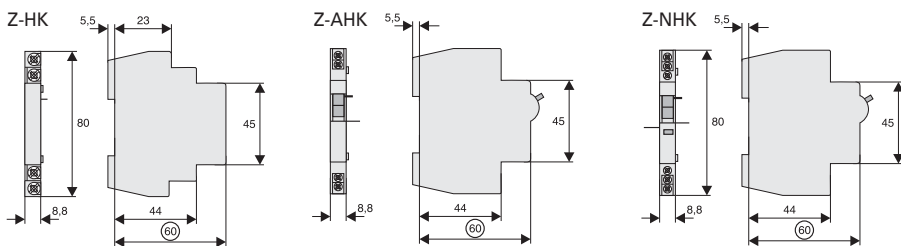


Example: Z-HK+RCCB




1NO+1NC 24V 50mA min.

Example: Z-AHK+MCB



1NO+1NC 5V 10mA min.


Example: Z-NHK+MCB RCCB+Z-NHK

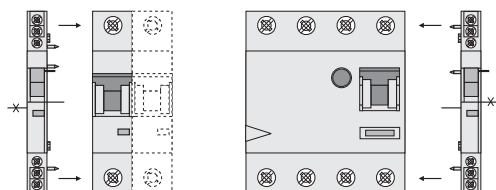

2CO 5V 10mA min.

Specifications | Auxiliary Switch Z-HD


Function Auxiliary Switch Z-HD

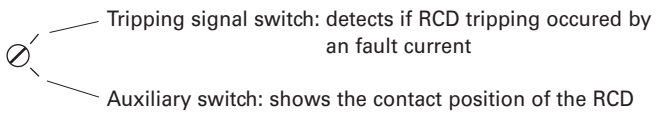


Technical Data

| Z-HD | |
|--|---------------------------|
| Electrical | |
| Subsequent installation to the left onto | FRCmM-125A |
| Contacts | 1CO + 1NC |
| Load rating | |
| AC11 | 6 A / 230 V AC |
| DC11 | 1 A / 230 V DC |
| Mechanical | |
| Terminal capacity | up to 2.5 mm ² |

Connection diagram






Dimensions (mm)



Auxiliary Switch ZP-AHK, ZP-IHK, ZP-WHK; Tripping Signal Switch ZP-NHK

Design: for snapping

| | For Protective Device / Function | Type Designation | Article No. | Units per package |
|---|----------------------------------|------------------|-------------|-------------------|
|  <p>SG60811</p> | MCB, RCBO / 1NO+1NC | ZP-IHK | 286052 | 4/120 |
|  <p>SG34612</p> | MCB, RCBO / 1CO | ZP-WHK | 286053 | 4/120 |
|  <p>SG34512</p> | MCB, RCBO / 2CO | ZP-NHK | 248437 | 4/120 |

Specifications | Auxiliary Switch ZP-IHK, ZP-WHK; Tripping Signal Switch ZP-NHK


Description

- Design according to IEC/EN 62019
- No screws required. Can be snapped onto FAZ and FRBmM-1N subsequently
- **ZP-IHK, ZP-WHK:** Can be snapped on additionally 1 time onto itself
- The specified minimum voltages are per contact. Take into account particularly in case of series connection!
- Contact material and design particularly suitable for extra low voltage.
- Contact function with relative movement (self-cleaning contacts)e)
- **ZP-NHK:** The function of one of the two change-over contacts can be switched from "auxiliary switch" to "tripping signal switch"
- Tripping signal contact transmits message of electric tripping, not mechanical switch-off
- **ZP-NHK:** The "Service button" is used to check whether or not the auxiliary switch is correctly wired in the tripping-signal-switch position. Activating the "service button" will mechanically simulate an electrical switch-off, so the mechanism for the electrical switchoff will disengage and can be checked. The main switchgear (MCB or combined MCB/RCD) connected to the ZP-NHK auxiliary switch does not need to trip as well during an inspection through the service button.

Technical Data

| | ZP-IHK | ZP-WHK | ZP-NHK |
|---|--|-------------------------|-------------------------|
| Electrical | | | |
| Contact function | 1NO + 1NC | 1CO | 2CO |
| Rated voltage | 250 V | 250 V | 250 V |
| Frequency | 50/60 Hz | 50/60 Hz | 50/60 Hz |
| Rated current | 6 A | 6 A | 4 A |
| Rated thermal current | I_{th} 6 A | 6 A | 4 A |
| Utilisation category AC13 | | | |
| Rated operational current | I_e 3A/250V AC | 3A/250V AC | 3A/250V AC |
| Utilisation category AC15 | | | |
| Rated operational current | I_e 2A/250V AC | 2A/250V AC | 2A/250V AC |
| Utilisation category DC12 | | | |
| Rated operational current | I_e 0.5A/110V DC | 0.5A/110V DC | 0.5A/110V DC |
| Rated insulation voltage | U_I 250 V AC | 250 V AC | 250 V AC |
| Minimum operational voltage per contact | U_{min} 5 V DC | 5 V DC | 5 V DC |
| Minimum operational current | I_{min} 10 mA DC | 10 mA DC | 10 mA DC |
| Rated peak withstand voltage | U_{imp} (1.2/50 μ) 2.5 kV | 2.5 kV | 2.5 kV |
| Conditional short circuit current | | | |
| with back-up fuse 6A or PLSM-B4-HS | I_k 1 kA | 1 kA | 1 kA |
| Max. back-up fuse, overload and short circuit | 6 A gL / FAZ-B4-HS | 6 A gL / FAZ-B4-HS | 6 A gL / FAZ-B4-HS |
| Mechanical | | | |
| Can be mounted from the left onto | MCB, RCBO | MCB, RCBO | MCB, RCBO |
| Accessories: | ZP-ASA | ZP-ASA | ZP-ASA |
| Tripping indicator "electrical tripping" | – | – | blue/white |
| Frame size | 45 mm | 45 mm | 45 mm |
| Device height | 80 mm | 80 mm | 80 mm |
| Device width | 8.8 mm (0.5MU) | 8.8 mm (0.5MU) | 8.8 mm (0.5MU) |
| Degree of protection, built-in | IP40 | IP40 | IP40 |
| Terminal protection | finger and hand touch safe according to BGV A3, ÖVE-EN 6 | | |
| Terminals | lift terminals | lift terminals | lift terminals |
| Terminal capacity | 0.5-2.5 mm ² | 0.5-2.5 mm ² | 0.5-2.5 mm ² |
| Terminal screws | M4 (Pozidrive Z2) | M4 (Pozidrive Z2) | M3 (Pozidrive Z0) |
| Fastening torque of terminal screws | max. 1.2 Nm | max. 1.2 Nm | max. 0.8-1.0 Nm |


Connection diagram




Dimensions (mm)

ZP-IHK, ZP-WHK


ZP-NHK

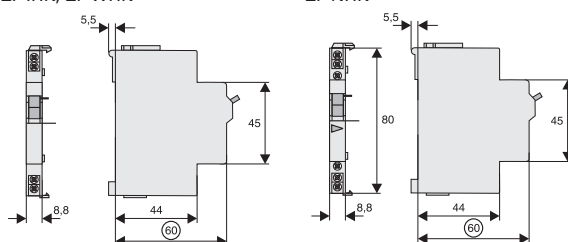

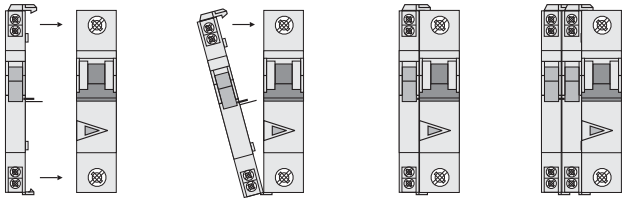

Example: ZP-IHK/(ZP-WHK)+MCB

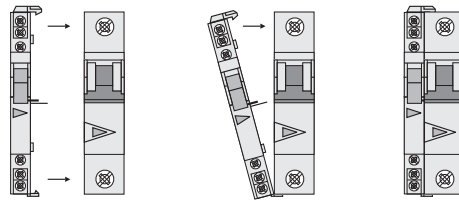

Example: ZP-NHK+MCB



RCCB-Tripping Module Z-.AM

| | For Protective Device | Type Designation | Article No. | Units per package |
|--|-----------------------|------------------|-------------|-------------------|
|  <p>SG16011</p> | RCCB | Z-FAM | 248293 | 1/60 |
|  <p>SG16211</p> | RCBO | Z-KAM | 248294 | 1/60 |

Specifications | RCCB Tripping Module Z-FAM, Z-KAM


Description

- For remote switch-off of RCCBs, standard and electronic combined RCD/MCB devices
- Remote switch-off by one or several parallel potential-free contacts, e.g. pushbutton max. rated current 3 A at 250 V, take into account maximum pushbutton voltage
- Remote tripping test by means of remote testing module Z-FW
- Can be mounted subsequently, to be wired according to connection diagram with the respective terminals of the RCCB
- No undesired voltage rise in the consumer system during remote switch-off thanks to integrated breaker contact K1-K2


Technical Data

| | Z-FAM | Z-KAM |
|--------------------------------|---|---------------------------|
| Electrical | | |
| Rated voltage | 230(400) V AC | 230(400) V AC |
| Frequency | 50-60 Hz | 50-60 Hz |
| Rated tripping current | $I_{\Delta n}$ 0.01 - 0.3 A | 0.01 - 0.3 A |
| Function | 1NO | 1NO |
| Mechanical | | |
| Tripping module for | RCCB | RCBO |
| Frame size | 45 mm | 45 mm |
| Device height | 80 mm | 80 mm |
| Device width | 8.8 mm (0.5MU) | 8.8 mm (0.5MU) |
| Degree of protection, built-in | IP40 | IP40 |
| Terminal capacity | 1 - 2x2.5 mm ² | 1 - 2x2.5 mm ² |
| Terminal protection | finger and hand touch safe, according to BGV A3, ÖVE-EN 6 | |


Connection diagram




Dimensions (mm)

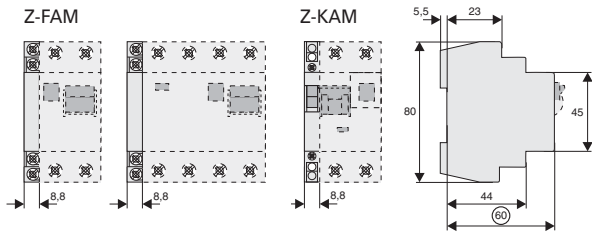


Connection examples Lay lines to the switching devices with double insulation **and** overload protection, e.g. 4A gL or CLS6-4..-HS




Connection diagram:
RCCB-2p, RCCB feed above



Connection diagram:
RCCB-4p, RCCB feed above



Connection diagram:
RCBO-2p, RCBO feed below



Connection diagram:
RCCB-4p, RCCB feed below

Shunt Trip Release Z-ASA, ZP-ASA

| Operational voltage range (V-) | Type Designation | Article No. | Units per package |
|--------------------------------|------------------|-------------|-------------------|
|--------------------------------|------------------|-------------|-------------------|

SG00712



To be glued on

| | | | |
|---------|-----------|--------|------|
| 12-110 | Z-ASA/24 | 248286 | 1/60 |
| 110-415 | Z-ASA/230 | 248287 | 1/60 |

SG00212



To be snapped on

| | | | |
|---------|------------|--------|------|
| 12-110 | ZP-ASA/24 | 248438 | 1/60 |
| 110-415 | ZP-ASA/230 | 248439 | 1/60 |

Specifications | Shunt Trip Release Z-ASA, ZP-ASA


Description

- Remote release for subsequent mounting onto FAZ, FRBmM-1N, Z-MS
- Module width 1MU
- Additional installation of standard auxiliary switch is possible
- Position indicator red - green
- Type ZP-ASA for snap-on mounting

Technical Data


| | Z-ASA24 | Z-ASA230 | ZP-ASA24 | ZP-ASA230 |
|---|-------------------------|-------------------------|------------------------------|------------------------------|
| Electrical | | | | |
| Minimum pulse duration | 15 ms | 10 ms | 15 ms | 10 ms |
| Internal resistance | 2.2 Ω | 215 Ω | 2.2 Ω | 215 Ω |
| Duty cycle | 100% | 100% | 100% | 100% |
| Tripping time | < 20 ms | < 20 ms | < 20 ms | < 20 ms |
| Rated peak withstand voltage (1.2/50μs) | 2.5 kV | 2.5 kV | 2.5 kV | 2.5 kV |
| Endurance | > 4000 operating cycles | > 4000 operating cycles | > 4000 operating cycles | > 4000 operating cycles |
| AC voltage range | | | | |
| Operating limit | 10 V | 60 V | 10 V | 60 V |
| Operational voltage range | 12-110 V | 110-415 V | 12-110 V | 110-415 V |
| Maximum current consumption during switch-on | 15 A | | 2.1 A | 15 A |
| Current flow time at max. current consumption | 10 ms | | 10 ms | 10 ms |
| DC voltage range | | | | |
| Operating limit | 9 V | 72 V | 9 V | 72 V |
| Operational voltage range | 10-60 V | 110-220 V | 10-60 V | 110-220 V |
| Maximum current consumption during switch-on | 21 A | | 1 A | 21 A |
| Current flow time at max. current consumption | 2 ms | | 2 ms | 2 ms |
| Mechanical | | | | |
| Frame size | 45 mm | 45 mm | 45 mm | 45 mm |
| Device height | 80 mm | 80 mm | 80 mm | 80 mm |
| Device width | 17.5 mm (1MU) | 17.5 mm (1MU) | 17.5 mm (1MU) | 17.5 mm (1MU) |
| Mounting | bonding | bonding | to snap on | to snap on |
| Degree of protection, built-in | IP40 | IP40 | IP40 | IP40 |
| Terminals above/below | open mouthed/lift | open mouthed/lift | open mouthed/lift with guide | open mouthed/lift with guide |
| Klemmquerschnitt | 1-25 mm ² | 1-25 mm ² | 1-25 mm ² | 1-25 mm ² |
| Fastening torque of terminal screws | max. 2.4 Nm | max. 2.4 Nm | max. 2.4 Nm | max. 2.4 Nm |

Connection diagram




Dimensions (mm)


Z-ASA




ZP-ASA




Connection Example 230 V




Connection Example 24 V



Example: Z-ASA + MCB

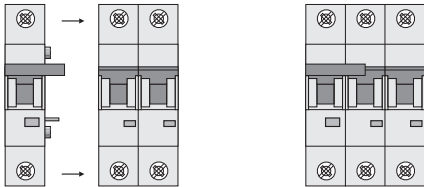

Example: ZP-ASA + MCB

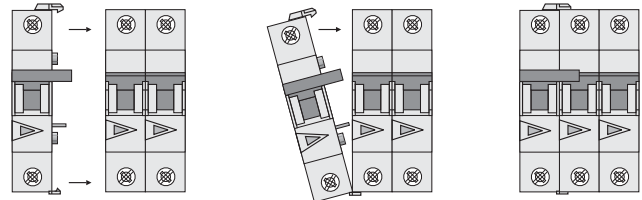

Undervoltage Release Z-USA, Z-USD

SG78811



| Operational voltage range (V-) / Function | Type Designation | Article No. | Units per package |
|---|------------------|-------------|-------------------|
| To be screwed on | | | |
| 115 / undelayed | Z-USA/115 | 248288 | 1/60 |
| 230 / undelayed | Z-USA/230 | 248289 | 1/60 |
| 400 / undelayed | Z-USA/400 | 248290 | 1/60 |
| 115 / delayed 0.4s | Z-USD/115 | 248292 | 1/60 |
| 230 / delayed 0.4s | Z-USD/230 | 248291 | 1/60 |

Specifications | Undervoltage Release Z-USA, Z-USD


Description

- Tripping:
Instantaneous Z-USA
Delayed Z-USD, typ. 0,4 s
- Voltage control indicator blue/white
- Service key for zero voltage switch-on for testing purposes
- Can be used with FAZ


Technical Data

| | Z-US./115 | Z-US./230 | Z-US./400 |
|--------------------------------|---|---------------------------|---------------------------|
| Electrical | | | |
| Rated voltage | U_n 115 V AC | 230 V AC | 400 V AC |
| Frequency | 50-60 Hz | 50-60 Hz | 50-60 Hz |
| Making threshold | 80% of U_n | 80% of U_n | 80% of U_n |
| Tripping threshold | 50% of U_n | 50% of U_n | 50% of U_n |
| Mechanical | | | |
| Frame size | 45 mm | 45 mm | 45 mm |
| Device height | 80 mm | 80 mm | 80 mm |
| Device width | 17.5 mm (1MU) | 17.5 mm (1MU) | 17.5 mm (1MU) |
| Mounting | quick fastening on DIN rail IEC/EN 60715 | | |
| Degree of protection, built-in | IP40 | IP40 | IP40 |
| Terminals | open mouthed/lift | open mouthed/lift | open mouthed/lift |
| Terminal capacity | 1 - 2x2.5 mm ² | 1 - 2x2.5 mm ² | 1 - 2x2.5 mm ² |
| Terminal protection | finger and hand touch safe, according to BGV A3, ÖVE-EN 6 | | |


Connection diagram




Dimensions (mm)



Connection Example Release




Connection Examples 400V and 230V

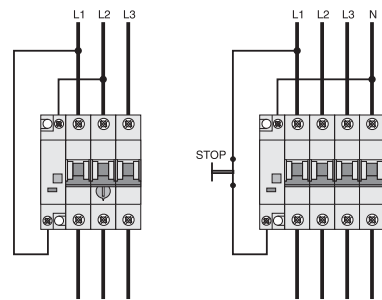

Connection example
Z-USA/400 + Z-MS

Connection example
Z-USA/230 + MCB

Switching interlocks IS/SPE-1TE, Z-IS/SPE-1TE

| | Description | Type Designation | Article No. | Units per package |
|---|--|------------------|-------------|-------------------|
|  | Switching interlock without lock for Isolators, RCDs, combined RCD/MCBs, ... | IS/SPE-1TE | 101911 | 5/30 |
| | Switching interlock without lock for MCBs and Circuit Breaker ZP-A | Z-IS/SPE-1TE | 274418 | 5/30 |

Specifications | Switching interlocks IS/SPE-1TE, Z-IS/SPE-1TE

Description

- Without lock

Type IS/SPE-1TE:

- for Isolators, RCDs, combined RCD/MCBs, ...


Type Z-IS/SPE-1TE:

- for MCB



Accessories for Add-on Residual Current Protection Unit FBHmV

Shunt Trip Release Kit Z-BHASA

| | Operational voltage range V~ | Type Designation | Article No. | Units per package |
|---|------------------------------|------------------|-------------|-------------------|
|  | 110-415 | Z-BHASA/230 | 248445 | 8 |
| | 12-60 | Z-BHASA/24 | 248444 | 8 |

Specifications | Shunt Trip Release Kit Z-BHASA

Description


- Can be mounted subsequently
- Contact position indicator red - green
- Wide operational voltage range
- Sufficient power of extra low voltage source must be ensured
FBHmV-ASA/24: min. 90 VA
- Screws for mounting included FBHmV => BHASA => AZ

Accessories for Add-on Residual Current Protection Unit FBHmV


Technical Data

| | Z-BHASA/24 | Z-BHASA/230 |
|---|--|-------------------------|
| Electrical | | |
| Minimum pulse duration | 15 ms | 10 ms |
| Internal resistance | 2 W | 130 W |
| Duty | 100% | 100% |
| Tripping time | < 20 ms | < 20 ms |
| Peak withstand voltage (1.2/50µs) | 2 kV | 2 kV |
| Endurance | >4,000 operating cycles | >4,000 operating cycles |
| AC voltage range: | | |
| Responding limit | 8 V | 70 V |
| Operational voltage range | 12-60 V | 110-415 V |
| Maximum current consumption during switch-on | 14 A | 3.4 A |
| Current flow time at max. current consumption | 4.0 ms | 4.5 ms |
| DC voltage range: | | |
| Responding limit | 11 V | 90 V |
| Operational voltage range | 12-60 V | 110-230 V |
| Maximum current consumption during switch-on | 23.5 A typ. | 1.7 A typ. |
| Current flow time at max. current consumption | 2 ms | 4 ms |
| Mechanical | | |
| Frame size | 45 mm | 45 mm |
| Device height | 90 mm | 90 mm |
| Device width | 27 mm | 27 mm |
| Mounting | quick fastening on DIN rail IEC/EN 60715 | |
| Degree of protection, built-in | IP40 | IP40 |
| Upper and lower terminal screws | lift terminals | lift terminals |
| Terminal capacity | 2.5-30 mm ² | 2.5-30 mm ² |
| Fastening torque of terminal screws | 4 Nm | 4 Nm |

Connection diagram




Dimensions (mm)

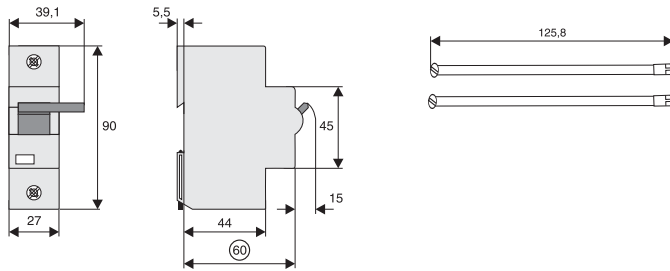

Accessories for Miniature Circuit Breakers AZ

Shunt Trip Release Z-LHASA

| | Operational voltage range V~ | Type Designation | Article No. | Units per package |
|---|------------------------------|------------------|-------------|-------------------|
|  | 110-415 | Z-LHASA/230 | 248442 | 8 |
| | 12-60 | Z-LHASA/24 | 248441 | 8 |

Specifications | Shunt Trip Release Z-LHASA


Description

- Can be mounted subsequently
- Contact position indicator red - green
- Wide operational voltage range
- Sufficient power of extra low voltage source must be ensured
Z-LHASA/24: min. 90 VA


Technical Data

| | Z-LHASA/24 | Z-LHASA/230 |
|---|--|-------------------------|
| Electrical | | |
| Minimum pulse duration | 15 ms | 10 ms |
| Internal resistance | 2 W | 130 W |
| Duty | 100% | 100% |
| Tripping time | < 20 ms | < 20 ms |
| Peak withstand voltage (1.2/50µs) | 2 kV | 2 kV |
| Endurance | >4,000 operating cycles | >4,000 operating cycles |
| AC voltage range: | | |
| Responding limit | 8 V | 70 V |
| Operational voltage range | 12-60 V | 110-415 V |
| Maximum current consumption during switch-on | 14 A | 3.4 A |
| Current flow time at max. current consumption | 4.0 ms | 4.5 ms |
| DC voltage range: | | |
| Responding limit | 11 V | 90 V |
| Operational voltage range | 12-60 V | 110-230 V |
| Maximum current consumption during switch-on | 23.5 A typ. | 1.7 A typ. |
| Current flow time at max. current consumption | 2 ms | 4 ms |
| Mechanical | | |
| Frame size | 45 mm | 45 mm |
| Device height | 90 mm | 90 mm |
| Device width | 27 mm | 27 mm |
| Mounting | quick fastening on DIN rail IEC/EN 60715 | |
| Degree of protection, built-in | IP40 | IP40 |
| Upper and lower terminal screws | lift terminals | lift terminals |
| Terminal capacity | 2.5-30 mm ² | 2.5-30 mm ² |
| Fastening torque of terminal screws | 4 Nm | 4 Nm |

Connection diagram



Dimensions (mm)



Accessories for Miniature Circuit Breakers AZ

Auxiliary Switch Z-LHK

| Function | Type Designation | Article No. | Units per package |
|----------|------------------|-------------|-------------------|
| 1NO+1NC | Z-LHK | 248440 | 10/100 |

SG16111



Specifications | Auxiliary Switch Z-LHK

Description

- Auxiliary switch according to IEC 947-5-1
- Can be mounted subsequently


Technical Data

| | | Z-LHK |
|---|-----------------------|--|
| Electrical | | |
| Contact function | | 1NO + 1NC |
| Rated voltage | | 250 V |
| Frequency | | 50/60 Hz |
| Rated current | | 8 A |
| Rated thermal current | I_{th} | 8 A |
| Utilisation category AC13 | | |
| Rated operational current | I_e | 6A/250V AC 2A/440V AC |
| Utilisation category AC15 | | |
| Rated operational current | I_e | – |
| Utilisation category DC12 | | |
| Rated operational current | I_e | – |
| Utilisation category DC13 | | |
| Rated operational current | I_e | 0.5A/230V DC 2A/110V DC 4A/60V DC |
| Rated insulation voltage | U_I | 250 V AC |
| Minimum operational voltage per contact | U_{min} | 24 V AC/DC |
| Minimum operational current | I_{min} | 50 mA AC/DC |
| Rated peak withstand voltage | $U_{imp} (1.2/50\mu)$ | 2.5 kV |
| Conditional short circuit current | I_k | 1 kA |
| with back-up fuse 6A or FAZ-B4-HS | | |
| Max. back-up fuse, overload and short circuit | | 6 A gL / FAZ-4/..B-HS |
| Mechanical | | |
| Can be mounted from the left onto | | AZ |
| Can be mounted from the right onto | | – |
| Tripping indicator "electrical tripping" | | – |
| Frame size | | 45 mm |
| Device height | | 80 mm |
| Device width | | 8.8 mm (0.5MU) |
| Mounting | | onto switching device |
| Degree of protection, built-in | | IP40 |
| Terminal protection | | finger and hand touch safe according to BGV A3, ÖVE-EN 6 |
| Terminals | | lift terminals |
| Terminal capacity | | 0.5-2.5 mm ² |
| Terminal screws | | M3 (PoziDrive Z0) |
| Fastening torque of terminal screws | | max. 0.8-1.0 Nm |

Connection diagram



Dimensions (mm)



Accessories for Miniature Circuit Breakers AZ

Interlocks LH-SP

| Function | Type Designation | Article No. | Units per package |
|---------------------|------------------|-------------|-------------------|
| Tripping interlock | LH-SPL | 285752 | 1 |
| Tripping interlock | LH-SPE | 215999 | 1 |
| Switchoff interlock | LH-SPA | 216000 | 1 |

Specifications | Anti-Tamper Device LH-SPE, LH-SPL

Description


- Prevents undesired switching ON or OFF

Specifications | Switchoff Interlock LH-SPA

Description

- Prevents undesired switch-OFF

Dimensions (mm)

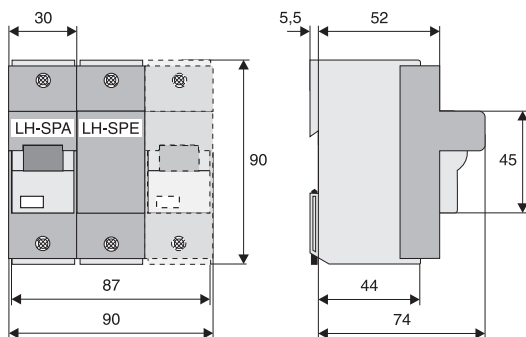

Accessories for Miniature Circuit Breaker FAZ-...-NA, -RT, -DU

Auxiliary Contact Z-IHK-NA

| | Operational Voltage Range | Type Designation | Article No. | Units per package |
|---|---------------------------|------------------|-------------|-------------------|
|  | 250 VAC | Z-IHK-NA | 113895 | 1 |

Specifications | Auxiliary Contact Z-IHK-NA


Description

- Design according to IEC/EN 60947-5-1, IEC/EN 62019
- Field installable
- The specified minimum voltages are per contact—take into account particularly in case of series connection
- Self-cleaning contacts
- Contact material and design particularly suitable for extra low voltage
- Tripping signal contact transmits message of electric tripping, not mechanical switch-off
- Test key for contact function “electrical tripping”
- Will allow for > 480Y/277 VAC rating


Technical Data

| | | Z-IHK-NA |
|---|-----------------------|--|
| Electrical | | |
| Contact function | | 1NO + 1NC |
| Rated voltage | | 250V |
| Rated current | | 6A |
| Rated thermal current | I_{th} | 6A |
| Utilization category AC13 | | |
| Rated operational current | I_e | 3A/250 Vac |
| Utilization category AC15 | | |
| Rated operational current | I_e | 2A/250 Vac |
| Utilization category DC12 | | |
| Rated operational current | I_e | 0.5A/110 Vdc |
| Rated insulation voltage | U_i | 250 Vac |
| Minimum operational voltage per contact | U_{min} | 5 Vdc |
| Minimum operational current | I_{min} | 10 mA AC/DC |
| Rated peak withstand voltage | $U_{imp} (1.2/50\mu)$ | 4 kV |
| Conditional short circuit current | I_k | |
| with Back-Up Fuse 6A | | 1 kA |
| Max. back-up fuse, overload and short circuit | | 6 A gL / FAZ-4/.../B-HS |
| Mechanical | | |
| Tripping indicator “electrical tripping” | | — |
| Frame size | | 45 mm |
| Device height | | 80 mm |
| Device width | | 8.8 mm (0.5MU) |
| Mounting | | — |
| Degree of protection, built-in | | IP40 |
| Terminal protection | | Finger and hand touch safe according to BGV A3, ÖVE-EN 6 |
| Terminals | | Lift terminals |
| Terminal capacity | | 0.5–2.5 mm ² |
| Terminal screws | | M3 (Pozidrive Z2) |
| Tightening torque of terminal screws | | max. 1.2 Nm |

Connection diagram



Dimensions (mm)



Accessories for Miniature Circuit Breaker FAZ-..-NA, -RT, -DU

Shunt Trip FAZ-XAA-NA

SG13511



| Operational Voltage Range | Type Designation | Article No. | Units per package |
|----------------------------|----------------------|-------------|-------------------|
| 12–110 VAC 12–60 VDC | FAZ-XAA-NA12-110VAC | 102037 | 1 |
| 110–415 VAC 110–230 VDC | FAZ-XAA-NA110-415VAC | 102036 | 1 |

Specifications | Shunt Trip FAZ-XAA-NA


Description

- Remote release for subsequent mounting onto FAZ-NA
- Additional installation of standard auxiliary switch is possible
- Position indicator red–green

Technical Data

| | FAZ-XAA-NA12-110VAC | FAZ-XAA-NA110-415VAC |
|--------------------------------------|--|--|
| Electrical | | |
| Can be mounted onto | FAZ-NA / FAZ-NA-DC / FAZ-RT/-DU | FAZ-NA / FAZ-NA-DC / FAZ-RT/-DU |
| Operational voltage range | 12–110 Vac 12–60 Vdc | 110–415 Vac 110–230 Vdc |
| Frequency | 50/60 Hz | 50/60 Hz |
| Mechanical | | |
| Frame size | 45 mm | 45 mm |
| Device height | 105 mm | 105 mm |
| Device width | 17.5 mm | 17.5 mm |
| Mounting | Quick fastening with two lock-in positions on EN 50022 | |
| Degree of protection, built-in | IP40 | IP40 |
| Terminal protection | Finger and hand touch safe according to BGV A3, ÖVE-EN 6 | Finger and hand touch safe according to BGV A3, ÖVE-EN 6 |
| Terminals | Open mouthed/lift | Open mouthed/lift |
| Terminal capacity, one and two wires | 18–10 AWG | 18–10 AWG |

Connection diagram



Terminal Covers

| Description | Type Designation | Article No. | Units per package |
|-------------|------------------|-------------|-------------------|
|-------------|------------------|-------------|-------------------|

Terminal Covers for RCDs

| | | | |
|--------|-------------|--------|----|
| 2-pole | Z-RC/AK-2TE | 285385 | 10 |
| 4-pole | Z-RC/AK-4TE | 101062 | 10 |

Terminal Covers for Add-on Device

| | | | |
|----------|--------------|-----------|----|
| 2-pole | Z-CV/AO-2P | 221957600 | 10 |
| 3+4-pole | Z-CV/AO-3-4P | 221957500 | 10 |



Terminal Covers for MCB, RCBO

| | | | |
|--------|------------|-----------|----|
| 2-pole | Z-CV/SD-2P | 221954800 | 10 |
| 3-pole | Z-CV/SD-3P | 221954900 | 10 |
| 4-pole | Z-CV/SD-4P | 221953900 | 10 |


Terminal Cover for MCB

| | | | |
|--------|-----------|-----------|----|
| 1-pole | Z7-AK-1TE | 750754200 | 10 |
|--------|-----------|-----------|----|


Remote Control and Automatic Switching Device Z-ZW

| Function | Type Designation | Article No. | Units per package | |
|--|--|-------------|-------------------|------|
|  SG30811 | Automatic restarting 230VAC | Z-FW-LP | 248296 | 1/20 |
| | Automatic restarting 24-48VDC | Z-FW-LPD | 265244 | 1/20 |
|  SG30711 | + Remote control ON/OFF/TEST (only in connection with Z-FW-LP, -LPD from delivery date 2006!) | Z-FW-MO | 284730 | 1 |

Pre-mounted sets Z-FW

| Operational voltage range | Type Designation | Article No. | Units per package | |
|---|------------------|-------------|-------------------|------|
|  SG31311 | 230 VAC | Z-FW-LP/MO | 290171 | 1/12 |
| | 24-48 VDC | Z-FW-LPD/MO | 290172 | 1/12 |

Remote Testing Module Z-FW (for Z-FW-LP/MO set use only)

| Operational voltage range | Type Designation | Article No. | Units per package | |
|--|------------------|-------------|-------------------|-------|
|  SG12111 | 0.01 A | Z-FW/001 | 248297 | 4/120 |
| | 0.03 A | Z-FW/003 | 248298 | 4/120 |
| | 0.1 A | Z-FW/010 | 248299 | 4/120 |
| | 0.3 A | Z-FW/030 | 248300 | 4/120 |
| | 0.5 A | Z-FW/050 | 248301 | 4/120 |

Specifications | Remote Control and Automatic Switching Z-FW


Description

- Shape compatible switching device suitable for subsequent installation for automatic re-setting and remote control of CLS6, PFIM, PFHM-4p, dRCM, Z-A40, PFR, Z-MS
- Mechanical interlock, can be sealed with leads
- Mechanical switching capability up to max. PFIM-100/4p, CLS6-100/4p
- Operating and alarm display by green and red LED
- Function extension with Switching Modul Z-FW-MO
Operating and trouble display by LED pre-assembled only with Z-FW...

Technical Data


| | Z-FW-LP | Z-FW-LPD | Z-FW-MO |
|--|--|---|---|
| Electrical | | | |
| Possible operating voltages | 220-240 V AC | 24-48 V DC | - |
| Frequency | 50/60 Hz | - | - |
| Testing module (0.5MU) for remote testing of RCDs | Z-FW... | Z-FW... | - |
| Control voltage for remote control | - | - | 24-230 V AC/DC |
| Relay output for tripping test with Z-FW | - | - | 400 V AC max. |
| Relay output for alarm, potential-free | 5A/250V AC | 5A/250V AC | - |
| Functions | automatic restarting | automatic restarting | +ON/OFF/TEST |
| Function selector | Automatic 5x, OFF/RESET | Automatic 5x, OFF/RESET | ON, OFF/RESET |
| Remote control function via telephone with Telecommander | - | - | - |
| Mechanical | | | |
| Frame size | 45 mm | 45 mm | 45 mm |
| Device height | 80 mm | 80 mm | 80 mm |
| Device width | 70 mm | 70 mm | 35 mm |
| Mounting | quick fastening with 2 lock-in positions on DIN rail IEC/EN 60715 | | - |
| Degree of protection, built-in | IP40 | IP40 | IP40 |
| Terminal protection | finger and hand touch safe according to BGV A3, ÖVE-EN 6 | | |
| Terminals | lift terminals | lift terminals | lift terminals |
| Terminal capacity | 2 x 1.5 mm ² or 1 x 2.5 mm ² | 2 x 1.5 mm ² or 1 x 2.5 mm ² | 4 x 1.5 mm ² or 2 x 2.5 mm ² |
| Scope of delivery | - | - | Coupling plug |

Connection diagram

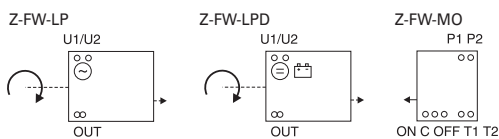


Dimensions (mm)


Z-FW-LP, -LPD

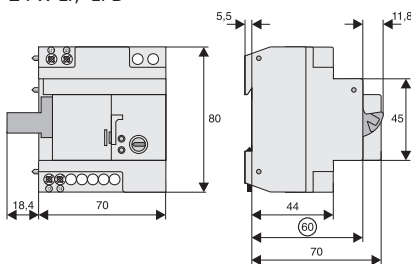


Z-FW-MO





Connection example

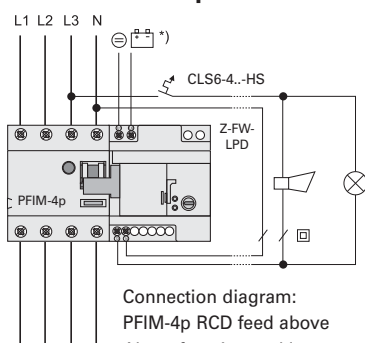

Connection diagram:
PFIM-4p RCD feed above
Alarm function and lamp
*) discretionary polarity

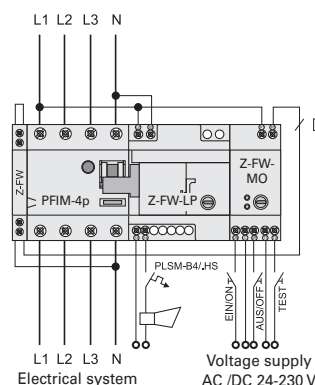

Pre-mounted Sets

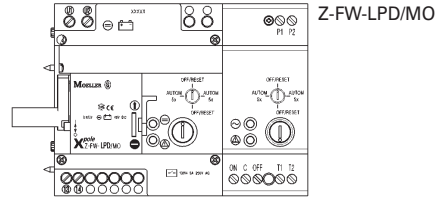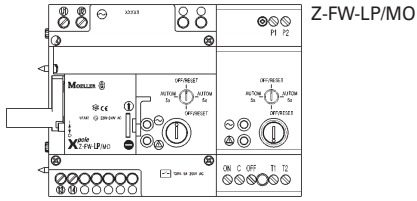


Specifications | Remote Testing Module Z-FW (for Z-FW-LP)


Description

- External testing module with testing resistor for RCDs
- Proper "external" test key function according to the applicable rules thanks to design adapted to the rated tripping current
- For remote testing with remote control and automatic switching device Z-FW-LP
- No undesired voltage rise in the consumer system during remote switch-off thanks to integrated breaker contact K1-K2
- Can also be used as a remote tripping module for PFIM, PFHM


Dimensions (mm)



Connection examples

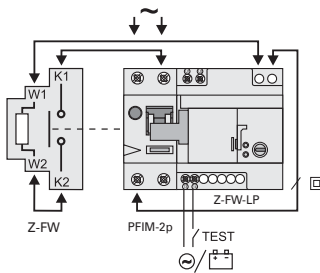

Connection diagram:
PFIM-2p, RCD feed above

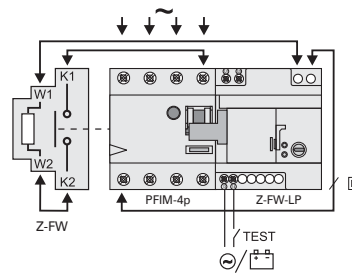

Connection diagram:
PFIM-4p, RCD feed above