

WIRING INFORMATION

1. TURN OFF POWER.
2. LOOSEN TERMINAL SCREWS.
3. CONNECT WITH INSULATED COPPER CONDUCTORS (SOLID OR STRANDED). DO NOT TIN CONDUCTORS.
CAUTION: USE WITH COPPER WIRE ONLY.
ATTENTION: EMPLOYER UNIQUEMENT AVEC FIL DE CUIVRE.
4. DO NOT EXCEED MARKED ELECTRICAL RATING.
5. FOR PROPER WIRING PROCEDURE.
 - A. FOR BACK WIRED DEVICES, SEE FIG. A
 - a) STRIP WIRE (* 14-"10 AWG) 11/16 LONG.
 - b) INSERT STRIPPED WIRE IN BACK SLOT UNDER CLAMP.
 - B. FOR SIDE WIRED DEVICES, SEE FIG. B
 - a) STRIP WIRE (* 14-"10 AWG) 15/16 LONG.
 - b) BEND WIRE AROUND SCREW.
6. TIGHTEN SCREWS TO 12-15 INCH POUNDS.

NOTE: WHEN FLUORESCENT LOADS ARE CONTROLLED BY LIGHTED SWITCHES THE LAMP MAY OCCASIONALLY FLICKER WHEN THE SWITCH IS IN THE OFF POSITION.

7. A GREEN HEX, HEAD SCREW (OR GREEN PIG TAIL) IS PROVIDED TO GROUND THE MOUNTING STRAP WHERE REQUIRED.
8. INSTALL SWITCH AND WALL PLATE SECURELY TO ELECTRICAL BOX.
9. TURN ON POWER.

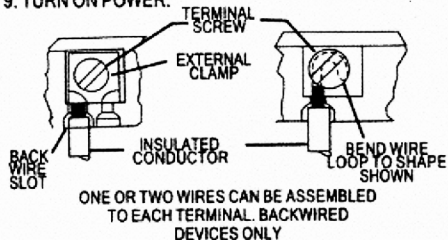


FIG. A

FIG. B