


**NEW!**  
Weight  
Ratings

# Fan/Fixture Box with Adjustable Bracket

Now with *HIGHER* Weight Ratings • For Retrofit

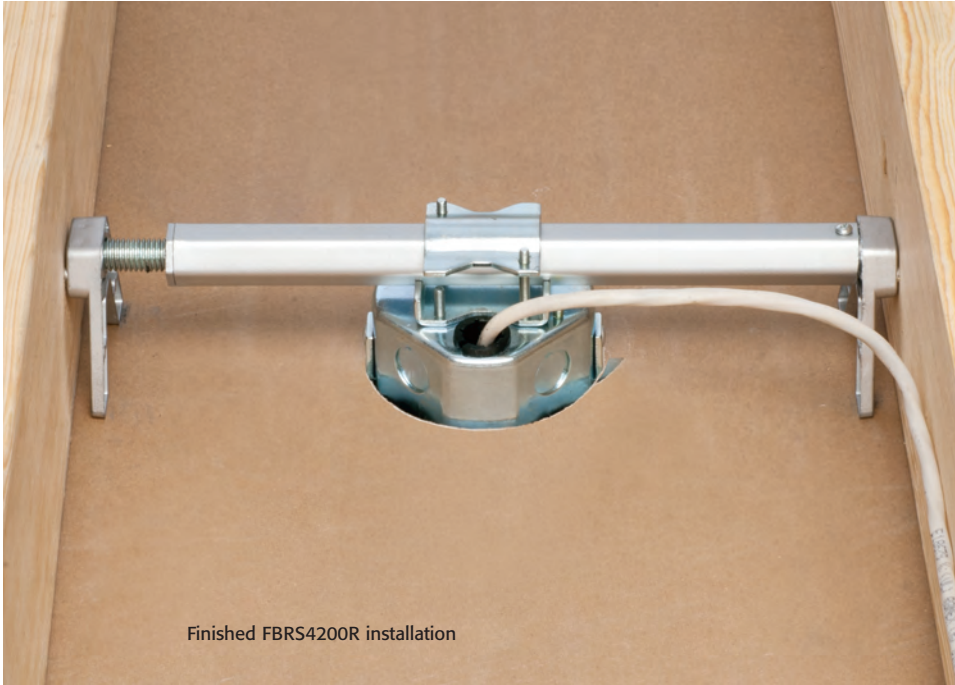

**NEW**  
Higher  
Weight Ratings!



Arlington's extra heavy-duty, **plated steel fan/fixture box** now has higher weight ratings...

**150 lbs for fixtures • 70 lbs for fans** when installed on joists spaced 16" on center; **70 lbs for either a fan or fixture on joists spaced 24" on-center.**

Our FBR54200R features a fully adjustable bracket for installations between joists or rafters spaced from 16 to 24" on center. Bracket ends bite into the wood rafter or joist, holding the fan or fixture securely in place.

- Fast, easy installation in old work (retrofit) projects
- 20.0 cubic inch capacity, 2 inch box depth
- No parts to lose...installation screws ship captive, with an installed mud cover and NM cable connector
- UL/CSA Listed



**Arlington**

1 Stauffer Industrial Park  
Scranton, PA 18517

**800/233.4717**

**Fax 570/562.0646**

**[www.aifittings.com](http://www.aifittings.com)**

Patented. Other patents pending.


# Fan/Fixture Box with Adjustable Bracket

*Installs between rafters spaced 16" to 24" on center*

Easy, secure fan or fixture installation in retrofit projects




1 Determine location of fan/fixture. Cut a 4-1/16" diameter hole in ceiling. Remove box (only) from the bracket. Loosen screws on sled to enable centering above hole (step 5). Insert bracket through the opening.

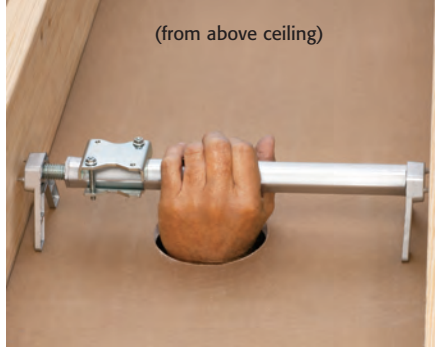


2 Position bracket between joists with "feet" resting on the ceiling. Embed bracket ends in joists by turning the hex bar by hand...



3 ...then tightening with a wrench.

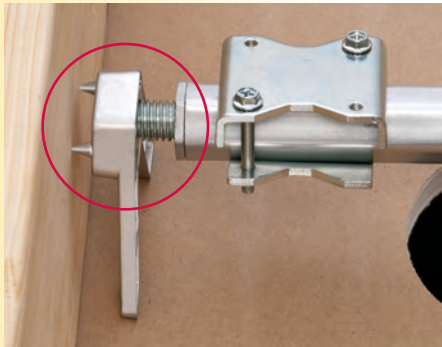

4 As the hex bar is tightened, the bracket ends bite into the joists, holding the unit securely in place.

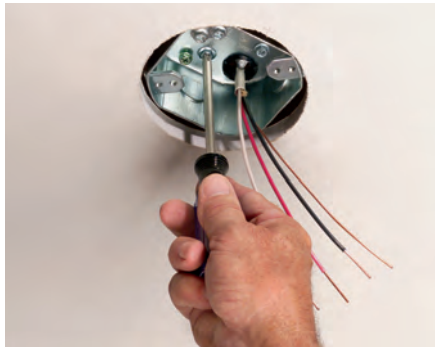

5 Position sled. Tighten screws. Pull cable through installed NM cable connector. Reattach the box to the sled. Attach the fan/fixture bracket with supplied screws.

**NEW**  
**Higher**  
**Weight Ratings!**

**LOAD RATINGS (LBS)**

RAFTER/JOIST CENTERLINE SPACING	FAN	FIXTURE
16"	70 LBS	150 LBS
24"	70 LBS	70 LBS



**Arlington**  
1 Stauffer Industrial Park  
Scranton, PA 18517  
**800/233.4717**  
**Fax 570/562.0646**  
**www.aifittings.com**




CATALOG NUMBER	UPC/DCI/NAED MFG #01 8997	DESCRIPTION	UNIT PKG	STD PKG
FBR54200R	75315	Heavy-duty, plated steel fan/fixture box with fully adjustable bracket	1	10

Distributed by

**NEW!**  
Weight  
Ratings

# Fan/Fixture Box with Adjustable Bracket

Now with *HIGHER* Weight Ratings • For Retrofit

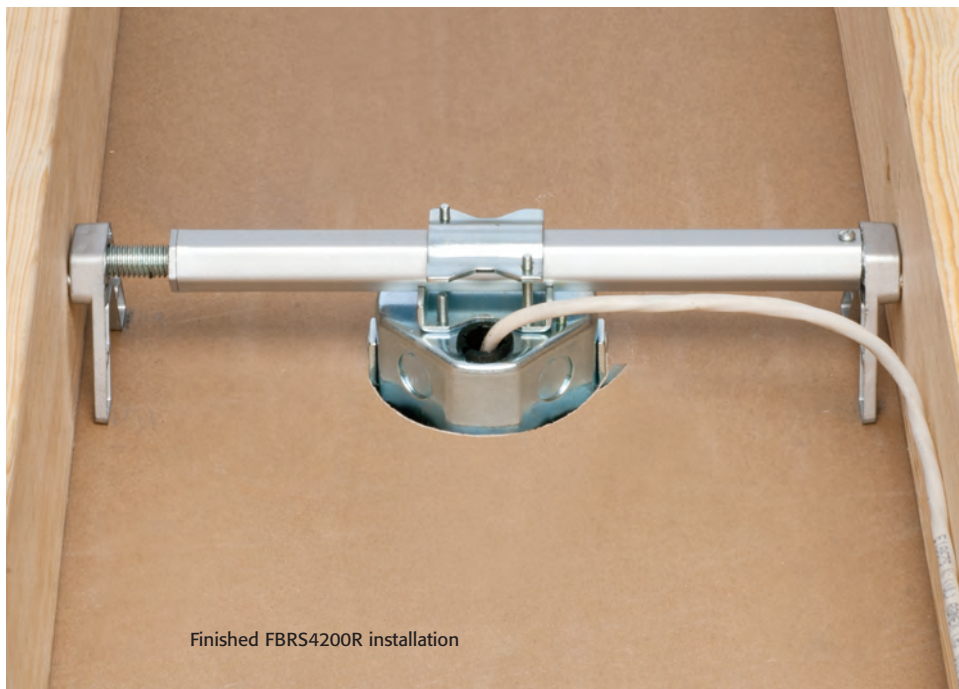

Arlington's extra heavy-duty, **plated steel fan/fixture box** now has higher weight ratings...

**150 lbs for fixtures • 70 lbs for fans** when installed on joists spaced 16" on center; **70 lbs for either a fan or fixture on joists spaced 24" on-center.**

Our FBR54200R features a fully adjustable bracket for installations between joists or rafters spaced from 16 to 24" on center. Bracket ends bite into the wood rafter or joist, holding the fan or fixture securely in place.

- Fast, easy installation in old work (retrofit) projects
- 20.0 cubic inch capacity, 2 inch box depth
- No parts to lose...installation screws ship captive, with an installed mud cover and NM cable connector
- UL/CSA Listed



**A**  
**Arlington**



1 Stauffer Industrial Park  
Scranton, PA 18517  
**800/233.4717**  
**Fax 570/562.0646**  
[www.aifittings.com](http://www.aifittings.com)

Patented. Other patents pending.


# Fan/Fixture Box with Adjustable Bracket

*Installs between rafters spaced 16" to 24" on center*

Easy, secure fan or fixture installation in retrofit projects




1 Determine location of fan/fixture. Cut a 4-1/16" diameter hole in ceiling. Remove box (only) from the bracket. Loosen screws on sled to enable centering above hole (step 5). Insert bracket through the opening.

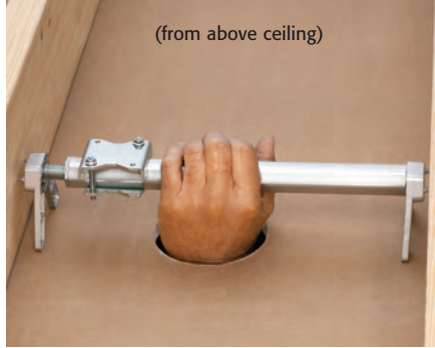

2 Position bracket between joists with "feet" resting on the ceiling. Embed bracket ends in joists by turning the hex bar by hand...



3 ...then tightening with a wrench.

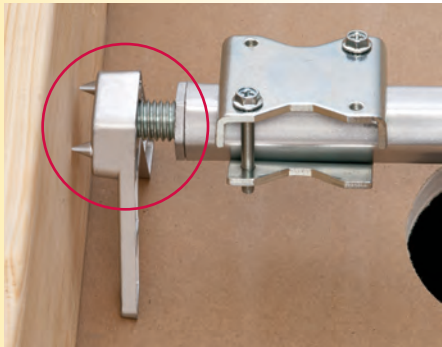

4 As the hex bar is tightened, the bracket ends bite into the joists, holding the unit securely in place.



5 Position sled. Tighten screws. Pull cable through installed NM cable connector. Reattach the box to the sled. Attach the fan/fixture bracket with supplied screws.

**NEW**  
**Higher**  
**Weight Ratings!**

**LOAD RATINGS (LBS)**

RAFTER/JOIST CENTERLINE SPACING	FAN	FIXTURE
16"	70 LBS	150 LBS
24"	70 LBS	70 LBS



**Arlington**  
1 Stauffer Industrial Park  
Scranton, PA 18517  
**800/233.4717**  
**Fax 570/562.0646**  
**www.aifittings.com**



CATALOG NUMBER	UPC/DCI/NAED MFG #01 8997	DESCRIPTION	UNIT PKG	STD PKG
FBR54200R	75315	Heavy-duty, plated steel fan/fixture box with fully adjustable bracket	1	10

Distributed by