


GFCIs

Audible Alarm GFCI Receptacles 2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

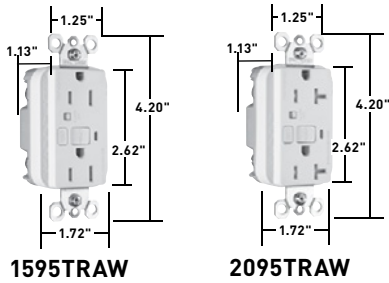


Features

- Audible Alarm alert of tripped condition. Alarm can be turned ON/OFF.
- Alarm rated at 60 db at 10 feet.
- Rated as a 1.5 HP motor control switch.
- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- Meets National Electrical Code® Tamper-Resistant requirements.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Feed-thru wiring configuration allows GFCI to protect downstream receptacles.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- FSUL Listed (Federal Specification WC596).
- Trip indicator light (red LED).
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Two back wire holes per terminal.
- Ground screw has a back wire clamp for easy installation.
- 10kA short circuit rating.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity
- Trio Threshold: 5± 1mA

| CATALOG NUMBER | RATING | | COLOR | NEMA CONFIG. NO. | 3rd PARTY COMPLIANCE | | |
|---|--------|-----|--------------|------------------|------------------------|-----------------------|---------------|
| | A. | VAC | | | UL943 C22.2 No. 144 | UL498 C22.2 No. 42 | FSUL WC596 |
| TRADEMASTER® AUDIBLE ALARM TAMPER-RESISTANT DUPLEX GFCI | | | | | | | |
| 1595TRAI | 15 | 125 | Ivory | 5-15R | • | • | • |
| 1595TRAW | 15 | 125 | White | 5-15R | • | • | • |
| 1595TRA | 15 | 125 | Brown | 5-15R | • | • | • |
| 1595TRABK | 15 | 125 | Black | 5-15R | • | • | • |
| 1595TRALA | 15 | 125 | Light Almond | 5-15R | • | • | • |
| SPECIFICATION GRADE AUDIBLE ALARM TAMPER-RESISTANT DUPLEX GFCI | | | | | | | |
| 2095TRAI | 20 | 125 | Ivory | 5-20R | • | • | • |
| 2095TRAW | 20 | 125 | White | 5-20R | • | • | • |
| 2095TRA | 20 | 125 | Brown | 5-20R | • | • | • |
| 2095TRAGRY | 20 | 125 | Gray | 5-20R | • | • | • |
| 2095TRABK | 20 | 125 | Black | 5-20R | • | • | • |
| 2095TRARED | 20 | 125 | Red | 5-20R | • | • | • |
| 2095TRALA | 20 | 125 | Light Almond | 5-20R | • | • | • |
| HOSPITAL GRADE AUDIBLE ALARM TAMPER-RESISTANT DUPLEX GFCI | | | | | | | |
| 1595HGTRA | 15 | 125 | Brown | 5-15R | • | • | • |
| 1595HGTRAGRY | 15 | 125 | Gray | 5-15R | • | • | • |
| 1595HGTRALA | 15 | 125 | Light Almond | 5-15R | • | • | • |
| 2095HGTRAI | 20 | 125 | Ivory | 5-20R | • | • | • |
| 2095HGTRAW | 20 | 125 | White | 5-20R | • | • | • |
| 2095HGTRARED | 20 | 125 | Red | 5-20R | • | • | • |
| 2095HGTRALA | 20 | 125 | Light Almond | 5-20R | • | • | • |



National Electrical Code® Section 406.12 Tamper-Resistant Receptacles in Dwelling Units.

In all areas specified in 210.52 all 125-volt, 15- and 20-amp receptacles shall be listed tamper-resistant receptacles.

All devices listed on this page conform to NEMA WD-1 and WD-6.


DEVICES & WALL PLATES

Color Selection Chart

Devices & Plastic Wall Plate Colors



Ivory Light Almond White Green Antique Brass Dark Bronze Nickel

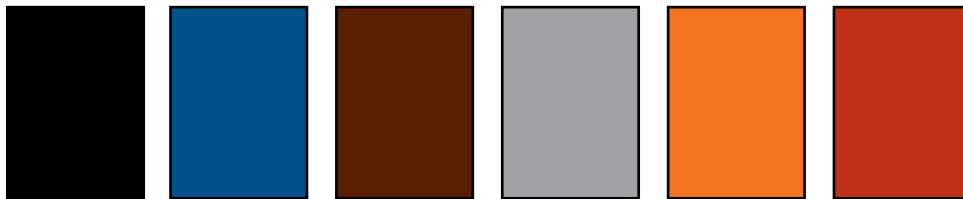

Black Blue Brown Gray Orange Red

See specific device and wall plate catalog charts for particular color availabilities.

Metal Wall Plates


Metal Finish



Aluminum Brass (Brushed) Polished Brass Stainless Steel Brushed Bronze Chrome

Custom Metal Wall Plates Paint Finish Colors

Paint Color

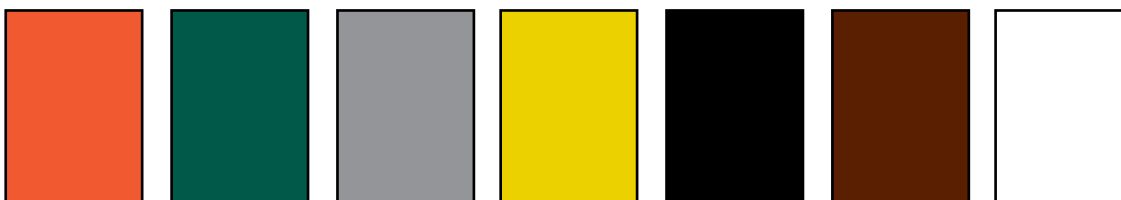

Orange Green Gray Yellow Glossy Black Brown White




Primer Red Pink Flat Black Ivory Light Almond Blue

To order custom metal wall plates, see Pages P-40 – P-42.
For additional colors consult factory.

GFCIs

Audible Alarm GFCI Receptacles 2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

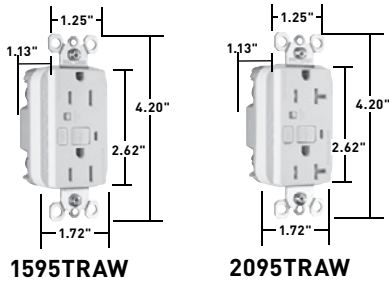


Features

- Audible Alarm alert of tripped condition. Alarm can be turned ON/OFF.
- Alarm rated at 60 db at 10 feet.
- Rated as a 1.5 HP motor control switch.
- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- Meets National Electrical Code® Tamper-Resistant requirements.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Feed-thru wiring configuration allows GFCI to protect downstream receptacles.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- FSUL Listed (Federal Specification WC596).
- Trip indicator light (red LED).
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Two back wire holes per terminal.
- Ground screw has a back wire clamp for easy installation.
- 10kA short circuit rating.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trio Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

| CATALOG NUMBER | RATING | | COLOR | NEMA CONFIG. NO. | 3rd PARTY COMPLIANCE | | |
|---|--------|-----|--------------|------------------|----------------------|--------------------|------------|
| | A. | VAC | | | UL943 C22.2 No. 144 | UL498 C22.2 No. 42 | FSUL WC596 |
| TRADEMASTER® AUDIBLE ALARM TAMPER-RESISTANT DUPLEX GFCI | | | | | | | |
| 1595TRAI | 15 | 125 | Ivory | 5-15R | • | • | • |
| 1595TRAW | 15 | 125 | White | 5-15R | • | • | • |
| 1595TRA | 15 | 125 | Brown | 5-15R | • | • | • |
| 1595TRABK | 15 | 125 | Black | 5-15R | • | • | • |
| 1595TRALA | 15 | 125 | Light Almond | 5-15R | • | • | • |
| SPECIFICATION GRADE AUDIBLE ALARM TAMPER-RESISTANT DUPLEX GFCI | | | | | | | |
| 2095TRAI | 20 | 125 | Ivory | 5-20R | • | • | • |
| 2095TRAW | 20 | 125 | White | 5-20R | • | • | • |
| 2095TRA | 20 | 125 | Brown | 5-20R | • | • | • |
| 2095TRAGRY | 20 | 125 | Gray | 5-20R | • | • | • |
| 2095TRABK | 20 | 125 | Black | 5-20R | • | • | • |
| 2095TRARED | 20 | 125 | Red | 5-20R | • | • | • |
| 2095TRALA | 20 | 125 | Light Almond | 5-20R | • | • | • |
| HOSPITAL GRADE AUDIBLE ALARM TAMPER-RESISTANT DUPLEX GFCI | | | | | | | |
| 1595HGTRA | 15 | 125 | Brown | 5-15R | • | • | • |
| 1595HGTRAGRY | 15 | 125 | Gray | 5-15R | • | • | • |
| 1595HGTRALA | 15 | 125 | Light Almond | 5-15R | • | • | • |
| 2095HGTRAI | 20 | 125 | Ivory | 5-20R | • | • | • |
| 2095HGTRAW | 20 | 125 | White | 5-20R | • | • | • |
| 2095HGTRARED | 20 | 125 | Red | 5-20R | • | • | • |
| 2095HGTRALA | 20 | 125 | Light Almond | 5-20R | • | • | • |



National Electrical Code® Section 406.12 Tamper-Resistant Receptacles in Dwelling Units.

In all areas specified in 210.52 all 125-volt, 15- and 20-amp receptacles shall be listed tamper-resistant receptacles.

All devices listed on this page conform to NEMA WD-1 and WD-6.


DEVICES & WALL PLATES

Color Selection Chart

Devices & Plastic Wall Plate Colors



Ivory Light Almond White Green Antique Brass Dark Bronze Nickel

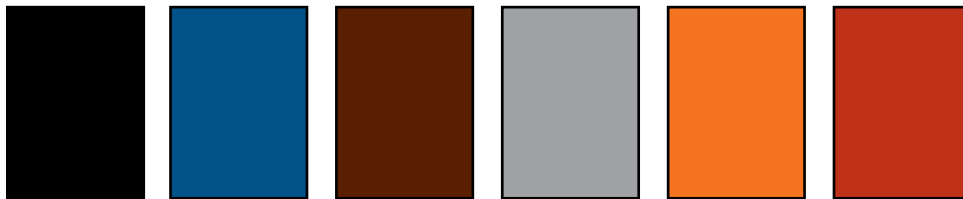


Black Blue Brown Gray Orange Red

See specific device and wall plate catalog charts for particular color availabilities.

Metal Wall Plates


Metal Finish

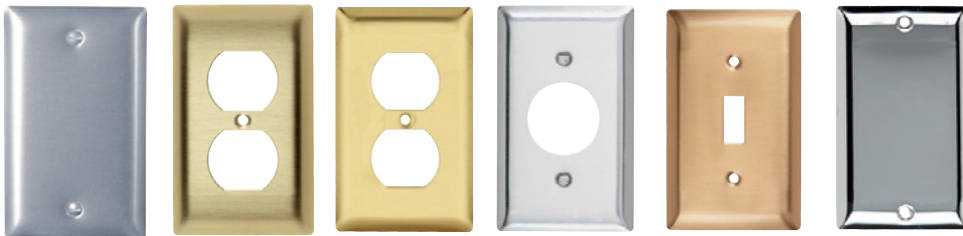


Aluminum Brass (Brushed) Polished Brass Stainless Steel Brushed Bronze Chrome

Custom Metal Wall Plates Paint Finish Colors

Paint Color

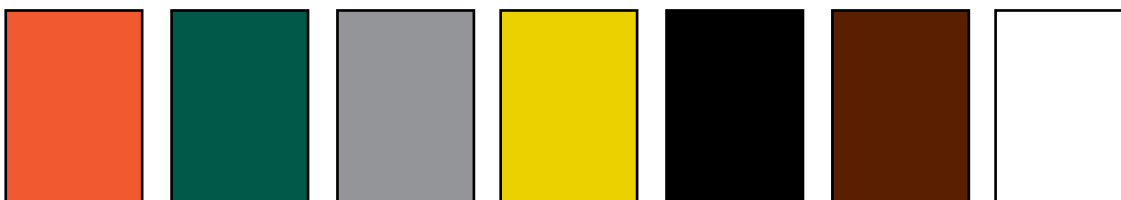

Orange Green Gray Yellow Glossy Black Brown White

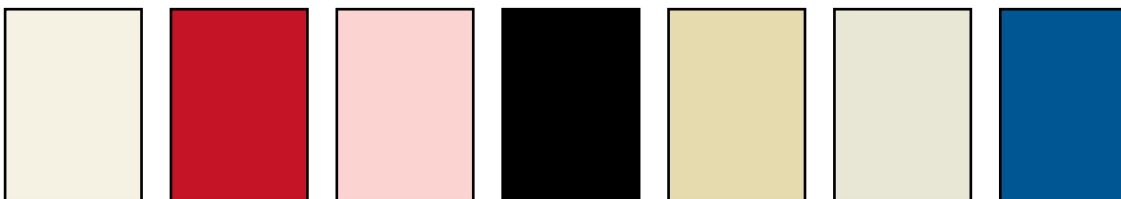

Primer Red Pink Flat Black Ivory Light Almond Blue

To order custom metal wall plates, see Pages P-40 – P-42.
For additional colors consult factory.