


## Plastic Insulating Bushings




- Threaded fittings for RIGID or IMC conduit
- Thermoplastic material—heat, impact and torque resistance
- Meets CSA and UL specifications
- Flame retardant Polypropylene (Rated to 221°F, 105°C)
- 1/2" wide

Dimension Measurement = Inches

| Cat No. | Size   | A     | B     | C     | D     | Bag Qty | Each |
|---------|--------|-------|-------|-------|-------|---------|------|
| 21732   | 1/2"   | 0.593 | 1.063 | 0.390 | 0.343 | 100     |      |
| 21733   | 3/4"   | 0.796 | 1.312 | 0.390 | 0.328 | 100     |      |
| 21734   | 1"     | 1.000 | 1.562 | 0.562 | 0.468 | 50      |      |
| 21735   | 1-1/4" | 1.328 | 1.921 | 0.562 | 0.468 | 50      |      |
| 21736   | 1-1/2" | 1.546 | 2.187 | 0.562 | 0.468 | 50      |      |
| 21737   | 2"     | 2.000 | 2.687 | 0.625 | 0.562 | 25      |      |
| 21738   | 2-1/2" | 2.406 | 3.187 | 0.671 | 0.718 | 20      |      |
| 21739   | 3"     | 3.000 | 3.843 | 0.750 | 0.687 | ---     |      |
| 21740   | 3-1/2" | 3.406 | 4.359 | 0.750 | 0.687 | ---     |      |
| 21741   | 4"     | 3.906 | 4.843 | 0.765 | 0.703 | ---     |      |
| 21742   | 5"     | 4.921 | 6.375 | 1.000 | 0.843 | ---     |      |
| 21743   | 6"     | 5.890 | 7.500 | 1.000 | 0.843 | ---     |      |



## Anti-Short Bushings



- Insulates conductor from cut armor ends on flexible BX or Greenfield conduit
- Overlapping horizontal flange protects against sharp metal edges
- Tapered design assures fast insertion
- Extra length assures positive grip
- Polypropylene material resists weather extremes, oil, moisture and chemicals
- Rated up to 194°F

| Cat No. | Size | Cable Sizes                  | A     | B      | C     | D      | Bag Qty | Each |
|---------|------|------------------------------|-------|--------|-------|--------|---------|------|
| 21752   | 0    | 14/2, 14/3, 12/2             | 0.56" | 0.671" | 0.38" | 0.312" | 35      |      |
| 21753   | 1    | 14/4, 12/3, 6/1, 4/1         | 0.65" | 0.671" | 0.45" | 0.312" | 35      |      |
| 21754   | 2    | 12/4, 10/2, 10/3, 2/1        | 0.61" | 0.859" | 0.58" | 0.125" | 35      |      |
| 21755   | 3    | 10/4, 8/2, 8/3, 1/1          | 0.67" | 1.046" | 0.79" | 0.109" | 20      |      |
| 21756   | 4    | 8/4, 6/4, 6/3, 6/2, 4/3, 4/2 | 0.83" | 1.266" | 1.00" | 0.156" | 16      |      |

## Polypropylene Stud Bushings

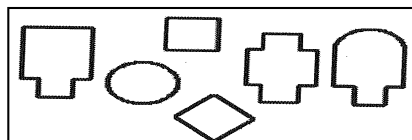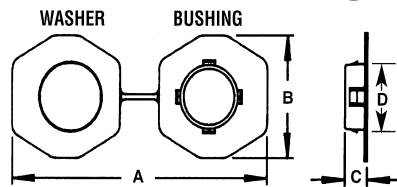


Examples of common hole configurations in Metal studs that stud bushing protects



- Fit existing irregular shaped holes in metal studs
- Alleviates the need to punch holes in metal studs, weakening the structural member
- Protects wire insulation from abrasion in metal studs
- Bushing allows smooth wire pulling making a difficult job easier
- No tools needed
- Use these bushings to comply with paragraph 300-4(b)(1) of the 2005 NEC code which states that: "In both exposed & concealed locations where nonmetallic-sheathed cables pass through either factory or field punched, cut, or drilled slots or holes in metal members, the cable shall be protected by bushings or grommets covering all metal edges & securely fastened in the opening prior to installation of the cable"

| Cat No. | Stud Size | A     | B     | C     | D     | Bag Qty | Each |
|---------|-----------|-------|-------|-------|-------|---------|------|
| 21760   | 2x4       | 5.67" | 2.50" | .505" | 1.30" | 25      |      |

## Plastic Insulating Bushings




- Threaded fittings for RIGID or IMC conduit
- Thermoplastic material—heat, impact and torque resistance
- Meets CSA and UL specifications
- Flame retardant Polypropylene (Rated to 221°F, 105°C)
- 1/2" wide

Dimension Measurement = Inches

| Cat No. | Size   | A     | B     | C     | D     | Bag Qty | Each |
|---------|--------|-------|-------|-------|-------|---------|------|
| 21732   | 1/2"   | 0.593 | 1.063 | 0.390 | 0.343 | 100     |      |
| 21733   | 3/4"   | 0.796 | 1.312 | 0.390 | 0.328 | 100     |      |
| 21734   | 1"     | 1.000 | 1.562 | 0.562 | 0.468 | 50      |      |
| 21735   | 1-1/4" | 1.328 | 1.921 | 0.562 | 0.468 | 50      |      |
| 21736   | 1-1/2" | 1.546 | 2.187 | 0.562 | 0.468 | 50      |      |
| 21737   | 2"     | 2.000 | 2.687 | 0.625 | 0.562 | 25      |      |
| 21738   | 2-1/2" | 2.406 | 3.187 | 0.671 | 0.718 | 20      |      |
| 21739   | 3"     | 3.000 | 3.843 | 0.750 | 0.687 | ---     |      |
| 21740   | 3-1/2" | 3.406 | 4.359 | 0.750 | 0.687 | ---     |      |
| 21741   | 4"     | 3.906 | 4.843 | 0.765 | 0.703 | ---     |      |
| 21742   | 5"     | 4.921 | 6.375 | 1.000 | 0.843 | ---     |      |
| 21743   | 6"     | 5.890 | 7.500 | 1.000 | 0.843 | ---     |      |




## Anti-Short Bushings



- Insulates conductor from cut armor ends on flexible BX or Greenfield conduit
- Overlapping horizontal flange protects against sharp metal edges
- Tapered design assures fast insertion
- Extra length assures positive grip
- Polypropylene material resists weather extremes, oil, moisture and chemicals
- Rated up to 194°F

| Cat No. | Size | Cable Sizes                  | A     | B      | C     | D      | Bag Qty | Each |
|---------|------|------------------------------|-------|--------|-------|--------|---------|------|
| 21752   | 0    | 14/2, 14/3, 12/2             | 0.56" | 0.671" | 0.38" | 0.312" | 35      |      |
| 21753   | 1    | 14/4, 12/3, 6/1, 4/1         | 0.65" | 0.671" | 0.45" | 0.312" | 35      |      |
| 21754   | 2    | 12/4, 10/2, 10/3, 2/1        | 0.61" | 0.859" | 0.58" | 0.125" | 35      |      |
| 21755   | 3    | 10/4, 8/2, 8/3, 1/1          | 0.67" | 1.046" | 0.79" | 0.109" | 20      |      |
| 21756   | 4    | 8/4, 6/4, 6/3, 6/2, 4/3, 4/2 | 0.83" | 1.266" | 1.00" | 0.156" | 16      |      |

## Polypropylene Stud Bushings

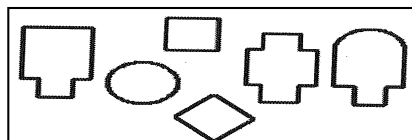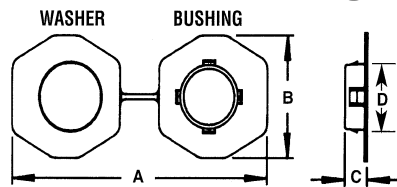

Examples of common hole configurations in Metal studs that stud bushing protects



- Fit existing irregular shaped holes in metal studs
- Alleviates the need to punch holes in metal studs, weakening the structural member
- Protects wire insulation from abrasion in metal studs
- Bushing allows smooth wire pulling making a difficult job easier
- No tools needed
- Use these bushings to comply with paragraph 300-4(b)(1) of the 2005 NEC code which states that: "In both exposed & concealed locations where nonmetallic-sheathed cables pass through either factory or field punched, cut, or drilled slots or holes in metal members, the cable shall be protected by bushings or grommets covering all metal edges & securely fastened in the opening prior to installation of the cable"

| Cat No. | Stud Size | A     | B     | C     | D     | Bag Qty | Each |
|---------|-----------|-------|-------|-------|-------|---------|------|
| 21760   | 2x4       | 5.67" | 2.50" | .505" | 1.30" | 25      |      |