

# Wire Pulling and Conduit Tools

Pulling wire and working with conduit is very challenging without the proper tools. Klein Tools' complete line of conduit tools allows you to get the job done while saving time, effort and materials.



For Professionals...  
Since 1857™

# FISH TAPES

**Unique sloped handle** optimizes hand position for quick hand-over-hand rewinds

**Raised fingergrrips** transfer 100% of the winding power from your hand and fingers

**Polypropylene case and handle** offer the maximum in impact resistance

**Round inner ring design** provides a smooth, surface for winding and rewinding



US Patents: 8899554 D574,277; 8,212,178; 8,168,921; 8,164,025  
Other patents pending




**Available in steel and fiberglass** with a wide variety of tips

## Multi-Groove Fiberglass Fish Tapes

**Additional Features:**

- Fiberglass Performance at 25% Lower Cost!\*
- Rigidity for long distance
- Less surface contact when pushing through crowded conduit
- Durable 7" (178 mm) leader helps push through crowded conduit
- Available resin eyelet for total non-conductivity



Old Profile      New Profile



*Less surface contact with wires*



56055



| Cat. No.   | Tape Size                                 | Reel Diameter  | Weight             |
|--|---|--|--------------------|
| <b>Multi-Groove Fiberglass - 7" (179 mm) Spiral Leader</b> |   |  |                    |
| 56055  | 100 ft. L x 3/16" W (30.5 m L x 4.8 mm W) | 13" (330.2 mm)   | 3.0 lbs. (1.36 kg) |
| 56056  | 200 ft. L x 3/16" W (61.0 m L x 4.8 mm W) | 17" (431.8 mm)   | 6.2 lbs. (2.81 kg) |
| <b>Multi-Groove Fiberglass - Non-Conductive</b>            |   |  |                    |
| 56057  | 50 ft. L x 3/16" W (15.2 m L x 4.8 mm W)  | 13" (330.2 mm)   | 2.3 lbs. (1.04 kg) |
| 56058  | 100 ft. L x 3/16" W (30.5 m L x 4.8 mm W) | 13" (330.2 mm)   | 3.1 lbs. (1.41 kg) |
| 56059  | 200 ft. L x 3/16" W (61.0 m L x 4.8 mm W) | 17" (431.8 mm)   | 6.0 lbs. (2.72 kg) |
| <b>Replacement Parts and Kits</b>                          |   |  |                    |
| Cat. No.   | Description                               | Included   | Weight             |
| 56115  | Fiberglass Fish Tape Repair Kit           | (1) High Leverage Crimper, (2) 7" (177.8 mm) Flexible Leaders, (2) Eyelets, (1) Tube Quick-Drying Glue | 2.2 lbs. (1.00 kg) |
| 56025  | Non-conductive Fish Tape Repair Kit       | Non-Conductive Eyelets ( 2 Ea.), Tube Quick-Drying Glue (1 Ea)   | 2.2 lbs. (1.00 kg) |
| 56116  | Fiberglass Fish Tape Replacement Eyelets  | —  | 1 oz. (27 g)       |
| 56120  | Fiberglass Fish Tape Replacement Leaders  | —  | 1.8 oz. (50 g)     |

\*When compared to published price of Klein Tools fiberglass fish tapes.






## Fish Tapes

### Fiberglass Fish Tapes

#### Additional Features:

- Designed for flexibility and easy navigation through conduit runs
- Non-conductive, fiberglass fish tape slides easily over existing wires and through multiple bends
- Durable 7" (179 mm) leader helps push through crowded conduit
- The lightweight and strong fiberglass composite tape resists harsh elements and is strength rated up to 500 pulling pounds
- Repair kit (Cat. No. 56115) available to replace tips
- Replacement metal eyelets (Cat. No. 56116) and spiral steel leaders (Cat. No. 56120) available



1' permanent laser etched descending increments.



56010

| Cat. No. | Tape Size  | Reel Diameter  | Weight             |
|----------|--|----------------|--------------------|
| 56009    | 50 ft. L x 3/16" W (7" Leader) (15.2 m L x 4.8 mm W [177.8 mm Leader])   | 13" (330.2 mm) | 2.8 lbs. (1.27 kg) |
| 56010    | 100 ft. L x 3/16" W (7" leader) (30.5 m L x 4.8 mm W [177.8 mm Leader])  | 13" (330.2 mm) | 3.5 lbs. (1.59 kg) |
| 56014    | 200 ft. L x 3/16" W (7" Leader) (60.96 m L x 4.8 mm W [177.8 mm Leader]) | 17" (431.8 mm) | 6.2 lbs. (2.81 kg) |


#### Replacement Tapes

| Cat. No. | Description                              | Included   | Weight             |
|----------|--|--|--------------------|
| 56115    | Fiberglass Fish Tape Repair Kit          | (1) High Leverage Crimper, (2) 7" (177.8 mm) Flexible Leaders, (2) Eyelets, (1) Tube Quick-Drying Glue | 2.2 lbs. (1.00 kg) |
| 56116    | Fiberglass Fish Tape Replacement Eyelets | —  | 1 oz. (27 g)       |
| 56120    | Fiberglass Fish Tape Replacement Leaders | —  | 1.8 oz. (50 g)     |

### 1/8" (3 mm) Wide Steel Fish Tapes

#### Additional Features:

- High strength spring steel fish tapes are stiff for long runs and are great for heavy duty wire pulls
- Full grip style handle gives you a firm, steady grip as you pull tape from the case
- Stainless Steel fish tape (Cat. Nos. 56007, 56008) is corrosion resistant and extends the life of the tool



1' permanent laser etched descending increments.



56001

| Cat. No.  | Tape Size   | Reel Diameter  | Weight             |
|---|---|----------------|--------------------|
| <b>Stainless Steel for Corrosion Resistance</b> |   |                |                    |
| 56007   | 125' L x 1/8" W x 0.062" H (38.1 m L x 3.2 mm W x 1.57 mm H)    | 13" (330.2 mm) | 4.7 lbs. (2.13 kg) |
| 56008   | 240 ft. L x 1/8" W x 0.062" H (73.2 m L x 3.2 mm W x 1.57 mm H) | 13" (330.2 mm) | 7.5 lbs. (3.40 kg) |

#### Flat Steel

|       |   |                |                    |
|-------|---|----------------|--------------------|
| 56000 | 25 ft. L x 1/8" W x 0.045" H (7.6 m L x 3.2 mm W x 1.14 mm H)   | 7" (177.8 mm)  | 1.0 lbs. (0.45 kg) |
| 56001 | 50 ft. L x 1/8" W x 0.045" H (15.2 m L x 3.2 mm W x 1.14 mm H)  | 7" (177.8 mm)  | 1.3 lbs. (0.59 kg) |
| 56002 | 65 ft. L x 1/8" W x 0.062" H (19.8 m L x 3.2 mm W x 1.57 mm H)  | 9" (228.6 mm)  | 2.6 lbs. (1.18 kg) |
| 56003 | 125' L x 1/8" W x 0.062" H (38.1 m L x 3.2 mm W x 1.57 mm H)    | 13" (330.2 mm) | 4.7 lbs. (2.13 kg) |
| 56004 | 240 ft. L x 1/8" W x 0.062" H (73.2 m L x 3.2 mm W x 1.57 mm H) | 13" (330.2 mm) | 7.5 lbs. (3.40 kg) |

#### Replacement Tapes

|       |   |   |                    |
|-------|---|---|--------------------|
| 56065 | 65 ft. L x 1/8" W x 0.062" H (19.8 m L x 3.2 mm W x 1.57 mm H)  | — | 1.7 lbs. (0.77 kg) |
| 56125 | 125 ft. L x 1/8" W x 0.062" H (38.1 m L x 3.2 mm W x 1.57 mm H) | — | 3.3 lbs. (1.50 kg) |
| 56240 | 240 ft. L x 1/8" W x 0.062" H (73.2 m L x 3.2 mm W x 1.57 mm H) | — | 6.1 lbs. (2.77 kg) |





## Fish Tapes

### 1/4" (6 mm) Wide Steel Fish Tapes

**Additional Features:**

- Tempered, high quality tape keeps its stability as it glides between surfaces for effective pushing and pulling of wire under carpets, through insulated walls and over suspended ceilings
- 25' length with no snag tip, is perfect for short wire runs associated with light commercial, residential and voice-data-video-audio installations (Cat. No. 56005)



56005 has a no snag plastic tip



1' permanent laser etched descending increments.



56005

| Cat. No. | Tape Size  | Reel Diameter  | Weight             |
|----------|--|----------------|--------------------|
| 56005    | 25 ft. L x 1/4" W x 0.030" H (7.6 m L x 6.4 mm W x 0.76mm H) | 7" (177.8 mm)  | 1.1 lbs. (0.50 kg) |
| 56006    | 100' L x 1/4" W x 0.062" H (30.5 m L x 6.4 mm W x 1.57 mm H) | 13" (330.2 mm) | 6.8 lbs. (3.08 kg) |

### Spiral Steel Fish Tapes

**Additional Features:**

- Designed for super flexibility and easy navigation through conduit runs
- Slides easily over existing wires and through multiple bends
- The durable spiral steel tape construction yields a maximum pulling force of up to 250 lbs.
- Replacement metal eyelets (Cat. No. 56116) and spiral steel leaders (Cat. No. 56120) available



56013

| Cat. No. | Tape Size                                | Reel Diameter  | Weight             |
|----------|--|----------------|--------------------|
| 56013    | 50 ft. L x 3/16" W (15.2 m L x 4.8 mm W) | 13" (330.2 mm) | 5.1 lbs. (2.31 kg) |

**Replacement Parts and Kits**

| Cat. No. | Description                              | Length              | Weight         |
|----------|--|---------------------|----------------|
| 56116    | Fiberglass Fish Tape Replacement Eyelets | 1-1/2" (38.1 mm)    | 1 oz. (27 g)   |
| 56120    | Fiberglass Fish Tape Replacement Leaders | 8-15/16" (227.0 mm) | 1.8 oz. (50 g) |

## Fish Tape Accessories

### Fiberglass Fish Tape Repair Kit

- Contains high leverage ratcheting crimper, two replacement eyelets, two 7" (179 mm) replacement leaders, one tube of quick dry glue and comprehensive instructions
- Multi-function ratcheting crimper (Cat. No. 56115V) cuts tape cleanly, strips tapes and crimps on new attachments
- Newly crimped on eyelets meet or exceed original factory pulling strength requirements
- Protective carry case firmly holds all tools and additional parts in handy, organized compartments
- Cat. No. 56025 is for repairing non-conductive fiberglass fish tapes



56115

| Cat. No. | Included   | Weight             |
|----------|--|--------------------|
| 56115    | (1) High Leverage Crimper, (2) 7" (177.8 mm) Flexible Leaders, (2) Eyelets, (1) Tube Quick-Drying Glue | 2.2 lbs. (1.00 kg) |
| 56025    | Non-Conductive Eyelets ( 2 Ea.), Tube Quick-Drying Glue (1 Ea)   | 2.2 lbs. (1.00 kg) |







## Fish Tape Accessories

### 2-Pack 7" (179 mm) Replacement Flexible Leaders & 6-Pack Replacement Eyelets

- For use only with fiberglass fish tapes (Cat. No. 56009, 56010 & 56014)
- Attach with Klein Tools ratcheting crimper (Cat. No. 56115V) available in kit 56115 only

| Cat. No. | Length              | Weight         |
|----------|---------------------|----------------|
| 56120    | 8-15/16" (227.0 mm) | 1.8 oz. (50 g) |
| 56116    | 1-1/2" (38.1 mm)    | 1 oz. (27 g)   |



56120



56116

### 13" (330 mm) Flexible Leader for Steel Fish Tapes

- For use with 1/8" (3 mm) wide steel fish tapes
- Heavy duty construction is strength rated up to 250 pulling pounds
- High capacity eyelet holds up to five #12 unstripped wires and seven #10 bare wires
- Retrofit instructions included
- The 3/16" (5 mm) diameter tape has a rustproof inner steel cable core wrapped with a spiral cover for exceptional flexibility
- Flexible leader guides steel tapes through 90° bends and makes pulling and pushing flat steel tapes easier

| Cat. No. | Diameter       | Length             | Weight         |
|----------|----------------|--------------------|----------------|
| 50350    | 3/16" (4.8 mm) | 13-1/2" (342.9 mm) | 1.6 oz. (45 g) |



50350

### 6 Loop Wire Pulling Leader

- Save time by attaching leader to the end of a fish tape and pull up to six wires at once
- Braided steel construction provides up to 450 lbs. pull strength on main eyelet
- Flexible construction allows for easy navigation through multiple bends in conduit
- Staggered loop lengths won't overlap and clog pipe
- For use with 1/8" and 1/4" (3 mm and 6 mm) flat steel fish tapes

| Cat. No. | Length             | Weight         |
|----------|--------------------|----------------|
| 56107    | 11-1/4" (285.8 mm) | 3.2 oz. (91 g) |



56107

### Steel Fish Tape Swivel Eyelet

- For use with 1/8" (6 mm) wide steel fish tapes
- Swivel head design helps prevent kinks and allows smoother, easier fishing in tight turns
- High capacity eyelet holds up to five #12 unstripped wires or seven #10 bare wires
- High strength steel construction allows for optimal performance over repeated uses
- Retrofit instructions included

| Cat. No. | Diameter       | Length           | Weight         |
|----------|----------------|------------------|----------------|
| 50351    | 3/16" (4.8 mm) | 1-1/2" (38.1 mm) | 0.5 oz. (14 g) |



50351



# Fish Rods & Accessories



**Exclusive Splinter Guard™ protection from painful fiberglass splinters**  
**Rods have threaded beveled connectors to attach to desired length and prevent snagging on obstructions**

**LO flex** – long, straight feeding  
**HIGH flex** – tight bends in walls  
**MID flex** – all needs in between

**Luminescent glow rods provide added visibility** in dark work spaces

**Shines 2X brighter and lasts 2X longer** than ordinary glow rods



## Fish and Glow Rods

### Additional Features:

- Variety of flexibilities and lengths for any application such as walls, drop ceilings, attics, crawl spaces, etc.
- Sets include bull nose and hook attachments to attach and grab wires
- Cat. No. 56430 also includes illuminated tip



| Cat. No.         | Description                       | Included  | Diameter                      | Overall Length | Weight             |
|------------------|-----------------------------------|---|-------------------------------|----------------|--------------------|
| <b>Fish Rods</b> |                                   |   |                               |                |                    |
| 56312            | 12' (3.7 m) Lo-Flex Fish Rod Set  | (3) 1/4" (6.4 mm) Diameter 4' (1.2 m) Fish Rods with Bullet Nose and Hook Attachments                             | 1/4" (6.4 mm)                 | 12 ft. (3.7 m) | 1.1 lbs. (0.50 kg) |
| 56324            | 24' (7.3 m) Lo-Flex Fish Rod Set  | (4) 1/4" Diameter 6' (1.5 m) Fish Rods with Bullet Nose and Hook Attachments                                      | 1/4" (6.4 mm)                 | 24' (7.3 m)    | 1.9 lbs. (0.86 kg) |
| 56325            | 25' (7.6 m) Fish and Glow Rod Set | (5) 1/4" 1/4" (6.4 mm) Diameter 4' Diameter 4' (1.2 m) Fish Rods, Fish Rods, (1) 3/16" 3/16" (4.8 mm) Diameter 5' | 1/4" to 3/16" (6.4 to 4.8 mm) | 25 ft. (7.6 m) | 1.8 lbs. (0.82 kg) |
| <b>Glow Rods</b> |                                   |   |                               |                |                    |
| 56406            | 6' (1.8 m) Hi-Flex Glow Rod       |   | 5/32" (4.0 mm)                | 6 ft. (1.8 m)  | 3.2 oz. (91 g)     |
| 56409            | 9' (2.7 m) Mid-Flex Glow Rod Set  | (6) 3/16" (4.76 mm) Diameter 18" (457.2 mm) Glow Rods with Bullet Nose and Hook Attachments                       | 3/16" (4.8 mm)                | 9 ft. (2.7 m)  | 8.8 oz. (249 g)    |
| 56415            | 15' (4.6 m) Mid-Flex Glow Rod Set | (3) 3/16" (4.8 mm) Diameter 5' (1.5 m) Glow Rods with Bullet Nose and Hook Attachments                            | 3/16" (4.8 mm)                | 15 ft. (4.6 m) | 13.6 oz. (386 g)   |
| 56418            | 18' (5.5 m) Hi-Flex Glow Rod Set  | (3) 5/32" (4 mm) Diameter 6' (1.8 m) Glow Rods with Bullet Nose and Hook Attachments                              | 5/32" (4.0 mm)                | 18 ft. (5.5 m) | 13.6 oz. (386 g)   |
| 56430            | 30' Glow Rod Set                  | (6) 3/15" (4.7 mm) Diameter x 5' (1.5 m) Glow Rods with Bullet Nose, Hook, and LED-Illuminated Tip Attachments    | 3/16" (4.8 mm)                | 30 ft. (9.1 m) | 1.2 lbs. (0.54 kg) |

## Deluxe Fish and Glow Rod Kit

- Heavy-duty storage case with fitted pockets and straps for organization
- Large handles fit over the shoulder for easy transport
- Convenient zipper pocket for accessory storage



| Cat. No. | Included   | Overall Length  | Weight             |
|----------|--|-----------------|--------------------|
| 56326    | (2) 1/4" (6.4 mm) Diameter 6 ft. (1.8 m) Lo-Flex and (2) 1/4" (6.4 mm) Diameter 4 ft. (1.2 m) Lo-Flex Fish Rods, (3) 3/16" (4.8 mm) Diameter 5 ft. (1.5 m) Mid-Flex Glow Rods, (3) 5/32" (4 mm) Diameter 6 ft. (1.8 m) Hi-Flex Glow Rods, (1) Hook, (1) Bullet Nose, and (1) Carrying Case | 75" (1905.0 mm) | 3.8 lbs. (1.72 kg) |

## Illuminated Fish Rod Tip

- Lights up for maximum visibility in dark spaces
- Bright white, omni-directional LED light for long life
- Threaded top for hook or bullet nose attachment (not included)
- Fits drilled holes as small as 5/8" (16 mm)
- Compatible with Lo, Mid and High flex rods
- Replaceable batteries included
- U.S. Pat. No. 9,062,834



56119

| Cat. No. | Description              | Dimensions  | Weight          |
|----------|--------------------------|---|-----------------|
| 56119    | Illuminated Fish Rod Tip | 2.5" L x 37/64" Diameter (63.5 mm L x 14.7 mm Diameter) | 5.0 oz. (142 g) |

## Fish Rod Accessories

- Attachments help guide, grab, attach and steer wire or cable
- Compatible with Lo, Mid and High flex rods



56104

| Cat. No. | Description                              | Included  | Weight          |
|----------|--|---|-----------------|
| 56104    | 3 Piece Fish and Glow Rod Attachment Set | (1) Whisk Attachment (1) Bullet Nose Attachment (1) Hook Attachment | 0.2 oz. (5.7 g) |





## Wire Pulling Tools

### WireSpanner™ - Telescopic Pole 18'

**SUPER ROD® SERIES**



- Extends to 18' (5.4 m) in 10 seconds
- Easily retrieve cable from a distance without needing an extra pair of hands to shorten installation time
- Large hook attachment pulls multiple wires easily
- Friction-twist lock pole design stays locked in place
- Lightweight resin slides easily over obstructions
- Compact design retracts to 32" (813 mm) for easy storage

SRS56036

| Cat. No. | Compact Length | Extended Length | Weight             |
|----------|----------------|-----------------|--------------------|
| SRS56036 | 32" (812.8 mm) | 18 ft. (5.5 m)  | 2.8 lbs. (1.27 kg) |

### Polymer Fish Rod Set with Glow-in-the-Dark Leaders

**SUPER ROD® SERIES**

- Non-conductive rods designed for working in confined spaces
- Great for routing cables in wire racks and on short runs
- Attachments glow in the dark for ease of use
- Includes 14" (356 mm) rods of various flexibilities and illumination for a range of individual (or 56" (1.4 m) combined) wire pulling applications
- Includes five Glow-in-the-Dark leaders (hook, bullet, mini-eyelet, domed-eyelet and claw)
- Convenient storage tube protects the rods between use and fits easily into your bag or toolbox



SRS56038

5 Attachments Included



Hook Bullet Mini-Eyelet Domed-Eyelet Claw

| Cat. No. | Extended Length | Weight          |
|----------|-----------------|-----------------|
| SRS56038 | 56" (1.4 m)     | 4.0 oz. (113 g) |

### Magnetic Wire Pulling System

- This system allows you to effortlessly pull cable behind walls by yourself
- Navigates through insulation and other obstructions
- Perfect for routing cable between drywall and insulation or fixture installations
- Swivel leader eyelet securely connects to most wires and mesh wire pulling grips
- Non-marring nylon leader-pull with 20' (6.1 m) of heavy-duty nylon rope eyelet for wire tie-on



SRS56037

| Cat. No. | Length         | Weight          |
|----------|----------------|-----------------|
| SRS56037 | 20 ft. (6.1 m) | 6.4 oz. (181 g) |



## Wire Pulling Lubricant

### Wire Pulling Foam Lubricant

- **NO DRIPS! NO STAINS! NO MESS!**
- One can equals one gallon or 4 quarts of wax/gel lubricants\*
- Foam lubricant is applied directly into the conduit. No need to pre-coat wires
- No mess formula stays where it is applied, even in vertical conduit
- Dissolves clean from hands and clothing



| Cat. No. | Description                 | Weight             |
|----------|-----------------------------|--------------------|
| 51100    | Wire Pulling Foam Lubricant | 1.2 lbs. (0.54 kg) |

\*Based on job site pulls with foam in 3/4" conduit when used as directed.



51100

**⚠ WARNING:**

- Contents under pressure. Do not expose container to direct sunlight or temperatures above 120°F. Do not transport or store near heat sources. Keep cans dry and away from sources of ignition. If frozen, gradually warm to room temperature.
- Do not use wet product on live circuits. Compound is electrically conductive before it dries.

See page 310 for additional information on warnings.





## Wire Pulling Lubricant

### One-Quart Premium Synthetic Clear™

- Designed for use primarily in finished workspaces (i.e. around painted walls and carpeted floors)
- The crystal clear formulation is easy to clean-up and will not stain
- Excellent all purpose lubricant for electrical or datacom applications
- Compatible with most types of cable jackets
- Will not separate out in hot environments for when exposed to freezing temperatures

| Cat. No. | Size            | Container      | Temperature Range                | Weight             |
|----------|-----------------|----------------|----------------------------------|--------------------|
| 51028    | 1 Quart (0.9 L) | Squeeze Bottle | 20° F to 122° F (-6° C to 50° C) | 2.3 lbs. (1.04 kg) |

**US LISTED**  
Wire Pulling Lubricant 842F



51028

### Premium Synthetic Wax™

- High performance lubricant for general electrical and utility applications
- Temperature stable and does not liquify and drop off after high temperature exposure
- Compatible with most types of cable, including low density polyethylene
- Superior "clingability" coats wires and conduit evenly
- Exceptional lubricity
- Non-staining, slow-drying, easy clean-up formula

**US LISTED**  
Wire Pulling Lubricant 842F

| Cat. No. | Size              | Container               | Temperature Range                | Weight               |
|----------|-------------------|-------------------------|----------------------------------|----------------------|
| 51010    | 1 Quart (0.9 L)   | Squeeze Bottle          | 20° F to 122° F (-6° C to 50° C) | 2.3 lbs. (1.04 kg)   |
| 51012    | 1 Gallon (3.8 L)  | Bucket                  | 20° F to 122° F (-6° C to 50° C) | 8.8 lbs. (3.99 kg)   |
| 51013    | 5 Gallon (18.9 L) | Bucket                  | 20° F to 122° F (-6° C to 50° C) | 44.0 lbs. (19.96 kg) |
| 56117    | 1 Quart (0.9 L)   | Squeeze Bottle - 6 Pack | 20° F to 122° F (-6° C to 50° C) | 13.5 lbs. (6.12 kg)  |



51010



51012

### Premium Synthetic Polymer™

- Excellent all-purpose lubricant for electrical, telecommunications and data applications
- Easy-to-apply gel evenly clings instantly to the cable for easy handling and application
- Compatible with most types of cable, including polyethylene and semi conducting jackets
- Superior "clingability" coats wires and conduit evenly
- Non-staining, slow-drying, easy clean-up formula

**US LISTED**  
CERTIFIED TO CSA  
STANDARD C22.2 NO. 249-96

| Cat. No. | Size              | Container      | Temperature Range                | Weight               |
|----------|-------------------|----------------|----------------------------------|----------------------|
| 51015    | 1 Quart (0.9 L)   | Squeeze Bottle | 20° F to 140° F (-6° C to 60° C) | 2.3 lbs. (1.04 kg)   |
| 51017    | 1 Gallon (3.8 L)  | Bucket         | 20° F to 140° F (-6° C to 60° C) | 8.8 lbs. (3.99 kg)   |
| 51018    | 5 Gallon (18.9 L) | Bucket         | 20° F to 140° F (-6° C to 60° C) | 44.0 lbs. (19.96 kg) |



51015



51017

## Wire Pulling Supplies

### Poly Pull Line

- Use polypropylene line with manual or power fishing systems for light duty cable or rope pulling applications
- Ready to use storage containers quickly dispense a tangle free line and also protects line from direct sunlight
- Line is resistant to rot and mildew
- Up to 210 lbs. (95.2 kg) average breaking strength

| Cat. No. | Description                             | Container                    | Weight              |
|----------|---|------------------------------|---------------------|
| 56108    | Poly Pull Line with Orange Tracer 500'  | One-Quart Size w/Locking Lid | 1.0 lbs. (0.45 kg)  |
| 56110    | Poly Pull Line with Orange Tracer 6500' | Five-Gallon Bucket           | 11.0 lbs. (4.99 kg) |



56108



56110



## Conduit Tools

### Conduit Locknut Wrench

- Easily attach locknuts in tight or deep cut-in boxes
- For 1/2" and 3/4" connectors
- Direct-drive heads rotate each other when twisted
- Heavy-duty steel construction enables needed torque to loosen or tighten connectors
- Perfect for remodel work where box is filled with existing wires



56999



US Patent pending

| Cat. No. | Fitting Size  | Overall Length | Weight           |
|----------|---------------|----------------|------------------|
| 56999    | 1/2" and 3/4" | 9" (228.6 mm)  | 11.2 oz. (318 g) |

### High-Leverage Side-Cutting Pliers - Fish Tape Pulling

#### Additional Features:

- Easily pulls 1/8" or 1/4" flat steel fish tape without damaging the tape
- High-leverage design. Rivet is closer to the cutting edge for 46% greater cutting and gripping power than other pliers designs
- Streamlined design
- Cat. No. J2000-9NECRTP crimps non-insulated connectors, lugs, and terminals



D213-9NETP

| Cat. No.  | Nose Type   | Overall Length    | Jaw Length         | Jaw Width        | Jaw Thickness  | Knife Length     | Handle Finish  | Handle Color     | Weight             |
|---|-------------|-------------------|--------------------|------------------|----------------|------------------|----------------|------------------|--------------------|
| D213-9NETP  | New England | 9-3/8" (238.1 mm) | 1-19/32" (40.5 mm) | 1-1/4" (31.8 mm) | 5/8" (15.9 mm) | 25/32" (19.8 mm) | Plastic-Dipped | Dark Blue        | 1.1 lbs. (0.50 kg) |
| <b>Journeyman™ Series – Dual-material handles</b>       |             |                   |                    |                  |                |                  |                |                  |                    |
| J213-9NETP  | New England | 9-1/2" (241.3 mm) | 1-19/32" (40.5 mm) | 1-1/4" (31.8 mm) | 5/8" (15.9 mm) | 25/32" (19.8 mm) | Journeyman     | Dark Blue/Black  | 1.1 lbs. (0.50 kg) |
| <b>2000 Series* – Heavy-duty cutting knives</b>         |             |                   |                    |                  |                |                  |                |                  |                    |
| D2000-9NETP   | New England | 9-3/8" (238.1 mm) | 1-19/32" (40.5 mm) | 1-1/4" (31.8 mm) | 5/8" (15.9 mm) | 25/32" (19.8 mm) | Plastic-Dipped | Royal Blue       | 1.1 lbs. (0.50 kg) |
| <b>Journeyman™ 2000 Series* – Dual-material handles</b> |             |                   |                    |                  |                |                  |                |                  |                    |
| J2000-9NETP   | New England | 9-1/2" (241.3 mm) | 1-19/32" (40.5 mm) | 1-1/4" (31.8 mm) | 5/8" (15.9 mm) | 25/32" (19.8 mm) | Journeyman     | Light Blue/Black | 1.1 lbs. (0.50 kg) |
| J2000-9NECRTP   | New England | 9-1/2" (241.3 mm) | 1-19/32" (40.5 mm) | 1-1/4" (31.8 mm) | 5/8" (15.9 mm) | 25/32" (19.8 mm) | Journeyman     | Blue/Black       | 1.1 lbs. (0.50 kg) |

\*Cuts ACSR, screws, nails, and most hardened wire. Features combination polished and black-oxide finish.

### Conduit Locknut and Reaming Pliers

- Tightens 1/2" (13 mm) and 3/4" (19 mm) EMT or 1/2" (13 mm) rigid locknuts
- Fits liquid tight fittings and caps
- Reams and deburrs both inside and outside of conduit
- Knurled jaws at nose tip pull wire or fish tape
- Machined nose fits snugly into locknut wings



D333-8

| Cat. No. | Overall Length    | Jaw Length       | Jaw Width        | Jaw Thickness  | Point Thickness | Handle Finish  | Handle Color | Weight          |
|----------|-------------------|------------------|------------------|----------------|-----------------|----------------|--------------|-----------------|
| D333-8   | 7-3/4" (196.9 mm) | 1-5/8" (41.3 mm) | 15/16" (23.8 mm) | 1/2" (12.7 mm) | 3/16" (4.8 mm)  | Plastic-Dipped | Yellow       | 8.8 oz. (249 g) |

### Conduit-Fitting and Reaming Screwdriver

- Hooded-blade design keeps tip from slipping out of screws, especially when tightening hard-to-reach conduit fittings. Thicker hood is designed for rugged use
- Reams and smooths 1/2" (13 mm), 3/4" (19 mm), and 1" (25 mm) thin-wall conduit ends to protect wire and permit correct installation of fittings
- Reams both the inside and outside of the conduit at the same time
- Longer Cushion-Grip handle provides comfort and more torque for reaming
- Replaceable reaming blade is now held in place with a 1/6" (1.5 mm) set screw



85191

| Cat. No. | Tip Size                         | Shank Length     | Overall Length    | Weight           |
|----------|----------------------------------|------------------|-------------------|------------------|
| 85191    | 5/16" (7.9 mm)                   | 2-1/2" (63.5 mm) | 7-1/2" (190.5 mm) | 8.0 oz. (227 g)  |
| 19353    | Conduit Reamer Replacement Blade |                  |                   | 0.16 oz. (4.5 g) |

See page 310 for additional information on warnings.



# Conduit Benders

**Exclusive design** reduces rippling and ovaling of conduit

**The traditional Benfield® head design**

accurately and consistently performs common bends such as Stub Ups, Offsets, Back-to-Back and Saddle Bends

**Wide foot pedal** provides excellent stability, leverage and comfort

**Interior clamp** securely holds conduit while cutting with hacksaw

**Interior hook surface** prevents conduit from rolling or twisting during bends

**Easily visible arrow** for ease of alignment on conduit marks


**Bold cast-in symbols**, degree scales, multiplier scales and center of bend marks help save time on the job



## Aluminum Conduit Benders

**Additional Features:**

- Lightweight die-cast aluminum construction
- Both Cat. Nos. 56206 and 56207 come assembled with #51427 handle

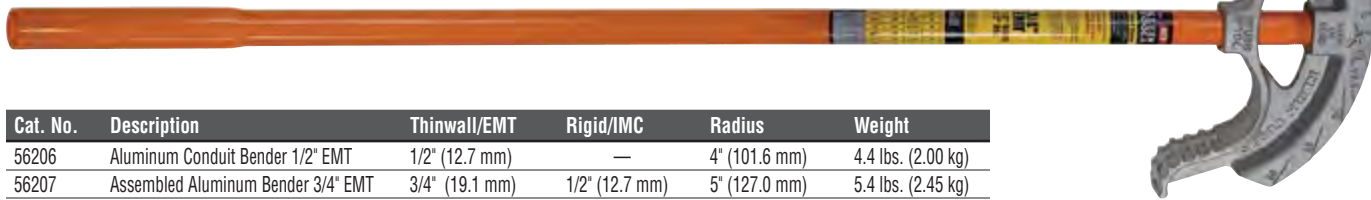


56207

| Cat. No. | Description                        | Thinwall/EMT   | Rigid/IMC      | Radius        | Weight             |
|----------|------------------------------------|----------------|----------------|---------------|--------------------|
| 56206    | Aluminum Conduit Bender 1/2" EMT   | 1/2" (12.7 mm) | —              | 4" (101.6 mm) | 4.4 lbs. (2.00 kg) |
| 56207    | Assembled Aluminum Bender 3/4" EMT | 3/4" (19.1 mm) | 1/2" (12.7 mm) | 5" (127.0 mm) | 5.4 lbs. (2.45 kg) |

## Iron Conduit Benders

**Additional Features:**

- High strength steel handle features a swaged end for inserting conduit to correct overbends (Cat. Nos. 56203 & 56204 only)
- Bright orange color handle is easy to spot on the jobsite

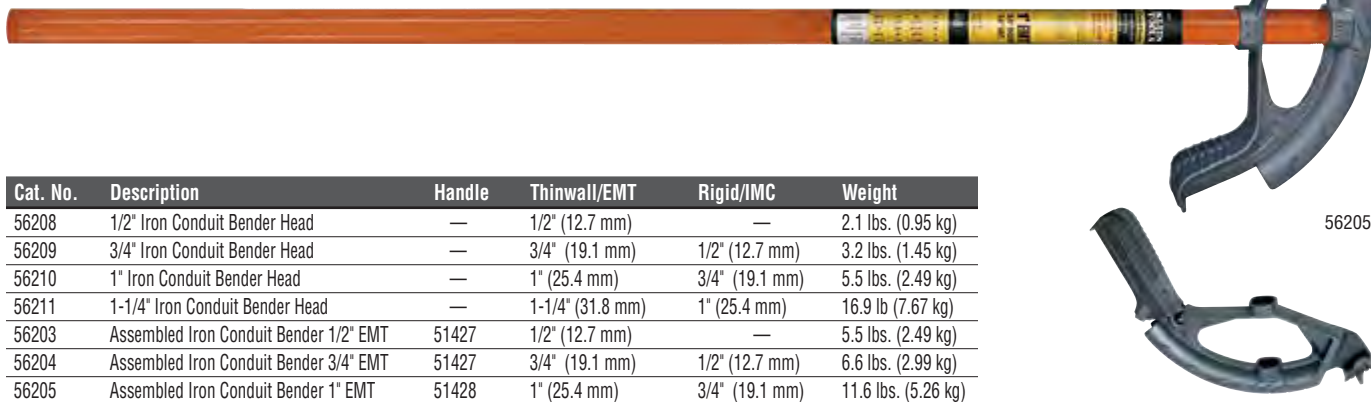

56205

56211

| Cat. No. | Description                            | Handle | Thinwall/EMT     | Rigid/IMC      | Weight              |
|----------|--|--------|------------------|----------------|---------------------|
| 56208    | 1/2" Iron Conduit Bender Head          | —      | 1/2" (12.7 mm)   | —              | 2.1 lbs. (0.95 kg)  |
| 56209    | 3/4" Iron Conduit Bender Head          | —      | 3/4" (19.1 mm)   | 1/2" (12.7 mm) | 3.2 lbs. (1.45 kg)  |
| 56210    | 1" Iron Conduit Bender Head            | —      | 1" (25.4 mm)     | 3/4" (19.1 mm) | 5.5 lbs. (2.49 kg)  |
| 56211    | 1-1/4" Iron Conduit Bender Head        | —      | 1-1/4" (31.8 mm) | 1" (25.4 mm)   | 16.9 lb (7.67 kg)   |
| 56203    | Assembled Iron Conduit Bender 1/2" EMT | 51427  | 1/2" (12.7 mm)   | —              | 5.5 lbs. (2.49 kg)  |
| 56204    | Assembled Iron Conduit Bender 3/4" EMT | 51427  | 3/4" (19.1 mm)   | 1/2" (12.7 mm) | 6.6 lbs. (2.99 kg)  |
| 56205    | Assembled Iron Conduit Bender 1" EMT   | 51428  | 1" (25.4 mm)     | 3/4" (19.1 mm) | 11.6 lbs. (5.26 kg) |







## Conduit Bender Handles

### Bender Handles



- Available in multiple sizes and lengths and are compatible with all Klein Tools conduit bender heads
- High-strength steel eliminates flex and provides excellent feel, control and leverage
- Handle features an enlarged diameter hollow end for inserting conduit to correct overbends (Cat. No. 51427)
- Bright orange color is easy to spot on the jobsite



51427

| Cat. No. | Description                            | Item                  | NPT Tap Size   | Length          | Fits                       | For Use With    | Weight             |
|----------|--|-----------------------|----------------|-----------------|----------------------------|-----------------|--------------------|
| 51427    | Conduit Bender Handle for 1/2", 3/4"   | Conduit Bender Handle | 3/4" (19.1 mm) | 38" (965.2 mm)  | 1/2" and 3/4" Bender Heads | 56208 and 56209 | 3.5 lbs. (1.59 kg) |
| 51428    | Conduit Bender Handle for 1" Heads     | Conduit Bender Handle | 1" (25.4 mm)   | 44" (1117.6 mm) | 1" Bender Head             | 56210           | 6.0 lbs. (2.72 kg) |
| 51429    | Conduit Bender Handle for 1-1/4" Heads | Conduit Bender Handle | 1-1/4"         | 54" (1371.6 mm) | 1-1/4" Bender Head         | 56211           | 8.9 lbs. (4.04 kg) |

## Armored Cable Cutter

### BX and Armored Cable Cutter

- Cuts BX and 3/8" armored cable
- Eliminates burrs
- Does not nick cable
- Easily cuts 3/8" flexible conduit and #10, 12, and 14 armored cables with up to 4 wires with a couple of turns of the handle
- Depth of cut adjusts between standard MC and reduced diameter MC
- Extra blade storage in handle
- Use with Klein Tools replacement blade Cat. No. 53726-SEN



53725

| Cat. No. | Length            | Weight             |
|----------|-------------------|--------------------|
| 53725    | 7-1/4" (184.2 mm) | 2.0 lbs. (0.91 kg) |

#### Replacement Parts

| Cat. No. | Description                 | For Use With                   | Weight         |
|----------|-----------------------------|--------------------------------|----------------|
| 53726SEN | BX Cutter Replacement Blade | Klein Tools Cable Cutter 53725 | 1.6 oz. (45 g) |

## Conduit Scoring Tool

### Electrician's Conduit Scoring Tool

- Durable zinc cast scoring tool eliminates spiraling
- Used for scoring 1/2", 3/4" and 1" EMT conduit
- Klein-designed, patented scoring wheel scores and allows clean conduit snaps without leaving burrs inside
- 1" scoring wheel conveniently located in base of the handle; no tools required to replace scoring wheels
- Four roller tracks specifically designed for professional use
- Compact, enclosed design for use on job sites



88906

| Cat. No. | Length        | Conduit Diameter  | Weight             |
|----------|---------------|---|--------------------|
| 88906    | 6" (152.4 mm) | Scores 1/2", 3/4" and 1" (12.7 mm, 19.1 mm and 25.4 mm) EMT Conduit | 1.3 lbs. (0.59 kg) |

#### Replacement Parts

| Cat. No. | Description                              | Weight          |
|----------|--|-----------------|
| 88907    | 1/2", 3/4" EMT Replacement Scoring Wheel | 0.3 oz. (8.5 g) |
| 88908    | 1" EMT Replacement Scoring Wheel         | 0.3 oz. (8.5 g) |



## PVC-Cutters

### PVC-Cutter

- Cuts up to 3/4" schedule 40 PVC
- Makes clean burr-free cuts in PVC and flexible pipe
- Reversible blade doubles life
- Cuts 1-3/8" outer diameter flexible plastic pipe
- Steel construction for strength
- Guide helps cut pipe squarely
- Handle latch keeps tool closed



50506-SEN

| Cat. No.          | PVC Cutting Capacity                 | Non-metallic Tubing Cutting Capacity | Length            | Weight             |
|-------------------|--------------------------------------|--------------------------------------|-------------------|--------------------|
| 50506SEN          | 3/4" (19.1 mm) Schedule 40           | 1" (25.4 mm)                         | 8-1/2" (215.9 mm) | 1.0 lbs. (0.45 kg) |
| Replacement Parts |                                      |                                      |                   |                    |
| Cat. No.          | Description                          | Length                               | Weight            |                    |
| 50549             | Replacement Blade for Cat. No. 50506 | 3-1/4" (82.6 mm)                     | 1.3 oz. (37 g)    |                    |



50549

### Ratcheting PVC-Cutters

- Provide straight cuts 1/2"-2" I.D. (13 mm-51 mm) O.D. 5/8" - 2-1/2" (16 mm-64 mm) of white and gray schedule 40 and 80 PVC
- Quick, one-handed blade release
- Ratchet action allows easy, one-hand cutting
- No tools required for instant blade change
- Replacement blade and pin available



50031

| Cat. No.          | PVC Cutting Capacity  | Length           | Weight             |
|-------------------|---|------------------|--------------------|
| 50031             | O.D. 5/8" to 1-5/8" (15.9 to 41.3 mm);<br>I.D. 1/2" to 1-1/4" (12.7 to 31.8 mm) | 9" (228.6 mm)    | 1.1 lbs. (0.50 kg) |
| 50034             | O.D. 5/8" to 2-1/2" (15.9 to 63.5 mm);<br>I.D. 1/2" to 2" (12.7 to 50.8 mm)     | 11" (279.4 mm)   | 1.3 lbs. (0.59 kg) |
| Replacement Parts |   |                  |                    |
| Cat. No.          | Description   | Length           | Weight             |
| 50032             | Blade for Ratcheting PVC Cutter   | 4" (101.6 mm)    | 3.0 oz. (86 g)     |
| 50035             | Blade for Large Capacity PVC Cutter   | 4" (101.6 mm)    | 3.0 oz. (86 g)     |
| 50033             | Replacement Retaining Pin for PVC Cutter  | 2-3/8" (60.3 mm) | 0.1 oz. (2.7 g)    |



50032

50033

**WARNING:** Do NOT cut cold PVC.

**WARNING:** Do NOT use to cut metallic pipes, cable or wire.



# Wire Pulling and Conduit Tools

Pulling wire and working with conduit is very challenging without the proper tools. Klein Tools' complete line of conduit tools allows you to get the job done while saving time, effort and materials.



For Professionals...  
Since 1857™



# FISH TAPES

**Unique sloped handle** optimizes hand position for quick hand-over-hand rewinds

**Raised fingergrrips** transfer 100% of the winding power from your hand and fingers

**Polypropylene case and handle** offer the maximum in impact resistance

**Round inner ring design** provides a smooth, surface for winding and rewinding



US Patents: 8899554 D574,277; 8,212,178; 8,168,921; 8,164,025  
Other patents pending




**Available in steel and fiberglass** with a wide variety of tips

## Multi-Groove Fiberglass Fish Tapes

**Additional Features:**

- Fiberglass Performance at 25% Lower Cost!\*
- Rigidity for long distance
- Less surface contact when pushing through crowded conduit
- Durable 7" (178 mm) leader helps push through crowded conduit
- Available resin eyelet for total non-conductivity



Old Profile      New Profile



*Less surface contact with wires*



56055



| Cat. No.   | Tape Size                                 | Reel Diameter  | Weight             |
|--|---|--|--------------------|
| <b>Multi-Groove Fiberglass - 7" (179 mm) Spiral Leader</b> |   |  |                    |
| 56055  | 100 ft. L x 3/16" W (30.5 m L x 4.8 mm W) | 13" (330.2 mm)   | 3.0 lbs. (1.36 kg) |
| 56056  | 200 ft. L x 3/16" W (61.0 m L x 4.8 mm W) | 17" (431.8 mm)   | 6.2 lbs. (2.81 kg) |
| <b>Multi-Groove Fiberglass - Non-Conductive</b>            |   |  |                    |
| 56057  | 50 ft. L x 3/16" W (15.2 m L x 4.8 mm W)  | 13" (330.2 mm)   | 2.3 lbs. (1.04 kg) |
| 56058  | 100 ft. L x 3/16" W (30.5 m L x 4.8 mm W) | 13" (330.2 mm)   | 3.1 lbs. (1.41 kg) |
| 56059  | 200 ft. L x 3/16" W (61.0 m L x 4.8 mm W) | 17" (431.8 mm)   | 6.0 lbs. (2.72 kg) |
| <b>Replacement Parts and Kits</b>                          |   |  |                    |
| Cat. No.   | Description                               | Included   | Weight             |
| 56115  | Fiberglass Fish Tape Repair Kit           | (1) High Leverage Crimper, (2) 7" (177.8 mm) Flexible Leaders, (2) Eyelets, (1) Tube Quick-Drying Glue | 2.2 lbs. (1.00 kg) |
| 56025  | Non-conductive Fish Tape Repair Kit       | Non-Conductive Eyelets ( 2 Ea.), Tube Quick-Drying Glue (1 Ea)   | 2.2 lbs. (1.00 kg) |
| 56116  | Fiberglass Fish Tape Replacement Eyelets  | —  | 1 oz. (27 g)       |
| 56120  | Fiberglass Fish Tape Replacement Leaders  | —  | 1.8 oz. (50 g)     |

\*When compared to published price of Klein Tools fiberglass fish tapes.






## Fish Tapes

### Fiberglass Fish Tapes

#### Additional Features:

- Designed for flexibility and easy navigation through conduit runs
- Non-conductive, fiberglass fish tape slides easily over existing wires and through multiple bends
- Durable 7" (179 mm) leader helps push through crowded conduit
- The lightweight and strong fiberglass composite tape resists harsh elements and is strength rated up to 500 pulling pounds
- Repair kit (Cat. No. 56115) available to replace tips
- Replacement metal eyelets (Cat. No. 56116) and spiral steel leaders (Cat. No. 56120) available



1' permanent laser etched descending increments.



56010

| Cat. No. | Tape Size  | Reel Diameter  | Weight             |
|----------|--|----------------|--------------------|
| 56009    | 50 ft. L x 3/16" W (7" Leader) (15.2 m L x 4.8 mm W [177.8 mm Leader])   | 13" (330.2 mm) | 2.8 lbs. (1.27 kg) |
| 56010    | 100 ft. L x 3/16" W (7" leader) (30.5 m L x 4.8 mm W [177.8 mm Leader])  | 13" (330.2 mm) | 3.5 lbs. (1.59 kg) |
| 56014    | 200 ft. L x 3/16" W (7" Leader) (60.96 m L x 4.8 mm W [177.8 mm Leader]) | 17" (431.8 mm) | 6.2 lbs. (2.81 kg) |


#### Replacement Tapes

| Cat. No. | Description                              | Included   | Weight             |
|----------|--|--|--------------------|
| 56115    | Fiberglass Fish Tape Repair Kit          | (1) High Leverage Crimper, (2) 7" (177.8 mm) Flexible Leaders, (2) Eyelets, (1) Tube Quick-Drying Glue | 2.2 lbs. (1.00 kg) |
| 56116    | Fiberglass Fish Tape Replacement Eyelets | —  | 1 oz. (27 g)       |
| 56120    | Fiberglass Fish Tape Replacement Leaders | —  | 1.8 oz. (50 g)     |

### 1/8" (3 mm) Wide Steel Fish Tapes

#### Additional Features:

- High strength spring steel fish tapes are stiff for long runs and are great for heavy duty wire pulls
- Full grip style handle gives you a firm, steady grip as you pull tape from the case
- Stainless Steel fish tape (Cat. Nos. 56007, 56008) is corrosion resistant and extends the life of the tool



1' permanent laser etched descending increments.



56001

| Cat. No.  | Tape Size   | Reel Diameter  | Weight             |
|---|---|----------------|--------------------|
| <b>Stainless Steel for Corrosion Resistance</b> |   |                |                    |
| 56007   | 125' L x 1/8" W x 0.062" H (38.1 m L x 3.2 mm W x 1.57 mm H)    | 13" (330.2 mm) | 4.7 lbs. (2.13 kg) |
| 56008   | 240 ft. L x 1/8" W x 0.062" H (73.2 m L x 3.2 mm W x 1.57 mm H) | 13" (330.2 mm) | 7.5 lbs. (3.40 kg) |

#### Flat Steel

|       |   |                |                    |
|-------|---|----------------|--------------------|
| 56000 | 25 ft. L x 1/8" W x 0.045" H (7.6 m L x 3.2 mm W x 1.14 mm H)   | 7" (177.8 mm)  | 1.0 lbs. (0.45 kg) |
| 56001 | 50 ft. L x 1/8" W x 0.045" H (15.2 m L x 3.2 mm W x 1.14 mm H)  | 7" (177.8 mm)  | 1.3 lbs. (0.59 kg) |
| 56002 | 65 ft. L x 1/8" W x 0.062" H (19.8 m L x 3.2 mm W x 1.57 mm H)  | 9" (228.6 mm)  | 2.6 lbs. (1.18 kg) |
| 56003 | 125' L x 1/8" W x 0.062" H (38.1 m L x 3.2 mm W x 1.57 mm H)    | 13" (330.2 mm) | 4.7 lbs. (2.13 kg) |
| 56004 | 240 ft. L x 1/8" W x 0.062" H (73.2 m L x 3.2 mm W x 1.57 mm H) | 13" (330.2 mm) | 7.5 lbs. (3.40 kg) |

#### Replacement Tapes

|       |   |   |                    |
|-------|---|---|--------------------|
| 56065 | 65 ft. L x 1/8" W x 0.062" H (19.8 m L x 3.2 mm W x 1.57 mm H)  | — | 1.7 lbs. (0.77 kg) |
| 56125 | 125 ft. L x 1/8" W x 0.062" H (38.1 m L x 3.2 mm W x 1.57 mm H) | — | 3.3 lbs. (1.50 kg) |
| 56240 | 240 ft. L x 1/8" W x 0.062" H (73.2 m L x 3.2 mm W x 1.57 mm H) | — | 6.1 lbs. (2.77 kg) |

See page 310 for additional information on warnings.



**WARNING:** Never remove screws while fish tape is coiled inside reel.

123

## Fish Tapes

### 1/4" (6 mm) Wide Steel Fish Tapes

**Additional Features:**

- Tempered, high quality tape keeps its stability as it glides between surfaces for effective pushing and pulling of wire under carpets, through insulated walls and over suspended ceilings
- 25' length with no snag tip, is perfect for short wire runs associated with light commercial, residential and voice-data-video-audio installations (Cat. No. 56005)



56005 has a no snag plastic tip



1' permanent laser etched descending increments.



56005

| Cat. No. | Tape Size  | Reel Diameter  | Weight             |
|----------|--|----------------|--------------------|
| 56005    | 25 ft. L x 1/4" W x 0.030" H (7.6 m L x 6.4 mm W x 0.76mm H) | 7" (177.8 mm)  | 1.1 lbs. (0.50 kg) |
| 56006    | 100' L x 1/4" W x 0.062" H (30.5 m L x 6.4 mm W x 1.57 mm H) | 13" (330.2 mm) | 6.8 lbs. (3.08 kg) |

### Spiral Steel Fish Tapes

**Additional Features:**

- Designed for super flexibility and easy navigation through conduit runs
- Slides easily over existing wires and through multiple bends
- The durable spiral steel tape construction yields a maximum pulling force of up to 250 lbs.
- Replacement metal eyelets (Cat. No. 56116) and spiral steel leaders (Cat. No. 56120) available



56013

| Cat. No. | Tape Size                                | Reel Diameter  | Weight             |
|----------|--|----------------|--------------------|
| 56013    | 50 ft. L x 3/16" W (15.2 m L x 4.8 mm W) | 13" (330.2 mm) | 5.1 lbs. (2.31 kg) |

**Replacement Parts and Kits**

| Cat. No. | Description                              | Length              | Weight         |
|----------|--|---------------------|----------------|
| 56116    | Fiberglass Fish Tape Replacement Eyelets | 1-1/2" (38.1 mm)    | 1 oz. (27 g)   |
| 56120    | Fiberglass Fish Tape Replacement Leaders | 8-15/16" (227.0 mm) | 1.8 oz. (50 g) |

## Fish Tape Accessories

### Fiberglass Fish Tape Repair Kit

- Contains high leverage ratcheting crimper, two replacement eyelets, two 7" (179 mm) replacement leaders, one tube of quick dry glue and comprehensive instructions
- Multi-function ratcheting crimper (Cat. No. 56115V) cuts tape cleanly, strips tapes and crimps on new attachments
- Newly crimped on eyelets meet or exceed original factory pulling strength requirements
- Protective carry case firmly holds all tools and additional parts in handy, organized compartments
- Cat. No. 56025 is for repairing non-conductive fiberglass fish tapes



56115

| Cat. No. | Included   | Weight             |
|----------|--|--------------------|
| 56115    | (1) High Leverage Crimper, (2) 7" (177.8 mm) Flexible Leaders, (2) Eyelets, (1) Tube Quick-Drying Glue | 2.2 lbs. (1.00 kg) |
| 56025    | Non-Conductive Eyelets ( 2 Ea.), Tube Quick-Drying Glue (1 Ea)   | 2.2 lbs. (1.00 kg) |







## Fish Tape Accessories

### 2-Pack 7" (179 mm) Replacement Flexible Leaders & 6-Pack Replacement Eyelets

- For use only with fiberglass fish tapes (Cat. No. 56009, 56010 & 56014)
- Attach with Klein Tools ratcheting crimper (Cat. No. 56115V) available in kit 56115 only

| Cat. No. | Length              | Weight         |
|----------|---------------------|----------------|
| 56120    | 8-15/16" (227.0 mm) | 1.8 oz. (50 g) |
| 56116    | 1-1/2" (38.1 mm)    | 1 oz. (27 g)   |



56120



56116

### 13" (330 mm) Flexible Leader for Steel Fish Tapes

- For use with 1/8" (3 mm) wide steel fish tapes
- Heavy duty construction is strength rated up to 250 pulling pounds
- High capacity eyelet holds up to five #12 unstripped wires and seven #10 bare wires
- Retrofit instructions included
- The 3/16" (5 mm) diameter tape has a rustproof inner steel cable core wrapped with a spiral cover for exceptional flexibility
- Flexible leader guides steel tapes through 90° bends and makes pulling and pushing flat steel tapes easier

| Cat. No. | Diameter       | Length             | Weight         |
|----------|----------------|--------------------|----------------|
| 50350    | 3/16" (4.8 mm) | 13-1/2" (342.9 mm) | 1.6 oz. (45 g) |



50350

### 6 Loop Wire Pulling Leader

- Save time by attaching leader to the end of a fish tape and pull up to six wires at once
- Braided steel construction provides up to 450 lbs. pull strength on main eyelet
- Flexible construction allows for easy navigation through multiple bends in conduit
- Staggered loop lengths won't overlap and clog pipe
- For use with 1/8" and 1/4" (3 mm and 6 mm) flat steel fish tapes

| Cat. No. | Length             | Weight         |
|----------|--------------------|----------------|
| 56107    | 11-1/4" (285.8 mm) | 3.2 oz. (91 g) |



56107

### Steel Fish Tape Swivel Eyelet

- For use with 1/8" (6 mm) wide steel fish tapes
- Swivel head design helps prevent kinks and allows smoother, easier fishing in tight turns
- High capacity eyelet holds up to five #12 unstripped wires or seven #10 bare wires
- High strength steel construction allows for optimal performance over repeated uses
- Retrofit instructions included

| Cat. No. | Diameter       | Length           | Weight         |
|----------|----------------|------------------|----------------|
| 50351    | 3/16" (4.8 mm) | 1-1/2" (38.1 mm) | 0.5 oz. (14 g) |



50351



# Fish Rods & Accessories



**Exclusive Splinter Guard™ protection from painful fiberglass splinters**  
**Rods have threaded beveled connectors to attach to desired length and prevent snagging on obstructions**

**LO flex** – long, straight feeding  
**HIGH flex** – tight bends in walls  
**MID flex** – all needs in between

**Luminescent glow rods provide added visibility** in dark work spaces

**Shines 2X brighter and lasts 2X longer** than ordinary glow rods



## Fish and Glow Rods

### Additional Features:

- Variety of flexibilities and lengths for any application such as walls, drop ceilings, attics, crawl spaces, etc.
- Sets include bull nose and hook attachments to attach and grab wires
- Cat. No. 56430 also includes illuminated tip



| Cat. No.         | Description                       | Included  | Diameter                      | Overall Length | Weight             |
|------------------|-----------------------------------|---|-------------------------------|----------------|--------------------|
| <b>Fish Rods</b> |                                   |   |                               |                |                    |
| 56312            | 12' (3.7 m) Lo-Flex Fish Rod Set  | (3) 1/4" (6.4 mm) Diameter 4' (1.2 m) Fish Rods with Bullet Nose and Hook Attachments                             | 1/4" (6.4 mm)                 | 12 ft. (3.7 m) | 1.1 lbs. (0.50 kg) |
| 56324            | 24' (7.3 m) Lo-Flex Fish Rod Set  | (4) 1/4" Diameter 6' (1.5 m) Fish Rods with Bullet Nose and Hook Attachments                                      | 1/4" (6.4 mm)                 | 24' (7.3 m)    | 1.9 lbs. (0.86 kg) |
| 56325            | 25' (7.6 m) Fish and Glow Rod Set | (5) 1/4" 1/4" (6.4 mm) Diameter 4' Diameter 4' (1.2 m) Fish Rods, Fish Rods, (1) 3/16" 3/16" (4.8 mm) Diameter 5' | 1/4" to 3/16" (6.4 to 4.8 mm) | 25 ft. (7.6 m) | 1.8 lbs. (0.82 kg) |
| <b>Glow Rods</b> |                                   |   |                               |                |                    |
| 56406            | 6' (1.8 m) Hi-Flex Glow Rod       |   | 5/32" (4.0 mm)                | 6 ft. (1.8 m)  | 3.2 oz. (91 g)     |
| 56409            | 9' (2.7 m) Mid-Flex Glow Rod Set  | (6) 3/16" (4.76 mm) Diameter 18" (457.2 mm) Glow Rods with Bullet Nose and Hook Attachments                       | 3/16" (4.8 mm)                | 9 ft. (2.7 m)  | 8.8 oz. (249 g)    |
| 56415            | 15' (4.6 m) Mid-Flex Glow Rod Set | (3) 3/16" (4.8 mm) Diameter 5' (1.5 m) Glow Rods with Bullet Nose and Hook Attachments                            | 3/16" (4.8 mm)                | 15 ft. (4.6 m) | 13.6 oz. (386 g)   |
| 56418            | 18' (5.5 m) Hi-Flex Glow Rod Set  | (3) 5/32" (4 mm) Diameter 6' (1.8 m) Glow Rods with Bullet Nose and Hook Attachments                              | 5/32" (4.0 mm)                | 18 ft. (5.5 m) | 13.6 oz. (386 g)   |
| 56430            | 30' Glow Rod Set                  | (6) 3/15" (4.7 mm) Diameter x 5' (1.5 m) Glow Rods with Bullet Nose, Hook, and LED-Illuminated Tip Attachments    | 3/16" (4.8 mm)                | 30 ft. (9.1 m) | 1.2 lbs. (0.54 kg) |

## Deluxe Fish and Glow Rod Kit

- Heavy-duty storage case with fitted pockets and straps for organization
- Large handles fit over the shoulder for easy transport
- Convenient zipper pocket for accessory storage



| Cat. No. | Included   | Overall Length  | Weight             |
|----------|--|-----------------|--------------------|
| 56326    | (2) 1/4" (6.4 mm) Diameter 6 ft. (1.8 m) Lo-Flex and (2) 1/4" (6.4 mm) Diameter 4 ft. (1.2 m) Lo-Flex Fish Rods, (3) 3/16" (4.8 mm) Diameter 5 ft. (1.5 m) Mid-Flex Glow Rods, (3) 5/32" (4 mm) Diameter 6 ft. (1.8 m) Hi-Flex Glow Rods, (1) Hook, (1) Bullet Nose, and (1) Carrying Case | 75" (1905.0 mm) | 3.8 lbs. (1.72 kg) |

## Illuminated Fish Rod Tip

- Lights up for maximum visibility in dark spaces
- Bright white, omni-directional LED light for long life
- Threaded top for hook or bullet nose attachment (not included)
- Fits drilled holes as small as 5/8" (16 mm)
- Compatible with Lo, Mid and High flex rods
- Replaceable batteries included
- U.S. Pat. No. 9,062,834



56119

| Cat. No. | Description              | Dimensions  | Weight          |
|----------|--------------------------|---|-----------------|
| 56119    | Illuminated Fish Rod Tip | 2.5" L x 37/64" Diameter (63.5 mm L x 14.7 mm Diameter) | 5.0 oz. (142 g) |

## Fish Rod Accessories

- Attachments help guide, grab, attach and steer wire or cable
- Compatible with Lo, Mid and High flex rods



56104

| Cat. No. | Description                              | Included  | Weight          |
|----------|--|---|-----------------|
| 56104    | 3 Piece Fish and Glow Rod Attachment Set | (1) Whisk Attachment (1) Bullet Nose Attachment (1) Hook Attachment | 0.2 oz. (5.7 g) |





## Wire Pulling Tools

### WireSpanner™ - Telescopic Pole 18'

**SUPER ROD® SERIES**



- Extends to 18' (5.4 m) in 10 seconds
- Easily retrieve cable from a distance without needing an extra pair of hands to shorten installation time
- Large hook attachment pulls multiple wires easily
- Friction-twist lock pole design stays locked in place
- Lightweight resin slides easily over obstructions
- Compact design retracts to 32" (813 mm) for easy storage

SRS56036

| Cat. No. | Compact Length | Extended Length | Weight             |
|----------|----------------|-----------------|--------------------|
| SRS56036 | 32" (812.8 mm) | 18 ft. (5.5 m)  | 2.8 lbs. (1.27 kg) |

### Polymer Fish Rod Set with Glow-in-the-Dark Leaders

**SUPER ROD® SERIES**

- Non-conductive rods designed for working in confined spaces
- Great for routing cables in wire racks and on short runs
- Attachments glow in the dark for ease of use
- Includes 14" (356 mm) rods of various flexibilities and illumination for a range of individual (or 56" (1.4 m) combined) wire pulling applications
- Includes five Glow-in-the-Dark leaders (hook, bullet, mini-eyelet, domed-eyelet and claw)
- Convenient storage tube protects the rods between use and fits easily into your bag or toolbox



SRS56038

5 Attachments Included



Hook Bullet Mini-Eyelet Domed-Eyelet Claw

| Cat. No. | Extended Length | Weight          |
|----------|-----------------|-----------------|
| SRS56038 | 56" (1.4 m)     | 4.0 oz. (113 g) |

### Magnetic Wire Pulling System

- This system allows you to effortlessly pull cable behind walls by yourself
- Navigates through insulation and other obstructions
- Perfect for routing cable between drywall and insulation or fixture installations
- Swivel leader eyelet securely connects to most wires and mesh wire pulling grips
- Non-marring nylon leader-pull with 20' (6.1 m) of heavy-duty nylon rope eyelet for wire tie-on



SRS56037

| Cat. No. | Length         | Weight          |
|----------|----------------|-----------------|
| SRS56037 | 20 ft. (6.1 m) | 6.4 oz. (181 g) |



## Wire Pulling Lubricant

### Wire Pulling Foam Lubricant

- **NO DRIPS! NO STAINS! NO MESS!**
- One can equals one gallon or 4 quarts of wax/gel lubricants\*
- Foam lubricant is applied directly into the conduit. No need to pre-coat wires
- No mess formula stays where it is applied, even in vertical conduit
- Dissolves clean from hands and clothing



| Cat. No. | Description                 | Weight             |
|----------|-----------------------------|--------------------|
| 51100    | Wire Pulling Foam Lubricant | 1.2 lbs. (0.54 kg) |

\*Based on job site pulls with foam in 3/4" conduit when used as directed.



51100

**⚠ WARNING:**

- Contents under pressure. Do not expose container to direct sunlight or temperatures above 120°F. Do not transport or store near heat sources. Keep cans dry and away from sources of ignition. If frozen, gradually warm to room temperature.
- Do not use wet product on live circuits. Compound is electrically conductive before it dries.

See page 310 for additional information on warnings.



## Wire Pulling Lubricant

### One-Quart Premium Synthetic Clear™

- Designed for use primarily in finished workspaces (i.e. around painted walls and carpeted floors)
- The crystal clear formulation is easy to clean-up and will not stain
- Excellent all purpose lubricant for electrical or datacom applications
- Compatible with most types of cable jackets
- Will not separate out in hot environments for when exposed to freezing temperatures

| Cat. No. | Size            | Container      | Temperature Range                | Weight             |
|----------|-----------------|----------------|----------------------------------|--------------------|
| 51028    | 1 Quart (0.9 L) | Squeeze Bottle | 20° F to 122° F (-6° C to 50° C) | 2.3 lbs. (1.04 kg) |

**US LISTED**  
Wire Pulling Lubricant 842F



51028

### Premium Synthetic Wax™

- High performance lubricant for general electrical and utility applications
- Temperature stable and does not liquify and drop off after high temperature exposure
- Compatible with most types of cable, including low density polyethylene
- Superior "clingability" coats wires and conduit evenly
- Exceptional lubricity
- Non-staining, slow-drying, easy clean-up formula

**US LISTED**  
Wire Pulling Lubricant 842F

| Cat. No. | Size              | Container               | Temperature Range                | Weight               |
|----------|-------------------|-------------------------|----------------------------------|----------------------|
| 51010    | 1 Quart (0.9 L)   | Squeeze Bottle          | 20° F to 122° F (-6° C to 50° C) | 2.3 lbs. (1.04 kg)   |
| 51012    | 1 Gallon (3.8 L)  | Bucket                  | 20° F to 122° F (-6° C to 50° C) | 8.8 lbs. (3.99 kg)   |
| 51013    | 5 Gallon (18.9 L) | Bucket                  | 20° F to 122° F (-6° C to 50° C) | 44.0 lbs. (19.96 kg) |
| 56117    | 1 Quart (0.9 L)   | Squeeze Bottle - 6 Pack | 20° F to 122° F (-6° C to 50° C) | 13.5 lbs. (6.12 kg)  |



51010



51012

### Premium Synthetic Polymer™

- Excellent all-purpose lubricant for electrical, telecommunications and data applications
- Easy-to-apply gel evenly clings instantly to the cable for easy handling and application
- Compatible with most types of cable, including polyethylene and semi conducting jackets
- Superior "clingability" coats wires and conduit evenly
- Non-staining, slow-drying, easy clean-up formula

**US LISTED**  
CERTIFIED TO CSA  
STANDARD C22.2 NO. 249-96

| Cat. No. | Size              | Container      | Temperature Range                | Weight               |
|----------|-------------------|----------------|----------------------------------|----------------------|
| 51015    | 1 Quart (0.9 L)   | Squeeze Bottle | 20° F to 140° F (-6° C to 60° C) | 2.3 lbs. (1.04 kg)   |
| 51017    | 1 Gallon (3.8 L)  | Bucket         | 20° F to 140° F (-6° C to 60° C) | 8.8 lbs. (3.99 kg)   |
| 51018    | 5 Gallon (18.9 L) | Bucket         | 20° F to 140° F (-6° C to 60° C) | 44.0 lbs. (19.96 kg) |



51015



51017

## Wire Pulling Supplies

### Poly Pull Line

- Use polypropylene line with manual or power fishing systems for light duty cable or rope pulling applications
- Ready to use storage containers quickly dispense a tangle free line and also protects line from direct sunlight
- Line is resistant to rot and mildew
- Up to 210 lbs. (95.2 kg) average breaking strength

| Cat. No. | Description                             | Container                    | Weight              |
|----------|---|------------------------------|---------------------|
| 56108    | Poly Pull Line with Orange Tracer 500'  | One-Quart Size w/Locking Lid | 1.0 lbs. (0.45 kg)  |
| 56110    | Poly Pull Line with Orange Tracer 6500' | Five-Gallon Bucket           | 11.0 lbs. (4.99 kg) |



56108



56110





## Conduit Tools

### Conduit Locknut Wrench

- Easily attach locknuts in tight or deep cut-in boxes
- For 1/2" and 3/4" connectors
- Direct-drive heads rotate each other when twisted
- Heavy-duty steel construction enables needed torque to loosen or tighten connectors
- Perfect for remodel work where box is filled with existing wires



56999



US Patent pending

| Cat. No. | Fitting Size  | Overall Length | Weight           |
|----------|---------------|----------------|------------------|
| 56999    | 1/2" and 3/4" | 9" (228.6 mm)  | 11.2 oz. (318 g) |

### High-Leverage Side-Cutting Pliers - Fish Tape Pulling

#### Additional Features:

- Easily pulls 1/8" or 1/4" flat steel fish tape without damaging the tape
- High-leverage design. Rivet is closer to the cutting edge for 46% greater cutting and gripping power than other pliers designs
- Streamlined design
- Cat. No. J2000-9NECRTP crimps non-insulated connectors, lugs, and terminals



D213-9NETP

| Cat. No.  | Nose Type   | Overall Length    | Jaw Length         | Jaw Width        | Jaw Thickness  | Knife Length     | Handle Finish  | Handle Color     | Weight             |
|---|-------------|-------------------|--------------------|------------------|----------------|------------------|----------------|------------------|--------------------|
| D213-9NETP  | New England | 9-3/8" (238.1 mm) | 1-19/32" (40.5 mm) | 1-1/4" (31.8 mm) | 5/8" (15.9 mm) | 25/32" (19.8 mm) | Plastic-Dipped | Dark Blue        | 1.1 lbs. (0.50 kg) |
| <b>Journeyman™ Series – Dual-material handles</b>       |             |                   |                    |                  |                |                  |                |                  |                    |
| J213-9NETP  | New England | 9-1/2" (241.3 mm) | 1-19/32" (40.5 mm) | 1-1/4" (31.8 mm) | 5/8" (15.9 mm) | 25/32" (19.8 mm) | Journeyman     | Dark Blue/Black  | 1.1 lbs. (0.50 kg) |
| <b>2000 Series* – Heavy-duty cutting knives</b>         |             |                   |                    |                  |                |                  |                |                  |                    |
| D2000-9NETP   | New England | 9-3/8" (238.1 mm) | 1-19/32" (40.5 mm) | 1-1/4" (31.8 mm) | 5/8" (15.9 mm) | 25/32" (19.8 mm) | Plastic-Dipped | Royal Blue       | 1.1 lbs. (0.50 kg) |
| <b>Journeyman™ 2000 Series* – Dual-material handles</b> |             |                   |                    |                  |                |                  |                |                  |                    |
| J2000-9NETP   | New England | 9-1/2" (241.3 mm) | 1-19/32" (40.5 mm) | 1-1/4" (31.8 mm) | 5/8" (15.9 mm) | 25/32" (19.8 mm) | Journeyman     | Light Blue/Black | 1.1 lbs. (0.50 kg) |
| J2000-9NECRTP   | New England | 9-1/2" (241.3 mm) | 1-19/32" (40.5 mm) | 1-1/4" (31.8 mm) | 5/8" (15.9 mm) | 25/32" (19.8 mm) | Journeyman     | Blue/Black       | 1.1 lbs. (0.50 kg) |

\*Cuts ACSR, screws, nails, and most hardened wire. Features combination polished and black-oxide finish.

### Conduit Locknut and Reaming Pliers

- Tightens 1/2" (13 mm) and 3/4" (19 mm) EMT or 1/2" (13 mm) rigid locknuts
- Fits liquid tight fittings and caps
- Reams and deburrs both inside and outside of conduit
- Knurled jaws at nose tip pull wire or fish tape
- Machined nose fits snugly into locknut wings



D333-8

| Cat. No. | Overall Length    | Jaw Length       | Jaw Width        | Jaw Thickness  | Point Thickness | Handle Finish  | Handle Color | Weight          |
|----------|-------------------|------------------|------------------|----------------|-----------------|----------------|--------------|-----------------|
| D333-8   | 7-3/4" (196.9 mm) | 1-5/8" (41.3 mm) | 15/16" (23.8 mm) | 1/2" (12.7 mm) | 3/16" (4.8 mm)  | Plastic-Dipped | Yellow       | 8.8 oz. (249 g) |

### Conduit-Fitting and Reaming Screwdriver

- Hooded-blade design keeps tip from slipping out of screws, especially when tightening hard-to-reach conduit fittings. Thicker hood is designed for rugged use
- Reams and smooths 1/2" (13 mm), 3/4" (19 mm), and 1" (25 mm) thin-wall conduit ends to protect wire and permit correct installation of fittings
- Reams both the inside and outside of the conduit at the same time
- Longer Cushion-Grip handle provides comfort and more torque for reaming
- Replaceable reaming blade is now held in place with a 1/6" (1.5 mm) set screw



85191

| Cat. No. | Tip Size                         | Shank Length     | Overall Length    | Weight           |
|----------|----------------------------------|------------------|-------------------|------------------|
| 85191    | 5/16" (7.9 mm)                   | 2-1/2" (63.5 mm) | 7-1/2" (190.5 mm) | 8.0 oz. (227 g)  |
| 19353    | Conduit Reamer Replacement Blade |                  |                   | 0.16 oz. (4.5 g) |

See page 310 for additional information on warnings.



# Conduit Benders

**Exclusive design** reduces rippling and ovaling of conduit

**The traditional Benfield® head design**

accurately and consistently performs common bends such as Stub Ups, Offsets, Back-to-Back and Saddle Bends

**Wide foot pedal** provides excellent stability, leverage and comfort

**Interior clamp** securely holds conduit while cutting with hacksaw

**Interior hook surface** prevents conduit from rolling or twisting during bends

**Easily visible arrow** for ease of alignment on conduit marks


**Bold cast-in symbols**, degree scales, multiplier scales and center of bend marks help save time on the job



## Aluminum Conduit Benders

**Additional Features:**

- Lightweight die-cast aluminum construction
- Both Cat. Nos. 56206 and 56207 come assembled with #51427 handle

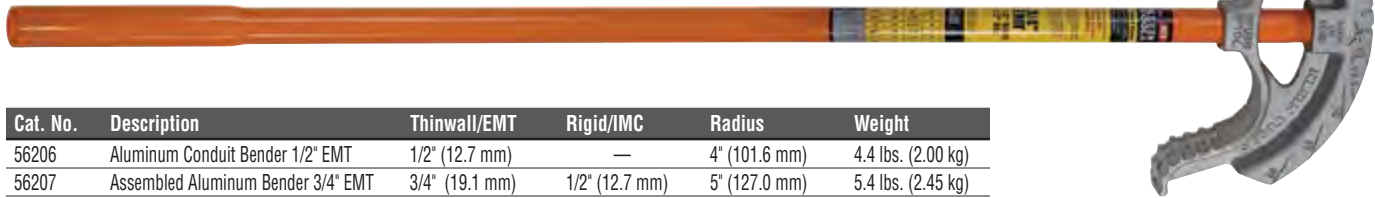


56207

| Cat. No. | Description                        | Thinwall/EMT   | Rigid/IMC      | Radius        | Weight             |
|----------|------------------------------------|----------------|----------------|---------------|--------------------|
| 56206    | Aluminum Conduit Bender 1/2" EMT   | 1/2" (12.7 mm) | —              | 4" (101.6 mm) | 4.4 lbs. (2.00 kg) |
| 56207    | Assembled Aluminum Bender 3/4" EMT | 3/4" (19.1 mm) | 1/2" (12.7 mm) | 5" (127.0 mm) | 5.4 lbs. (2.45 kg) |

## Iron Conduit Benders

**Additional Features:**

- High strength steel handle features a swaged end for inserting conduit to correct overbends (Cat. Nos. 56203 & 56204 only)
- Bright orange color handle is easy to spot on the jobsite

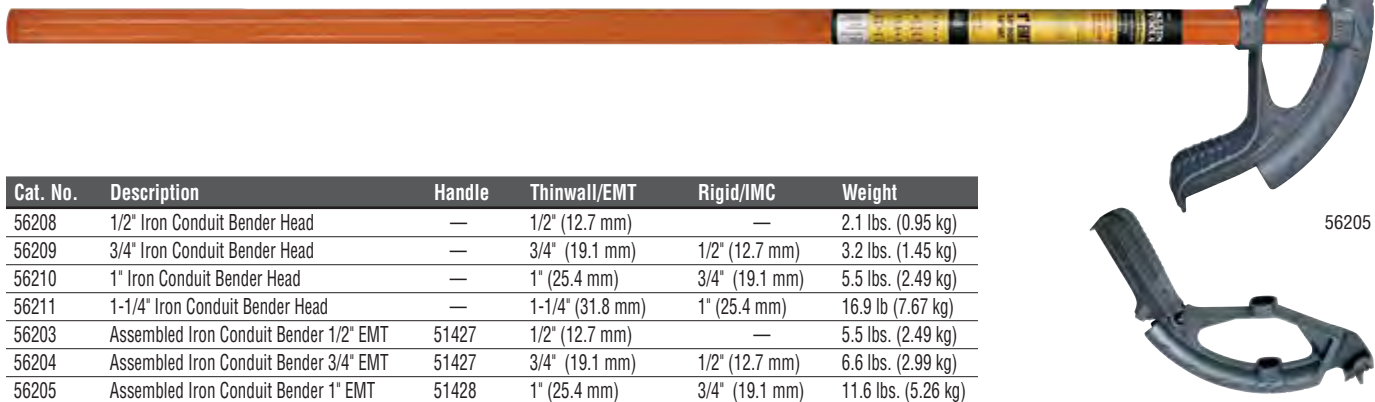

56205

56211

| Cat. No. | Description                            | Handle | Thinwall/EMT     | Rigid/IMC      | Weight              |
|----------|--|--------|------------------|----------------|---------------------|
| 56208    | 1/2" Iron Conduit Bender Head          | —      | 1/2" (12.7 mm)   | —              | 2.1 lbs. (0.95 kg)  |
| 56209    | 3/4" Iron Conduit Bender Head          | —      | 3/4" (19.1 mm)   | 1/2" (12.7 mm) | 3.2 lbs. (1.45 kg)  |
| 56210    | 1" Iron Conduit Bender Head            | —      | 1" (25.4 mm)     | 3/4" (19.1 mm) | 5.5 lbs. (2.49 kg)  |
| 56211    | 1-1/4" Iron Conduit Bender Head        | —      | 1-1/4" (31.8 mm) | 1" (25.4 mm)   | 16.9 lb (7.67 kg)   |
| 56203    | Assembled Iron Conduit Bender 1/2" EMT | 51427  | 1/2" (12.7 mm)   | —              | 5.5 lbs. (2.49 kg)  |
| 56204    | Assembled Iron Conduit Bender 3/4" EMT | 51427  | 3/4" (19.1 mm)   | 1/2" (12.7 mm) | 6.6 lbs. (2.99 kg)  |
| 56205    | Assembled Iron Conduit Bender 1" EMT   | 51428  | 1" (25.4 mm)     | 3/4" (19.1 mm) | 11.6 lbs. (5.26 kg) |





## Conduit Bender Handles

### Bender Handles



- Available in multiple sizes and lengths and are compatible with all Klein Tools conduit bender heads
- High-strength steel eliminates flex and provides excellent feel, control and leverage
- Handle features an enlarged diameter hollow end for inserting conduit to correct overbends (Cat. No. 51427)
- Bright orange color is easy to spot on the jobsite



51427

| Cat. No. | Description                            | Item                  | NPT Tap Size   | Length          | Fits                       | For Use With    | Weight             |
|----------|--|-----------------------|----------------|-----------------|----------------------------|-----------------|--------------------|
| 51427    | Conduit Bender Handle for 1/2", 3/4"   | Conduit Bender Handle | 3/4" (19.1 mm) | 38" (965.2 mm)  | 1/2" and 3/4" Bender Heads | 56208 and 56209 | 3.5 lbs. (1.59 kg) |
| 51428    | Conduit Bender Handle for 1" Heads     | Conduit Bender Handle | 1" (25.4 mm)   | 44" (1117.6 mm) | 1" Bender Head             | 56210           | 6.0 lbs. (2.72 kg) |
| 51429    | Conduit Bender Handle for 1-1/4" Heads | Conduit Bender Handle | 1-1/4"         | 54" (1371.6 mm) | 1-1/4" Bender Head         | 56211           | 8.9 lbs. (4.04 kg) |

## Armored Cable Cutter

### BX and Armored Cable Cutter

- Cuts BX and 3/8" armored cable
- Eliminates burrs
- Does not nick cable
- Easily cuts 3/8" flexible conduit and #10, 12, and 14 armored cables with up to 4 wires with a couple of turns of the handle
- Depth of cut adjusts between standard MC and reduced diameter MC
- Extra blade storage in handle
- Use with Klein Tools replacement blade Cat. No. 53726-SEN



53725

| Cat. No. | Length            | Weight             |
|----------|-------------------|--------------------|
| 53725    | 7-1/4" (184.2 mm) | 2.0 lbs. (0.91 kg) |

#### Replacement Parts

| Cat. No. | Description                 | For Use With                   | Weight         |
|----------|-----------------------------|--------------------------------|----------------|
| 53726SEN | BX Cutter Replacement Blade | Klein Tools Cable Cutter 53725 | 1.6 oz. (45 g) |

## Conduit Scoring Tool

### Electrician's Conduit Scoring Tool

- Durable zinc cast scoring tool eliminates spiraling
- Used for scoring 1/2", 3/4" and 1" EMT conduit
- Klein-designed, patented scoring wheel scores and allows clean conduit snaps without leaving burrs inside
- 1" scoring wheel conveniently located in base of the handle; no tools required to replace scoring wheels
- Four roller tracks specifically designed for professional use
- Compact, enclosed design for use on job sites



88906

| Cat. No. | Length        | Conduit Diameter  | Weight             |
|----------|---------------|---|--------------------|
| 88906    | 6" (152.4 mm) | Scores 1/2", 3/4" and 1" (12.7 mm, 19.1 mm and 25.4 mm) EMT Conduit | 1.3 lbs. (0.59 kg) |

#### Replacement Parts

| Cat. No. | Description                              | Weight          |
|----------|--|-----------------|
| 88907    | 1/2", 3/4" EMT Replacement Scoring Wheel | 0.3 oz. (8.5 g) |
| 88908    | 1" EMT Replacement Scoring Wheel         | 0.3 oz. (8.5 g) |



88907

88908



## PVC-Cutters

### PVC-Cutter

- Cuts up to 3/4" schedule 40 PVC
- Makes clean burr-free cuts in PVC and flexible pipe
- Reversible blade doubles life
- Cuts 1-3/8" outer diameter flexible plastic pipe
- Steel construction for strength
- Guide helps cut pipe squarely
- Handle latch keeps tool closed



50506-SEN

| Cat. No.          | PVC Cutting Capacity                 | Non-metallic Tubing Cutting Capacity | Length            | Weight             |
|-------------------|--------------------------------------|--------------------------------------|-------------------|--------------------|
| 50506SEN          | 3/4" (19.1 mm) Schedule 40           | 1" (25.4 mm)                         | 8-1/2" (215.9 mm) | 1.0 lbs. (0.45 kg) |
| Replacement Parts |                                      |                                      |                   |                    |
| Cat. No.          | Description                          | Length                               | Weight            |                    |
| 50549             | Replacement Blade for Cat. No. 50506 | 3-1/4" (82.6 mm)                     | 1.3 oz. (37 g)    |                    |



50549

### Ratcheting PVC-Cutters

- Provide straight cuts 1/2"-2" I.D. (13 mm-51 mm) O.D. 5/8" - 2-1/2" (16 mm-64 mm) of white and gray schedule 40 and 80 PVC
- Quick, one-handed blade release
- Ratchet action allows easy, one-hand cutting
- No tools required for instant blade change
- Replacement blade and pin available



50031

| Cat. No.          | PVC Cutting Capacity   | Length           | Weight             |
|-------------------|--|------------------|--------------------|
| 50031             | O.D. 5/8" to 1-5/8" (15.9 to 41.3 mm); I.D. 1/2" to 1-1/4" (12.7 to 31.8 mm) | 9" (228.6 mm)    | 1.1 lbs. (0.50 kg) |
| 50034             | O.D. 5/8" to 2-1/2" (15.9 to 63.5 mm); I.D. 1/2" to 2" (12.7 to 50.8 mm)     | 11" (279.4 mm)   | 1.3 lbs. (0.59 kg) |
| Replacement Parts |  |                  |                    |
| Cat. No.          | Description  | Length           | Weight             |
| 50032             | Blade for Ratcheting PVC Cutter  | 4" (101.6 mm)    | 3.0 oz. (86 g)     |
| 50035             | Blade for Large Capacity PVC Cutter  | 4" (101.6 mm)    | 3.0 oz. (86 g)     |
| 50033             | Replacement Retaining Pin for PVC Cutter                                     | 2-3/8" (60.3 mm) | 0.1 oz. (2.7 g)    |



50032

50033

**WARNING:** Do NOT cut cold PVC.

**WARNING:** Do NOT use to cut metallic pipes, cable or wire.

