

## FEATURES & SPECIFICATIONS

**INTENDED USE** — Our recessed LED module is the most economical means to create a well lit environment with exceptional energy efficiency and near zero maintenance. Great for retrofit into existing downlight cans or new construction and remodel applications. Adjustable torsion spring and retention allows fitment into many 5" and 6" cans. The LED module maintains at least 70% light output for 35,000 hours.

**CONSTRUCTION** — Aluminum spun reflector with deep baffle configuration for reduced glare. Combined LED and driver printed circuit board attached. Inner reflector cone funnels light through the pressed-in diffused lens.

**OPTICS** — Diffused lens at end of mixing chamber to provide even light distribution for general illumination, equivalent to 65W BR30 lamp.

Wide flood beam angle at >45°.

**ELECTRICAL** — Center 2 Edge™ (patent pending) technology created for a single point source. Primary power disconnect provided for simple connection to a dedicated LED connector in the housing.

Dimming down to 10%. For compatible dimmers, refer to [Compatible Dimmers Chart](#).

650L-lumen E series has an input wattage of 11.9 watts, 54 lumens per watt, equivalent to 65-watt incandescent.

E Series' patent pending driver has zero inrush, which allows power loads to be calculated with actual rated wattages.

Example: 54 units of 65BEMW LED fixtures can be installed in line with a 600-watt dimmer.  $600W/11.9W = 54$  fixtures.

\*Actual wattage may differ by +/-5% when operating at 120V +/-10%.

**INSTALLATION** — Suitable for installation in standard and shallow-height rough-in sections.

E26 socket adapter ships standard.

Twin torsion springs ensure easy installation for 5" and 6" recessed housings.

**LISTINGS** — CSA certified to US and Canadian safety standards. ENERGY STAR® qualified. Wet location listed. WSEC ASTM E283 for Air-Tight (with IC housings).

**WARRANTY** — 5-year limited warranty. Complete warranty terms located at [www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx)

Actual performance may differ as a result of end-user environment and application.

Note: Specifications subject to change without notice.

**PATENTS PENDING.**

Catalog Number
Notes
Type

### LED Recessed Downlighting


# 65BE

5" / 6" LED Module

IC/Non-IC  
Retrofit



E26 adaptor  
(included)

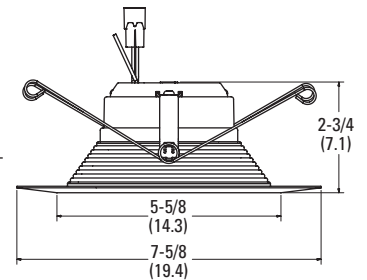

#### Specifications

Aperture: 5-5/8 (14.3)  
Ceiling opening: Determined by rough-in  
Overlap trim: 7-5/8 (19.4)  
Height: 2-3/4 (7.1)

All dimensions are inches (centimeters) unless otherwise indicated.

### ORDERING INFORMATION

For shortest lead times, configure product using **bolded** options.

**Example:** 65BEMW LED 27K L7XLED T24

Series/Finish	LED Lamp	CCT / CRI / W / Lumens <sup>1</sup>	Voltage	Options
65BEMW 5" / 6" Baffle LED module, matte white	LED	<b>27K</b> 2700 K /82CRI/11.9W/590L	(blank) 120V	<b>L7XLED T24</b> 6" new construction rough-in LED base
		<b>30K</b> 3000 K /82CRI/11.9W/650L		L7XRLED T24 6" remodel rough-in LED base
		<b>40K</b> 4000K /82CRI/11.9W/675L		LC6LED T24 6" new construction rough-in LED base
				L7X 6" new construction rough-in <sup>2</sup>
				L7XR 6" remodel rough-in <sup>2</sup>
				L7XP 6" new construction shallow rough-in <sup>2</sup>
				L7XPR 6" remodel shallow rough-in <sup>2</sup>
				LC6 6" new construction rough-in <sup>2</sup>
				LCP 6" new construction shallow rough-in <sup>2</sup>
				<b>L5LED T24</b> 5" new construction rough-in LED base
				L5RLED T24 5" remodel rough-in LED base
				L5 5" new construction rough-in <sup>2</sup>
				L5R 5" new construction rough-in <sup>2</sup>

#### Notes


- Total system delivered lumens.
- Must be ordered on a separate line.

# 5"/6" LED Module


## PHOTOMETRICS

Distribution Curve      Distribution Data      Output Data      Coefficient of Utilization      Illuminance Data at 30" Above Floor for a Single Luminaire


**65BEMW LED, 27K, input watts: 11.7, delivered lumens: 594, LM/W = 50, test no. 3598, tested in accordance with IESNA LM 79-08**

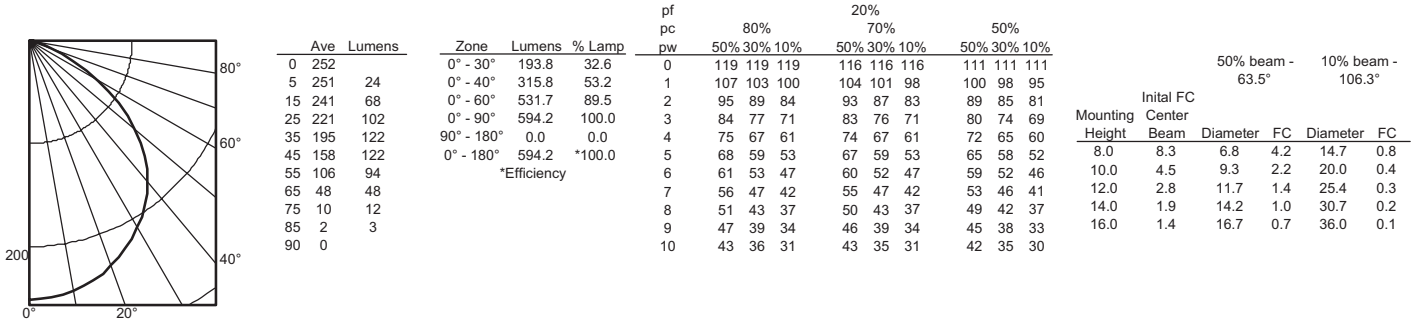

**65BEMW LED, 30K, input watts: 11.9, delivered lumens: 676, LM/W = 56, test no. 3596, tested in accordance with IESNA LM 79-08**

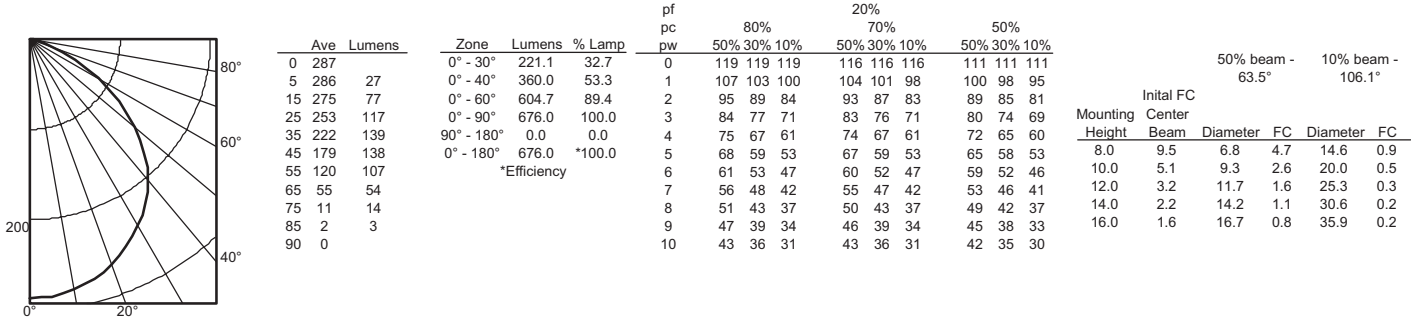

**65BEMW LED, 40K, input watts: 10.1, delivered lumens: 582, LM/W = 58, test no. 3597, tested in accordance with IESNA LM 79-08**

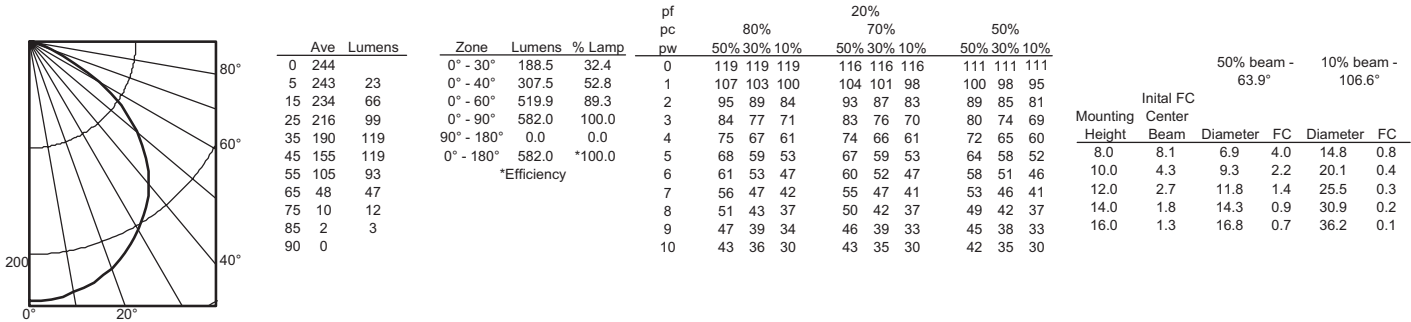

### ADDITIONAL DATA 65BEMW LED 27K

ENERGY DATA* - 590 Lumens	
CRI - 82	
Lumens	590L
Min. starting temp	-18°C (0°F)
Max. temp	46°C (115°F)
EMI/RFI	FCC Title 47 CFR, Part 15, Class B
Sound rating	A standards
Input voltage	120V
Min. power factor	0.99
Input frequency	50/60 Hz
Rated wattage	11.9W
Input power	11.9W
Input current	.11A

\*Values at non-dimming line voltage.

### ADDITIONAL DATA 65BEMW LED 30K

ENERGY DATA* - 650 Lumens	
CRI - 82	
Lumens	650L
Min. starting temp	-18°C (0°F)
Max. temp	46°C (115°F)
EMI/RFI	FCC Title 47 CFR, Part 15, Class B
Sound rating	A standards
Input voltage	120V
Min. power factor	0.99
Input frequency	50/60 Hz
Rated wattage	11.9W
Input power	11.9W
Input current	.11A

\*Values at non-dimming line voltage.

### ADDITIONAL DATA 65BEMW LED 40K

ENERGY DATA* - 675 Lumens	
CRI - 82	
Lumens	675L
Min. starting temp	-18°C (0°F)
Max. temp	46°C (115°F)
EMI/RFI	FCC Title 47 CFR, Part 15, Class B
Sound rating	A standards
Input voltage	120V
Min. power factor	0.99
Input frequency	50/60 Hz
Rated wattage	11.9W
Input power	11.9W
Input current	.11A

\*Values at non-dimming line voltage.



65BE LED

# 5"/6" LED Module

## LIGHTING FACTS

**LED lighting facts**<sup>®</sup>  
A Program of the U.S. DOE

Lithonia Lighting

Light Output (Lumens)	590
Watts	11.9
Lumens per Watt (Efficacy)	49

Color Accuracy Color Rendering Index (CRI)	82
---	----

**Light Color**  
Correlated Color Temperature (CCT) **2700 (Warm White)**

2700K 3000K 4500K 6500K

Warm White Bright White Daylight

All results are according to IESNA LM-79-2008: *Approved Method for the Electrical and Photometric Testing of Solid-State Lighting*. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the *Label Reference Guide*.

Registration Number: JB22-83VNVH (9/23/2014)  
Model Number: 65BEMW LED 27K  
Type: Luminaire - Downlight

**LED lighting facts**<sup>®</sup>  
A Program of the U.S. DOE

Lithonia Lighting

Light Output (Lumens)	650
Watts	11.9
Lumens per Watt (Efficacy)	54

Color Accuracy Color Rendering Index (CRI)	82
---	----

**Light Color**  
Correlated Color Temperature (CCT) **3000 (Bright White)**

2700K 3000K 4500K 6500K

Warm White Bright White Daylight

All results are according to IESNA LM-79-2008: *Approved Method for the Electrical and Photometric Testing of Solid-State Lighting*. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the *Label Reference Guide*.

Registration Number: JB22-7QGHY (9/23/2014)  
Model Number: 65BEMW LED 30K  
Type: Luminaire - Downlight

## FEATURES & SPECIFICATIONS

**INTENDED USE** — Our recessed LED module is the most economical means to create a well lit environment with exceptional energy efficiency and near zero maintenance. Great for retrofit into existing downlight cans or new construction and remodel applications. Adjustable torsion spring and retention allows fitment into many 5" and 6" cans. The LED module maintains at least 70% light output for 35,000 hours.

**CONSTRUCTION** — Aluminum spun reflector with deep baffle configuration for reduced glare. Combined LED and driver printed circuit board attached. Inner reflector cone funnels light through the pressed-in diffused lens.

**OPTICS** — Diffused lens at end of mixing chamber to provide even light distribution for general illumination, equivalent to 65W BR30 lamp.

Wide flood beam angle at >45°.

**ELECTRICAL** — Center 2 Edge™ (patent pending) technology created for a single point source. Primary power disconnect provided for simple connection to a dedicated LED connector in the housing.

Dimming down to 10%. For compatible dimmers, refer to [Compatible Dimmers Chart](#).

650L-lumen E series has an input wattage of 11.9 watts, 54 lumens per watt, equivalent to 65-watt incandescent.

E Series' patent pending driver has zero inrush, which allows power loads to be calculated with actual rated wattages.

Example: 54 units of 65BEMW LED fixtures can be installed in line with a 600-watt dimmer. 600W/11.9W = 54 fixtures.

\*Actual wattage may differ by +/-5% when operating at 120V +/-10%.

**INSTALLATION** — Suitable for installation in standard and shallow-height rough-in sections.

E26 socket adapter ships standard.

Twin torsion springs ensure easy installation for 5" and 6" recessed housings.

**LISTINGS** — CSA certified to US and Canadian safety standards. ENERGY STAR® qualified. Wet location listed. WSEC ASTM E283 for Air-Tight (with IC housings).

**WARRANTY** — 5-year limited warranty. Complete warranty terms located at [www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx)

Actual performance may differ as a result of end-user environment and application.

Note: Specifications subject to change without notice.

**PATENTS PENDING.**

Catalog Number
Notes
Type

### LED Recessed Downlighting


# 65BE

5" / 6" LED Module

IC/Non-IC  
Retrofit



E26 adaptor  
(included)

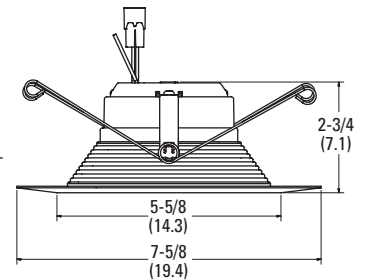

#### Specifications

Aperture: 5-5/8 (14.3)  
Ceiling opening: Determined by rough-in  
Overlap trim: 7-5/8 (19.4)  
Height: 2-3/4 (7.1)

All dimensions are inches (centimeters) unless otherwise indicated.

### ORDERING INFORMATION

For shortest lead times, configure product using **bolded** options.

**Example:** 65BEMW LED 27K L7XLED T24

Series/Finish	LED Lamp	CCT / CRI / W / Lumens <sup>1</sup>	Voltage	Options
65BEMW 5" / 6" Baffle LED module, matte white	LED	<b>27K</b> 2700 K /82CRI/11.9W/590L	(blank) 120V	<b>L7XLED T24</b> 6" new construction rough-in LED base
		<b>30K</b> 3000 K /82CRI/11.9W/650L		L7XRLED T24 6" remodel rough-in LED base
		<b>40K</b> 4000K /82CRI/11.9W/675L		LC6LED T24 6" new construction rough-in LED base
				<b>L7X</b> 6" new construction rough-in <sup>2</sup>
				<b>L7XR</b> 6" remodel rough-in <sup>2</sup>
				<b>L7XP</b> 6" new construction shallow rough-in <sup>2</sup>
				<b>L7XPR</b> 6" remodel shallow rough-in <sup>2</sup>
				<b>LC6</b> 6" new construction rough-in <sup>2</sup>
				LCP 6" new construction shallow rough-in <sup>2</sup>
				<b>L5LED T24</b> 5" new construction rough-in LED base
				L5RLED T24 5" remodel rough-in LED base
				<b>L5</b> 5" new construction rough-in <sup>2</sup>
				<b>L5R</b> 5" new construction rough-in <sup>2</sup>

#### Notes


- Total system delivered lumens.
- Must be ordered on a separate line.

# 5"/6" LED Module


## PHOTOMETRICS

**Distribution Curve      Distribution Data      Output Data      Coefficient of Utilization      Illuminance Data at 30" Above Floor for a Single Luminaire**


**65BEMW LED, 27K, input watts: 11.7, delivered lumens: 594, LM/W = 50, test no. 3598, tested in accordance with IESNA LM 79-08**

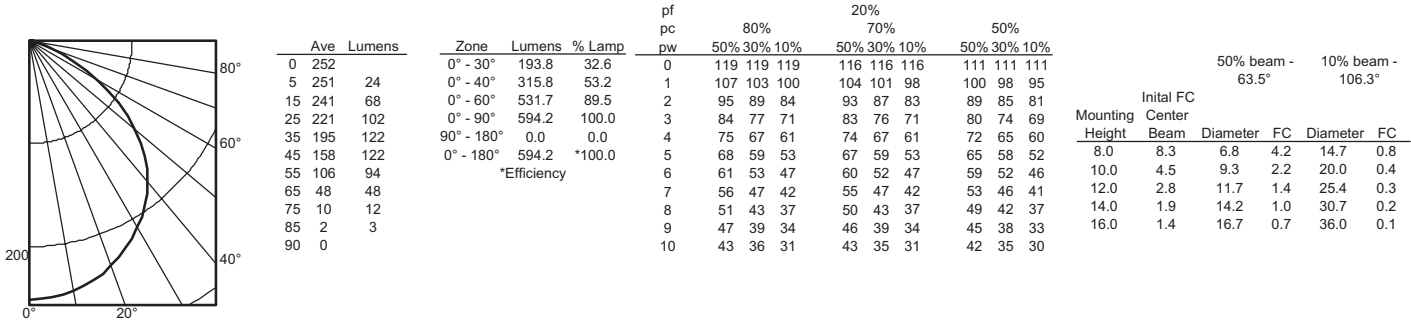

**65BEMW LED, 30K, input watts: 11.9, delivered lumens: 676, LM/W = 56, test no. 3596, tested in accordance with IESNA LM 79-08**

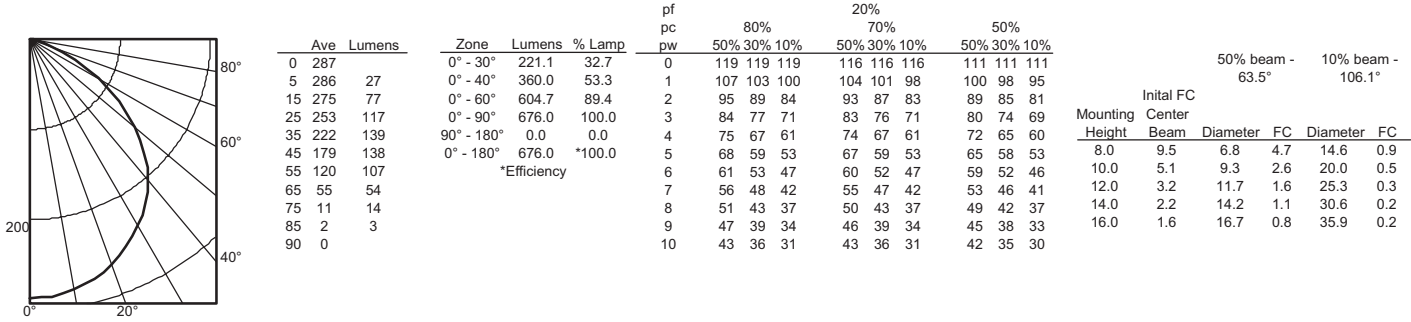

**65BEMW LED, 40K, input watts: 10.1, delivered lumens: 582, LM/W = 58, test no. 3597, tested in accordance with IESNA LM 79-08**

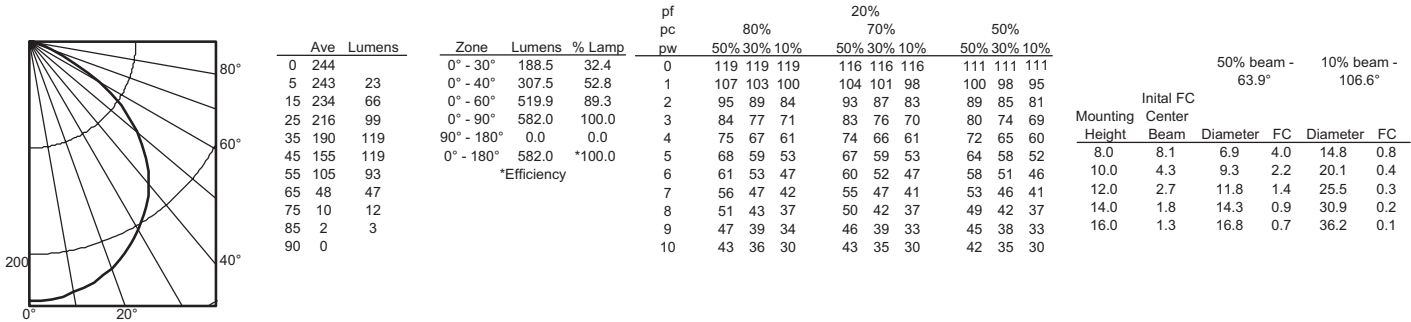

### ADDITIONAL DATA 65BEMW LED 27K

ENERGY DATA* - 590 Lumens	
CRI - 82	
Lumens	590L
Min. starting temp	-18°C (0°F)
Max. temp	46°C (115°F)
EMI/RFI	FCC Title 47 CFR, Part 15, Class B
Sound rating	A standards
Input voltage	120V
Min. power factor	0.99
Input frequency	50/60 Hz
Rated wattage	11.9W
Input power	11.9W
Input current	.11A

\*Values at non-dimming line voltage.

### ADDITIONAL DATA 65BEMW LED 30K

ENERGY DATA* - 650 Lumens	
CRI - 82	
Lumens	650L
Min. starting temp	-18°C (0°F)
Max. temp	46°C (115°F)
EMI/RFI	FCC Title 47 CFR, Part 15, Class B
Sound rating	A standards
Input voltage	120V
Min. power factor	0.99
Input frequency	50/60 Hz
Rated wattage	11.9W
Input power	11.9W
Input current	.11A

\*Values at non-dimming line voltage.

### ADDITIONAL DATA 65BEMW LED 40K


ENERGY DATA* - 675 Lumens	
CRI - 82	
Lumens	675L
Min. starting temp	-18°C (0°F)
Max. temp	46°C (115°F)
EMI/RFI	FCC Title 47 CFR, Part 15, Class B
Sound rating	A standards
Input voltage	120V
Min. power factor	0.99
Input frequency	50/60 Hz
Rated wattage	11.9W
Input power	11.9W
Input current	.11A

\*Values at non-dimming line voltage.

# 5"/6" LED Module

## LIGHTING FACTS

Lithonia Lighting



**Lighting facts**<sup>®</sup>  
A Program of the U.S. DOE


<b>Light Output (Lumens)</b>	<b>590</b>
<b>Watts</b>	<b>11.9</b>
<b>Lumens per Watt (Efficacy)</b>	<b>49</b>

---

**Color Accuracy**  
Color Rendering Index (CRI) **82**

---

**Light Color**  
Correlated Color Temperature (CCT) **2700 (Warm White)**

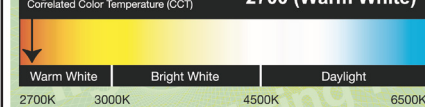

2700K    3000K    4500K    6500K


Warm White    Bright White    Daylight

All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the *Label Reference Guide*.

Registration Number: JB22-83VNVH (9/23/2014)  
Model Number: 65BEMW LED 27K  
Type: Luminaire - Downlight

Lithonia Lighting



**Lighting facts**<sup>®</sup>  
A Program of the U.S. DOE


<b>Light Output (Lumens)</b>	<b>650</b>
<b>Watts</b>	<b>11.9</b>
<b>Lumens per Watt (Efficacy)</b>	<b>54</b>

---

**Color Accuracy**  
Color Rendering Index (CRI) **82**

---

**Light Color**  
Correlated Color Temperature (CCT) **3000 (Bright White)**

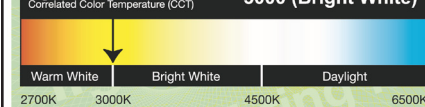

2700K    3000K    4500K    6500K

Warm White    Bright White    Daylight

All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the *Label Reference Guide*.

Registration Number: JB22-7QGHY (9/23/2014)  
Model Number: 65BEMW LED 30K  
Type: Luminaire - Downlight