



Powering Business Worldwide

APX/APXH Polycarbonate LED Exit



APX



APXH

The APX series is a fully code compliant, polycarbonate LED solution for exit needs. The series has universal mounting flexibility (ceiling, wall, end), is configurable to single or double-sided, and is available with red or green letters. Options include a white or black housing and remote capacity that can power the APWR LED remote series.

| Features | Benefits |
|--|--|
| LED source with nickel cadmium battery | Up to 10 years with no maintenance |
| Universal mount; single or double sided | Ease of ordering & installation |
| Optional remote capacity to drive 2 or 4 LED heads | Design flexibility; labor and material savings |

| Certification/Warranty |
|----------------------------------|
| UL 924 damp location listed |
| NFPA/NEC/OSHA/CEC code compliant |
| 5 year product warranty |
| 7 year prorated battery warranty |



Ordering Information


SAMPLE NUMBER: APX6R, APX6G, APX6RBK, APX6GBK, APX7R, APX7G, APX7RBK, APX7GBK

| Series | Battery | Face Options | Letter Colors | Housing Color |
|--------------------|--|---------------|----------------------|-------------------------|
| APX = All-Pro exit | 6 = no battery (AC only) 7 = nickel cadmium battery | _ = Universal | R = red G = green | _ = white BK = black |

SAMPLE NUMBER: APXH7R, APXH7G, APXH7RBK, APXH7GBK


| Series | Battery | Face Options | Letter Colors | Housing Color | Remote Heads Powered |
|--|----------------------------|---------------|----------------------|-------------------------|---|
| APXH = All-Pro exit w/ remote capacity | 7 = nickel cadmium battery | _ = Universal | R = red G = green | _ = white BK = black | 2 = two 3.6 V LED heads 4 = four 3.6 V LED heads |

| Series | Remote Heads Powered | Housing Color |
|---------------------------------|---------------------------------------|-------------------------|
| APWR = All-Pro emergency remote | 1 = one LED head 2 = two LED heads | _ = White BK = Black |

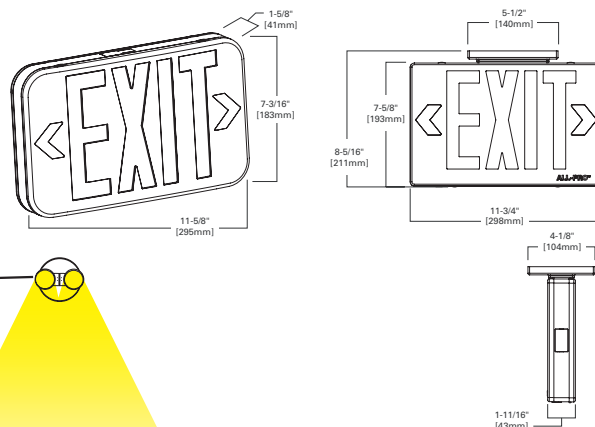


Spacing

APXH7R2 (Remotes not included)



APXH7R4 (Remotes not included)

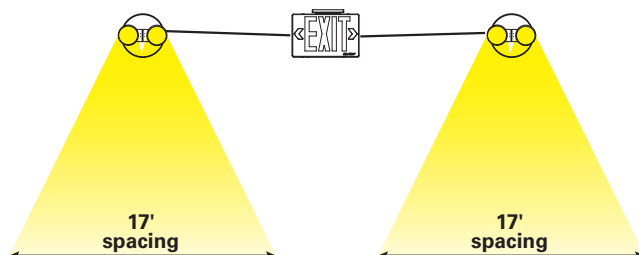

APC/APCH Polycarbonate LED Exit



The APC series is a fully code compliant, polycarbonate LED solution for exit and emergency needs. The series has universal mounting flexibility (ceiling, wall, end), is configurable to single or double-sided, and is available with red or green letters. The LED emergency heads can be side or top mounted and will run for a minimum of 90 minutes. Options include a white or black housing and remote capacity that can power the APWR LED remote series.

| Features | Benefits |
|--|---|
| LED source with nickel cadmium battery | Up to 10 years with no maintenance |
| Universal mount; single or double sided | Ease of ordering & installation |
| Optional remote capacity to drive 2 or 4 LED heads | Up to 50 feet of indoor/outdoor egress coverage |

| Certification/Warranty |
|----------------------------------|
| UL 924 damp location listed |
| NFPA/NEC/OSHA/CEC code compliant |
| 5 year product warranty |
| 7 year prorated battery warranty |




Ordering Information


SAMPLE NUMBER: APXH7R, APXH7G, APXH7RBK, APXH7GBK

| Series | Remote Heads Powered | Battery | Face Options | Letter Colors | Housing Color |
|------------------------------------|-------------------------|----------------------------|---------------|----------------------|-------------------------|
| APC = All-Pro exit/emergency combo | _ = no remote heads | 7 = nickel cadmium battery | _ = Universal | R = red G = green | _ = white BK = black |
| | H = two 3.6 V LED heads | 7 = nickel cadmium battery | _ = Universal | R = red G = green | _ = white BK = black |

| Series | Remote Heads Powered | Housing Color |
|---------------------------------|---------------------------------------|-------------------------|
| APWR = All-Pro emergency remote | 1 = one LED head 2 = two LED heads | _ = White BK = Black |

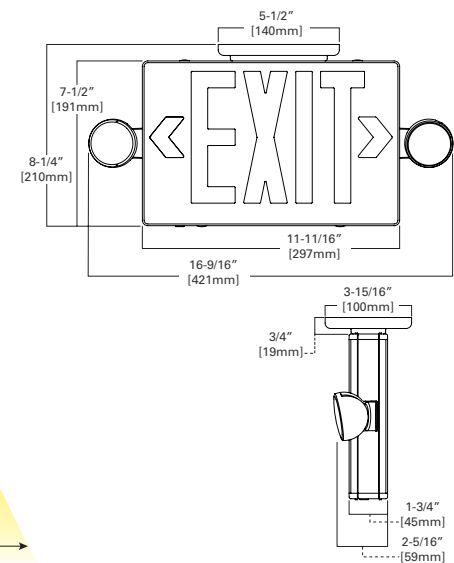

Spacing

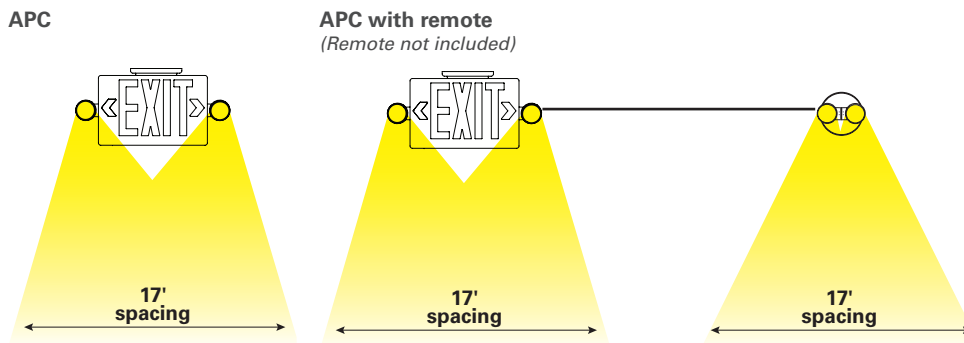

APEL/APELH2 Polycarbonate LED Emergency



APEL



APELH2

The APEL series is a fully code compliant, polycarbonate LED solution for emergency needs. The LED emergency heads will run for a minimum of 90 minutes. The universal j-box mounting pattern and snap fit housing construction significantly reduce installation time. Options include a white or black housing and remote capacity that can power the APWR LED remote series.

| Features | Benefits |
|---|---|
| LED source with nickel cadmium battery | Up to 10 years with no maintenance |
| Adjustable heads | Design flexibility |
| Optional remote capacity to drive 2 LED heads | Up to 34 feet of indoor/outdoor egress coverage |


| Certification/Warranty |
|----------------------------------|
| UL 924 damp location listed |
| NFPA/NEC/OSHA/CEC code compliant |
| 5 year product warranty |
| 7 year prorated battery warranty |





Ordering Information

SAMPLE NUMBER: APEL, APELH2, APELH2BK

| Series | Remote Heads Powered | Housing Color |
|---------------------------------|--|-------------------------|
| APEL = All-Pro emergency light | _ = no LED heads H2 = two LED heads | _ = White BK = Black |
| APWR = All-Pro emergency remote | 1 = one LED head 2 = two LED heads | _ = White BK = Black |

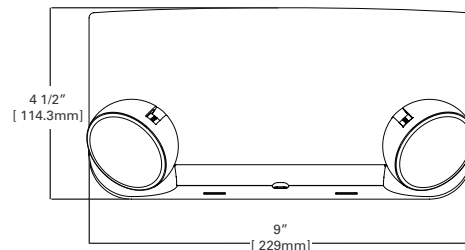

Spacing

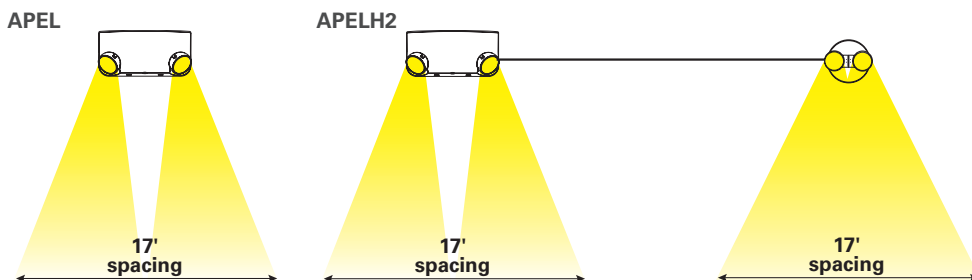

APWR Polycarbonate LED remote



APWR2



APWR2BK

The APWR series is fully code compliant, polycarbonate LED solution for emergency needs. The heads are fully adjustable and available with a white or black housing. This product is wet location listed and suitable for outdoor applications.

| Features | Benefits |
|----------------------|---|
| LED source | Up to 10 years with no maintenance |
| Adjustable heads | Design flexibility |
| Wet location capable | Up to 17 feet of indoor/outdoor egress coverage |

| Certification/Warranty |
|----------------------------------|
| UL 924 wet location listed |
| NFPA/NEC/OSHA code compliant |
| 5 year product warranty |
| 7 year prorated battery warranty |





Ordering Information

SAMPLE NUMBER: APWR1, APWR2, APWR1BK, APWR2BK

| Series | Remote Heads Powered | Housing Color |
|---------------------------------|---------------------------------------|-------------------------|
| APWR = All-Pro emergency remote | 1 = one LED head 2 = two LED heads | _ = White BK = Black |

Spacing

APWR

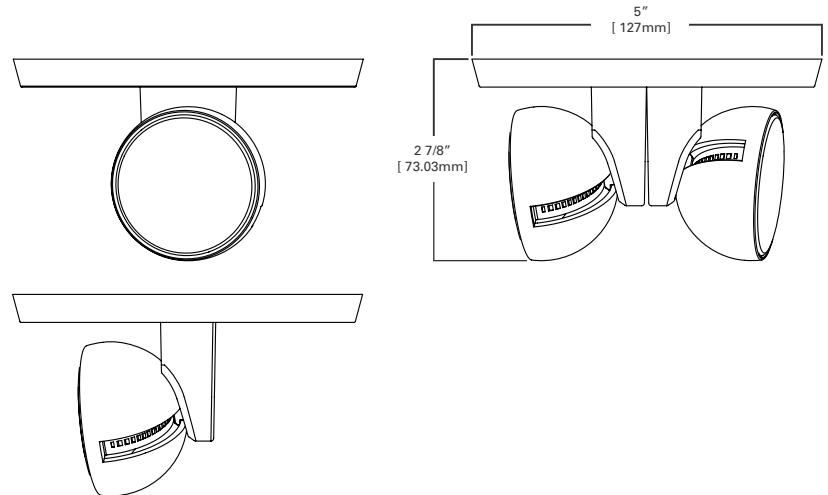

EBPLED LED Emergency battery pack



The EBPLED series enables electrical contractors to add a UL924 code compliant emergency option to an existing LED fixture. While compatible with almost any LED fixture that has an accessible driver, this series offers guaranteed quality and compatibility with Eaton products.

| Features | Benefits |
|---|--|
| Field installable | Meet emergency code with no aesthetic impact |
| Satisfies all wiring configurations as conduit and test button are included | Design ease; less SKU's to stock |
| 7 watt or 14 watt output creates 600 to 2500 lumens in emergency mode | Design flexibility; superior egress coverage |
| Laser test feature enables simplified NFPA testing | Labor savings |


| Certification/Warranty |
|---|
| UL 924 Classified |
| NFPA/NEC/OSHA/CEC code compliant |
| Guaranteed compatibility w/Eaton Fixtures |
| 5 year product warranty |
| 7 year prorated battery warranty |



Ordering Information

SAMPLE NUMBER: EBPLED7W

| Series | Output | Run Time |
|-------------------------------------|---------------|-----------------------------------|
| EBPLED = LED emergency battery pack | 7W = 7 Watt | _ = 90 minute -3H = 180 minute |
| | 14W = 14 Watt | _ = 90 minute |

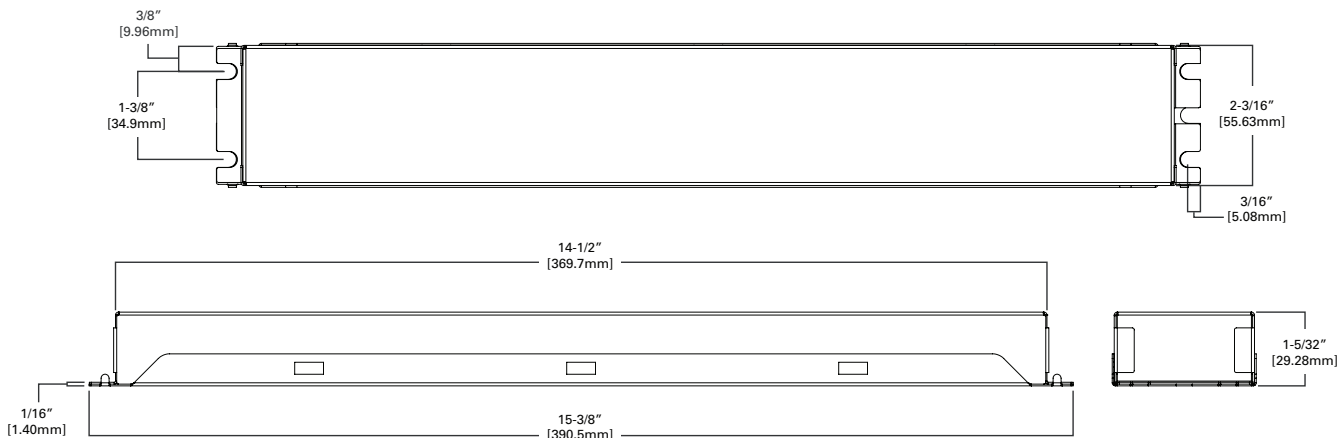

Cross Reference

| Description | All-Pro | Acuity | Hubbell | Barron | Thomas & Betts | Philips | Mule |
|---|------------|--------------------------|---------|-----------------|------------------|---------|--------------------|
| Green LED Polycarbonate Exit, AC only | APX6G | LQM S W 3 G 120/277 | CAG | ILX-G-AC-WH | QLX500G | VEGW | MXAGU |
| Red LED Polycarbonate Exit, AC only | APX6R | LQM S W 3 R 120/277 | CAR | ILX-R-AC-WH | QLX500R | VERW | MXARU |
| Green LED Polycarbonate Exit, Nickel Cadmium Battery | APX7G | LQM S W 3 G 120/277 EL N | CEG | ILX-G-EM-WH | QLXN500G | VEGWEM | MXBGU |
| Red LED Polycarbonate Exit, Nickel Cadmium Battery | APX7R | LQM S W 3 R 120/277 EL N | CER | ILX-R-EM-WH | QLXN500R | VERWEM | MXBRU |
| Green LED Polycarbonate Exit, AC only, Black Option | APX6GBK | LQM S 3 G 120/277 | CAGB | ILX-G-AC-BL | N/A | VEGB | MXAGU-BL |
| Red LED Polycarbonate Exit, AC only, Black Option | APX6RBK | LQM S 3 R 120/277 | CARB | ILX-R-AC-BL | N/A | VERB | MXARU-BL |
| Green LED Polycarbonate Exit, Nickel Cadmium Battery, Black Option | APX7GBK | LQM S 3 G 120/277 EL N | CEGB | ILX-G-EM-BL | N/A | VEGBEM | MXBGU-BL |
| Red LED Polycarbonate Exit, Nickel Cadmium Battery, Black Option | APX7RBK | LQM S 3 R 120/277 EL N | CERB | ILX-R-EM-BL | N/A | VERBEM | MXBRU-BL |
| Green LED polycarbonate exit, Remote capacity | APXH7G2 | N/A | CERRC | N/A | N/A | VREGWEM | MXBGU-REM |
| Red LED polycarbonate exit, Remote capacity | APXH7R2 | N/A | CEGRC | N/A | N/A | VRERWEM | MXBRU-REM |
| Green LED polycarbonate exit, Remote capacity | APXH7G4 | N/A | CERRC | N/A | N/A | VREGWEM | N/A |
| Red LED polycarbonate exit, Remote capacity | APXH7R4 | N/A | CEGRC | N/A | N/A | VRERWEM | N/A |
| LED Adjustable Heads, Nickel Cadmium Battery, 90-min Run-Time | APEL | EU2 LED M12 | CU2 | LL90-G2 | LCAB-2SQLED | VLLU | SQ-80 |
| High-powered, Two LED Adjustable Heads, Nickel Cadmium Battery, 90-min Run-Time | APEL H2 | EU2 LED HO M6 | CU2RC | LL90-R | LCAB-2SQLEDRID | VLLUR | SQ-120 |
| LED adjustable heads, Nickel cadmium battery, 90-min run-time, Black option | APELBK | ELM2 LED B | CU2SQ | LL90-G2-B | N/A | N/A | SQ-LED-80-B |
| High-powered, Two LED adjustable heads, Nickel cadmium battery, 90-min run-time, Black option | APEL BK H2 | ELM2 LED B HO | CU2SQB | LL90-R-B | N/A | N/A | SQ-LED-120-B |
| 3.6V LED adjustable head, Outdoor rated | APWR1 | ELA LED WP M12 | CIRS | LED-51-WH | ELF612D | VLT1R | RLED-1-SD-WP-3.6V |
| Outdoor rated, 3.6V LED adjustable heads | APWR2 | ELA LED T WP M12 | CIRD | LED-52-WH-G2 | ELF612D/LED | VLT2R | RLED-2-SD-WP-3.6V |
| 3.6V LED Adjustable Head, Outdoor rated, Black option | APWR1BK | N/A | N/A | LED-51-BL | N/A | VLL1RGO | N/A |
| Outdoor rated, 3.6V LED adjustable heads, Black option | APWR2BK | N/A | N/A | LED-52-BL-R2 | N/A | VLL2RGO | N/A |
| LED source with nickel cadmium battery, Red | APC7R | ECR LED M6 | CCR | VLED-U-WH-EL90 | UQLX-N500R-2LD1N | VLLCR | SQC-LED-U-R-WW |
| LED source with nickel cadmium battery, Green | APC7G | ECG LED M6 | CCG | GVLED-U-WH-EL90 | UQLXN500G-2LD1N | VLLCG | SQC-LED-U-G-WW |
| LED source with nickel cadmium battery, Red, Black option | APC7RBK | N/A | CCRB | VLED-U-BL-EL90 | N/A | N/A | SQC-LED-U-R-BB |
| LED source with nickel cadmium battery, Green, Black option | APC7GBK | N/A | CCGB | GVLED-U-BL-EL90 | N/A | N/A | SQC-LED-U-G-BB |
| 3.6V LED heads with nickel cadmium battery, Remote capacity, Red | APCH7R | ECR LED HO M6 | CCRRC | VLEDC-51-WH-R | UQLXN500R-2LEDR | VLLCR2R | SQC-LED-U-R-WW-REM |
| 3.6V LED heads with nickel cadmium battery, Remote capacity, Green | APCH7G | ECG LED HO M6 | CCGRC | GVLEDC-51-WH-R | UQLXN500G-2LEDR | VLLCG2R | SQC-LED-U-G-WW-REM |
| 3.6V LED heads with nickel cadmium battery, Remote capacity, Red, Black option | APCH7RBK | N/A | CCRRCB | VLEDC-51-BK-R | UQLXN500R-2LEDRB | N/A | SQC-LED-U-R-BB-REM |
| 3.6V LED heads with nickel cadmium battery, Remote capacity, Green, Black option | APCH7GBK | N/A | N/A | GVLEDC-51-BK-R | UQLXN500G-2LEDRB | N/A | SQC-LED-U-G-BB-REM |

Lighting Product Lines

Halo
Halo Commercial
Portfolio
Iris
RSA
Metalux
Corelite
Neo-Ray
Fail-Safe
MWS
Ametrix
Shaper
io
Lumark
McGraw-Edison
Invue
Ephesus
Lumière
Streetworks
AtLite
Sure-Lites

Controls Product Lines

Greengate
iLumin
Zero 88
Fifth Light Technology
iLight (International Only)

Connected Lighting Systems

LumaWatt Pro
WaveLinx
Distributed Low-Voltage Power
ConnectWorks

Eaton
1121 Highway 74 South
Peachtree City, GA 30269
P: 770-486-4800
www.eaton.com/lighting

Canada Sales
5925 McLaughlin Road
Mississauga, Ontario L5R 1B8
P: 905-501-3000
F: 905-501-3172

© 2017 Eaton
All Rights Reserved
Printed in USA
Publication No. BR505016EN
November 15, 2017

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

Product availability, specifications, and compliances are subject to change without notice.



Powering Business Worldwide

APX/APXH Polycarbonate LED Exit



APX



APXH

The APX series is a fully code compliant, polycarbonate LED solution for exit needs. The series has universal mounting flexibility (ceiling, wall, end), is configurable to single or double-sided, and is available with red or green letters. Options include a white or black housing and remote capacity that can power the APWR LED remote series.

| Features | Benefits |
|--|--|
| LED source with nickel cadmium battery | Up to 10 years with no maintenance |
| Universal mount; single or double sided | Ease of ordering & installation |
| Optional remote capacity to drive 2 or 4 LED heads | Design flexibility; labor and material savings |

| Certification/Warranty |
|----------------------------------|
| UL 924 damp location listed |
| NFPA/NEC/OSHA/CEC code compliant |
| 5 year product warranty |
| 7 year prorated battery warranty |



Ordering Information


SAMPLE NUMBER: APX6R, APX6G, APX6RBK, APX6GBK, APX7R, APX7G, APX7RBK, APX7GBK

| Series | Battery | Face Options | Letter Colors | Housing Color |
|--------------------|--|---------------|----------------------|-------------------------|
| APX = All-Pro exit | 6 = no battery (AC only) 7 = nickel cadmium battery | _ = Universal | R = red G = green | _ = white BK = black |

SAMPLE NUMBER: APXH7R, APXH7G, APXH7RBK, APXH7GBK


| Series | Battery | Face Options | Letter Colors | Housing Color | Remote Heads Powered |
|--|----------------------------|---------------|----------------------|-------------------------|---|
| APXH = All-Pro exit w/ remote capacity | 7 = nickel cadmium battery | _ = Universal | R = red G = green | _ = white BK = black | 2 = two 3.6 V LED heads 4 = four 3.6 V LED heads |

| Series | Remote Heads Powered | Housing Color |
|---------------------------------|---------------------------------------|-------------------------|
| APWR = All-Pro emergency remote | 1 = one LED head 2 = two LED heads | _ = White BK = Black |

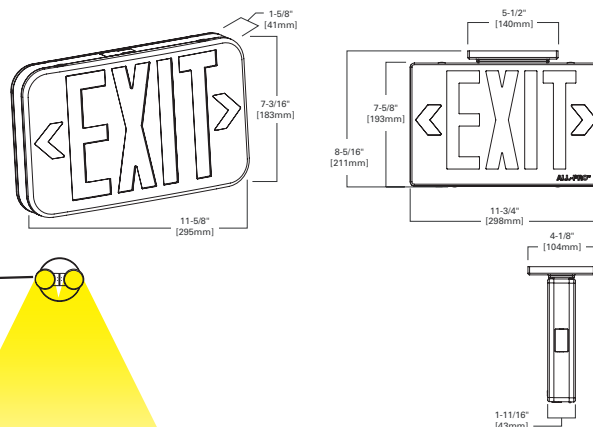


Spacing


APXH7R2
(Remotes not included)



APXH7R4
(Remotes not included)

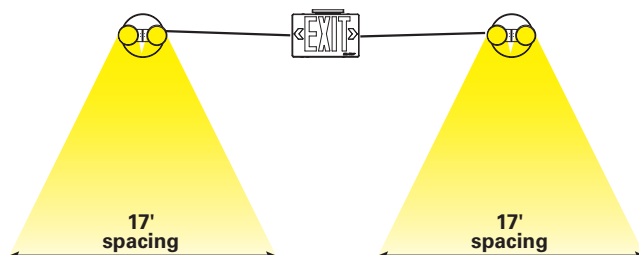

APC/APCH Polycarbonate LED Exit

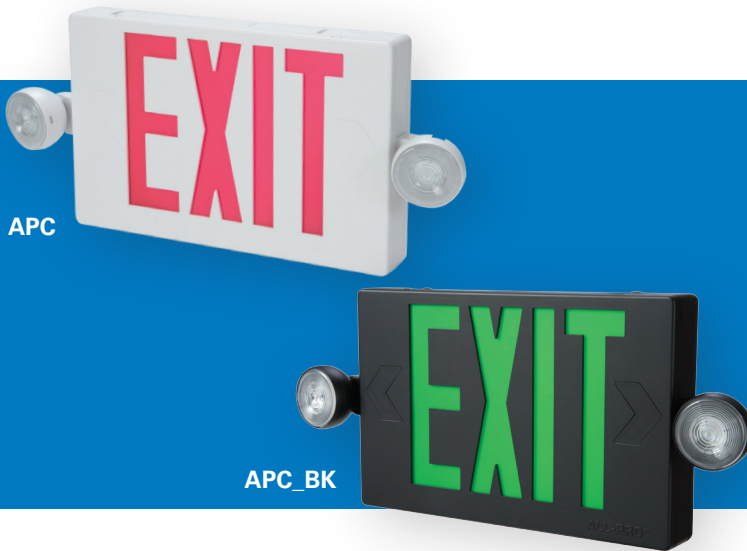

The APC series is a fully code compliant, polycarbonate LED solution for exit and emergency needs. The series has universal mounting flexibility (ceiling, wall, end), is configurable to single or double-sided, and is available with red or green letters. The LED emergency heads can be side or top mounted and will run for a minimum of 90 minutes. Options include a white or black housing and remote capacity that can power the APWR LED remote series.

| Features | Benefits |
|--|---|
| LED source with nickel cadmium battery | Up to 10 years with no maintenance |
| Universal mount; single or double sided | Ease of ordering & installation |
| Optional remote capacity to drive 2 or 4 LED heads | Up to 50 feet of indoor/outdoor egress coverage |

| Certification/Warranty |
|----------------------------------|
| UL 924 damp location listed |
| NFPA/NEC/OSHA/CEC code compliant |
| 5 year product warranty |
| 7 year prorated battery warranty |




Ordering Information


SAMPLE NUMBER: APXH7R, APXH7G, APXH7RBK, APXH7GBK

| Series | Remote Heads Powered | Battery | Face Options | Letter Colors | Housing Color |
|------------------------------------|-------------------------|----------------------------|---------------|----------------------|-------------------------|
| APC = All-Pro exit/emergency combo | _ = no remote heads | 7 = nickel cadmium battery | _ = Universal | R = red G = green | _ = white BK = black |
| | H = two 3.6 V LED heads | 7 = nickel cadmium battery | _ = Universal | R = red G = green | _ = white BK = black |

| Series | Remote Heads Powered | Housing Color |
|---------------------------------|---------------------------------------|-------------------------|
| APWR = All-Pro emergency remote | 1 = one LED head 2 = two LED heads | _ = White BK = Black |

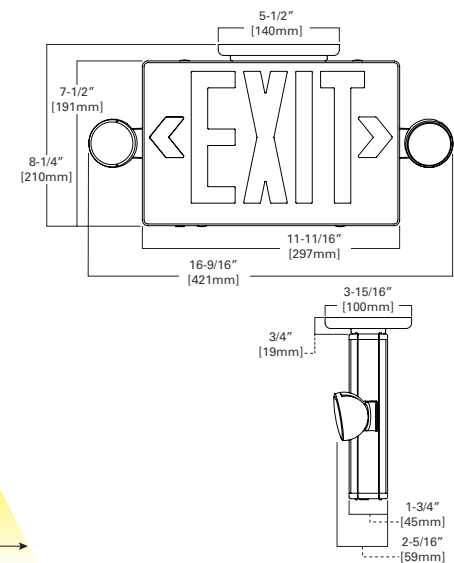

Spacing

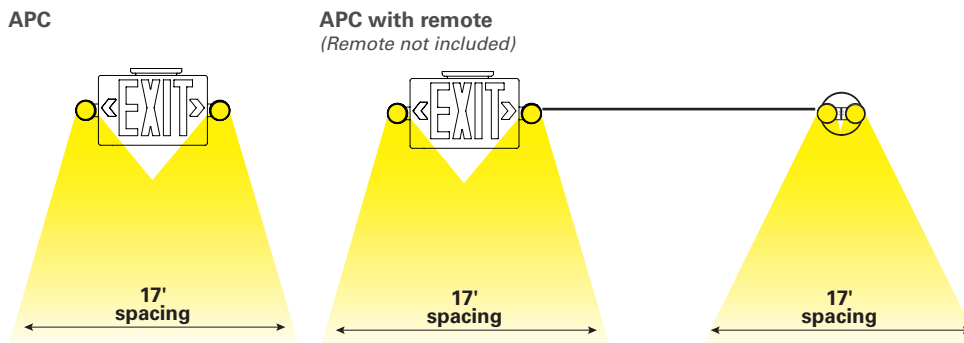

APEL/APELH2 Polycarbonate LED Emergency



APEL



APELH2

The APEL series is a fully code compliant, polycarbonate LED solution for emergency needs. The LED emergency heads will run for a minimum of 90 minutes. The universal j-box mounting pattern and snap fit housing construction significantly reduce installation time. Options include a white or black housing and remote capacity that can power the APWR LED remote series.

| Features | Benefits |
|---|---|
| LED source with nickel cadmium battery | Up to 10 years with no maintenance |
| Adjustable heads | Design flexibility |
| Optional remote capacity to drive 2 LED heads | Up to 34 feet of indoor/outdoor egress coverage |


| Certification/Warranty |
|----------------------------------|
| UL 924 damp location listed |
| NFPA/NEC/OSHA/CEC code compliant |
| 5 year product warranty |
| 7 year prorated battery warranty |





Ordering Information

SAMPLE NUMBER: APEL, APELH2, APELH2BK

| Series | Remote Heads Powered | Housing Color |
|---------------------------------|--|-------------------------|
| APEL = All-Pro emergency light | _ = no LED heads H2 = two LED heads | _ = White BK = Black |
| APWR = All-Pro emergency remote | 1 = one LED head 2 = two LED heads | _ = White BK = Black |

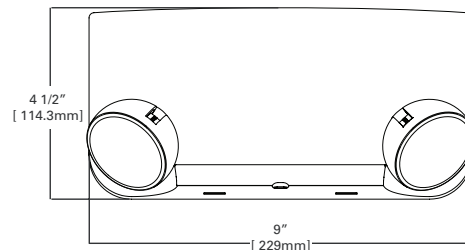

Spacing

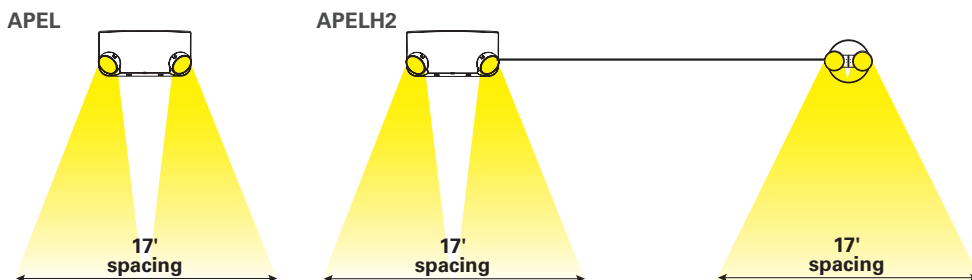

APWR Polycarbonate LED remote



APWR2



APWR2BK

The APWR series is fully code compliant, polycarbonate LED solution for emergency needs. The heads are fully adjustable and available with a white or black housing. This product is wet location listed and suitable for outdoor applications.

| Features | Benefits |
|----------------------|---|
| LED source | Up to 10 years with no maintenance |
| Adjustable heads | Design flexibility |
| Wet location capable | Up to 17 feet of indoor/outdoor egress coverage |

| Certification/Warranty |
|----------------------------------|
| UL 924 wet location listed |
| NFPA/NEC/OSHA code compliant |
| 5 year product warranty |
| 7 year prorated battery warranty |





Ordering Information

SAMPLE NUMBER: APWR1, APWR2, APWR1BK, APWR2BK

| Series | Remote Heads Powered | Housing Color |
|---------------------------------|---------------------------------------|-------------------------|
| APWR = All-Pro emergency remote | 1 = one LED head 2 = two LED heads | _ = White BK = Black |

Spacing

APWR

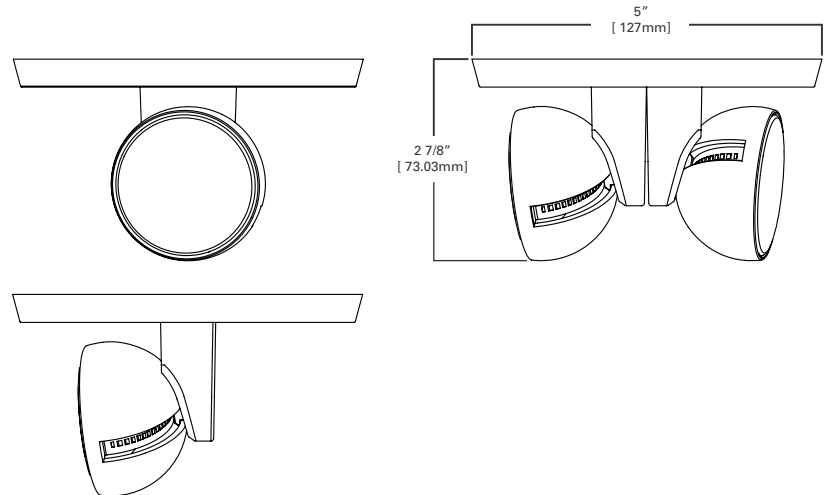

EBPLED LED Emergency battery pack



The EBPLED series enables electrical contractors to add a UL924 code compliant emergency option to an existing LED fixture. While compatible with almost any LED fixture that has an accessible driver, this series offers guaranteed quality and compatibility with Eaton products.

| Features | Benefits |
|---|--|
| Field installable | Meet emergency code with no aesthetic impact |
| Satisfies all wiring configurations as conduit and test button are included | Design ease; less SKU's to stock |
| 7 watt or 14 watt output creates 600 to 2500 lumens in emergency mode | Design flexibility; superior egress coverage |
| Laser test feature enables simplified NFPA testing | Labor savings |


| Certification/Warranty |
|---|
| UL 924 Classified |
| NFPA/NEC/OSHA/CEC code compliant |
| Guaranteed compatibility w/Eaton Fixtures |
| 5 year product warranty |
| 7 year prorated battery warranty |



Ordering Information

SAMPLE NUMBER: EBPLED7W

| Series | Output | Run Time |
|-------------------------------------|---------------|-----------------------------------|
| EBPLED = LED emergency battery pack | 7W = 7 Watt | _ = 90 minute -3H = 180 minute |
| | 14W = 14 Watt | _ = 90 minute |

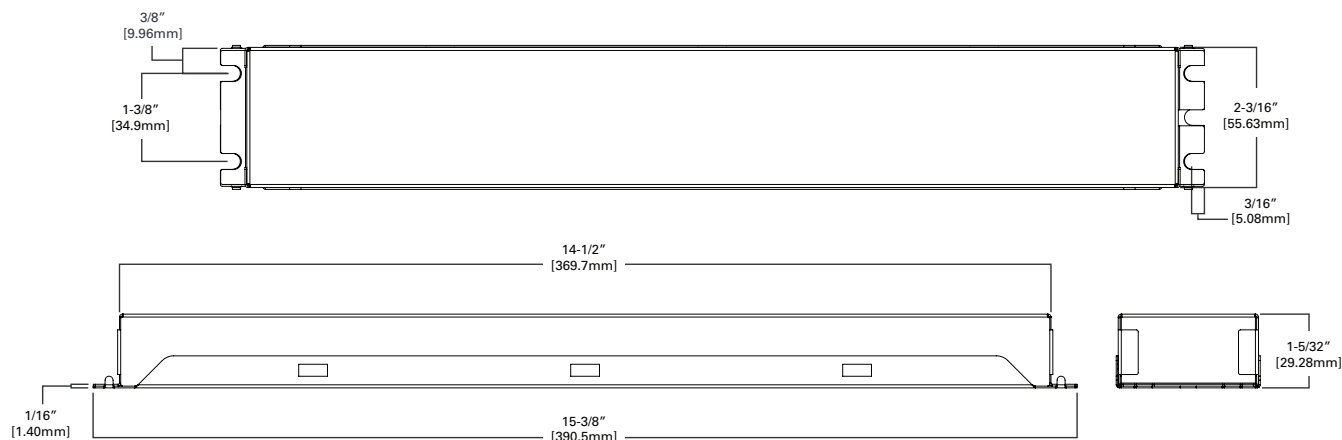

Cross Reference

| Description | All-Pro | Acuity | Hubbell | Barron | Thomas & Betts | Philips | Mule |
|---|------------|-----------------------------|---------|-----------------|------------------|---------|--------------------|
| Green LED Polycarbonate Exit, AC only | APX6G | LQM S W 3 G 120/277 | CAG | ILX-G-AC-WH | QLX500G | VEGW | MXAGU |
| Red LED Polycarbonate Exit, AC only | APX6R | LQM S W 3 R 120/277 | CAR | ILX-R-AC-WH | QLX500R | VERW | MXARU |
| Green LED Polycarbonate Exit, Nickel Cadmium Battery | APX7G | LQM S W 3 G 120/277 EL N | CEG | ILX-G-EM-WH | QLXN500G | VEGWEM | MXBGU |
| Red LED Polycarbonate Exit, Nickel Cadmium Battery | APX7R | LQM S W 3 R 120/277 EL N | CER | ILX-R-EM-WH | QLXN500R | VERWEM | MXBRU |
| Green LED Polycarbonate Exit, AC only, Black Option | APX6GBK | LQM S 3 G 120/277 | CAGB | ILX-G-AC-BL | N/A | VEGB | MXAGU-BL |
| Red LED Polycarbonate Exit, AC only, Black Option | APX6RBK | LQM S 3 R 120/277 | CARB | ILX-R-AC-BL | N/A | VERB | MXARU-BL |
| Green LED Polycarbonate Exit, Nickel Cadmium Battery, Black Option | APX7GBK | LQM S 3 G 120/277 EL N | CEGB | ILX-G-EM-BL | N/A | VEGBEM | MXBGU-BL |
| Red LED Polycarbonate Exit, Nickel Cadmium Battery, Black Option | APX7RBK | LQM S 3 R 120/277 EL N | CERB | ILX-R-EM-BL | N/A | VERBEM | MXBRU-BL |
| Green LED polycarbonate exit, Remote capacity | APXH7G2 | N/A | CERRC | N/A | N/A | VREGWEM | MXBGU-REM |
| Red LED polycarbonate exit, Remote capacity | APXH7R2 | N/A | CEGRC | N/A | N/A | VRERWEM | MXBRU-REM |
| Green LED polycarbonate exit, Remote capacity | APXH7G4 | N/A | CERRC | N/A | N/A | VREGWEM | N/A |
| Red LED polycarbonate exit, Remote capacity | APXH7R4 | N/A | CEGRC | N/A | N/A | VRERWEM | N/A |
| LED Adjustable Heads, Nickel Cadmium Battery, 90-min Run-Time | APEL | EU2 LED M12 | CU2 | LL90-G2 | LCAB-2SQLED | VLLU | SQ-80 |
| High-powered, Two LED Adjustable Heads, Nickel Cadmium Battery, 90-min Run-Time | APEL H2 | EU2 LED HO M6 | CU2RC | LL90-R | LCAB-2SQLEDRID | VLLUR | SQ-120 |
| LED adjustable heads, Nickel cadmium battery, 90-min run-time, Black option | APELBK | ELM2 LED B | CU2SQ | LL90-G2-B | N/A | N/A | SQ-LED-80-B |
| High-powered, Two LED adjustable heads, Nickel cadmium battery, 90-min run-time, Black option | APEL BK H2 | ELM2 LED B HO | CU2SQB | LL90-R-B | N/A | N/A | SQ-LED-120-B |
| 3.6V LED adjustable head, Outdoor rated | APWR1 | ELA LED WP M12 | CIRS | LED-51-WH | ELF612D | VLT1R | RLED-1-SD-WP-3.6V |
| Outdoor rated, 3.6V LED adjustable heads | APWR2 | ELA LED T WP M12 | CIRD | LED-52-WH-G2 | ELF612D/LED | VLT2R | RLED-2-SD-WP-3.6V |
| 3.6V LED Adjustable Head, Outdoor rated, Black option | APWR1BK | N/A | N/A | LED-51-BL | N/A | VLL1RGO | N/A |
| Outdoor rated, 3.6V LED adjustable heads, Black option | APWR2BK | N/A | N/A | LED-52-BL-R2 | N/A | VLL2RGO | N/A |
| LED source with nickel cadmium battery, Red | APC7R | ECR LED M6 | CCR | VLED-U-WH-EL90 | UQLX-N500R-2LD1N | VLLCR | SQC-LED-U-R-WW |
| LED source with nickel cadmium battery, Green | APC7G | ECG LED M6 | CCG | GVLED-U-WH-EL90 | UQLXN500G-2LD1N | VLLCG | SQC-LED-U-G-WW |
| LED source with nickel cadmium battery, Red, Black option | APC7RBK | N/A | CCRB | VLED-U-BL-EL90 | N/A | N/A | SQC-LED-U-R-BB |
| LED source with nickel cadmium battery, Green, Black option | APC7GBK | N/A | CCGB | GVLED-U-BL-EL90 | N/A | N/A | SQC-LED-U-G-BB |
| 3.6V LED heads with nickel cadmium battery, Remote capacity, Red | APCH7R | ECR LED HO M6 | CCRRC | VLEDC-51-WH-R | UQLXN500R-2LEDR | VLLCR2R | SQC-LED-U-R-WW-REM |
| 3.6V LED heads with nickel cadmium battery, Remote capacity, Green | APCH7G | ECG LED HO M6 | CCGRC | GVLEDC-51-WH-R | UQLXN500G-2LEDR | VLLCG2R | SQC-LED-U-G-WW-REM |
| 3.6V LED heads with nickel cadmium battery, Remote capacity, Red, Black option | APCH7RBK | N/A | CCRRCB | VLEDC-51-BK-R | UQLXN500R-2LEDRB | N/A | SQC-LED-U-R-BB-REM |
| 3.6V LED heads with nickel cadmium battery, Remote capacity, Green, Black option | APCH7GBK | N/A | N/A | GVLEDC-51-BK-R | UQLXN500G-2LEDRB | N/A | SQC-LED-U-G-BB-REM |

Lighting Product Lines

Halo
Halo Commercial
Portfolio
Iris
RSA
Metalux
Corelite
Neo-Ray
Fail-Safe
MWS
Ametrix
Shaper
io
Lumark
McGraw-Edison
Invue
Ephesus
Lumière
Streetworks
AtLite
Sure-Lites

Controls Product Lines

Greengate
iLumin
Zero 88
Fifth Light Technology
iLight (International Only)

Connected Lighting Systems

LumaWatt Pro
WaveLinx
Distributed Low-Voltage Power
ConnectWorks

Eaton
1121 Highway 74 South
Peachtree City, GA 30269
P: 770-486-4800
www.eaton.com/lighting

Canada Sales
5925 McLaughlin Road
Mississauga, Ontario L5R 1B8
P: 905-501-3000
F: 905-501-3172

© 2017 Eaton
All Rights Reserved
Printed in USA
Publication No. BR505016EN
November 15, 2017

Eaton is a registered trademark.

All other trademarks are property
of their respective owners.

Product availability, specifications,
and compliances are subject to
change without notice.