


Straight Blade Receptacles Commercial Specification Grade Receptacles

15 & 20A, 125V

Pass & Seymour



| Features | |
|---|---|
| <ul style="list-style-type: none"> Corrosion-resistant, plated steel strap locked in to face and back body to resist pulling away from face/body assembly. .032 inch thick, brass, triple-wipe power contacts for lasting retention. Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring. Impact-resistant nylon face and thermoplastic back body. | <ul style="list-style-type: none"> CR Series: #14 – #10 AWG solid side wire only. BR Series: side and internal screw-pressure-plate back wire capable of accepting #14 – #10 AWG solid or stranded copper or copper-clad wire. Terminal compartments isolated from each other for positive conductor containment. Tri-drive terminal and mounting screws. Auto-ground clip assures positive ground. |

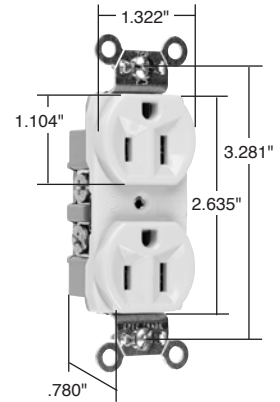

CR15I

| Catalog Number | Rating | | Color | NEMA Config. No. | 3rd Party Compliance | |
|--|--------|-----|--------------|------------------|----------------------|--------------|
| | A. | V. | | | UL498 | C22.2 No. 42 |
| Duplex Receptacles Side Wire | | | | | | |
| CR15I | 15 | 125 | Ivory | 5-15R | • | • |
| CR15W | 15 | 125 | White | 5-15R | • | • |
| CR15 | 15 | 125 | Brown | 5-15R | • | • |
| CR15GRY | 15 | 125 | Gray | 5-15R | • | • |
| CR15LA | 15 | 125 | Light Almond | 5-15R | • | • |
| CR20I | 20 | 125 | Ivory | 5-20R | • | • |
| CR20W | 20 | 125 | White | 5-20R | • | • |
| CR20 | 20 | 125 | Brown | 5-20R | • | • |
| CR20GRY | 20 | 125 | Gray | 5-20R | • | • |
| CR20BK | 20 | 125 | Black | 5-20R | • | • |
| CR20RED | 20 | 125 | Red | 5-20R | • | • |
| CR20LA | 20 | 125 | Light Almond | 5-20R | • | • |
| Duplex Receptacles Back & Side Wire | | | | | | |
| BR15I | 15 | 125 | Ivory | 5-15R | • | • |
| BR15W | 15 | 125 | White | 5-15R | • | • |
| BR15 | 15 | 125 | Brown | 5-15R | • | • |
| BR15GRY | 15 | 125 | Gray | 5-15R | • | • |
| BR15LA | 15 | 125 | Light Almond | 5-15R | • | • |
| BR20I | 20 | 125 | Ivory | 5-20R | • | • |
| BR20W | 20 | 125 | White | 5-20R | • | • |
| BR20 | 20 | 125 | Brown | 5-20R | • | • |
| BR20GRY | 20 | 125 | Gray | 5-20R | • | • |
| BR20BK | 20 | 125 | Black | 5-20R | • | • |
| BR20LA | 20 | 125 | Light Almond | 5-20R | • | • |

NEW

NEW

2 Pole, 3 Wire



NEMA 5-15R



NEMA 5-20R

For Configurable Solutions, see Page U-1.

All devices listed on this page conform to NEMA WD-1 and WD-6.


Straight Blade Receptacles Commercial Specification Grade Receptacles

15 & 20A, 125V

Pass & Seymour



| Features | |
|---|---|
| <ul style="list-style-type: none"> Corrosion-resistant, plated steel strap locked in to face and back body to resist pulling away from face/body assembly. .032 inch thick, brass, triple-wipe power contacts for lasting retention. Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring. Impact-resistant nylon face and thermoplastic back body. | <ul style="list-style-type: none"> CR Series: #14 – #10 AWG solid side wire only. BR Series: side and internal screw-pressure-plate back wire capable of accepting #14 – #10 AWG solid or stranded copper or copper-clad wire. Terminal compartments isolated from each other for positive conductor containment. Tri-drive terminal and mounting screws. Auto-ground clip assures positive ground. |

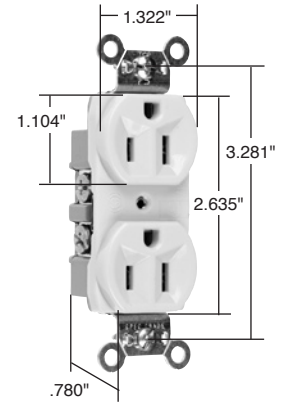

CR15I

| Catalog Number | Rating | | Color | NEMA Config. No. | 3rd Party Compliance | |
|--|--------|-----|--------------|------------------|----------------------|--------------|
| | A. | V. | | | UL498 | C22.2 No. 42 |
| Duplex Receptacles Side Wire | | | | | | |
| CR15I | 15 | 125 | Ivory | 5-15R | • | • |
| CR15W | 15 | 125 | White | 5-15R | • | • |
| CR15 | 15 | 125 | Brown | 5-15R | • | • |
| CR15GRY | 15 | 125 | Gray | 5-15R | • | • |
| CR15LA | 15 | 125 | Light Almond | 5-15R | • | • |
| CR20I | 20 | 125 | Ivory | 5-20R | • | • |
| CR20W | 20 | 125 | White | 5-20R | • | • |
| CR20 | 20 | 125 | Brown | 5-20R | • | • |
| CR20GRY | 20 | 125 | Gray | 5-20R | • | • |
| CR20BK | 20 | 125 | Black | 5-20R | • | • |
| CR20RED | 20 | 125 | Red | 5-20R | • | • |
| CR20LA | 20 | 125 | Light Almond | 5-20R | • | • |
| Duplex Receptacles Back & Side Wire | | | | | | |
| BR15I | 15 | 125 | Ivory | 5-15R | • | • |
| BR15W | 15 | 125 | White | 5-15R | • | • |
| BR15 | 15 | 125 | Brown | 5-15R | • | • |
| BR15GRY | 15 | 125 | Gray | 5-15R | • | • |
| BR15LA | 15 | 125 | Light Almond | 5-15R | • | • |
| BR20I | 20 | 125 | Ivory | 5-20R | • | • |
| BR20W | 20 | 125 | White | 5-20R | • | • |
| BR20 | 20 | 125 | Brown | 5-20R | • | • |
| BR20GRY | 20 | 125 | Gray | 5-20R | • | • |
| BR20BK | 20 | 125 | Black | 5-20R | • | • |
| BR20LA | 20 | 125 | Light Almond | 5-20R | • | • |

NEW

NEW

2 Pole, 3 Wire



NEMA 5-15R



NEMA 5-20R

For Configurable Solutions, see Page U-1.

All devices listed on this page conform to NEMA WD-1 and WD-6.