

## Flexible Conduit/ Cable Fasteners



BX4



BX4M




BX4MD

- Attaches MC, AC, sizes 14/2 through 10/3 or 3/8" FMC to studs or flanges up to 3/16" thick.
- Snaps into place on metal stud openings or may be screwed to metal or wood studs.
- BX4M may be snapped in half to make two BX4's.
- Allows cables to be positioned a minimum of 1 1/4" from face of stud as required by NEC Article 300.4(D).

| UPC/Part Number | Catalog Number | Description  | Box Qty. |
|-----------------|----------------|--------------|----------|
| 78101101079     | <b>BX4</b>     | Single Runs  | 100      |
| 78101101080     | <b>BX4M</b>    | Double Runs  | 100      |
| 78101101224     | <b>BX4MD</b>   | Up to 4 Runs | 100      |

*Read safety/installation instruction sheets in packages before use. These products are designed for positioning only. No load rating.*

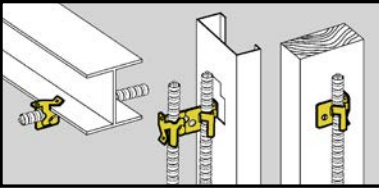

## Flexible Conduit/ Cable Fasteners



BX4



BX4M



BX4MD

- Attaches MC, AC, sizes 14/2 through 10/3 or 3/8" FMC to studs or flanges up to 3/16" thick.
- Snaps into place on metal stud openings or may be screwed to metal or wood studs.
- BX4M may be snapped in half to make two BX4's.
- Allows cables to be positioned a minimum of 1 1/4" from face of stud as required by NEC Article 300.4(D).

| UPC/Part Number | Catalog Number | Description  | Box Qty. |
|-----------------|----------------|--------------|----------|
| 78101101079     | <b>BX4</b>     | Single Runs  | 100      |
| 78101101080     | <b>BX4M</b>    | Double Runs  | 100      |
| 78101101224     | <b>BX4MD</b>   | Up to 4 Runs | 100      |

*Read safety/installation instruction sheets in packages before use. These products are designed for positioning only. No load rating.*