

## Description

The E4RTATSB is a remodel Non-IC Air-Tite™ housing optimized and listed for EISA compliant tungsten-halogen lamps, CFL and LED lamps as well as incandescent. Housing features an adjustable socket bracket, and is suitable for residential or commercial applications. Installation in non-insulated ceilings with Air-Tite code compliant construction. If insulation is present it must be kept 3" from all sides of the housing. May be retrofit with compatible Halo LED lighting systems.

| Catalog #   |  | Type |
|-------------|--|------|
| Project     |  |      |
| Comments    |  | Date |
| Prepared by |  |      |

## Specification Features

### Housing

- Die-formed CRS
- For installation from below the finished ceiling
- Air-Tite gasket pre-installed on remodel flange

### Remodel Clips

- Four remodel clips secure housing and accommodates 1/2" and 5/8" ceiling materials.

### Junction Box

- Seven conduit knockouts are uniform 1/2" size with true pry-out slots
- Four pry-outs with integral strain relief simplify "NM" non-metallic sheathed cable installation
- Three quick connect wire connectors included

### Includes:

#### Quick Connect™

- (3) Push wire nuts included, for speed & reliability
- Clear caps for wire connection visibility

#### Air-Tite™ code compliant

- ASTM E283 compliant

### Socket

- Adjustable position porcelain socket with nickel plated brass screw shell provides flexibility in lamp positioning.

### Thermal Protector

- Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation.

### Trims

- Halo Fit-All concept offers multiple trim options in a variety of design styles, and functional beam distributions to control beam angle and lumen delivery in accommodating various lamp types

### Compliance

- cULus Listed 1598 Luminaire
- cULus Listed for Damp Location
- cULus Listed for Wet Location, with select trims
- RoHS compliant
- Air-Tite code compliant. Certified under ASTM E283; not exceeding 2.0 cfm (0.944 L/s) air leakage rate tested at a 1.57 psf (75 Pa) pressure differential



## E4RTATSB



**4" Non-Insulated Ceiling  
AIR-TITE Remodel Housing  
with Adjustable Socket  
Bracket**

**4" Trims**

**FOR USE IN EXISTING  
CEILINGS**

**FOR USE IN  
NON-INSULATED CEILINGS  
OR  
INSULATED CEILINGS BUT  
INSULATION MUST BE  
KEPT 3" FROM ALL SIDES  
OF FIXTURE**

## Dimensions

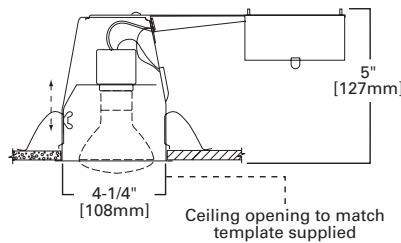

## Special Features

Quick Connect™ push wire nuts  
Air-Tite™ code compliant

## Ordering Information

**Sample Number:** E4RTATSB 4003SC

Order housing, trim and lamp (by others) separately for a complete luminaire.

## Housing

**E4RTATSB** = 4" non-insulated ceiling AIR-TITE small aperture remodel housing with adjustable socket bracket

## Trims

### Reflectors



#### 999 Reflector Cone

OD: 5-1/16" [129mm]

**999P**=Specular Clear, White Trim Ring  
**999RG**=Residential Gold, White Trim Ring  
**999W**=White Reflector, White Trim Ring  
**999H**=Haze Reflector, White Trim Ring  
**999MB**=Specular Black Reflector, White Trim Ring  
**999SN**=Satin Nickel Reflector with Satin Nickel Trim Ring  
**999TBZ**=Tuscan Bronze Reflector with Tuscan Bronze Trim Ring



#### 4003 Reflector Cone

OD: 4-3/4" [120mm]

**4003SC**=Specular Clear Reflector, White Trim Ring

### Baffles



#### 953 Metal Baffle

OD: 5-1/16" [129mm]

**953P**=Black Baffle with White Trim Ring  
**953W**=White Baffle with White Trim Ring  
**953SN**=Satin Nickel Baffle with Satin Nickel Trim Ring  
**953TBZ**=Tuscan Bronze Baffle with Tuscan Bronze Trim Ring



#### 990 Pinhole Trim

OD: 5-1/16" [129mm]

**990P**=White Die Cast Trim  
**990AC**=Antique Copper Die Cast Trim  
**990SN**=Satin Nickel Die Cast Trim  
**990TBZ**=Tuscan Bronze Die Cast Trim

### Baffles



#### 992 Wall Wash with Baffle

OD: 5-1/16" [129mm]

**992P**=White Scoop and Trim Ring, Black Baffle  
**992AC**=Antique Copper, Scoop and Trim Ring, Black Baffle  
**992W**=White Scoop and Trim Ring, White Baffle  
**993SN**=Satin Nickel Scoop and Trim Ring, Black Baffle  
**993TBZ**=Tuscan Bronze Scoop and Trim Ring, Black Baffle



#### 993 Coiled Baffle

OD: 5-1/16" [129mm]

**993P**=Black Baffle with White Trim Ring  
**993W**=White Baffle with White Trim Ring  
**993SN**=Black Baffle with Satin Nickel Trim Ring  
**993TBZ**=Black baffle with Tuscan Bronze Trim Ring



#### 4001 Step Baffle

OD: 4-3/4" [120mm]

**4001BB**=Black Plastic Baffle, White Trim Ring  
**4001WB**=White Plastic Baffle, White Trim Ring



#### 4010 Metal Baffle

OD: 5" [127mm]

**4010BB**=Black Metal Baffle, White Trim Ring  
**4010WB**=White Metal Baffle, White Trim Ring



#### 4013 Metal Baffle

OD: 5" [127mm]

**4013BB**=Black Metal Baffle, White Trim Ring  
**4013WB**=White Metal Baffle, White Trim Ring

### Adjustable



#### 996 Eyeball 15° Tilt

OD: 5-1/16" [129mm]

**996P**=White Eyeball  
**996SN**=Satin Nickel Eyeball  
**996TBZ**=Tuscan Bronze Eyeball



#### 998 Eyeball 30° Tilt

OD: 5-1/16" [129mm]

**998P**=White Eyeball  
**998SN**=Satin Nickel Eyeball  
**998TBZ**=Tuscan Bronze Eyeball



#### 4002 Eyeball

OD: 4-3/4" [120mm]

**4002WH**=White Eyeball

### Lens / Wet Location Listed



#### 951 Prismatic Glass Lens with Full Cone Reflector

**951PS**=Full Reflector and Glass Lens, White Trim  
**951SNS**=Full Reflector and Glass Lens, Satin Nickel Trim  
**951TBZS**=Full Reflector and Glass Lens, Tuscan Bronze Trim



#### 952 Cone Reflector

**952PS**=White Trim Ring, Dome Lens Shower Light



#### 945 Metropolitan Ice Light

OD: 5-5/16" [135mm]

**945**=Clear Frosted  
**945Blue**=Blue Frosted



#### 4055 Prismatic Glass Lens Shower Light

OD: 4-3/4" [120mm]

**4055WH**=Shower Light, White Trim Ring, Prismatic Flat Glass Lens



LISTED

For use in Halo listed housings.

## Description

The E4RTATSB is a remodel Non-IC Air-Tite™ housing optimized and listed for EISA compliant tungsten-halogen lamps, CFL and LED lamps as well as incandescent. Housing features an adjustable socket bracket, and is suitable for residential or commercial applications. Installation in non-insulated ceilings with Air-Tite code compliant construction. If insulation is present it must be kept 3" from all sides of the housing. May be retrofit with compatible Halo LED lighting systems.

| Catalog #   |  | Type |
|-------------|--|------|
| Project     |  |      |
| Comments    |  | Date |
| Prepared by |  |      |

## Specification Features

### Housing

- Die-formed CRS
- For installation from below the finished ceiling
- Air-Tite gasket pre-installed on remodel flange

### Remodel Clips

- Four remodel clips secure housing and accommodates 1/2" and 5/8" ceiling materials.

### Junction Box

- Seven conduit knockouts are uniform 1/2" size with true pry-out slots
- Four pry-outs with integral strain relief simplify "NM" non-metallic sheathed cable installation
- Three quick connect wire connectors included

### Includes:

#### Quick Connect™

- (3) Push wire nuts included, for speed & reliability
- Clear caps for wire connection visibility

#### Air-Tite™ code compliant

- ASTM E283 compliant

### Socket

- Adjustable position porcelain socket with nickel plated brass screw shell provides flexibility in lamp positioning.

### Thermal Protector

- Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation.

### Trims

- Halo Fit-All concept offers multiple trim options in a variety of design styles, and functional beam distributions to control beam angle and lumen delivery in accommodating various lamp types

### Compliance

- cULus Listed 1598 Luminaire
- cULus Listed for Damp Location
- cULus Listed for Wet Location, with select trims
- RoHS compliant
- Air-Tite code compliant. Certified under ASTM E283; not exceeding 2.0 cfm (0.944 L/s) air leakage rate tested at a 1.57 psf (75 Pa) pressure differential



## E4RTATSB



**4" Non-Insulated Ceiling  
AIR-TITE Remodel Housing  
with Adjustable Socket  
Bracket**

**4" Trims**

**FOR USE IN EXISTING  
CEILINGS**

**FOR USE IN  
NON-INSULATED CEILINGS  
OR  
INSULATED CEILINGS BUT  
INSULATION MUST BE  
KEPT 3" FROM ALL SIDES  
OF FIXTURE**

## Dimensions

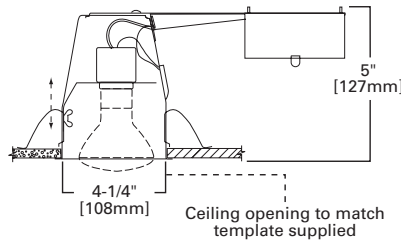

## Special Features

Quick Connect™ push wire nuts  
Air-Tite™ code compliant

## Ordering Information

**Sample Number:** E4RTATSB 4003SC

Order housing, trim and lamp (by others) separately for a complete luminaire.

## Housing

**E4RTATSB** = 4" non-insulated ceiling AIR-TITE small aperture remodel housing with adjustable socket bracket

## Trims

### Reflectors



#### 999 Reflector Cone

OD: 5-1/16" [129mm]

**999P**=Specular Clear, White Trim Ring  
**999RG**=Residential Gold, White Trim Ring  
**999W**=White Reflector, White Trim Ring  
**999H**=Haze Reflector, White Trim Ring  
**999MB**=Specular Black Reflector, White Trim Ring  
**999SN**=Satin Nickel Reflector with Satin Nickel Trim Ring  
**999TBZ**=Tuscan Bronze Reflector with Tuscan Bronze Trim Ring



#### 4003 Reflector Cone

OD: 4-3/4" [120mm]

**4003SC**=Specular Clear Reflector, White Trim Ring

### Baffles



#### 953 Metal Baffle

OD: 5-1/16" [129mm]

**953P**=Black Baffle with White Trim Ring  
**953W**=White Baffle with White Trim Ring  
**953SN**=Satin Nickel Baffle with Satin Nickel Trim Ring  
**953TBZ**=Tuscan Bronze Baffle with Tuscan Bronze Trim Ring



#### 990 Pinhole Trim

OD: 5-1/16" [129mm]

**990P**=White Die Cast Trim  
**990AC**=Antique Copper Die Cast Trim  
**990SN**=Satin Nickel Die Cast Trim  
**990TBZ**=Tuscan Bronze Die Cast Trim

### Baffles



#### 992 Wall Wash with Baffle

OD: 5-1/16" [129mm]

**992P**=White Scoop and Trim Ring, Black Baffle  
**992AC**=Antique Copper, Scoop and Trim Ring, Black Baffle  
**992W**=White Scoop and Trim Ring, White Baffle  
**992SN**=Satin Nickel Scoop and Trim Ring, Black Baffle  
**992TBZ**=Tuscan Bronze Scoop and Trim Ring, Black Baffle



#### 993 Coilex Baffle

OD: 5-1/16" [129mm]

**993P**=Black Baffle with White Trim Ring  
**993W**=White Baffle with White Trim Ring  
**993SN**=Black Baffle with Satin Nickel Trim Ring  
**993TBZ**=Black baffle with Tuscan Bronze Trim Ring



#### 4001 Step Baffle

OD: 4-3/4" [120mm]

**4001BB**=Black Plastic Baffle, White Trim Ring  
**4001WB**=White Plastic Baffle, White Trim Ring



#### 4010 Metal Baffle

OD: 5" [127mm]

**4010BB**=Black Metal Baffle, White Trim Ring  
**4010WB**=White Metal Baffle, White Trim Ring



#### 4013 Metal Baffle

OD: 5" [127mm]

**4013BB**=Black Metal Baffle, White Trim Ring  
**4013WB**=White Metal Baffle, White Trim Ring

### Adjustable



#### 996 Eyeball 15° Tilt

OD: 5-1/16" [129mm]

**996P**=White Eyeball  
**996SN**=Satin Nickel Eyeball  
**996TBZ**=Tuscan Bronze Eyeball



#### 998 Eyeball 30° Tilt

OD: 5-1/16" [129mm]

**998P**=White Eyeball  
**998SN**=Satin Nickel Eyeball  
**998TBZ**=Tuscan Bronze Eyeball



#### 4002 Eyeball

OD: 4-3/4" [120mm]

**4002WH**=White Eyeball

### Lens / Wet Location Listed



#### 951 Prismatic Glass Lens with Full Cone Reflector

**951PS**=Full Reflector and Glass Lens, White Trim  
**951SNS**=Full Reflector and Glass Lens, Satin Nickel Trim  
**951TBZS**=Full Reflector and Glass Lens, Tuscan Bronze Trim



#### 952 Cone Reflector

**952PS**=White Trim Ring, Dome Lens Shower Light



#### 945 Metropolitan Ice Light

OD: 5-5/16" [135mm]

**945**=Clear Frosted  
**945Blue**=Blue Frosted



#### 4055 Prismatic Glass Lens Shower Light

OD: 4-3/4" [120mm]

**4055WH**=Shower Light, White Trim Ring, Prismatic Flat Glass Lens



For use in Halo listed housings.