




GE
Lighting

38201 - F25T12/CW/33 6PK

GE garage & basement 25 watt T12 1-pack

- Passes TCLP, which can lower disposal costs.
- 1.5 inch diameter T12 with medium bi-pin (g13) base
- 4100K cool white light appearance
- Cool white light perfect for sizable spaces
- For use in large spaces such as basements and garages
- GE garage & basement fluorescent bulbs' cool white light is perfect for illuminating sizable spaces throughout your home. Use in large open spaces in your home including finished and unfinished basements, garages and rec rooms
- Lasts 3.4 years based on 6 hours per day usage
- 33 inches long

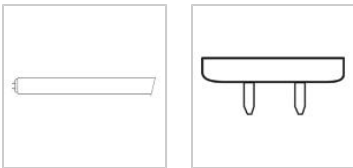

CAUTIONS & WARNINGS

Caution


- Lamp may shatter and cause injury if broken
 - Wear safety glasses and gloves when handling lamp.
 - Do not use excessive force when installing lamp.

Warning

- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.

GRAPHS & CHARTS

Graphs_Lamp Mortality

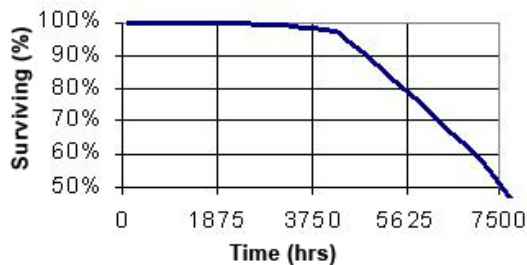

GENERAL CHARACTERISTICS

Lamp Type	Linear Fluorescent - Straight Linear
Bulb	T12
Base	Medium Bi-Pin (G13)
Rated Life	7500.0 hrs
Rated Life (instant start) @ Time	7500 h @ 3 h
Bulb Material	Soda lime
Starting Temperature (MIN)	10.0 °C
LEED-EB MR Credit	4776 picograms Hg per mean lumen hour
Additional Info	TCLP compliant
Primary Application	Appliance,Speciality

PHOTOMETRIC CHARACTERISTICS

Initial Lumens	1860.0
Mean Lumens	1675.0
Nominal Initial Lumens per Watt	74
Color Temperature	4100.0 K
Color Rendering Index (CRI)	60.0

ELECTRICAL CHARACTERISTICS

Wattage	25.0
Voltage	61.0
Cathode Resistance Ratio - Rh/ Rc (MAX)	6.5
Preheat Voltage (MIN)	4.25 V

DIMENSIONS

Maximum Overall Length (MOL)	33.0000 in(838.2 mm)
Nominal Length	33.000 in(838.2 mm)
Bulb Diameter (DIA) (MAX)	1.590 in(40.4 mm)
Bulb Diameter (DIA)	1.500 in(38.1 mm)

PRODUCT INFORMATION

Product Code	38201
Description	F25T12/CW/33 6PK
Standard Package	BUNDLE
Standard Package GTIN	00043168382014
Standard Package Quantity	24
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	24
UPC	043168980760




GE
Lighting

38201 - F25T12/CW/33 6PK

GE garage & basement 25 watt T12 1-pack

- Passes TCLP, which can lower disposal costs.
- 1.5 inch diameter T12 with medium bi-pin (g13) base
- 4100K cool white light appearance
- Cool white light perfect for sizable spaces
- For use in large spaces such as basements and garages
- GE garage & basement fluorescent bulbs' cool white light is perfect for illuminating sizable spaces throughout your home. Use in large open spaces in your home including finished and unfinished basements, garages and rec rooms
- Lasts 3.4 years based on 6 hours per day usage
- 33 inches long

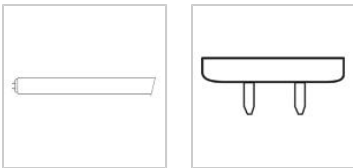

CAUTIONS & WARNINGS

Caution


- Lamp may shatter and cause injury if broken
 - Wear safety glasses and gloves when handling lamp.
 - Do not use excessive force when installing lamp.

Warning

- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.

GRAPHS & CHARTS

Graphs_Lamp Mortality

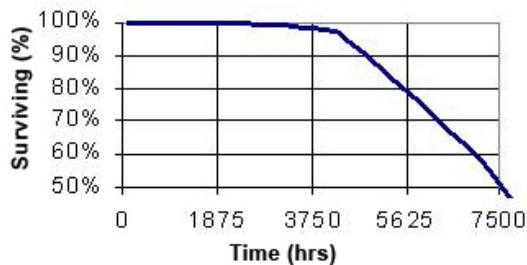

GENERAL CHARACTERISTICS

Lamp Type	Linear Fluorescent - Straight
Bulb	Linear
Base	T12
Rated Life	Medium Bi-Pin (G13)
Rated Life (instant start) @ Time	7500.0 hrs
Bulb Material	7500 h @ 3 h
Starting Temperature (MIN)	Soda lime
LEED-EB MR Credit	10.0 °C
Additional Info	4776 picograms Hg per mean lumen hour
Primary Application	TCLP compliant Appliance,Speciality

PHOTOMETRIC CHARACTERISTICS

Initial Lumens	1860.0
Mean Lumens	1675.0
Nominal Initial Lumens per Watt	74
Color Temperature	4100.0 K
Color Rendering Index (CRI)	60.0

ELECTRICAL CHARACTERISTICS

Wattage	25.0
Voltage	61.0
Cathode Resistance Ratio - Rh/ Rc (MAX)	6.5
Preheat Voltage (MIN)	4.25 V

DIMENSIONS

Maximum Overall Length (MOL)	33.0000 in(838.2 mm)
Nominal Length	33.000 in(838.2 mm)
Bulb Diameter (DIA) (MAX)	1.590 in(40.4 mm)
Bulb Diameter (DIA)	1.500 in(38.1 mm)

PRODUCT INFORMATION

Product Code	38201
Description	F25T12/CW/33 6PK
Standard Package	BUNDLE
Standard Package GTIN	00043168382014
Standard Package Quantity	24
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	24
UPC	043168980760