


FXH150QT

Medium base HPS, MH or CFL specification grade flood with Integra Hood glare shield and 1/2" heavy duty swivel arm. Lamp supplied.

Color: Bronze

Weight: 15.6 lbs

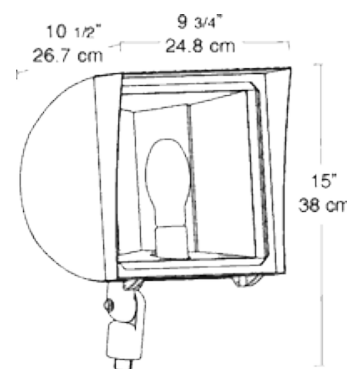

Lamp Info

Type: ED17
Watts: 150W
Shape/Size: N/A
Base: N/A
ANSI: N/A
Hours: 10,000
Lamp Lumens: 12,500
Efficacy: 68 LPW

Ballast Info

Type: CWA-HPF QT
120V: 1.3/1.8A
208V: .8/1.1A
240V: .7/.9A
277V: .6/.8A
Input Watts: 185W
Efficiency: 81%

Technical Specifications

UL Listing:

Suitable for wet locations. Suitable for mounting within 1.2m (4ft) of the ground.

Housing:

Precision die cast aluminum. 1/2" NPS locking Swivel Arm, Wall Bracket Trunnion or Slip Fitter.

Reflector:

Anodized aluminum. Field adjustable beam spread. Rotates 90° for horizontal or vertical lamp position.

Lens Frame & Glare Shield:

Precision die cast aluminum. Hinged for easy access. Phillips head screws for added security.

Socket:

HID Porcelain 4kv Pulse Rated socket with nickel plated screw shell CFL Plug in type, GX24q-4 base.

Finish:

Our environmentally friendly polyester powder coatings are formulated for high-durability and long-lasting color, and contains no VOC or toxic heavy metals.

Lens:

Thermal tempered shock resistant glass, 3/16" thick.

Lens Gasket:

High temperature one piece molded silicone set in die cast retaining groove. Remains in place during relamping.

Ground Mounting:

Use the new MPM19 Mighty Post with aluminum cap for sturdy installation.

Quad Tap:

Fixture works with 120, 208, 240 and 277 Volts .

EPA:

Maximum EPA 1.1

Patents:

Pat. D545,472



Tech Help Line: 888 RAB-1000

Email: sales@rabweb.com

On the web at: www.rabweb.com

Copyright ©2013 RAB Lighting, Inc. All Rights Reserved

Note: Specifications are subject to change without notice


Page 1 of 1

FXH150QT

Medium base HPS, MH or CFL specification grade flood with Integra Hood glare shield and 1/2" heavy duty swivel arm. Lamp supplied.

Color: Bronze

Weight: 15.6 lbs

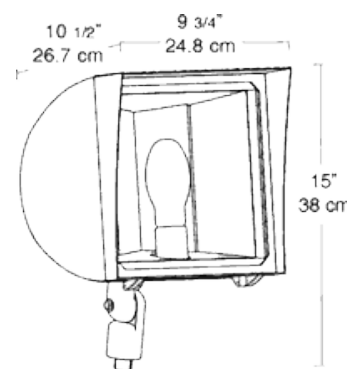

Lamp Info

Type: ED17
Watts: 150W
Shape/Size: N/A
Base: N/A
ANSI: N/A
Hours: 10,000
Lamp Lumens: 12,500
Efficacy: 68 LPW

Ballast Info

Type: CWA-HPF QT
120V: 1.3/1.8A
208V: .8/1.1A
240V: .7/.9A
277V: .6/.8A
Input Watts: 185W
Efficiency: 81%

Technical Specifications

UL Listing:

Suitable for wet locations. Suitable for mounting within 1.2m (4ft) of the ground.

Housing:

Precision die cast aluminum. 1/2" NPS locking Swivel Arm, Wall Bracket Trunnion or Slip Fitter.

Reflector:

Anodized aluminum. Field adjustable beam spread. Rotates 90° for horizontal or vertical lamp position.

Lens Frame & Glare Shield:

Precision die cast aluminum. Hinged for easy access. Phillips head screws for added security.

Socket:

HID Porcelain 4kv Pulse Rated socket with nickel plated screw shell CFL Plug in type, GX24q-4 base.

Finish:

Our environmentally friendly polyester powder coatings are formulated for high-durability and long-lasting color, and contains no VOC or toxic heavy metals.

Lens:

Thermal tempered shock resistant glass, 3/16" thick.

Lens Gasket:

High temperature one piece molded silicone set in die cast retaining groove. Remains in place during relamping.

Ground Mounting:

Use the new MPM19 Mighty Post with aluminum cap for sturdy installation.

Quad Tap:

Fixture works with 120, 208, 240 and 277 Volts .

EPA:

Maximum EPA 1.1

Patents:

Pat. D545,472



Tech Help Line: 888 RAB-1000

Email: sales@rabweb.com

On the web at: www.rabweb.com

Copyright ©2013 RAB Lighting, Inc. All Rights Reserved

Note: Specifications are subject to change without notice

Page 1 of 1