

Intersystem Grounding Bridges with PVC Adapter


Available in zinc or bronze. Provides reliable intersystem bonding between power and communication grounding systems. Comes with a PVC adapter for 1/2" PVC pipe. Cover is UV rated plastic for long outdoor life.

FEATURES AND BENEFITS

- Meets 2014 NEC Ground Requirements
- GB5P has four termination points—one more than required by 250.94 of the 2014 NEC
- Available in Zinc and Bronze
- Handles multiple hookups of communications systems—for instance phone, cable TV, or a satellite dish
- Fast, simple installation on grounding conductor
- Plastic cover is textured and paintable for good looks

CABLE RANGE


- Four termination points for #4-#14 (solid or stranded)
- Attaches to conductor with "Lay in" style lug with cable range of #6-#2
- GBB50P has larger cable range of #6-#1/0

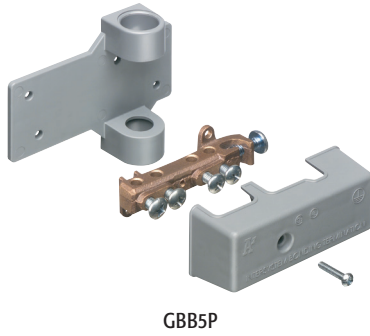

GBB5P

| CATALOG NUMBER | UPC/DCI/NAED MFG #018997 | MATERIAL | UNIT PKG | STD PKG | DIM A | DIM B | DIM C | DIM D | DIM E | DIM F |
|----------------|--------------------------|----------|----------|---------|-------|-------|-------|-------|-------|-------|
| GB5P | 09720 | Zinc | 1 | 10 | 3.383 | 1.409 | .872 | 1.653 | 4.575 | 3.461 |
| GBB5P | 09721 | Bronze | 1 | 10 | 3.383 | 1.409 | .872 | 1.653 | 4.575 | 3.461 |
| GBB50P | 09726 | Bronze | 1 | 10 | 3.383 | 1.409 | .872 | 1.653 | 4.575 | 3.461 |

PATENTED.

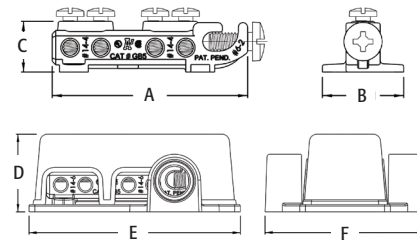

INSTALLATION INSTRUCTIONS



1 Mount conduit adapter plate in desired location using three screws (not provided).



2 Insert grounding electrode conductor into the lay in lug. Tighten screw.



3 Insert grounding electrode conductor into the lay in lug. Tighten screw.



4 Finish by attaching the cover. Good looks, a great finish.




GBB5P

Scan For Video



Intersystem Grounding Bridges with PVC Adapter

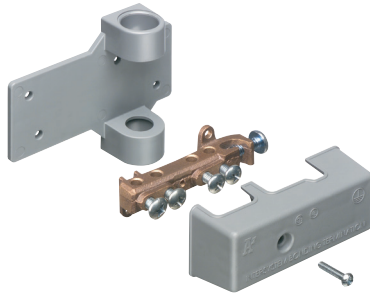

GBB5P

Available in zinc or bronze. Provides reliable intersystem bonding between power and communication grounding systems. Comes with a PVC adapter for 1/2" PVC pipe. Cover is UV rated plastic for long outdoor life.

FEATURES AND BENEFITS


- Meets 2014 NEC Ground Requirements
- GB5P has four termination points—one more than required by 250.94 of the 2014 NEC
- Available in Zinc and Bronze
- Handles multiple hookups of communications systems—for instance phone, cable TV, or a satellite dish
- Fast, simple installation on grounding conductor
- Plastic cover is textured and paintable for good looks

CABLE RANGE

- Four termination points for #4-#14 (solid or stranded)
- Attaches to conductor with "Lay in" style lug with cable range of #6-#2
- GBB50P has larger cable range of #6-#1/0

| CATALOG NUMBER | UPC/DCI/NAED MFG #018997 | MATERIAL | UNIT PKG | STD PKG | DIM A | DIM B | DIM C | DIM D | DIM E | DIM F |
|----------------|--------------------------|----------|----------|---------|-------|-------|-------|-------|-------|-------|
| GB5P | 09720 | Zinc | 1 | 10 | 3.383 | 1.409 | .872 | 1.653 | 4.575 | 3.461 |
| GBB5P | 09721 | Bronze | 1 | 10 | 3.383 | 1.409 | .872 | 1.653 | 4.575 | 3.461 |
| GBB50P | 09726 | Bronze | 1 | 10 | 3.383 | 1.409 | .872 | 1.653 | 4.575 | 3.461 |

PATENTED.

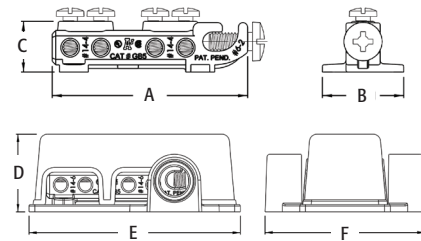

INSTALLATION INSTRUCTIONS



1 Mount conduit adapter plate in desired location using three screws (not provided).



2 Insert grounding electrode conductor into the lay in lug. Tighten screw.



3 Insert grounding electrode conductor into the lay in lug. Tighten screw.



4 Finish by attaching the cover. Good looks, a great finish.



GBB5P

Scan For Video

