

NICOR[®] | LED

Under Cabinet Series

NUC-4 | Hardwired | Linkable | High/Low/Off Switch



LED under cabinet solutions
Enhanced ambiance, safety, and efficiency

NUC-4

LED Under Cabinet



Increase the value and functionality of your work space with the NUC-4 LED Under Cabinet Series

Whether in a kitchen, under a shelf, or in a defined work space, these low profile fixtures are perfect for task or accent light levels. The NUC-4 LED Under Cabinet Series presents a clean, professional look allowing you to use an existing wall switch or dimmer to easily control your lighting.* This energy efficient lighting solution is not only affordable, but offers even more flexibility with three key choices, including a direct hardwire, a linkable with plug and play, and a high/low/off switch option. Featuring a 1" slim line design with warm color tones designed to enhance any application, the NUC-4 Series offers a greater than 90 CRI with R9 greater than 50, **making colors more vibrant and accurate to the naked eye.**

*High/Low/Off fixture is not dimmable

NUC-4

LED Under Cabinet | Hardwired | Linkable | High/Low/Off Switch



The NUC-4 Series provides softer, more uniform illumination with a specially designed diffuser that eliminates hot spots on counter surfaces. These linear fixtures are Energy Star rated, CEC Title 24 compliant*, and offer over 20 years of maintenance free operation. Available in five lengths and in four decorative colors, the NUC-4 Series' cool operating temperature and warm natural color makes this energy efficient family **a great choice for accent, office, cove, task and display lighting.**

*Excluding High/Low/Off




NUC-4 | Hardwired | Linkable | High/Low/Off Switch

At a glance under cabinet comparison

	Hardwired	Linkable	High/Low
Dimmable	TRIAC Dimming	TRIAC Dimming	High/Low/Off Switch
Length	8", 12.5", 21.5", 30", 40"	8", 12.5", 21.5", 30", 40"	8", 12.5", 21.5", 30", 40"
Finish Options	 (White, Black, Nickel, Oil-rubbed Bronze)	 (White, Black, Nickel, Oil-rubbed Bronze)	 (White, Black, Nickel, Oil-rubbed Bronze)
Color Temp	2700K	2700K	2700K
TM-21 Reported L70(6k) hours	>36,000 hours	>36,000 hours	>36,000 hours
TM-21 Calculated L70(6k) hours	>100,000 hours	>100,000 hours	>100,000 hours
Input Voltage	120V	120V	120V
Mounting	Surface	Surface	Surface
Installation	Hardwire	Plug & Play or Optional Hardwire Conversion Kit	Hardwire
Certifications			

Small details that make a big difference

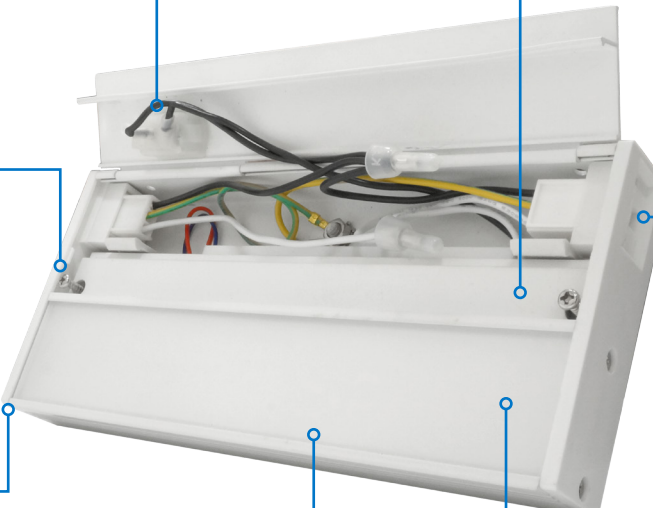

ELECTRICAL ACCESS
Easy-open door with positive latch makes electrical installation simple

EASY INSTALLATION
Captive screws make for a quick one-person installation

LOW PROFILE DESIGN
1-inch height conceals fixture and keeps it out of view

CONSTRUCTION
Extruded aluminum housing provides durability and ample heat-sinking

SLIM-LINE DRIVER
Custom driver engineered for optimal dimming across all sizes
*Not for High/Low

MULTIPLE KNOCKOUTS OR LINKABLE PORTS
Versatile knockout selection allows for multidirectional wiring or linkable capped parts enable for quick daisy-chaining to other fixtures

DIFFUSER
Specially designed diffuser prevents pixilation and provides uniform illumination

CONNECTOR
Used to directly join two NUC-4 Linkable fixtures together.

PLUG
72" Cord and plug allows NUC-4 Linkable fixtures to be direct plug-in units

JUMPER
Used to join NUC-4 Linkable fixtures together

JBOX
Hardwire conversion junction box used to power NUC-4 Linkable fixtures using jumper cables

NUC-4

Product Specs



Construction

- Low profile aluminum housing
- Extruded aluminum housing for durability and ample heatsinking
- Low 1-inch profile keeps the fixture unobtrusive and out of view
- No UV or forward-projected heat
- UL Listed for damp locations

Optical System

Even lighting with specially designed diffuser to prevent "hot spots" on counter tops

Electrical

- Greater than 90 CRI with R9 greater than 50
- 61-1136 Lumens (varies by length)
- Hardwire and linkable dimmable with most TRIAC dimmers less than 10%
- High/Low non-dimmable at 100% on high and 30% on low
- Custom low-profile driver engineered for optimal dimming (except for High/Low/Off)
- Operating temperature rating of 0°F to 120°F (-18°C – 49°C)
- 120V line voltage no transformer
- L70 rated for greater than >36,000 hours
- TM-21 Projected L70(6k) life >100,000 hours
- LM-79, LM-80 testing performed in accordance with IESNA standards

Finish

Available in: Black, Nickel, White, and Oil-Rubbed Bronze

Installation

- Easy surface mount installation
- Pre-installed captive screws allow for quick mounting
- Positive latch door for easy access and installation
- Versatile knockout selection allows for multidirectional wiring except 8"

Linkable Version Benefits


- Linkability allows for more flexible installation with one power source
- Linkable accessories available: Connectors, Conversion Kit, Jumper Cables and Plugs (see ordering information for complete details)

Warranty

5-year limited system warranty standard




FINISH OPTIONS



PRODUCT INFORMATION	
Product Specs	NUC-4
TM-21 Calculated L70(6K) hours:	>100,000 hours
Power Draw at full power: (Hardwired & Linkable) (varies by length)	8" - 3.85W
	12.5" - 5.83W
	21.5" - 8.79W
	30" - 11.84W
Power Draw at full power: (High/Low) (varies by length)	40" - 16.19W
	8" - 4.6W
	12.5" - 6.5W
	21.5" - 9.2W
Input Voltage :	30" - 12.4W
	40" - 16.4W
	120VAC
Dimensions:	Height: 1" Width: 3.5" Length: Varies

Specifications and dimensions subject to change without notice



NUC-4

Ordering Information

NUC-4 | Hardwired

Ordering Information					
Series	Version	Length			Housing Color
NUC	4	08 (8 inches)	DM (Dimmable)	W (Wired)	BK (Black)
		12 (12 ½ inches)			NK (Nickel)
		21 (21 ½ inches)			OB (Oil-rubbed bronze)
		30 (30 inches)			WH (white)
		40 (40 Inches)			

All reports based on current industry standards; field performance may differ from laboratory performance. Specifications and dimensions subject to change without notice.



NUC-4 | Linkable

Ordering Information					
Series	Version	Length			Housing Color
NUC	4	08 (8 inches)	DM (Dimmable)	L (Linkable)	BK (Black)
		12 (12 ½ inches)			NK (Nickel)
		21 (21 ½ inches)			OB (Oil-rubbed bronze)
		30 (30 inches)			WH (White)
		40 (40 Inches)			



Accessory Ordering Information				
Series	Version	Accessory Type	Length (use for jumper cable only)	Accessory Color
NUC	4	JUMPER (Jumper Cable)	06 (6-inch)	WH (White)
		PLUG (72" Cord and Plug Standard)	12 (12-inch)	BK (Black)
		JBOX (Hardwire Conversion Kit)	24 (24-inch)	
		CONNECTOR (End to End Connector)	72 (72-inch)	

All reports based on current industry standards; field performance may differ from laboratory performance. Specifications and dimensions subject to change without notice.

NUC-4 | High/Low/Off

Ordering Information					
Series	Version	Length			Housing Color
NUC	4	08 (8 inches)	HL (High/Low)	W (Wired)	BK (Black)
		12 (12 ½ inches)			NK (Nickel)
		21 (21 ½ inches)			OB (Oil-rubbed bronze)
		30 (30 inches)			WH (White)
		40 (40 Inches)			

All reports based on current industry standards; field performance may differ from laboratory performance. Specifications and dimensions subject to change without notice.



NICOR[®] | **LED**

Under Cabinet Series

NUC-4 | Hardwired | Linkable | High/Low/Off Switch



LED under cabinet solutions
Enhanced ambiance, safety, and efficiency

NUC-4

LED Under Cabinet



Increase the value and functionality of your work space with the NUC-4 LED Under Cabinet Series

Whether in a kitchen, under a shelf, or in a defined work space, these low profile fixtures are perfect for task or accent light levels. The NUC-4 LED Under Cabinet Series presents a clean, professional look allowing you to use an existing wall switch or dimmer to easily control your lighting.* This energy efficient lighting solution is not only affordable, but offers even more flexibility with three key choices, including a direct hardwire, a linkable with plug and play, and a high/low/off switch option. Featuring a 1" slim line design with warm color tones designed to enhance any application, the NUC-4 Series offers a greater than 90 CRI with R9 greater than 50, **making colors more vibrant and accurate to the naked eye.**

*High/Low/Off fixture is not dimmable

NUC-4

LED Under Cabinet | Hardwired | Linkable | High/Low/Off Switch



The NUC-4 Series provides softer, more uniform illumination with a specially designed diffuser that eliminates hot spots on counter surfaces. These linear fixtures are Energy Star rated, CEC Title 24 compliant*, and offer over 20 years of maintenance free operation. Available in five lengths and in four decorative colors, the NUC-4 Series' cool operating temperature and warm natural color makes this energy efficient family **a great choice for accent, office, cove, task and display lighting.**

*Excluding High/Low/Off




NUC-4 | Hardwired | Linkable | High/Low/Off Switch

At a glance under cabinet comparison

	Hardwired	Linkable	High/Low
Dimmable	TRIAC Dimming	TRIAC Dimming	High/Low/Off Switch
Length	8", 12.5", 21.5", 30", 40"	8", 12.5", 21.5", 30", 40"	8", 12.5", 21.5", 30", 40"
Finish Options	 (White, Black, Nickel, Oil-rubbed Bronze)	 (White, Black, Nickel, Oil-rubbed Bronze)	 (White, Black, Nickel, Oil-rubbed Bronze)
Color Temp	2700K	2700K	2700K
TM-21 Reported L70(6k) hours	>36,000 hours	>36,000 hours	>36,000 hours
TM-21 Calculated L70(6k) hours	>100,000 hours	>100,000 hours	>100,000 hours
Input Voltage	120V	120V	120V
Mounting	Surface	Surface	Surface
Installation	Hardwire	Plug & Play or Optional Hardwire Conversion Kit	Hardwire
Certifications			

Small details that make a big difference

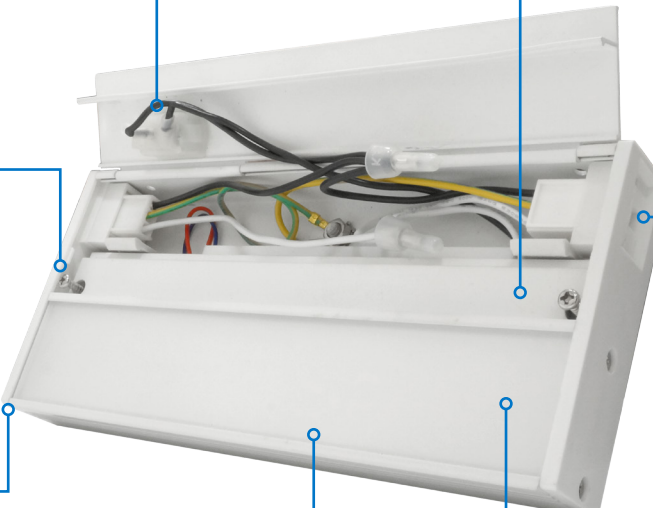

ELECTRICAL ACCESS
Easy-open door with positive latch makes electrical installation simple

EASY INSTALLATION
Captive screws make for a quick one-person installation

LOW PROFILE DESIGN
1-inch height conceals fixture and keeps it out of view

CONSTRUCTION
Extruded aluminum housing provides durability and ample heat-sinking

SLIM-LINE DRIVER
Custom driver engineered for optimal dimming across all sizes
*Not for High/Low

MULTIPLE KNOCKOUTS OR LINKABLE PORTS
Versatile knockout selection allows for multidirectional wiring or linkable capped parts enable for quick daisy-chaining to other fixtures

DIFFUSER
Specially designed diffuser prevents pixilation and provides uniform illumination

CONNECTOR
Used to directly join two NUC-4 Linkable fixtures together.

PLUG
72" Cord and plug allows NUC-4 Linkable fixtures to be direct plug-in units

JUMPER
Used to join NUC-4 Linkable fixtures together

JBOX
Hardwire conversion junction box used to power NUC-4 Linkable fixtures using jumper cables

NUC-4

Product Specs



Construction

- Low profile aluminum housing
- Extruded aluminum housing for durability and ample heatsinking
- Low 1-inch profile keeps the fixture unobtrusive and out of view
- No UV or forward-projected heat
- UL Listed for damp locations

Optical System

Even lighting with specially designed diffuser to prevent "hot spots" on counter tops

Electrical

- Greater than 90 CRI with R9 greater than 50
- 61-1136 Lumens (varies by length)
- Hardwire and linkable dimmable with most TRIAC dimmers less than 10%
- High/Low non-dimmable at 100% on high and 30% on low
- Custom low-profile driver engineered for optimal dimming (except for High/Low/Off)
- Operating temperature rating of 0°F to 120°F (-18°C – 49°C)
- 120V line voltage no transformer
- L70 rated for greater than >36,000 hours
- TM-21 Projected L70(6k) life >100,000 hours
- LM-79, LM-80 testing performed in accordance with IESNA standards

Finish

Available in: Black, Nickel, White, and Oil-Rubbed Bronze

Installation

- Easy surface mount installation
- Pre-installed captive screws allow for quick mounting
- Positive latch door for easy access and installation
- Versatile knockout selection allows for multidirectional wiring except 8"

Linkable Version Benefits


- Linkability allows for more flexible installation with one power source
- Linkable accessories available: Connectors, Conversion Kit, Jumper Cables and Plugs (see ordering information for complete details)

Warranty

5-year limited system warranty standard




FINISH OPTIONS



PRODUCT INFORMATION	
Product Specs	NUC-4
TM-21 Calculated L70(6K) hours:	>100,000 hours
Power Draw at full power: (Hardwired & Linkable) (varies by length)	8" - 3.85W
	12.5" - 5.83W
	21.5" - 8.79W
	30" - 11.84W
Power Draw at full power: (High/Low) (varies by length)	40" - 16.19W
	8" - 4.6W
	12.5" - 6.5W
	21.5" - 9.2W
Input Voltage :	30" - 12.4W
	40" - 16.4W
	120VAC
Dimensions:	Height: 1" Width: 3.5" Length: Varies

Specifications and dimensions subject to change without notice



NUC-4

Ordering Information

NUC-4 | Hardwired

Ordering Information					
Series	Version	Length			Housing Color
NUC	4	08 (8 inches)	DM (Dimmable)	W (Wired)	BK (Black)
		12 (12 ½ inches)			NK (Nickel)
		21 (21 ½ inches)			OB (Oil-rubbed bronze)
		30 (30 inches)			WH (white)
		40 (40 Inches)			

All reports based on current industry standards; field performance may differ from laboratory performance. Specifications and dimensions subject to change without notice.



NUC-4 | Linkable

Ordering Information					
Series	Version	Length			Housing Color
NUC	4	08 (8 inches)	DM (Dimmable)	L (Linkable)	BK (Black)
		12 (12 ½ inches)			NK (Nickel)
		21 (21 ½ inches)			OB (Oil-rubbed bronze)
		30 (30 inches)			WH (White)
		40 (40 Inches)			

All reports based on current industry standards; field performance may differ from laboratory performance. Specifications and dimensions subject to change without notice.



Accessory Ordering Information

Series	Version	Accessory Type	Length (use for jumper cable only)	Accessory Color
NUC	4	JUMPER (Jumper Cable)	06 (6-inch)	WH (White)
		PLUG (72" Cord and Plug Standard)	12 (12-inch)	BK (Black)
		JBOX (Hardwire Conversion Kit)	24 (24-inch)	
		CONNECTOR (End to End Connector)	72 (72-inch)	

All reports based on current industry standards; field performance may differ from laboratory performance. Specifications and dimensions subject to change without notice.

NUC-4 | High/Low/Off

Ordering Information					
Series	Version	Length			Housing Color
NUC	4	08 (8 inches)	HL (High/Low)	W (Wired)	BK (Black)
		12 (12 ½ inches)			NK (Nickel)
		21 (21 ½ inches)			OB (Oil-rubbed bronze)
		30 (30 inches)			WH (White)
		40 (40 Inches)			

All reports based on current industry standards; field performance may differ from laboratory performance. Specifications and dimensions subject to change without notice.

