

# Calbrite™

## Stainless Steel Conduit Systems

### Stainless Steel Couplings

#### Features:

- Manufactured in type 304 and 316 stainless steel to meet any stringent sanitary condition
- Polished with standard "brite" finish to increase corrosion resistance and aesthetic appearance
- Included with each length of stainless threaded conduit
- Straight threads—NPS
- No package qty. required



#### Certifications and Compliances:


UL / cUL 6A Listed  
 UL file number – E230584  
 Manufactured in accordance with CSA C22.1, Canadian Electrical Code, Part 1, NOM-001-SEDE, Standard for Electrical Installations, Inclusive for installation in accordance with Article 344 of ANSI/NFPA 70, "National Electrical Code" (NEC)  
 Manufactured in the USA

#### Applications:

Designed for use with stainless steel rigid conduit, and to connect threaded stainless conduit, nipples, and other threaded fittings.

#### Industries Commonly Served:

- Food & Beverage Production & Distribution
- Chemical Plants
- Water & Wastewater Treatment
- Pharmaceuticals & Cosmetics
- Refining & Extraction Sites
- Petrochemical
- Pulp & Paper Mills
- Marine & Coastal Facilities
- Along with other corrosive environments

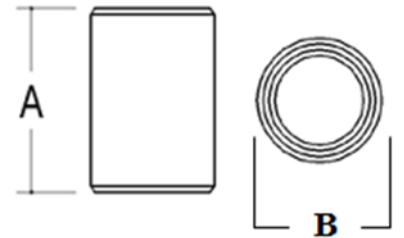

| Size   | Part Number | A      | B      | I.D.   | Wall Thickness | Weight (ea) per lb. |
|--------|-------------|--------|--------|--------|----------------|---------------------|
| 1/2"   | S60500CP00  | 1.640" | 1.035" | 0.840" | .110"          | 0.13                |
| 3/4"   | S60700CP00  | 1.645" | 1.260" | 1.050" | .140"          | 0.20                |
| 1"     | S61000CP00  | 2.000" | 1.550" | 1.315" | .160"          | 0.34                |
| 1-1/4" | S61200CP00  | 2.050" | 1.880" | 1.660" | .160"          | 0.38                |
| 1-1/2" | S61500CP00  | 2.085" | 2.200" | 1.900" | .200"          | 0.65                |
| 2"     | S62000CP00  | 2.165" | 2.740" | 2.375" | .200"          | 0.90                |
| 2-1/2" | S62500CP00  | 3.210" | 3.330" | 2.875" | .250"          | 2.10                |
| 3"     | S63000CP00  | 3.315" | 3.800" | 3.500" | .250"          | 2.20                |
| 4"     | S64000CP00  | 3.540" | 4.890" | 4.500" | .250"          | 3.19                |
| 5"     | S65000CP00  | 3.970" | 6.340" | 5.563" | .440"          | 8.66                |
| 6"     | S66000CP00  | 4.270" | 7.340" | 6.625" | .440"          | 10.00               |

All dimensions are for informational purposes only \*Tolerances +/- 5%

# Calbrite™

## Stainless Steel Conduit Systems

### Stainless Steel Couplings

#### Features:

- Manufactured in type 304 and 316 stainless steel to meet any stringent sanitary condition
- Polished with standard "brite" finish to increase corrosion resistance and aesthetic appearance
- Included with each length of stainless threaded conduit
- Straight threads—NPS
- No package qty. required



#### Certifications and Compliances:


UL / cUL 6A Listed  
 UL file number – E230584  
 Manufactured in accordance with CSA C22.1, Canadian Electrical Code, Part 1, NOM-001-SEDE, Standard for Electrical Installations, Inclusive for installation in accordance with Article 344 of ANSI/NFPA 70, "National Electrical Code" (NEC)  
 Manufactured in the USA

#### Applications:

Designed for use with stainless steel rigid conduit, and to connect threaded stainless conduit, nipples, and other threaded fittings.

#### Industries Commonly Served:

- Food & Beverage Production & Distribution
- Chemical Plants
- Water & Wastewater Treatment
- Pharmaceuticals & Cosmetics
- Refining & Extraction Sites
- Petrochemical
- Pulp & Paper Mills
- Marine & Coastal Facilities
- Along with other corrosive environments

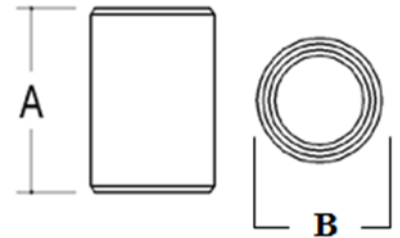

| Size   | Part Number | A      | B      | I.D.   | Wall Thickness | Weight (ea) per lb. |
|--------|-------------|--------|--------|--------|----------------|---------------------|
| 1/2"   | S60500CP00  | 1.640" | 1.035" | 0.840" | .110"          | 0.13                |
| 3/4"   | S60700CP00  | 1.645" | 1.260" | 1.050" | .140"          | 0.20                |
| 1"     | S61000CP00  | 2.000" | 1.550" | 1.315" | .160"          | 0.34                |
| 1-1/4" | S61200CP00  | 2.050" | 1.880" | 1.660" | .160"          | 0.38                |
| 1-1/2" | S61500CP00  | 2.085" | 2.200" | 1.900" | .200"          | 0.65                |
| 2"     | S62000CP00  | 2.165" | 2.740" | 2.375" | .200"          | 0.90                |
| 2-1/2" | S62500CP00  | 3.210" | 3.330" | 2.875" | .250"          | 2.10                |
| 3"     | S63000CP00  | 3.315" | 3.800" | 3.500" | .250"          | 2.20                |
| 4"     | S64000CP00  | 3.540" | 4.890" | 4.500" | .250"          | 3.19                |
| 5"     | S65000CP00  | 3.970" | 6.340" | 5.563" | .440"          | 8.66                |
| 6"     | S66000CP00  | 4.270" | 7.340" | 6.625" | .440"          | 10.00               |

All dimensions are for informational purposes only \*Tolerances +/- 5%