


## Low Voltage Brackets

### Steel

- Eliminates the need for an electrical box when installing low voltage Class 2 wiring
- For old work or new work
- Installs easily with a drywall saw and screwdriver

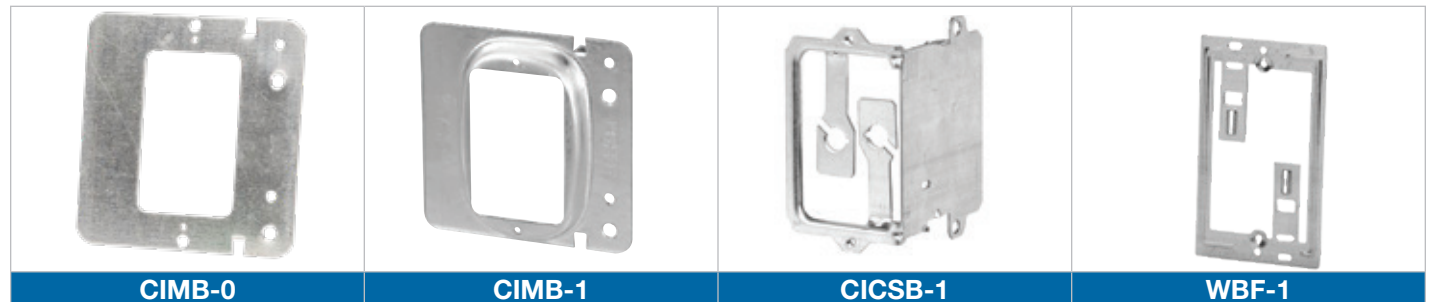

| Cat. No.                             | Description   |
|--------------------------------------|---|
| <b>Low Voltage Mounting Brackets</b> |   |
| <b>CIMB-0</b>                        | Flat mounting brackets that provides quick installation of low voltage class 2 communication outlets<br>Positioning tabs ensure straight installation           |
| <b>CIMB-1</b>                        | Mounting bracket that provides quick installation of low voltage class 2 communication outlets. Raised 1/2 in.<br>Positioning tabs ensure straight installation |
| <b>CICSB-1</b>                       | Mounting brackets that provides quick installation of low voltage communication outlets<br>May be used with all 2-1/2 in. deep gangable boxes                   |
| <b>WBF-1</b>                         | Low voltage wall bracket  |




| Cat. No.                                       | Dimensions (in.) |          | Hole Size (in.) | Suggested Application   |
|--|------------------|----------|-----------------|---|
|  | H                | W        |                 |   |
| <b>Nailing Straps (Zinc Plated Steel)</b>      |                  |          |                 |   |
| <b>CI1544</b>                                  | 0.25             | 0.51     | -               | 14/2-12/2   |
| <b>Nailing Straps (Polyethylene)</b>           |                  |          |                 |   |
| <b>CI1544-P</b>                                | 0.25             | 0.49     | -               | 14/2-12/2   |
| <b>CI1546-P</b>                                | 0.25             | 0.75     | -               | 14/2-8/2  |
| <b>Cable Staples (Galvanized Steel)</b>        |                  |          |                 |   |
| <b>CIS-1</b>                                   | 0.25             | 0.48     | -               | 14/2-12/2   |
| <b>CIS-2</b>                                   | 0.44             | 0.54     | -               | 2 cables 14/2; 2 cables 12/2<br>14/2-14/3-12/2-12/3-10/2-10/3 |
| <b>CIS-3</b>                                   | 0.49             | 0.70     | -               | 10/2-8/2; 14/3-10/3   |
| <b>CIS-4</b>                                   | 0.76             | 0.86     | -               | 8/3-6/3   |
| <b>Double Cable Staples (Galvanized Steel)</b> |                  |          |                 |   |
| <b>CIS-1X2</b>                                 | 0.25             | 0.48 x 2 | -               | 14/2-12/2   |
| <b>CIS-1X2-FP3</b>                             |                  |          |                 |   |
| <b>CIS-1X2-FP5</b>                             |                  |          |                 |   |


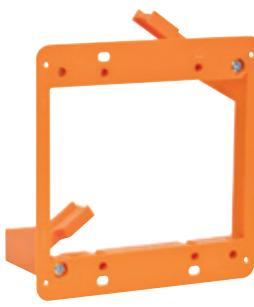




## Low Voltage Brackets

### Nonmetallic

|   |   |   |
|---|---|---|
|  |  |  |
| <b>SC100A</b>   | <b>SC200A</b>   | <b>SC300A</b>   |

Open-backed to easily accommodate the bend radiuses required for low voltage cabling and deep devices such as volume controls, and is designed to fit a standard two-gang three-gang faceplate. It also features an easy nail-on mounting or screw-in bracket, while more hard shell provides increased durability and no racking.

|  |  |   |  |
|--|--|---|--|
|  |  |  |  |
| <b>SC100RR</b>   | <b>SC200RR</b>   | <b>SC100SC</b>  | <b>SC100ADJC</b>   |

Swing arm rework bracket. 1 gang.

Swing arm rework bracket. 2 gang.

This low voltage bracket provides a low voltage outlet next to a previously installed high voltage outlet. For new construction and rework. Attaches easily to most electrical boxes, and is designed to fit a standard two-gang faceplate.

New work adjustable low voltage bracket. 1 gang.




| Cat. No.                                   | Description  |
|--|--|
| <b>Low Voltage Brackets</b>                |  |
| <b>SC100A</b>                              | One-Gang backless bracket 2.32 in. W x 3.73 in. L                        |
| <b>SC200A</b>                              | Two-Gang backless bracket 5.35 in. W x 3.81 in. L                        |
| <b>SC300A</b>                              | Three-Gang backless bracket 8.69 in. W x 7.20 in. L                      |
| <b>Old Work Backless Brackets</b>          |  |
| <b>SC100RR</b>                             | One-Gang backless old work bracket w/ swing clamps 2-1/4 in. x 3-1/4 in. |
| <b>SC200RR</b>                             | Two-Gang backless old work bracket w/ swing clamps 3.92 in. x 4.00 in.   |
| <b>Low Voltage Add-On Bracket</b>          |  |
| <b>SC100SC</b>                             | One-Gang Add-On Bracket 1.80 in. W x 3.68 in. L                          |
| <b>One-Gang and Two Gang – Low Voltage</b> |  |
| <b>SC100ADJC</b>                           | One-Gang adjustable brackless bracket 3-7/8 in. W x 3-3/4 in. H          |
| <b>SC200ADJC</b>                           | Two-Gang adjustable brackless bracket 5-5/8 in. W x 3-5/8 in. H          |

CSA not applicable

## Low Voltage Brackets

### Steel

- Eliminates the need for an electrical box when installing low voltage Class 2 wiring
- For old work or new work
- Installs easily with a drywall saw and screwdriver

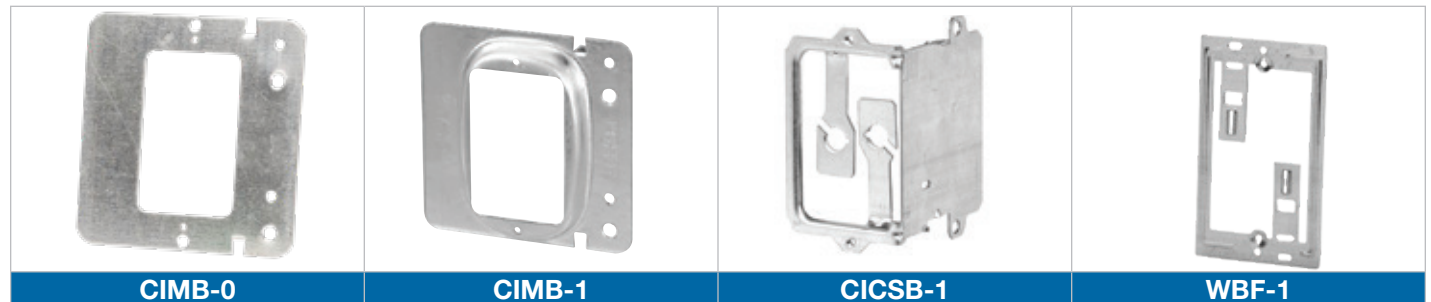

| Cat. No.                             | Description   |
|--------------------------------------|---|
| <b>Low Voltage Mounting Brackets</b> |   |
| <b>CIMB-0</b>                        | Flat mounting brackets that provides quick installation of low voltage class 2 communication outlets<br>Positioning tabs ensure straight installation           |
| <b>CIMB-1</b>                        | Mounting bracket that provides quick installation of low voltage class 2 communication outlets. Raised 1/2 in.<br>Positioning tabs ensure straight installation |
| <b>CICSB-1</b>                       | Mounting brackets that provides quick installation of low voltage communication outlets<br>May be used with all 2-1/2 in. deep gangable boxes                   |
| <b>WBF-1</b>                         | Low voltage wall bracket  |






| Cat. No.                                       | Dimensions (in.) |          | Hole Size (in.) | Suggested Application   |
|--|------------------|----------|-----------------|---|
|  | H                | W        |                 |   |
| <b>Nailing Straps (Zinc Plated Steel)</b>      |                  |          |                 |   |
| <b>CI1544</b>                                  | 0.25             | 0.51     | -               | 14/2-12/2   |
| <b>Nailing Straps (Polyethylene)</b>           |                  |          |                 |   |
| <b>CI1544-P</b>                                | 0.25             | 0.49     | -               | 14/2-12/2   |
| <b>CI1546-P</b>                                | 0.25             | 0.75     | -               | 14/2-8/2  |
| <b>Cable Staples (Galvanized Steel)</b>        |                  |          |                 |   |
| <b>CIS-1</b>                                   | 0.25             | 0.48     | -               | 14/2-12/2   |
| <b>CIS-2</b>                                   | 0.44             | 0.54     | -               | 2 cables 14/2; 2 cables 12/2<br>14/2-14/3-12/2-12/3-10/2-10/3 |
| <b>CIS-3</b>                                   | 0.49             | 0.70     | -               | 10/2-8/2; 14/3-10/3   |
| <b>CIS-4</b>                                   | 0.76             | 0.86     | -               | 8/3-6/3   |
| <b>Double Cable Staples (Galvanized Steel)</b> |                  |          |                 |   |
| <b>CIS-1X2</b>                                 | 0.25             | 0.48 x 2 | -               | 14/2-12/2   |
| <b>CIS-1X2-FP3</b>                             |                  |          |                 |   |
| <b>CIS-1X2-FP5</b>                             |                  |          |                 |   |


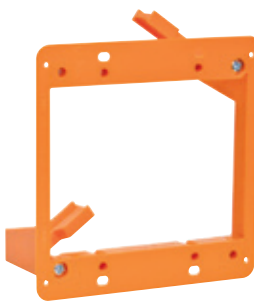




## Low Voltage Brackets

### Nonmetallic

|   |   |   |
|---|---|---|
|  |  |  |
| <b>SC100A</b>   | <b>SC200A</b>   | <b>SC300A</b>   |

Open-backed to easily accommodate the bend radiuses required for low voltage cabling and deep devices such as volume controls, and is designed to fit a standard two-gang three-gang faceplate. It also features an easy nail-on mounting or screw-in bracket, while more hard shell provides increased durability and no racking.

|  |  |   |  |
|--|--|---|--|
|  |  |  |  |
| <b>SC100RR</b>   | <b>SC200RR</b>   | <b>SC100SC</b>  | <b>SC100ADJC</b>   |

Swing arm rework bracket. 1 gang.

Swing arm rework bracket. 2 gang.

This low voltage bracket provides a low voltage outlet next to a previously installed high voltage outlet. For new construction and rework. Attaches easily to most electrical boxes, and is designed to fit a standard two-gang faceplate.

New work adjustable low voltage bracket. 1 gang.



| Cat. No.                                   | Description  |
|--|--|
| <b>Low Voltage Brackets</b>                |  |
| <b>SC100A</b>                              | One-Gang backless bracket 2.32 in. W x 3.73 in. L                        |
| <b>SC200A</b>                              | Two-Gang backless bracket 5.35 in. W x 3.81 in. L                        |
| <b>SC300A</b>                              | Three-Gang backless bracket 8.69 in. W x 7.20 in. L                      |
| <b>Old Work Backless Brackets</b>          |  |
| <b>SC100RR</b>                             | One-Gang backless old work bracket w/ swing clamps 2-1/4 in. x 3-1/4 in. |
| <b>SC200RR</b>                             | Two-Gang backless old work bracket w/ swing clamps 3.92 in. x 4.00 in.   |
| <b>Low Voltage Add-On Bracket</b>          |  |
| <b>SC100SC</b>                             | One-Gang Add-On Bracket 1.80 in. W x 3.68 in. L                          |
| <b>One-Gang and Two Gang – Low Voltage</b> |  |
| <b>SC100ADJC</b>                           | One-Gang adjustable brackless bracket 3-7/8 in. W x 3-3/4 in. H          |
| <b>SC200ADJC</b>                           | Two-Gang adjustable brackless bracket 5-5/8 in. W x 3-5/8 in. H          |

CSA not applicable