


# SEU/SER/SE

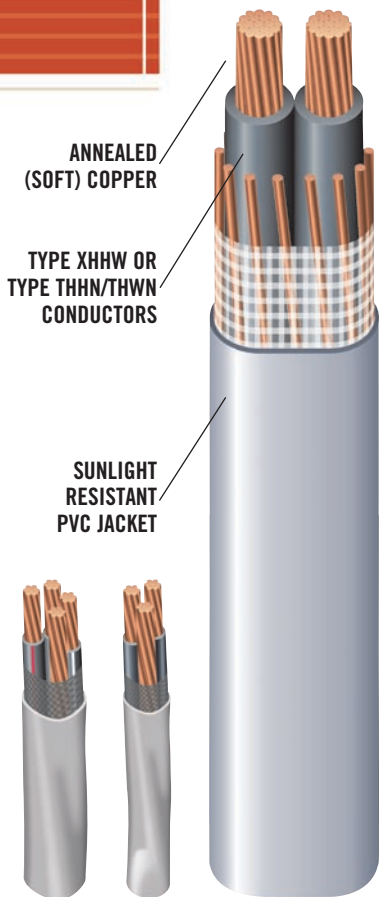

**Service Entrance Cable,  
Type SE, Style U**

**600 Volt**

**Copper Conductors  
Individual Conductors**

**Rated XHHW-2 or  
THHN/THWN**

**Copper Concentric  
Neutral**

**Jacket and Individual  
Conductors Sunlight  
Resistant**

## APPLICATIONS Suitable for use as follows:

Southwire Type SE, service entrance cable is primarily used to convey power from the service drop to the meter base and from the meter base to the distribution panelboard; however, the cable may be used in all applications where Type SE cable is permitted. SER may be used in wet or dry locations at temperatures not to exceed 90°C. Voltage rating is 600 volts.

## STANDARDS & REFERENCES

Southwire Type SE cable meets or exceeds UL Standard 44 for XHHW-2 conductors or UL 83 for THHN/THWN conductors, UL Standard 854, Federal Specification A-A-59544, and requirements of the National Electrical Code<sup>1</sup>.


## CONSTRUCTION

Southwire Type cable is constructed with sunlight resistant Type XHHW-2 conductors or Type THHN/THWN conductors. Copper conductors are annealed (soft) copper. Cable assembly plus reinforcement tape are jacketed with sunlight resistant gray polyvinyl chloride (PVC). Available as 1 conductor with a concentric ground, 2 conductor with a round or concentric ground, or 3 conductor with a bare ground. SE cable is jacketed with gray sunlight resistant polyvinyl chloride (PVC).

## SPECIFICATIONS

Cable shall be UL-listed Type SE, Style U, suitable for operation at 600 volts or less in all installations as specified in the National Electrical Code. Conductors shall be annealed copper, Type XHHW-2 or Type THHN/THWN, weather resistant PVC jacketed, as manufactured by Southwire Company or approved equal.

<sup>1</sup>2005 Edition.



# COPPER CONDUCTORS

SEU/SER/SE

## WEIGHTS, MEASUREMENTS AND PACKAGING

| CONDUCTOR  | COPPER                     |                            |                     |                       |      |      |          |                                    |                  |
|--|----------------------------|----------------------------|---------------------|-----------------------|------|------|----------|------------------------------------|------------------|
|  | STRANDING                  |                            | NOMINAL O.D. (mils) | ALLOWABLE AMPACITIES* |      |      |          | APPROX. NET WEIGHT PER 1000' (lbs) | STANDARD PACKAGE |
|  | PHASE CONDUCTORS & NEUTRAL | EQUIPMENT GROUND CONDUCTOR |                     | 60°C                  | 75°C | 90°C | DWELLING |                                    |                  |
| <b>SER TWO CONDUCTOR WITH BARE GROUND (FORMERLY REFERRED TO AS "THREE CONDUCTOR")</b>  |                            |                            |                     |                       |      |      |          |                                    |                  |
| 8-8-8  | 7                          | --                         | 586                 | 40                    | 50   | 55   | -        | 236                                | B                |
| 6-6-6  | 7                          | --                         | 669                 | 55                    | 65   | 75   | -        | 342                                | B                |
| 4-4-4  | 7                          | --                         | 771                 | 70                    | 85   | 95   | 100      | 499                                | B                |
| 3-3-3  | 7                          | --                         | 829                 | 85                    | 100  | 110  | 110      | 611                                | B                |
| 2-2-2  | 7                          | --                         | 896                 | 95                    | 115  | 130  | 125      | 752                                | B                |
| 1-1-1  | 19                         | --                         | 1021                | 110                   | 130  | 150  | 150      | 947                                | C                |
| 1/0-1/0-1/0  | 19                         | --                         | 1106                | 125                   | 150  | 170  | 175      | 1168                               | C                |
| 2/0-2/0-2/0  | 19                         | --                         | 1201                | 145                   | 175  | 195  | 200      | 1444                               | C                |
| 3/0-3/0-3/0  | 19                         | --                         | 1309                | 165                   | 200  | 225  | 225      | 1791                               | C                |
| 4/0-4/0-4/0  | 19                         | --                         | 1430                | 195                   | 230  | 260  | 250      | 2226                               | C                |
| <b>SER THREE CONDUCTOR WITH BARE GROUND (FORMERLY REFERRED TO AS "FOUR CONDUCTOR")</b> |                            |                            |                     |                       |      |      |          |                                    |                  |
| 8-8-8-8  | 7                          | 7                          | 645                 | 40                    | 50   | 55   | -        | 291                                | B                |
| 6-6-6-6  | 7                          | 7                          | 738                 | 55                    | 65   | 75   | -        | 428                                | B                |
| 4-4-4-6  | 7                          | 7                          | 852                 | 70                    | 85   | 95   | 100      | 586                                | B                |
| 3-3-3-5  | 7                          | 7                          | 917                 | 85                    | 100  | 110  | 110      | 720                                | B                |
| 2-2-2-4  | 7                          | 7                          | 992                 | 95                    | 115  | 130  | 125      | 888                                | B                |
| 1-1-1-3  | 19                         | 7                          | 1132                | 110                   | 130  | 150  | 150      | 1118                               | C                |
| 1/0-1/0-1/0-2  | 19                         | 7                          | 1226                | 125                   | 150  | 170  | 175      | 1382                               | C                |
| 2/0-2/0-2/0-1  | 19                         | 19                         | 1332                | 145                   | 175  | 195  | 200      | 1714                               | C                |
| 3/0-3/0-3/0-1/0  | 19                         | 19                         | 1453                | 165                   | 200  | 225  | 225      | 2130                               | C                |
| 4/0-4/0-4/0-2/0  | 19                         | 19                         | 1588                | 195                   | 230  | 260  | 250      | 2651                               | C                |

Table values reflect Type XHHW-2 conductors.

\*Allowable Ampacities:

Allowable ampacities shown are for general use as specified by the National Electrical Code, 2008 Edition, section 310.15.

60°C – When terminated to equipment for circuits rated 100 amperes or less or marked for 14 through 1 AWG conductors.

75 °C – When terminated to equipment for circuits rated over 100 amperes or marked for conductors larger than 1 AWG.

90°C – Wet or dry locations. For ampacity derating purposes.

Dwelling – For dwelling units, conductors shall be permitted at listed ampacities as 120/240-volt, 3-wire, single-phase services and feeders.

**STANDARD PACKAGE CODE:**

B – 1000 ft. reel

C – 500 ft. reel

# SEU/SER/SE

## WEIGHTS, MEASUREMENTS AND PACKAGING

| CONDUCTOR<br>SIZE/CONST.<br>(AWG)  | COPPER              |                |                        |                       |      |      |          |   |                     |
|--|---------------------|----------------|------------------------|-----------------------|------|------|----------|---|---------------------|
|  | STRANDING           |                | NOMINAL<br>O.D. (mils) | ALLOWABLE AMPACITIES* |      |      |          | APPROX.<br>NET WEIGHT<br>PER 1000'<br>(lbs) | STANDARD<br>PACKAGE |
|  | PHASE<br>CONDUCTORS | BARE<br>GROUND |                        | 60°C                  | 75°C | 90°C | DWELLING |   |                     |
| <b>SEU ONE CONDUCTOR WITH A BARE CONCENTRIC GROUND (FORMERLY REFERRED TO AS "TWO CONDUCTOR")</b>                     |                     |                |                        |                       |      |      |          |   |                     |
| 8-8  | 7                   | 8              | 400                    | 40                    | 50   | 55   | -        | 146   | BH                  |
| 6-6  | 7                   | 12             | 435                    | 55                    | 65   | 75   | -        | 210   | BH                  |
| 4-4  | 7                   | 12             | 506                    | 70                    | 85   | 95   | -        | 314   | BI                  |
| 2-2  | 7                   | 15             | 580                    | 95                    | 115  | 130  | -        | 485   | BJ                  |
| <b>SEU TWO CONDUCTOR WITH A BARE CONCENTRIC GROUND (FORMERLY REFERRED TO AS THREE CONDUCTOR)</b>                     |                     |                |                        |                       |      |      |          |   |                     |
| 10-10-10   | 1                   | 12             | 419 X 270              | 30                    | 30   | 30   | -        | 126   | BH                  |
| 8-8-8  | 7                   | 8              | 57 X 366               | 40                    | 50   | 55   | -        | 210   | BH                  |
| 6-6-6  | 7                   | 12             | 650 X 402              | 55                    | 65   | 75   | -        | 307   | BJ                  |
| 4-4-4  | 7                   | 12             | 815 X 506              | 70                    | 85   | 95   | 100      | 471   | BJ                  |
| 3-3-3  | 7                   | 12             | 874 X 534              | 85                    | 100  | 110  | 110      | 582   | BJ                  |
| 2-2-2  | 7                   | 15             | 935 X 565              | 95                    | 115  | 130  | 125      | 717   | BL                  |
| 1-1-1  | 19                  | 14             | 1084 X 650             | 110                   | 130  | 150  | 150      | 903   | CL                  |
| 1/0-1/0-1/0  | 19                  | 18             | 1162 X 689             | 125                   | 150  | 170  | 175      | 1121  | CM                  |
| 2/0-2/0-2/0  | 19                  | 18             | 1266 X 749             | 145                   | 175  | 195  | 200      | 1377  | CM                  |
| 3/0-3/0-3/0  | 19                  | 14             | 1412 X 845             | 165                   | 200  | 225  | 225      | 1711  | CM                  |
| 4/0-4/0-4/0  | 19                  | 18             | 1524 X 901             | 195                   | 230  | 260  | 250      | 2145  | CM                  |
| <b>SEU TWO CONDUCTOR WITH A BARE CONCENTRIC GROUND (FORMERLY REFERRED TO AS "THREE CONDUCTOR") (REDUCED NEUTRAL)</b> |                     |                |                        |                       |      |      |          |   |                     |
| 6-6-8  | 7                   | 8              | 650 X 402              | 55                    | 65   | 75   | -        | 280   | BI                  |
| 4-4-6  | 7                   | 12             | 781 X 468              | 70                    | 85   | 95   | 100      | 419   | BJ                  |
| 3-3-5  | 7                   | 15             | 834 X 494              | 85                    | 100  | 110  | 110      | 514   | BJ                  |
| 2-2-4  | 7                   | 12             | 920 X 549              | 95                    | 115  | 130  | 125      | 638   | BL                  |

Table values reflect Type XHHW-2 conductors

\*Allowable Ampacities:

Allowable ampacities shown are for general use as specified by the National Electrical Code, 2008 Edition, section 310.15.

60°C – When terminated to equipment for circuits rated 100 amperes or less or marked for 14 through 1 AWG conductors.

75°C – When terminated to equipment for circuits rated over 100 amperes or marked for conductors larger than 1 AWG.

90°C – Wet or dry locations. For ampacity derating purposes


Dwelling – For dwelling units, conductors shall be permitted at listed ampacities as 120/240-volt, 3-wire, single-phase services and feeders.

### STANDARD PACKAGE CODE:

- B – 1000 ft. reel
- C – 500 ft. reel
- H – 250 ft. reel
- I – 200 ft. coil
- J – 150 ft. coil
- L – 100 ft. coil
- M – 50 ft. coil



# SEU/SER/SE

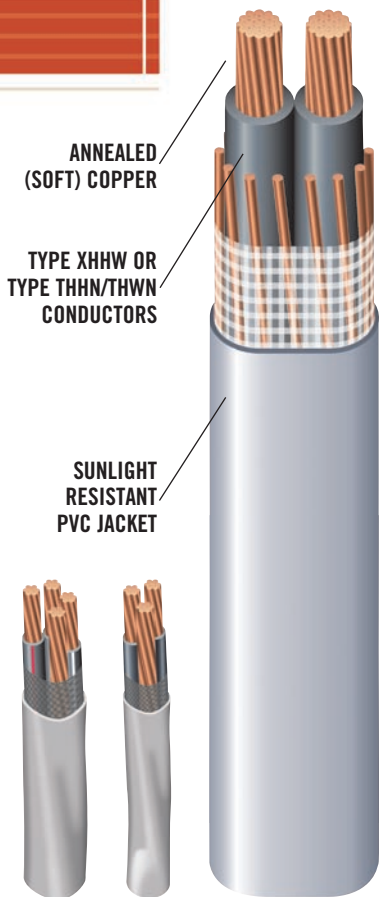

**Service Entrance Cable,  
Type SE, Style U**

**600 Volt**

**Copper Conductors  
Individual Conductors**

**Rated XHHW-2 or  
THHN/THWN**

**Copper Concentric  
Neutral**

**Jacket and Individual  
Conductors Sunlight  
Resistant**

## APPLICATIONS Suitable for use as follows:

Southwire Type SE, service entrance cable is primarily used to convey power from the service drop to the meter base and from the meter base to the distribution panelboard; however, the cable may be used in all applications where Type SE cable is permitted. SER may be used in wet or dry locations at temperatures not to exceed 90°C. Voltage rating is 600 volts.

## STANDARDS & REFERENCES

Southwire Type SE cable meets or exceeds UL Standard 44 for XHHW-2 conductors or UL 83 for THHN/THWN conductors, UL Standard 854, Federal Specification A-A-59544, and requirements of the National Electrical Code<sup>1</sup>.


## CONSTRUCTION

Southwire Type cable is constructed with sunlight resistant Type XHHW-2 conductors or Type THHN/THWN conductors. Copper conductors are annealed (soft) copper. Cable assembly plus reinforcement tape are jacketed with sunlight resistant gray polyvinyl chloride (PVC). Available as 1 conductor with a concentric ground, 2 conductor with a round or concentric ground, or 3 conductor with a bare ground. SE cable is jacketed with gray sunlight resistant polyvinyl chloride (PVC).

## SPECIFICATIONS

Cable shall be UL-listed Type SE, Style U, suitable for operation at 600 volts or less in all installations as specified in the National Electrical Code. Conductors shall be annealed copper, Type XHHW-2 or Type THHN/THWN, weather resistant PVC jacketed, as manufactured by Southwire Company or approved equal.

<sup>1</sup>2005 Edition.



## COPPER CONDUCTORS

SEU/SER/SE

### WEIGHTS, MEASUREMENTS AND PACKAGING

| CONDUCTOR  | COPPER                     |                            |                     |                       |      |      |          |                                    |                  |
|--|----------------------------|----------------------------|---------------------|-----------------------|------|------|----------|------------------------------------|------------------|
|  | STRANDING                  |                            | NOMINAL O.D. (mils) | ALLOWABLE AMPACITIES* |      |      |          | APPROX. NET WEIGHT PER 1000' (lbs) | STANDARD PACKAGE |
|  | PHASE CONDUCTORS & NEUTRAL | EQUIPMENT GROUND CONDUCTOR |                     | 60°C                  | 75°C | 90°C | DWELLING |                                    |                  |
| <b>SER TWO CONDUCTOR WITH BARE GROUND (FORMERLY REFERRED TO AS "THREE CONDUCTOR")</b>  |                            |                            |                     |                       |      |      |          |                                    |                  |
| 8-8-8  | 7                          | --                         | 586                 | 40                    | 50   | 55   | -        | 236                                | B                |
| 6-6-6  | 7                          | --                         | 669                 | 55                    | 65   | 75   | -        | 342                                | B                |
| 4-4-4  | 7                          | --                         | 771                 | 70                    | 85   | 95   | 100      | 499                                | B                |
| 3-3-3  | 7                          | --                         | 829                 | 85                    | 100  | 110  | 110      | 611                                | B                |
| 2-2-2  | 7                          | --                         | 896                 | 95                    | 115  | 130  | 125      | 752                                | B                |
| 1-1-1  | 19                         | --                         | 1021                | 110                   | 130  | 150  | 150      | 947                                | C                |
| 1/0-1/0-1/0  | 19                         | --                         | 1106                | 125                   | 150  | 170  | 175      | 1168                               | C                |
| 2/0-2/0-2/0  | 19                         | --                         | 1201                | 145                   | 175  | 195  | 200      | 1444                               | C                |
| 3/0-3/0-3/0  | 19                         | --                         | 1309                | 165                   | 200  | 225  | 225      | 1791                               | C                |
| 4/0-4/0-4/0  | 19                         | --                         | 1430                | 195                   | 230  | 260  | 250      | 2226                               | C                |
| <b>SER THREE CONDUCTOR WITH BARE GROUND (FORMERLY REFERRED TO AS "FOUR CONDUCTOR")</b> |                            |                            |                     |                       |      |      |          |                                    |                  |
| 8-8-8-8  | 7                          | 7                          | 645                 | 40                    | 50   | 55   | -        | 291                                | B                |
| 6-6-6-6  | 7                          | 7                          | 738                 | 55                    | 65   | 75   | -        | 428                                | B                |
| 4-4-4-6  | 7                          | 7                          | 852                 | 70                    | 85   | 95   | 100      | 586                                | B                |
| 3-3-3-5  | 7                          | 7                          | 917                 | 85                    | 100  | 110  | 110      | 720                                | B                |
| 2-2-2-4  | 7                          | 7                          | 992                 | 95                    | 115  | 130  | 125      | 888                                | B                |
| 1-1-1-3  | 19                         | 7                          | 1132                | 110                   | 130  | 150  | 150      | 1118                               | C                |
| 1/0-1/0-1/0-2  | 19                         | 7                          | 1226                | 125                   | 150  | 170  | 175      | 1382                               | C                |
| 2/0-2/0-2/0-1  | 19                         | 19                         | 1332                | 145                   | 175  | 195  | 200      | 1714                               | C                |
| 3/0-3/0-3/0-1/0  | 19                         | 19                         | 1453                | 165                   | 200  | 225  | 225      | 2130                               | C                |
| 4/0-4/0-4/0-2/0  | 19                         | 19                         | 1588                | 195                   | 230  | 260  | 250      | 2651                               | C                |

Table values reflect Type XHHW-2 conductors.

\*Allowable Ampacities:

Allowable ampacities shown are for general use as specified by the National Electrical Code, 2008 Edition, section 310.15.

60°C – When terminated to equipment for circuits rated 100 amperes or less or marked for 14 through 1 AWG conductors.

75 °C – When terminated to equipment for circuits rated over 100 amperes or marked for conductors larger than 1 AWG.

90°C – Wet or dry locations. For ampacity derating purposes.

Dwelling – For dwelling units, conductors shall be permitted at listed ampacities as 120/240-volt, 3-wire, single-phase services and feeders.

**STANDARD PACKAGE CODE:**

B – 1000 ft. reel

C – 500 ft. reel

# SEU/SER/SE

## WEIGHTS, MEASUREMENTS AND PACKAGING

| CONDUCTOR<br>SIZE/CONST.<br>(AWG)  | COPPER              |                |                        |                       |      |      |          |   |                     |
|--|---------------------|----------------|------------------------|-----------------------|------|------|----------|---|---------------------|
|  | STRANDING           |                | NOMINAL<br>O.D. (mils) | ALLOWABLE AMPACITIES* |      |      |          | APPROX.<br>NET WEIGHT<br>PER 1000'<br>(lbs) | STANDARD<br>PACKAGE |
|  | PHASE<br>CONDUCTORS | BARE<br>GROUND |                        | 60°C                  | 75°C | 90°C | DWELLING |   |                     |
| <b>SEU ONE CONDUCTOR WITH A BARE CONCENTRIC GROUND (FORMERLY REFERRED TO AS "TWO CONDUCTOR")</b>                     |                     |                |                        |                       |      |      |          |   |                     |
| 8-8  | 7                   | 8              | 400                    | 40                    | 50   | 55   | -        | 146   | BH                  |
| 6-6  | 7                   | 12             | 435                    | 55                    | 65   | 75   | -        | 210   | BH                  |
| 4-4  | 7                   | 12             | 506                    | 70                    | 85   | 95   | -        | 314   | BI                  |
| 2-2  | 7                   | 15             | 580                    | 95                    | 115  | 130  | -        | 485   | BJ                  |
| <b>SEU TWO CONDUCTOR WITH A BARE CONCENTRIC GROUND (FORMERLY REFERRED TO AS THREE CONDUCTOR)</b>                     |                     |                |                        |                       |      |      |          |   |                     |
| 10-10-10   | 1                   | 12             | 419 X 270              | 30                    | 30   | 30   | -        | 126   | BH                  |
| 8-8-8  | 7                   | 8              | 57 X 366               | 40                    | 50   | 55   | -        | 210   | BH                  |
| 6-6-6  | 7                   | 12             | 650 X 402              | 55                    | 65   | 75   | -        | 307   | BJ                  |
| 4-4-4  | 7                   | 12             | 815 X 506              | 70                    | 85   | 95   | 100      | 471   | BJ                  |
| 3-3-3  | 7                   | 12             | 874 X 534              | 85                    | 100  | 110  | 110      | 582   | BJ                  |
| 2-2-2  | 7                   | 15             | 935 X 565              | 95                    | 115  | 130  | 125      | 717   | BL                  |
| 1-1-1  | 19                  | 14             | 1084 X 650             | 110                   | 130  | 150  | 150      | 903   | CL                  |
| 1/0-1/0-1/0  | 19                  | 18             | 1162 X 689             | 125                   | 150  | 170  | 175      | 1121  | CM                  |
| 2/0-2/0-2/0  | 19                  | 18             | 1266 X 749             | 145                   | 175  | 195  | 200      | 1377  | CM                  |
| 3/0-3/0-3/0  | 19                  | 14             | 1412 X 845             | 165                   | 200  | 225  | 225      | 1711  | CM                  |
| 4/0-4/0-4/0  | 19                  | 18             | 1524 X 901             | 195                   | 230  | 260  | 250      | 2145  | CM                  |
| <b>SEU TWO CONDUCTOR WITH A BARE CONCENTRIC GROUND (FORMERLY REFERRED TO AS "THREE CONDUCTOR") (REDUCED NEUTRAL)</b> |                     |                |                        |                       |      |      |          |   |                     |
| 6-6-8  | 7                   | 8              | 650 X 402              | 55                    | 65   | 75   | -        | 280   | BI                  |
| 4-4-6  | 7                   | 12             | 781 X 468              | 70                    | 85   | 95   | 100      | 419   | BJ                  |
| 3-3-5  | 7                   | 15             | 834 X 494              | 85                    | 100  | 110  | 110      | 514   | BJ                  |
| 2-2-4  | 7                   | 12             | 920 X 549              | 95                    | 115  | 130  | 125      | 638   | BL                  |

Table values reflect Type XHHW-2 conductors

\*Allowable Ampacities:

Allowable ampacities shown are for general use as specified by the National Electrical Code, 2008 Edition, section 310.15.

60°C – When terminated to equipment for circuits rated 100 amperes or less or marked for 14 through 1 AWG conductors.

75°C – When terminated to equipment for circuits rated over 100 amperes or marked for conductors larger than 1 AWG.

90°C – Wet or dry locations. For ampacity derating purposes

Dwelling – For dwelling units, conductors shall be permitted at listed ampacities as 120/240-volt, 3-wire, single-phase services and feeders.

### STANDARD PACKAGE CODE:

- B – 1000 ft. reel
- C – 500 ft. reel
- H – 250 ft. reel
- I – 200 ft. coil
- J – 150 ft. coil
- L – 100 ft. coil
- M – 50 ft. coil

