

**3M** Science.  
Applied to Life.™

# Electrical Solutions you can rely on.

Electrical Products Catalog

# Cable Ties and Accessories

3M™ Cable Ties are designed to secure wire bundles and harness components quickly, without slipping. Featuring a self-locking head and a locking mechanism, they are designed to handle temperatures up to 185°F (85°C). Available in several strengths and lengths, including screw mount. Most are plenum rated and USA made.



## Cable Ties Part Number Naming Convention

The product name has been changed to better identify the characteristics of each tie.

**CT D C T X - P**

Example:

Catalog Number: CT4BK18-C

**CT                    D                    C                    T                    X                    -                    P**

|                                            |                                                                    |                                                                   |                                                                                                                             |                                                                                           |                                                                                  |
|--------------------------------------------|--------------------------------------------------------------------|-------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|
| CT = Cable Ties<br>CTB = Mounting<br>Bases | D = Dimensions (inches)<br>Ties = Length<br>Bases = Length X Width | C = Color<br>BK = Black<br>NT = Natural<br>RD = Red<br>BG = Beige | T* = Tensile (pounds)<br>18 = Miniature<br>40 = Intermediate<br>50 = Standard<br>120 = Light Heavy Duty<br>175 = Heavy Duty | X = Special Features<br>_ = Standard Tie (Blank)<br>S = Screw Mount<br>A = Adhesive Mount | P = Package Size<br>(Roman Numeral)<br>M = 1,000<br>D = 500<br>C = 100<br>L = 50 |
|--------------------------------------------|--------------------------------------------------------------------|-------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|

*\*Cable Tie Base Part Numbers do not include Tensile.*

## Section

## Page

|                                                                   |                |
|-------------------------------------------------------------------|----------------|
| <b>3M™ Standard Cable Ties</b> .....                              | <b>123-129</b> |
| 3M™ Miniature Ties (18 lb., 80 N) - Plenum Rated .....            | 123            |
| 3M™ Intermediate Ties (30-40 lb., 135-180 N) - Plenum Rated ..... | 124            |
| 3M™ Standard Ties (50 lb., 220 N) - Plenum Rated.....             | 125            |
| 3M™ Light Heavy Duty Ties (120 lb., 530 N) - Plenum Rated .....   | 126            |
| 3M™ Heavy Duty Ties (175 lb., 800 N) - Plenum Rated .....         | 127            |
| 3M™ Screw Mountable - Plenum Rated .....                          | 128            |
| 3M™ Standard Cable Ties - Assortment Pack .....                   | 129            |
| <b>3M™ Cable Bases and Stackers</b> .....                         | <b>129-130</b> |
| 3M™ Cable Stackers .....                                          | 129            |
| 3M™ Cable Tie Mounting Bases.....                                 | 130            |
| <b>3M™ Hook and Loop Reclosable Fasteners</b> .....               | <b>131-132</b> |
| 3M™ Hook and Loop Reclosable Fasteners .....                      | 131-132        |
| <b>3M™ Dual Lock™ Reclosable Fasteners</b> .....                  | <b>132-133</b> |
| 3M™ Dual Lock™ Reclosable Fasteners .....                         | 132            |
| 3M™ Dual Lock™ Low Profile Reclosable Fastener SJ4570.....        | 133            |

## 3M™ Standard Cable Ties

### 3M™ Miniature Ties (18 lb., 80 N) - Plenum Rated


3M™ Miniature Cable Ties are small lightweight cable ties for use in holding applications up to 18 lb. Ties come in UV-resistant black for outdoor and indoor use as well as natural (white) nylon for an economical solution indoors.

Tensile Strength 18 lb (80 N)  
 Min. Operating Temp. -40°F (-40°C)  
 Max. Operating Temp. 185°F (85°C)  
 Min. Installation Temp. 32°F (0°C)  
 RoHS 2011/65/EU Yes

Agency Approvals



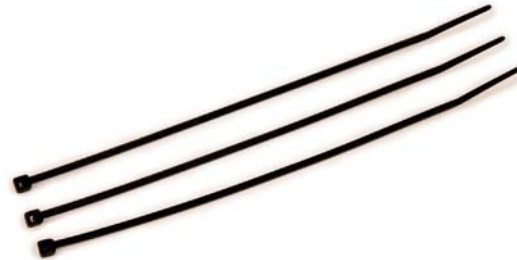

Country of Origin



| Order No. | UPC          | Color   | UV Resistance | Length            | Width             | Thickness         | Max. Bundle Dia.   | Tensile lbf (N) | Items per Bag (Case) |
|-----------|--------------|---------|---------------|-------------------|-------------------|-------------------|--------------------|-----------------|----------------------|
| CT4BK18-C | 051128-59273 | Black   | Yes           | 4.10"<br>(104 mm) | 0.10"<br>(3,0 mm) | 0.04"<br>(1,0 mm) | 0.75"<br>(19,1 mm) | 18 (80)         | 100 (1000)           |
| CT4BK18-M | 051128-59274 | Black   | Yes           | 4.10"<br>(104 mm) | 0.10"<br>(3,0 mm) | 0.04"<br>(1,0 mm) | 0.75"<br>(19,1 mm) | 18 (80)         | 1000 (10,000)        |
| CT4NT18-C | 051128-59275 | Natural | No            | 4.10"<br>(104 mm) | 0.10"<br>(3,0 mm) | 0.04"<br>(1,0 mm) | 0.75"<br>(19,1 mm) | 18 (80)         | 100 (1000)           |
| CT4NT18-M | 051128-59276 | Natural | No            | 4.10"<br>(104 mm) | 0.10"<br>(3,0 mm) | 0.04"<br>(1,0 mm) | 0.75"<br>(19,1 mm) | 18 (80)         | 1000 (10,000)        |
| CT6BK18-C | 051128-59277 | Black   | Yes           | 6.10"<br>(155 mm) | 0.10"<br>(3,0 mm) | 0.05"<br>(1,3 mm) | 1.25"<br>(31,8 mm) | 18 (80)         | 100 (1000)           |
| CT6NT18-C | 051128-59278 | Natural | No            | 6.10"<br>(155 mm) | 0.10"<br>(3,0 mm) | 0.05"<br>(1,3 mm) | 1.25"<br>(31,8 mm) | 18 (80)         | 100 (1000)           |
| CT6NT18-M | 051128-59279 | Natural | No            | 6.10"<br>(155 mm) | 0.10"<br>(3,0 mm) | 0.05"<br>(1,3 mm) | 1.25"<br>(31,8 mm) | 18 (80)         | 1000 (10,000)        |
| CT8BK18-C | 051128-59280 | Black   | Yes           | 8.10"<br>(206 mm) | 0.10"<br>(3,0 mm) | 0.05"<br>(1,3 mm) | 2.00"<br>(50,8 mm) | 18 (80)         | 100 (1000)           |
| CT8BK18-M | 051128-59281 | Black   | Yes           | 8.10"<br>(206 mm) | 0.10"<br>(3,0 mm) | 0.05"<br>(1,3 mm) | 2.00"<br>(50,8 mm) | 18 (80)         | 1000 (10,000)        |
| CT8NT18-C | 051128-59282 | Natural | No            | 8.10"<br>(206 mm) | 0.10"<br>(3,0 mm) | 0.05"<br>(1,3 mm) | 2.00"<br>(50,8 mm) | 18 (80)         | 100 (1000)           |
| CT8NT18-M | 051128-59283 | Natural | No            | 8.10"<br>(206 mm) | 0.10"<br>(3,0 mm) | 0.05"<br>(1,3 mm) | 2.00"<br>(50,8 mm) | 18 (80)         | 1000 (10,000)        |

## 3M™ Intermediate Ties (30-40 lb., 135-180 N) - Plenum Rated

3M™ Intermediate Cable Ties are a great solution for holding applications up to 40 lb. They provide an economical alternative to standard cable ties when higher tensile strength is not required. Ties come in UV-resistant black for outdoor and indoor use as well as natural (white) nylon for an economical solution indoors.

|                                |                                                                                   |
|--------------------------------|-----------------------------------------------------------------------------------|
| <b>Tensile Strength</b>        | 30-40 lb (135-180 N)                                                              |
| <b>Min. Operating Temp.</b>    | -40°F (-40°C)                                                                     |
| <b>Max. Operating Temp.</b>    | 185°F (85°C)                                                                      |
| <b>Min. Installation Temp.</b> | -4°F (-20°C)                                                                      |
| <b>RoHS 2011/65/EU</b>         | Yes                                                                               |
| <b>Agency Approvals</b>        |  |
| <b>Country of Origin</b>       |  |



| Order No. | UPC          | Color   | UV Resistance | Length         | Width          | Thickness      | Max. Bundle Dia. | Tensile lbf (N) | Items per Bag (Case) |
|-----------|--------------|---------|---------------|----------------|----------------|----------------|------------------|-----------------|----------------------|
| CT6BK40-C | 051128-59284 | Black   | Yes           | 5.80" (147 mm) | 0.14" (3,6 mm) | 0.05" (1,3 mm) | 1.25" (31,8 mm)  | 30 (135)        | 100 (1000)           |
| CT6BK40-M | 051128-59285 | Black   | Yes           | 5.80" (147 mm) | 0.14" (3,6 mm) | 0.05" (1,3 mm) | 1.25" (31,8 mm)  | 30 (135)        | 1000 (10,000)        |
| CT6NT40-C | 051128-59286 | Natural | No            | 5.80" (147 mm) | 0.14" (3,6 mm) | 0.05" (1,3 mm) | 1.25" (31,8 mm)  | 30 (135)        | 100 (1000)           |
| CT6NT40-M | 051128-59287 | Natural | No            | 5.80" (147 mm) | 0.14" (3,6 mm) | 0.05" (1,3 mm) | 1.25" (31,8 mm)  | 30 (135)        | 1000 (10,000)        |
| CT8BK40-C | 051128-59288 | Black   | Yes           | 8.90" (226 mm) | 0.14" (3,6 mm) | 0.05" (1,3 mm) | 2.00" (50,8 mm)  | 30 (135)        | 100 (1000)           |
| CT8BK40-M | 051128-59289 | Black   | Yes           | 8.90" (226 mm) | 0.14" (3,6 mm) | 0.05" (1,3 mm) | 2.00" (50,8 mm)  | 30 (135)        | 1000 (10,000)        |
| CT8NT40-C | 051128-59290 | Natural | No            | 8.90" (226 mm) | 0.14" (3,6 mm) | 0.05" (1,3 mm) | 2.00" (50,8 mm)  | 30 (135)        | 100 (1000)           |
| CT8NT40-M | 051128-59291 | Natural | No            | 8.90" (226 mm) | 0.14" (3,6 mm) | 0.05" (1,3 mm) | 2.00" (50,8 mm)  | 30 (135)        | 1000 (10,000)        |

## 3M™ Standard Cable Ties

### 3M™ Standard Ties (50 lb., 220 N) - Plenum Rated

3M™ Standard Cable Ties are the most common sized ties and provide a standard level of performance for general-use holding applications up to 50 lb. Ties come in UV-resistant black for outdoor and indoor use as well as natural (white) nylon for an economical solution indoors.

Tensile Strength 50 lb (220 N)  
 Min. Operating Temp. -40°F (-40°C)  
 Max. Operating Temp. 185°F (85°C)  
 Min. Installation Temp. -4°F (-20°C)  
 RoHS 2011/65/EU Yes

Agency Approvals



Country of Origin



| Order No.  | UPC          | Color   | UV Resistance | Length          | Width          | Thickness      | Max. Bundle Dia. | Tensile lbf. (N) | Items per Bag (Case) |
|------------|--------------|---------|---------------|-----------------|----------------|----------------|------------------|------------------|----------------------|
| CT8BK50-C  | 051128-59293 | Black   | Yes           | 7.60" (193 mm)  | 0.18" (4,6 mm) | 0.05" (1,3 mm) | 1.87" (47,5 mm)  | 50 (220)         | 100 (1000)           |
| CT8BK50-M  | 051128-59294 | Black   | Yes           | 7.60" (193 mm)  | 0.18" (4,6 mm) | 0.05" (1,3 mm) | 1.87" (47,5 mm)  | 50 (220)         | 1000 (10,000)        |
| CT8NT50-C  | 051128-59297 | Natural | No            | 7.60" (193 mm)  | 0.18" (4,6 mm) | 0.05" (1,3 mm) | 1.87" (47,5 mm)  | 50 (220)         | 100 (1000)           |
| CT8NT50-M  | 051128-59299 | Natural | No            | 7.60" (193 mm)  | 0.18" (4,6 mm) | 0.05" (1,3 mm) | 1.87" (47,5 mm)  | 50 (220)         | 1000 (10,000)        |
| CT8RD50-C  | 051128-59559 | Red     | No            | 7.60" (193 mm)  | 0.18" (4,6 mm) | 0.05" (1,3 mm) | 2.00" (50,8 mm)  | 50 (220)         | 100 (1000)           |
| CT11BK50-C | 051128-59300 | Black   | Yes           | 11.10" (282 mm) | 0.18" (4,6 mm) | 0.05" (1,3 mm) | 3.00" (76,2 mm)  | 50 (220)         | 100 (1000)           |
| CT11BK50-D | 051128-59301 | Black   | Yes           | 11.10" (282 mm) | 0.18" (4,6 mm) | 0.05" (1,3 mm) | 3.00" (76,2 mm)  | 50 (220)         | 500 (5000)           |
| CT11NT50-C | 051128-59302 | Natural | No            | 11.10" (282 mm) | 0.18" (4,6 mm) | 0.05" (1,3 mm) | 3.00" (76,2 mm)  | 50 (220)         | 100 (1000)           |
| CT11NT50-D | 051128-59303 | Natural | No            | 11.10" (282 mm) | 0.18" (4,6 mm) | 0.05" (1,3 mm) | 3.00" (76,2 mm)  | 50 (220)         | 500 (5000)           |
| CT11RD50-C | 051128-59560 | Red     | No            | 11.10" (282 mm) | 0.18" (4,6 mm) | 0.05" (1,3 mm) | 3.00" (76,2 mm)  | 50 (220)         | 100 (1000)           |
| CT15BK50-C | 051128-59304 | Black   | Yes           | 14.60" (371 mm) | 0.18" (4,6 mm) | 0.05" (1,3 mm) | 4.00" (101,6 mm) | 50 (220)         | 100 (500)            |
| CT15BK50-D | 051128-59305 | Black   | Yes           | 14.60" (371 mm) | 0.18" (4,6 mm) | 0.05" (1,3 mm) | 4.00" (101,6 mm) | 50 (220)         | 500 (2500)           |
| CT15NT50-C | 051128-59307 | Natural | No            | 14.60" (371 mm) | 0.18" (4,6 mm) | 0.05" (1,3 mm) | 4.00" (101,6 mm) | 50 (220)         | 100 (500)            |
| CT15NT50-D | 051128-59309 | Natural | No            | 14.60" (371 mm) | 0.18" (4,6 mm) | 0.05" (1,3 mm) | 4.00" (101,6 mm) | 50 (220)         | 500 (2500)           |

## 3M™ Light Heavy Duty Ties (120 lb., 530 N) - Plenum Rated

3M™ Light Heavy Duty Cable Ties are commonly used in more demanding commercial and industrial jobs when extra strength is required to hold up to 120 lb. Ties come in UV-resistant black for outdoor and indoor use as well as natural (white) nylon for an economical solution indoors.

**Tensile Strength** 120 lb (530 N)  
**Min. Operating Temp.** -40°F (-40°C)  
**Max. Operating Temp.** 185°F (85°C)  
**Min. Installation Temp.** -4°F (-20°C)  
**RoHS 2011/65/EU** Yes

**Agency Approvals**



**Country of Origin**




| Order No.   | UPC          | Color   | UV Resistance | Length             | Width             | Thickness         | Max. Bundle Dia.    | Tensile lbf (N) | Items per Bag (Case) |
|-------------|--------------|---------|---------------|--------------------|-------------------|-------------------|---------------------|-----------------|----------------------|
| CT8BK120-L  | 051128-59310 | Black   | Yes           | 9.00"<br>(229 mm)  | 0.30"<br>(7,6 mm) | 0.07"<br>(1,8 mm) | 2.00"<br>(50,8 mm)  | 120 (530)       | 50 (500)             |
| CT8NT120-L  | 051128-59311 | Natural | No            | 9.00"<br>(229 mm)  | 0.30"<br>(7,6 mm) | 0.07"<br>(1,8 mm) | 2.00"<br>(50,8 mm)  | 120 (530)       | 50 (500)             |
| CT15BK120-C | 051128-59312 | Black   | Yes           | 15.00"<br>(381 mm) | 0.30"<br>(7,6 mm) | 0.07"<br>(1,8 mm) | 4.00"<br>(101,6 mm) | 120 (530)       | 100 (500)            |
| CT15BK120-D | 051128-59313 | Black   | Yes           | 15.00"<br>(381 mm) | 0.30"<br>(7,6 mm) | 0.07"<br>(1,8 mm) | 4.00"<br>(101,6 mm) | 120 (530)       | 500 (2500)           |
| CT15NT120-C | 051128-59315 | Natural | No            | 15.00"<br>(381 mm) | 0.30"<br>(7,6 mm) | 0.07"<br>(1,8 mm) | 4.00"<br>(101,6 mm) | 120 (530)       | 100 (500)            |
| CT15NT120-D | 051128-59317 | Natural | No            | 15.00"<br>(381 mm) | 0.30"<br>(7,6 mm) | 0.07"<br>(1,8 mm) | 4.00"<br>(101,6 mm) | 120 (530)       | 500 (2500)           |

## 3M™ Standard Cable Ties







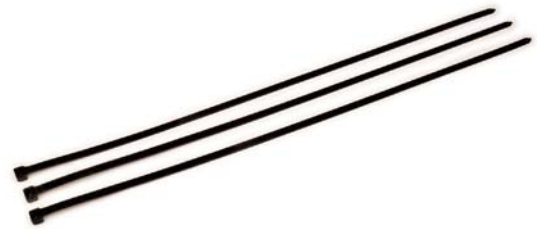

### 3M™ Heavy Duty Ties (175 lb., 800 N) - Plenum Rated

3M™ Heavy Duty Cable Ties provide an added level of strength plus a larger bundle diameter for heavy duty jobs up to 175 lb. Ties come in UV-resistant black for outdoor and indoor use as well as natural (white) nylon for an economical solution indoors.

The 24" and 36" ties are also suitable for use with UL non-metallic air ducts and air connectors. (Plenum)



|                                |                |
|--------------------------------|----------------|
| <b>Tensile Strength</b>        | 175 lb (800 N) |
| <b>Min. Operating Temp.</b>    | 32°F (0°C)     |
| <b>Max. Operating Temp.</b>    | 185°F (85°C)   |
| <b>Min. Installation Temp.</b> | 32°F (0°C)     |
| <b>RoHS 2011/65/EU</b>         | Yes            |

|                      | CT24BK175-L                                                                         | CT24NT175-L                                                                         | CT36BK175-L                                                                           |
|----------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| UPC                  | 051128-59318                                                                        | 051128-59319                                                                        | 051128-59320                                                                          |
| Color                | Black                                                                               | Natural                                                                             | Black                                                                                 |
| UV Resistance        | Yes                                                                                 | No                                                                                  | Yes                                                                                   |
| Length               | 24.00"<br>(610 mm)                                                                  | 24.00"<br>(610 mm)                                                                  | 36.00"<br>(914 mm)                                                                    |
| Width                | 0.34"<br>(8,6 mm)                                                                   | 0.34"<br>(8,6 mm)                                                                   | 0.34"<br>(8,6 mm)                                                                     |
| Thickness            | 0.09"<br>(2,3 mm)                                                                   | 0.09"<br>(2,3 mm)                                                                   | 0.09"<br>(2,3 mm)                                                                     |
| Max. Bundle Dia.     | 7.20"<br>(183 mm)                                                                   | 7.20"<br>(183 mm)                                                                   | 11.00"<br>(279 mm)                                                                    |
| Tensile lbf (N)      | 175<br>(800)                                                                        | 175<br>(800)                                                                        | 175<br>(800)                                                                          |
| Items per Bag (Case) | 50 (500)                                                                            | 50 (500)                                                                            | 50 (500)                                                                              |
| Agency Approval      |  |  |  |
| Country of Origin    |  |  |  |
|                      | CT36NT175-L                                                                         | CT48BK175-L                                                                         | CT48NT175-L                                                                           |
| UPC                  | 051128-59321                                                                        | 051128-59322                                                                        | 051128-59323                                                                          |
| Color                | Natural                                                                             | Black                                                                               | Natural                                                                               |
| UV Resistance        | No                                                                                  | Yes                                                                                 | No                                                                                    |
| Length               | 36.00"<br>(914 mm)                                                                  | 47.90"<br>(1217 mm)                                                                 | 47.90"<br>(1217 mm)                                                                   |
| Width                | 0.34"<br>(8,6 mm)                                                                   | 0.36"<br>(9,1 mm)                                                                   | 0.36"<br>(9,1 mm)                                                                     |
| Thickness            | 0.09"<br>(2,3 mm)                                                                   | 0.07"<br>(1,8 mm)                                                                   | 0.07"<br>(1,8 mm)                                                                     |
| Max. Bundle Dia.     | 11.00"<br>(279 mm)                                                                  | 14.60"<br>(372 mm)                                                                  | 14.60"<br>(372 mm)                                                                    |
| Tensile lbf (N)      | 175<br>(800)                                                                        | 175<br>(800)                                                                        | 175<br>(800)                                                                          |
| Items per Bag (Case) | 50 (500)                                                                            | 50 (500)                                                                            | 50 (500)                                                                              |
| Agency Approval      |  | UL Pending -<br>Not Plenum Rated                                                    | UL Pending -<br>Not Plenum Rated                                                      |
| Country of Origin    |  | -                                                                                   | -                                                                                     |





## 3M™ Standard Cable Ties


### 3M™ Screw Mountable - Plenum Rated

3M™ Screw Mount Cable Ties allow precise and controlled positioning of standard and heavy duty cables up to 120 lb. The easy-to-use ties can be quickly mounted to walls and structures with screws, bolts or rivets for added security. Ties come in UV-resistant black for outdoor and indoor use as well as natural (white) nylon for an economical solution indoors.

3M™ Screw Mount Cable Ties are suitable for use in air handling spaces (plenum).

NOTE: UL Listing is pending at this time for **CT15NT120S-D**.

|                         |                                                                                   |
|-------------------------|-----------------------------------------------------------------------------------|
| Stud Size               | 10                                                                                |
| Min. Operating Temp.    | -40°F (-40°C)                                                                     |
| Max. Operating Temp.    | 185°F (85°C)                                                                      |
| Min. Installation Temp. | -                                                                                 |
| RoHS 2011/65/EU         | Yes                                                                               |
| Agency Approvals        |  |
| Country of Origin       |  |

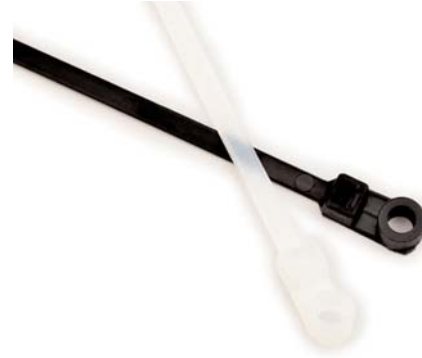



| Order No.    | UPC          | Color   | UV Resistance | Length             | Width             | Thickness         | Max. Bundle Dia.    | Tensile lbf (N) | Items per Bag (Case) |
|--------------|--------------|---------|---------------|--------------------|-------------------|-------------------|---------------------|-----------------|----------------------|
| CT8BK50S-C   | 051128-59292 | Black   | Yes           | 8.60"<br>(218 mm)  | 0.18"<br>(4,6 mm) | 0.06"<br>(1,5 mm) | 2.00"<br>(50,8 mm)  | 50 (220)        | 100 (1000)           |
| CT8BK50S-M   | 051128-59295 | Black   | Yes           | 8.60"<br>(218 mm)  | 0.18"<br>(4,6 mm) | 0.06"<br>(1,5 mm) | 2.00"<br>(50,8 mm)  | 50 (220)        | 1000 (10,000)        |
| CT8NT50S-C   | 051128-59296 | Natural | No            | 8.60"<br>(218 mm)  | 0.18"<br>(4,6 mm) | 0.06"<br>(1,5 mm) | 2.00"<br>(50,8 mm)  | 50 (220)        | 100 (1000)           |
| CT8NT50S-M   | 051128-59298 | Natural | No            | 8.60"<br>(218 mm)  | 0.18"<br>(4,6 mm) | 0.06"<br>(1,5 mm) | 2.00"<br>(50,8 mm)  | 50 (220)        | 1000 (10,000)        |
| CT15NT50S-L  | 051128-59306 | Natural | No            | 15.10"<br>(384 mm) | 0.18"<br>(4,6 mm) | 0.06"<br>(1,5 mm) | 4.00"<br>(102,6 mm) | 50 (220)        | 50 (500)             |
| CT15NT50S-D  | 051128-59308 | Natural | No            | 15.10"<br>(384 mm) | 0.18"<br>(4,6 mm) | 0.06"<br>(1,5 mm) | 4.00"<br>(102,0 mm) | 50 (220)        | 500 (2500)           |
| CT15NT120S-L | 051128-59314 | Natural | No            | 15.70"<br>(399 mm) | 0.30"<br>(7,6 mm) | 0.07"<br>(1,8 mm) | 4.00"<br>(102,0 mm) | 120 (530)       | 50 (500)             |
| CT15NT120S-D | 051128-59316 | Natural | No            | 15.70"<br>(399 mm) | 0.30"<br>(7,6 mm) | 0.07"<br>(1,8 mm) | 4.00"<br>(102,0 mm) | 120 (530)       | 500 (2500)           |

## 3M™ Standard Cable Ties

### 3M™ Standard Cable Ties - Assortment Pack

3M™ Cable Tie Assortment Pack contains 100 of our most commonly used ties. Includes three sizes, four lengths and both colors.

|                         |                                                                                   |
|-------------------------|-----------------------------------------------------------------------------------|
| Min. Operating Temp.    | -40°F (-40°C)                                                                     |
| Max. Operating Temp.    | 185°F (85°C)                                                                      |
| Min. Installation Temp. | Varies                                                                            |
| RoHS 2011/65/EU         | Yes                                                                               |
| Agency Approvals        |  |
| Country of Origin       |  |




| Order No. | UPC          | Product Name                        | Description                                                                                                                                                                                          | Items per Pack | Items per Case |
|-----------|--------------|-------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|----------------|
| CT06220   | 051128-59324 | 3M™ Cable Tie Assortment Pack 06220 | Contains 15 each of natural nylon 6.6. ties: CT4NT18-, CT6NT30-, CT8NT50-, and CT11NT50-<br>Contains 10 each of black, weather-resistant nylon 6.6 ties: CT4BK18-, CT6BK30-, CT8BK50-, and CT11BK50- | 100            | 1000           |



## 3M™ Cable Bases and Stackers

### 3M™ Cable Stackers

3M™ Cable Stackers organize cable runs and aid in identification, putting an end to tangled wires and the potential heating that could occur when cables are held together tightly under a single fastener. Easy installation simplifies compliance with the spacing requirements of the National Electrical Code, article 300-4-(d) and the Canadian Electric Code Part I, Section 12-516. Made from reclaimed plastic.

|                   |                                                                                     |
|-------------------|-------------------------------------------------------------------------------------|
| Cable Tie Type    | Stacker                                                                             |
| Color             | White                                                                               |
| RoHS 2011/65/EU   | Yes                                                                                 |
| Country of Origin |  |




|                | SI-1                                                                                | SIFS-1                                                                                                                         |
|----------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
|                |  |                                           |
| UPC            | 054007-49554                                                                        | 054007-49918                                                                                                                   |
| Product Name   | 3M™ Cable Stacker SI-1                                                              | 3M™ Furring Strip Cable Stacker SIFS-1                                                                                         |
| Description    | The 3M™ Cable Stacker SI-1 centers multiple cables on a 2 X 4 framing member.       | The 3M™ Furring Strip Cable Stacker SIFS-1 routes, fastens, and supports CATV, telephone, security and instrumentation cables. |
| Items per Bag  | 25                                                                                  | 25                                                                                                                             |
| Items per Case | 250                                                                                 | 250                                                                                                                            |

## 3M™ Cable Tie Mounting Bases

3M™ Cable Tie Bases make mounting wire and cable a quick, easy and secure process. 2-way and 4-way configurations as well as adhesive-backed and screw mount options offer flexible mounting alternatives to meet a variety of applications.

RoHS 2011/65/EU Yes

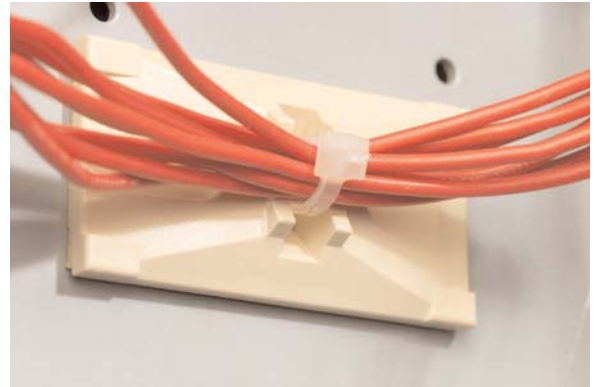

|                   | CTB2X1BGA-C          | CTB1X1BGA-C                        | CTB75X75NTA-C        | CTB75X75BKA-C        |
|-------------------|----------------------|------------------------------------|----------------------|----------------------|
|                   |                      |                                    |                      |                      |
| UPC               | 054007-06290         | 054007-06292                       | 054007-06294         | 054007-06295         |
| Material          | ABS                  | ABS                                | Nylon                | Nylon                |
| Mount Type        | Foam Backed Adhesive | Foam Backed Adhesive (Screw Mount) | Foam Backed Adhesive | Foam Backed Adhesive |
| Color             | Beige                | Beige                              | Natural              | Black (UV Resistant) |
| Length            | 2.0" (51 mm)         | 1.0" (25 mm)                       | 0.74" (19 mm)        | 0.74" (19 mm)        |
| Width             | 1.0" (25 mm)         | 1.2" (25 mm)                       | 0.74" (19 mm)        | 0.74" (19 mm)        |
| Height            | 0.35" (8,9 mm)       | 0.15" (3,8 mm)                     | 0.22" (5,6 mm)       | 0.22" (5,6 mm)       |
| Slot Width        | 0.21" (5,3 mm)       | 0.21" (5,3 mm)                     | 0.21" (5,3 mm)       | 0.21" (5,3 mm)       |
| Slot Height       | 0.18" (4,5 mm)       | 0.06" (1,5 mm)                     | 0.06" (1,5 mm)       | 0.06" (1,5 mm)       |
| Items per Bag     | 100                  | 100                                | 100                  | 100                  |
| Items per Case    | 500                  | 500                                | 500                  | 500                  |
| Country of Origin |                      |                                    |                      |                      |
|                   | CTB1X1NTA-C          | CTB1X1BKA-C                        | CTB60X41NTS-C        | CTB87X62NTS-C        |
|                   |                      |                                    |                      |                      |
| UPC               | 054007-06296         | 054007-06297                       | 054007-95667         | 054007-95668         |
| Material          | Nylon                | Nylon                              | Nylon                | Nylon                |
| Mount Type        | Foam Backed Adhesive | Foam Backed Adhesive               | Screw Mount          | Screw Mount          |
| Color             | Natural              | Black (UV Resistant)               | Natural              | Natural              |
| Length            | 0.99" (25 mm)        | 0.99" (25 mm)                      | 0.60" (15 mm)        | 0.87" (22 mm)        |
| Width             | 0.99" (25 mm)        | 0.99" (25 mm)                      | 0.41" (10 mm)        | 0.62" (16 mm)        |
| Height            | 0.22" (5,6 mm)       | 0.22" (5,6 mm)                     | 0.28" (7,0 mm)       | 0.38" (10 mm)        |
| Slot Width        | 0.21" (5,3 mm)       | 0.21" (5,3 mm)                     | 0.21" (5,3 mm)       | 0.35" (8,9 mm)       |
| Slot Height       | 0.06" (1,5 mm)       | 0.06" (1,5 mm)                     | 0.06" (1,5 mm)       | 0.10" (2,5 mm)       |
| Items per Bag     | 100                  | 100                                | 100                  | 100                  |
| Items per Case    | 500                  | 500                                | 500                  | 500                  |
| Country of Origin |                      |                                    | -                    | -                    |

## 3M™ Hook and Loop Reclosable Fasteners

### 3M™ Hook and Loop Reclosable Fasteners

3M™ Hook and Loop Reclosable Fasteners permit thousands of easy openings and secure closings. Stiff hooks on one side mesh with pliable loops on the other side to provide secure closure.

RoHS 2011/65/EU Yes



| Order No.                 | UPC          | Product Name                                      | Description                                          | Rolls per Case |
|---------------------------|--------------|---------------------------------------------------|------------------------------------------------------|----------------|
| SJ-3526N-Hook-Black-1-1/2 | 021200-86383 | 3M™ Fastener Hook SJ3526                          | Hook (Black) 1 1/2"x50 yd                            | 2              |
| SJ3526N-White-2"x50yd     | 021200-86247 | 3M™ Fastener Hook SJ3526                          | Hook (White) 2"x50yd                                 | 2              |
| SJ3527N-1"x50yd-White     | 021200-86253 | 3M™ Fastener Loop SJ3527                          | Loop (White) 1"x50 yd Bulk                           | 3              |
| SJ3527N-2"x50yd-Black     | 021200-86255 | 3M™ Fastener Loop SJ3527                          | Loop (Black) 2"x50 yd Bulk                           | 2              |
| SJ3527N-2"x50yd-White     | 021200-86256 | 3M™ Fastener Loop SJ3527                          | Loop (White) 2"x50 yd Bulk                           | 2              |
| SJ3526N-Beige-1"x50yd     | 021200-86242 | 3M™ Fastener Hook SJ3526                          | Hook (Beige) 1"x50yd                                 | 3              |
| SJ3526N-Beige-2"x50yd     | 021200-86246 | 3M™ Fastener Hook SJ3526                          | Hook (Beige) 2"x50yd                                 | 2              |
| SJ3526N-Beige-5/8"x50yd   | 021200-86239 | 3M™ Fastener Hook SJ3526                          | Hook (Beige) 5/8"x50yd                               | 4              |
| SJ3401-1"x50yd-Black      | 021200-62538 | 3M™ Fastener Loop SJ3401                          | Loop (Black) 1"x50 yd                                | 12             |
| SJ3401-1"x50yd-White      | 021200-62539 | 3M™ Fastener Loop SJ3401                          | Loop (White) 1"x50 yd                                | 12             |
| SJ3401-2"x50yd            | 021200-62544 | 3M™ Fastener Loop SJ3401                          | Loop (Black) 2"x50 yd                                | 6              |
| SJ3402-1"x50yd-Black      | 021200-62553 | 3M™ Fastener Hook SJ3402                          | Hook (Black) 1"x50 yd                                | 12             |
| SJ3402-1"x50yd-White      | 021200-62554 | 3M™ Fastener Hook SJ3402                          | Hook (White) 1"x50 yd                                | 12             |
| SJ3402-2"x50yd            | 021200-62559 | 3M™ Fastener Hook SJ3402                          | Hook (Black) 2"x50 yd                                | 6              |
| SJ3402-3/4"x50yd-Black    | 021200-62550 | 3M™ Fastener Hook SJ3402                          | Hook (Black) 3/4"x50 yd                              | 16             |
| SJ-3522                   | 021200-86236 | 3M™ Fastener Plasticizer Resistant Hook SJ3522    | Hook (Black) 1"x50 yd                                | 3              |
| SJ-3523                   | 021200-86238 | 3M™ Fastener Plasticizer Resistant Loop SJ3523    | Loop (Black) 1"x50 yd                                | 3              |
| SJ3526N-2"x50yd           | 021200-86245 | 3M™ Fastener Hook SJ3526                          | Hook (Black) 2"x50 yd                                | 2              |
| SJ3526N-Black-5/8"x50yd   | 021200-86240 | 3M™ Fastener Hook SJ3526                          | Hook (Black) 5/8"x50yd                               | 4              |
| SJ-3526N-Hook-Black-1"    | 021200-86243 | 3M™ Fastener Hook SJ3526                          | Hook (Black) 1"x50 yd                                | 3              |
| SJ-3526N-Hook-White-5/8"  | 021200-86241 | 3M™ Fastener Hook SJ3526                          | Hook (White) 5/8"x50 yd                              | 4              |
| SJ3527N-Beige-1"x50yd     | 021200-86251 | 3M™ Fastener Loop SJ3527                          | Loop (Beige) 1"x50yd                                 | 3              |
| SJ3527N-Beige-2"x50yd     | 021200-86254 | 3M™ Fastener Loop SJ3527                          | Loop (Beige) 2"x50yd                                 | 2              |
| SJ3527N-Beige-5/8"x50yd   | 021200-86248 | 3M™ Fastener Loop SJ3527                          | Loop (Beige) 5/8"x50yd                               | 4              |
| SJ3527N-Black-1.5"x50yd   | 021200-86167 | 3M™ Fastener Loop SJ3527                          | Loop (Black) 1.5"x50yd                               | 2              |
| SJ-3527N-Loop-Black-1"    | 021200-86252 | 3M™ Fastener Loop SJ3527                          | Loop (Black) 1"x50 yd                                | 3              |
| SJ3527N-White-5/8"x50yd   | 021200-86250 | 3M™ Fastener Loop SJ3527                          | Loop (White) 5/8"x50yd                               | 4              |
| SJ-3532N-Hook-Black-1"    | 021200-86259 | 3M™ Fastener Hook SJ3532                          | Hook (Black) 1"x50 yd                                | 3              |
| SJ-3533N-Loop-Black-1"    | 021200-86266 | 3M™ Fastener Loop SJ3533                          | Loop (Black) 1"x50 yd                                | 3              |
| SJ-3571-1"x50yd-Black     | 021200-86285 | 3M™ Fastener Loop SJ3571                          | Loop (Black) 1"x50 yd                                | 3              |
| SJ3571-1"x50yd-White      | 021200-87277 | 3M™ Fastener Loop SJ3571                          | Loop (White) 1"x50 yd                                | 3              |
| SJ3571-5/8"x50yd-Black    | 021200-86289 | 3M™ Fastener Loop SJ3571                          | Loop (Black) 5/8"x50 yd                              | 4              |
| SJ3571-White-2"x50yd      | 021200-86467 | 3M™ Fastener Loop SJ3571                          | Loop (White) 2"x50yd                                 | 2              |
| SJ-3572-1"x50yd-Black     | 021200-86286 | 3M™ Fastener Hook SJ3572                          | Hook (Black) 1"x50 yd                                | 3              |
| SJ3572-2"x50yd-Black      | 021200-86377 | 3M™ Fastener Hook SJ3572                          | Hook (Black) 2"x50 yd                                | 2              |
| SJ3572-5/8"x50yd-Black    | 021200-86290 | 3M™ Fastener Hook SJ3572                          | Hook (Black) 5/8"x50 yd                              | 4              |
| MP3401/MP3402-Black       | 051131-06465 | 3M™ Scotchmate™ Reclosable Fastener MP3401        | Reclosable Fastener (Black) 1"x5 yd                  | 5              |
| MP-3526/27N-Black         | 051131-06481 | 3M™ Scotchmate™ Reclosable Fastener MP3526/MP3527 | Hook & Loop Fastener (Black) 1"x5 yd Mini Pack, Roll | 5              |

## 3M™ Hook and Loop Reclosable Fasteners

### 3M™ Hook and Loop Reclosable Fasteners (continued)

| Order No.         | UPC          | Product Name                                      | Description                                          | Rolls per Case |
|-------------------|--------------|---------------------------------------------------|------------------------------------------------------|----------------|
| MP-3526/27N-White | 051131-06488 | 3M™ Scotchmate™ Reclosable Fastener MP3526/MP3527 | Hook & Loop Fastener (White) 1"x5 yd Mini Pack, Roll | 5              |

## 3M™ Dual Lock™ Reclosable Fasteners

### 3M™ Dual Lock™ Reclosable Fasteners

Strong. Hidden. Removable. 3M™ Dual Lock™ Reclosable Fasteners are a fastening solution that can replace screws, bolts and rivets. The fasteners contain hundreds of mushroom-shaped stems that audibly “SNAP” together to form a secure attachment with strong adhesive backings that adhere to your substrate.

RoHS 2011/65/EU Yes



| Order No.             | UPC          | Product Name                                             | Description                                                                                                                                                       | Rolls per Case |
|-----------------------|--------------|----------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
| MP-3541/42-Black      | 051131-06483 | 3M™ Dual Lock™ Reclosable Fastener MP3541/MP3542 400/170 | Reclosable Fastener (Black) 400 stems per square inch, 1"x5 yd                                                                                                    | 5              |
| MP-3551/52-Black      | 051131-06484 | 3M™ Dual Lock™ Reclosable Fastener MP3551/MP3552 400/170 | Reclosable Fastener (Black) 400 stems per square inch., 1"x5 yd                                                                                                   | 5              |
| MP-3560-Clear         | 051131-06463 | 3M™ Dual Lock™ Reclosable Fastener MP3560 250            | Reclosable Fastener (Clear) 250 stems per square inch, 1"x5 yd                                                                                                    | 5              |
| SJ-3463               | 021200-24993 | 3M™ Dual Lock™ Reclosable Fastener SJ3463 400            | Reclosable Fastener (Black) rigid backed circle with hole, 400 stems per square inch, 13/16" diameter with 0.16 in hole.                                          | 1000           |
| SJ3540-1"x50yd-Black  | 021200-65812 | 3M™ Dual Lock™ Reclosable Fastener 250 SJ3540            | Reclosable Fastener (Black) 250 stems per square inch, 1"x50 yd                                                                                                   | 2              |
| SJ-3541-1"x50yd-Black | 021200-86277 | 3M™ Dual Lock™ Reclosable Fastener 400 SJ3541            | Reclosable Fastener (Black) 400 stems per square inch, 1"x50 yd                                                                                                   | 2              |
| SJ-3542-1"x50yd-Black | 021200-86309 | 3M™ Dual Lock™ Reclosable Fastener SJ3542 170            | Reclosable Fastener (Black) 170 stems per square inch, 1"x50 yd                                                                                                   | 2              |
| SJ-3560-1"x50yd-Clear | 021200-86282 | 3M™ Dual Lock™ Reclosable Fastener 250 SJ3560            | Reclosable Fastener (Clear) 250 stems per square inch, 1"x50 yd                                                                                                   | 2              |
| SJ-3748               | 021200-63628 | 3M™ Dual Lock™ Reclosable Fastener 400 SJ3748 Black      | Pop-in, Christmas tree style reclosable fastener with a 16.2 mm stud, 400 stems per square inch, 1 inch x 1 inch.                                                 | 5000           |
| SJ-3755               | 021200-24129 | 3M™ Dual Lock™ Reclosable Fastener 250 SJ3755 Black      | Black, polypropylene reclosable fastener with rigid backing, rigid backed circle with one hole, 250 stems per square inch, 1 1/8 inch (28.5 mm) outside diameter. | 1000           |
| SJ-3762               | 021200-24131 | 3M™ Dual Lock™ Reclosable Fastener 400 SJ3762 Black      | Black, polypropylene reclosable fastener with rigid backing, rigid backed circle with one hole, 400 stems per square inch, 1 1/8 inch (28.5 mm) outside diameter. | 1000           |
| SJ-3767               | 021200-24128 | 3M™ Dual Lock™ Reclosable Fastener SJ3767 Black          | Black, polyolefin plastic reclosable square fastener with two counter-sunk holes, 400 stem per square inch, 1 1/2 inch (38 mm).                                   | 1000           |

3M™ Dual Lock™ Reclosable Fasteners

## 3M™ Dual Lock™ Low Profile Reclosable Fastener SJ4570

Low to medium temperature performance. Bonds well to metals (aluminum, stainless steel), glass, many plastics (polypropylene, polyethylene, polycarbonate, ABS), powder coated paints and medium to low surface energy materials. Designed for indoor use. Products include SJ4570 and SJ4575.



RoHS 2011/65/EU Yes

| Order No.              | UPC          | Product Name                                          | Description                                          | Rolls per Case |
|------------------------|--------------|-------------------------------------------------------|------------------------------------------------------|----------------|
| SJ4570-1"x50yd-Clear   | 021200-44883 | 3M™ Dual Lock™ Low Profile Reclosable Fastener SJ4570 | Low Profile Clear, 1 in x 50 yd 0.105 in (2,7 mm).   | 2              |
| SJ4570-2"x50yd-Clear   | 021200-46070 | 3M™ Dual Lock™ Low Profile Reclosable Fastener SJ4570 | Low Profile Clear, 2 in x 50 yd 0.105 in (2,7 mm).   | 1              |
| SJ4570-3/4"x50yd-Clear | 021200-46239 | 3M™ Dual Lock™ Low Profile Reclosable Fastener SJ4570 | Low Profile Clear, 3/4 in x 50 yd 0.105 in (2,7 mm). | 2              |
| SJ4570-4"x50yd-Clear   | 021200-46071 | 3M™ Dual Lock™ Low Profile Reclosable Fastener SJ4570 | Low Profile Clear, 4 in x 50 yd 0.105 in (2,7 mm).   | 1              |
| SJ4570-5/8"x50yd-Clear | 021200-45075 | 3M™ Dual Lock™ Low Profile Reclosable Fastener SJ4570 | Low Profile Clear, 5/8 in x 50 yd 0.105 in (2,7 mm). | 3              |

3M, ARC Plug, Blasts, BX, Centurion, Classic, ComTac, Cool Flow, Dual Lock, Dynatel, E-A-R, E-A-Rflex, E-A-Rform, E-A-Rsoft, Elavation, Express, FireDam, FX, GoggleGear, Hear-Through, Highland, Interam, Lexa, Light Vision, Maxim, Metaliks, Moon Dawg, No-Touch, Novec, Nuvo, One Touch, PanelSafe, Peltor, Optime, Pistonz, PTL, Pod Plugs, Privo, Push-Ins, Refine, ReLoad, Scotch, Scotch-Brite, Scotchcast, ScotchCode, Scotchfil, Scotchgard, Scotchkote, Scotchlok, Scotchmate, Scotchpro, Scotchrap, Scotch-Seal, Scotch-Weld, SecureFit, Skull Screws, Smart Lens, SofTouch, Splash GoggleGear, Super 33+, Super-Clear, Swerve, Temflex, Thinsulate, Tour-Guard, Tri-Flange, UltraFit, Ultrathon, Uvicator, VFlex, Virtua, Yellow Neons are trademarks of 3M Company. All other trademarks are property of their respective owners.

Dymo is a trademark of Newell Rubbermaid.

Unishield is a registered trademark for General Cable Technologies Corporation.

Latchways, Latchways Personal Rescue Device and PRD are trademarks of Latchways plc.

DEUS is a trademark of DEUS Rescue.

Vectran is a trademark of Kuraray Co., Ltd.

The images, pictures, and illustrations found in this catalog are for illustration purposes only. Check the Product Technical Data Sheets for actual product details.

3M products listed in this publication that are associated with a U.S.A. flag are manufactured in the USA as of the date of publication. 3M products offered on a government contract that require country of origin representation must be certified by 3M's Trade Compliance Department (contact your customer service support team to request a certification).

"RoHS 2011/65/EU" means that the product or part does not contain any of the substances in excess of the maximum concentration values ("MCVs") in EU RoHS Directive 2011/65/EU. The MCVs are by weight in homogeneous materials. This information represents 3M's knowledge and belief, which may be based in whole or in part on information provided by third party suppliers to 3M.

## **Important Notice**

Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use.

### **Warranty; Limited Remedy; Limited Liability.**

3M's product warranty is stated in its Product Literature available upon request. **3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. **Except where prohibited by law, 3M will not be liable for any direct, special, incidental or consequential loss or damage arising from this 3M product, regardless of the legal theory asserted.**

**3M** Science.  
Applied to Life.™

# Electrical Solutions you can rely on.

Electrical Products Catalog



# Cable Ties and Accessories

3M™ Cable Ties are designed to secure wire bundles and harness components quickly, without slipping. Featuring a self-locking head and a locking mechanism, they are designed to handle temperatures up to 185°F (85°C). Available in several strengths and lengths, including screw mount. Most are plenum rated and USA made.



## Cable Ties Part Number Naming Convention

The product name has been changed to better identify the characteristics of each tie.

**CT D C T X - P**

Example:

Catalog Number: CT4BK18-C

**CT                    D                    C                    T                    X                    -                    P**

|                                            |                                                                    |                                                                   |                                                                                                                             |                                                                                           |                                                                                  |
|--------------------------------------------|--------------------------------------------------------------------|-------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|
| CT = Cable Ties<br>CTB = Mounting<br>Bases | D = Dimensions (inches)<br>Ties = Length<br>Bases = Length X Width | C = Color<br>BK = Black<br>NT = Natural<br>RD = Red<br>BG = Beige | T* = Tensile (pounds)<br>18 = Miniature<br>40 = Intermediate<br>50 = Standard<br>120 = Light Heavy Duty<br>175 = Heavy Duty | X = Special Features<br>_ = Standard Tie (Blank)<br>S = Screw Mount<br>A = Adhesive Mount | P = Package Size<br>(Roman Numeral)<br>M = 1,000<br>D = 500<br>C = 100<br>L = 50 |
|--------------------------------------------|--------------------------------------------------------------------|-------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|

*\*Cable Tie Base Part Numbers do not include Tensile.*

## Section

## Page

|                                                                   |                |
|-------------------------------------------------------------------|----------------|
| <b>3M™ Standard Cable Ties</b> .....                              | <b>123-129</b> |
| 3M™ Miniature Ties (18 lb., 80 N) - Plenum Rated .....            | 123            |
| 3M™ Intermediate Ties (30-40 lb., 135-180 N) - Plenum Rated ..... | 124            |
| 3M™ Standard Ties (50 lb., 220 N) - Plenum Rated.....             | 125            |
| 3M™ Light Heavy Duty Ties (120 lb., 530 N) - Plenum Rated .....   | 126            |
| 3M™ Heavy Duty Ties (175 lb., 800 N) - Plenum Rated .....         | 127            |
| 3M™ Screw Mountable - Plenum Rated .....                          | 128            |
| 3M™ Standard Cable Ties - Assortment Pack .....                   | 129            |
| <b>3M™ Cable Bases and Stackers</b> .....                         | <b>129-130</b> |
| 3M™ Cable Stackers .....                                          | 129            |
| 3M™ Cable Tie Mounting Bases.....                                 | 130            |
| <b>3M™ Hook and Loop Reclosable Fasteners</b> .....               | <b>131-132</b> |
| 3M™ Hook and Loop Reclosable Fasteners .....                      | 131-132        |
| <b>3M™ Dual Lock™ Reclosable Fasteners</b> .....                  | <b>132-133</b> |
| 3M™ Dual Lock™ Reclosable Fasteners .....                         | 132            |
| 3M™ Dual Lock™ Low Profile Reclosable Fastener SJ4570.....        | 133            |

## 3M™ Standard Cable Ties

### 3M™ Miniature Ties (18 lb., 80 N) - Plenum Rated


3M™ Miniature Cable Ties are small lightweight cable ties for use in holding applications up to 18 lb. Ties come in UV-resistant black for outdoor and indoor use as well as natural (white) nylon for an economical solution indoors.

Tensile Strength 18 lb (80 N)  
 Min. Operating Temp. -40°F (-40°C)  
 Max. Operating Temp. 185°F (85°C)  
 Min. Installation Temp. 32°F (0°C)  
 RoHS 2011/65/EU Yes

Agency Approvals



Country of Origin

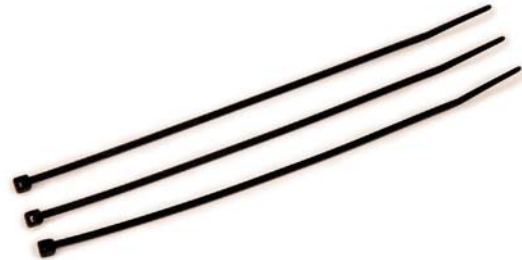

| Order No. | UPC          | Color   | UV Resistance | Length            | Width             | Thickness         | Max. Bundle Dia.   | Tensile lbf (N) | Items per Bag (Case) |
|-----------|--------------|---------|---------------|-------------------|-------------------|-------------------|--------------------|-----------------|----------------------|
| CT4BK18-C | 051128-59273 | Black   | Yes           | 4.10"<br>(104 mm) | 0.10"<br>(3,0 mm) | 0.04"<br>(1,0 mm) | 0.75"<br>(19,1 mm) | 18 (80)         | 100 (1000)           |
| CT4BK18-M | 051128-59274 | Black   | Yes           | 4.10"<br>(104 mm) | 0.10"<br>(3,0 mm) | 0.04"<br>(1,0 mm) | 0.75"<br>(19,1 mm) | 18 (80)         | 1000 (10,000)        |
| CT4NT18-C | 051128-59275 | Natural | No            | 4.10"<br>(104 mm) | 0.10"<br>(3,0 mm) | 0.04"<br>(1,0 mm) | 0.75"<br>(19,1 mm) | 18 (80)         | 100 (1000)           |
| CT4NT18-M | 051128-59276 | Natural | No            | 4.10"<br>(104 mm) | 0.10"<br>(3,0 mm) | 0.04"<br>(1,0 mm) | 0.75"<br>(19,1 mm) | 18 (80)         | 1000 (10,000)        |
| CT6BK18-C | 051128-59277 | Black   | Yes           | 6.10"<br>(155 mm) | 0.10"<br>(3,0 mm) | 0.05"<br>(1,3 mm) | 1.25"<br>(31,8 mm) | 18 (80)         | 100 (1000)           |
| CT6NT18-C | 051128-59278 | Natural | No            | 6.10"<br>(155 mm) | 0.10"<br>(3,0 mm) | 0.05"<br>(1,3 mm) | 1.25"<br>(31,8 mm) | 18 (80)         | 100 (1000)           |
| CT6NT18-M | 051128-59279 | Natural | No            | 6.10"<br>(155 mm) | 0.10"<br>(3,0 mm) | 0.05"<br>(1,3 mm) | 1.25"<br>(31,8 mm) | 18 (80)         | 1000 (10,000)        |
| CT8BK18-C | 051128-59280 | Black   | Yes           | 8.10"<br>(206 mm) | 0.10"<br>(3,0 mm) | 0.05"<br>(1,3 mm) | 2.00"<br>(50,8 mm) | 18 (80)         | 100 (1000)           |
| CT8BK18-M | 051128-59281 | Black   | Yes           | 8.10"<br>(206 mm) | 0.10"<br>(3,0 mm) | 0.05"<br>(1,3 mm) | 2.00"<br>(50,8 mm) | 18 (80)         | 1000 (10,000)        |
| CT8NT18-C | 051128-59282 | Natural | No            | 8.10"<br>(206 mm) | 0.10"<br>(3,0 mm) | 0.05"<br>(1,3 mm) | 2.00"<br>(50,8 mm) | 18 (80)         | 100 (1000)           |
| CT8NT18-M | 051128-59283 | Natural | No            | 8.10"<br>(206 mm) | 0.10"<br>(3,0 mm) | 0.05"<br>(1,3 mm) | 2.00"<br>(50,8 mm) | 18 (80)         | 1000 (10,000)        |

## 3M™ Intermediate Ties (30-40 lb., 135-180 N) - Plenum Rated

3M™ Intermediate Cable Ties are a great solution for holding applications up to 40 lb. They provide an economical alternative to standard cable ties when higher tensile strength is not required. Ties come in UV-resistant black for outdoor and indoor use as well as natural (white) nylon for an economical solution indoors.

**Tensile Strength** 30-40 lb (135-180 N)  
**Min. Operating Temp.** -40°F (-40°C)  
**Max. Operating Temp.** 185°F (85°C)  
**Min. Installation Temp.** -4°F (-20°C)  
**RoHS 2011/65/EU** Yes

**Agency Approvals**



**Country of Origin**



| Order No. | UPC          | Color   | UV Resistance | Length         | Width          | Thickness      | Max. Bundle Dia. | Tensile lbf (N) | Items per Bag (Case) |
|-----------|--------------|---------|---------------|----------------|----------------|----------------|------------------|-----------------|----------------------|
| CT6BK40-C | 051128-59284 | Black   | Yes           | 5.80" (147 mm) | 0.14" (3,6 mm) | 0.05" (1,3 mm) | 1.25" (31,8 mm)  | 30 (135)        | 100 (1000)           |
| CT6BK40-M | 051128-59285 | Black   | Yes           | 5.80" (147 mm) | 0.14" (3,6 mm) | 0.05" (1,3 mm) | 1.25" (31,8 mm)  | 30 (135)        | 1000 (10,000)        |
| CT6NT40-C | 051128-59286 | Natural | No            | 5.80" (147 mm) | 0.14" (3,6 mm) | 0.05" (1,3 mm) | 1.25" (31,8 mm)  | 30 (135)        | 100 (1000)           |
| CT6NT40-M | 051128-59287 | Natural | No            | 5.80" (147 mm) | 0.14" (3,6 mm) | 0.05" (1,3 mm) | 1.25" (31,8 mm)  | 30 (135)        | 1000 (10,000)        |
| CT8BK40-C | 051128-59288 | Black   | Yes           | 8.90" (226 mm) | 0.14" (3,6 mm) | 0.05" (1,3 mm) | 2.00" (50,8 mm)  | 30 (135)        | 100 (1000)           |
| CT8BK40-M | 051128-59289 | Black   | Yes           | 8.90" (226 mm) | 0.14" (3,6 mm) | 0.05" (1,3 mm) | 2.00" (50,8 mm)  | 30 (135)        | 1000 (10,000)        |
| CT8NT40-C | 051128-59290 | Natural | No            | 8.90" (226 mm) | 0.14" (3,6 mm) | 0.05" (1,3 mm) | 2.00" (50,8 mm)  | 30 (135)        | 100 (1000)           |
| CT8NT40-M | 051128-59291 | Natural | No            | 8.90" (226 mm) | 0.14" (3,6 mm) | 0.05" (1,3 mm) | 2.00" (50,8 mm)  | 30 (135)        | 1000 (10,000)        |

## 3M™ Standard Cable Ties

### 3M™ Standard Ties (50 lb., 220 N) - Plenum Rated

3M™ Standard Cable Ties are the most common sized ties and provide a standard level of performance for general-use holding applications up to 50 lb. Ties come in UV-resistant black for outdoor and indoor use as well as natural (white) nylon for an economical solution indoors.

**Tensile Strength** 50 lb (220 N)  
**Min. Operating Temp.** -40°F (-40°C)  
**Max. Operating Temp.** 185°F (85°C)  
**Min. Installation Temp.** -4°F (-20°C)  
**RoHS 2011/65/EU** Yes

**Agency Approvals**



**Country of Origin**





| Order No.  | UPC          | Color   | UV Resistance | Length             | Width             | Thickness         | Max. Bundle Dia.    | Tensile lbf. (N) | Items per Bag (Case) |
|------------|--------------|---------|---------------|--------------------|-------------------|-------------------|---------------------|------------------|----------------------|
| CT8BK50-C  | 051128-59293 | Black   | Yes           | 7.60"<br>(193 mm)  | 0.18"<br>(4,6 mm) | 0.05"<br>(1,3 mm) | 1.87"<br>(47,5 mm)  | 50 (220)         | 100 (1000)           |
| CT8BK50-M  | 051128-59294 | Black   | Yes           | 7.60"<br>(193 mm)  | 0.18"<br>(4,6 mm) | 0.05"<br>(1,3 mm) | 1.87"<br>(47,5 mm)  | 50 (220)         | 1000 (10,000)        |
| CT8NT50-C  | 051128-59297 | Natural | No            | 7.60"<br>(193 mm)  | 0.18"<br>(4,6 mm) | 0.05"<br>(1,3 mm) | 1.87"<br>(47,5 mm)  | 50 (220)         | 100 (1000)           |
| CT8NT50-M  | 051128-59299 | Natural | No            | 7.60"<br>(193 mm)  | 0.18"<br>(4,6 mm) | 0.05"<br>(1,3 mm) | 1.87"<br>(47,5 mm)  | 50 (220)         | 1000 (10,000)        |
| CT8RD50-C  | 051128-59559 | Red     | No            | 7.60"<br>(193 mm)  | 0.18"<br>(4,6 mm) | 0.05"<br>(1,3 mm) | 2.00"<br>(50,8 mm)  | 50 (220)         | 100 (1000)           |
| CT11BK50-C | 051128-59300 | Black   | Yes           | 11.10"<br>(282 mm) | 0.18"<br>(4,6 mm) | 0.05"<br>(1,3 mm) | 3.00"<br>(76,2 mm)  | 50 (220)         | 100 (1000)           |
| CT11BK50-D | 051128-59301 | Black   | Yes           | 11.10"<br>(282 mm) | 0.18"<br>(4,6 mm) | 0.05"<br>(1,3 mm) | 3.00"<br>(76,2 mm)  | 50 (220)         | 500 (5000)           |
| CT11NT50-C | 051128-59302 | Natural | No            | 11.10"<br>(282 mm) | 0.18"<br>(4,6 mm) | 0.05"<br>(1,3 mm) | 3.00"<br>(76,2 mm)  | 50 (220)         | 100 (1000)           |
| CT11NT50-D | 051128-59303 | Natural | No            | 11.10"<br>(282 mm) | 0.18"<br>(4,6 mm) | 0.05"<br>(1,3 mm) | 3.00"<br>(76,2 mm)  | 50 (220)         | 500 (5000)           |
| CT11RD50-C | 051128-59560 | Red     | No            | 11.10"<br>(282 mm) | 0.18"<br>(4,6 mm) | 0.05"<br>(1,3 mm) | 3.00"<br>(76,2 mm)  | 50 (220)         | 100 (1000)           |
| CT15BK50-C | 051128-59304 | Black   | Yes           | 14.60"<br>(371 mm) | 0.18"<br>(4,6 mm) | 0.05"<br>(1,3 mm) | 4.00"<br>(101,6 mm) | 50 (220)         | 100 (500)            |
| CT15BK50-D | 051128-59305 | Black   | Yes           | 14.60"<br>(371 mm) | 0.18"<br>(4,6 mm) | 0.05"<br>(1,3 mm) | 4.00"<br>(101,6 mm) | 50 (220)         | 500 (2500)           |
| CT15NT50-C | 051128-59307 | Natural | No            | 14.60"<br>(371 mm) | 0.18"<br>(4,6 mm) | 0.05"<br>(1,3 mm) | 4.00"<br>(101,6 mm) | 50 (220)         | 100 (500)            |
| CT15NT50-D | 051128-59309 | Natural | No            | 14.60"<br>(371 mm) | 0.18"<br>(4,6 mm) | 0.05"<br>(1,3 mm) | 4.00"<br>(101,6 mm) | 50 (220)         | 500 (2500)           |

## 3M™ Light Heavy Duty Ties (120 lb., 530 N) - Plenum Rated

3M™ Light Heavy Duty Cable Ties are commonly used in more demanding commercial and industrial jobs when extra strength is required to hold up to 120 lb. Ties come in UV-resistant black for outdoor and indoor use as well as natural (white) nylon for an economical solution indoors.

**Tensile Strength** 120 lb (530 N)  
**Min. Operating Temp.** -40°F (-40°C)  
**Max. Operating Temp.** 185°F (85°C)  
**Min. Installation Temp.** -4°F (-20°C)  
**RoHS 2011/65/EU** Yes

**Agency Approvals** 

**Country of Origin** 




| Order No.   | UPC          | Color   | UV Resistance | Length             | Width             | Thickness         | Max. Bundle Dia.    | Tensile lbf (N) | Items per Bag (Case) |
|-------------|--------------|---------|---------------|--------------------|-------------------|-------------------|---------------------|-----------------|----------------------|
| CT8BK120-L  | 051128-59310 | Black   | Yes           | 9.00"<br>(229 mm)  | 0.30"<br>(7,6 mm) | 0.07"<br>(1,8 mm) | 2.00"<br>(50,8 mm)  | 120 (530)       | 50 (500)             |
| CT8NT120-L  | 051128-59311 | Natural | No            | 9.00"<br>(229 mm)  | 0.30"<br>(7,6 mm) | 0.07"<br>(1,8 mm) | 2.00"<br>(50,8 mm)  | 120 (530)       | 50 (500)             |
| CT15BK120-C | 051128-59312 | Black   | Yes           | 15.00"<br>(381 mm) | 0.30"<br>(7,6 mm) | 0.07"<br>(1,8 mm) | 4.00"<br>(101,6 mm) | 120 (530)       | 100 (500)            |
| CT15BK120-D | 051128-59313 | Black   | Yes           | 15.00"<br>(381 mm) | 0.30"<br>(7,6 mm) | 0.07"<br>(1,8 mm) | 4.00"<br>(101,6 mm) | 120 (530)       | 500 (2500)           |
| CT15NT120-C | 051128-59315 | Natural | No            | 15.00"<br>(381 mm) | 0.30"<br>(7,6 mm) | 0.07"<br>(1,8 mm) | 4.00"<br>(101,6 mm) | 120 (530)       | 100 (500)            |
| CT15NT120-D | 051128-59317 | Natural | No            | 15.00"<br>(381 mm) | 0.30"<br>(7,6 mm) | 0.07"<br>(1,8 mm) | 4.00"<br>(101,6 mm) | 120 (530)       | 500 (2500)           |

## 3M™ Standard Cable Ties







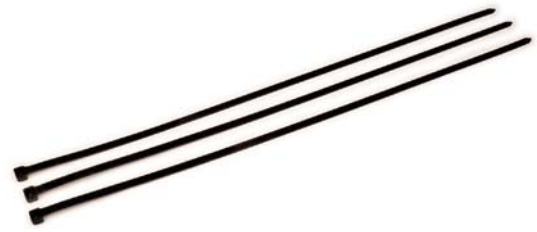

### 3M™ Heavy Duty Ties (175 lb., 800 N) - Plenum Rated

3M™ Heavy Duty Cable Ties provide an added level of strength plus a larger bundle diameter for heavy duty jobs up to 175 lb. Ties come in UV-resistant black for outdoor and indoor use as well as natural (white) nylon for an economical solution indoors.

The 24" and 36" ties are also suitable for use with UL non-metallic air ducts and air connectors. (Plenum)



|                                |                |
|--------------------------------|----------------|
| <b>Tensile Strength</b>        | 175 lb (800 N) |
| <b>Min. Operating Temp.</b>    | 32°F (0°C)     |
| <b>Max. Operating Temp.</b>    | 185°F (85°C)   |
| <b>Min. Installation Temp.</b> | 32°F (0°C)     |
| <b>RoHS 2011/65/EU</b>         | Yes            |

|                      | CT24BK175-L                                                                         | CT24NT175-L                                                                         | CT36BK175-L                                                                           |
|----------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| UPC                  | 051128-59318                                                                        | 051128-59319                                                                        | 051128-59320                                                                          |
| Color                | Black                                                                               | Natural                                                                             | Black                                                                                 |
| UV Resistance        | Yes                                                                                 | No                                                                                  | Yes                                                                                   |
| Length               | 24.00"<br>(610 mm)                                                                  | 24.00"<br>(610 mm)                                                                  | 36.00"<br>(914 mm)                                                                    |
| Width                | 0.34"<br>(8,6 mm)                                                                   | 0.34"<br>(8,6 mm)                                                                   | 0.34"<br>(8,6 mm)                                                                     |
| Thickness            | 0.09"<br>(2,3 mm)                                                                   | 0.09"<br>(2,3 mm)                                                                   | 0.09"<br>(2,3 mm)                                                                     |
| Max. Bundle Dia.     | 7.20"<br>(183 mm)                                                                   | 7.20"<br>(183 mm)                                                                   | 11.00"<br>(279 mm)                                                                    |
| Tensile lbf (N)      | 175<br>(800)                                                                        | 175<br>(800)                                                                        | 175<br>(800)                                                                          |
| Items per Bag (Case) | 50 (500)                                                                            | 50 (500)                                                                            | 50 (500)                                                                              |
| Agency Approval      |  |  |  |
| Country of Origin    |  |  |  |
|                      | CT36NT175-L                                                                         | CT48BK175-L                                                                         | CT48NT175-L                                                                           |
| UPC                  | 051128-59321                                                                        | 051128-59322                                                                        | 051128-59323                                                                          |
| Color                | Natural                                                                             | Black                                                                               | Natural                                                                               |
| UV Resistance        | No                                                                                  | Yes                                                                                 | No                                                                                    |
| Length               | 36.00"<br>(914 mm)                                                                  | 47.90"<br>(1217 mm)                                                                 | 47.90"<br>(1217 mm)                                                                   |
| Width                | 0.34"<br>(8,6 mm)                                                                   | 0.36"<br>(9,1 mm)                                                                   | 0.36"<br>(9,1 mm)                                                                     |
| Thickness            | 0.09"<br>(2,3 mm)                                                                   | 0.07"<br>(1,8 mm)                                                                   | 0.07"<br>(1,8 mm)                                                                     |
| Max. Bundle Dia.     | 11.00"<br>(279 mm)                                                                  | 14.60"<br>(372 mm)                                                                  | 14.60"<br>(372 mm)                                                                    |
| Tensile lbf (N)      | 175<br>(800)                                                                        | 175<br>(800)                                                                        | 175<br>(800)                                                                          |
| Items per Bag (Case) | 50 (500)                                                                            | 50 (500)                                                                            | 50 (500)                                                                              |
| Agency Approval      |  | UL Pending -<br>Not Plenum Rated                                                    | UL Pending -<br>Not Plenum Rated                                                      |
| Country of Origin    |  | -                                                                                   | -                                                                                     |



## 3M™ Standard Cable Ties


### 3M™ Screw Mountable - Plenum Rated

3M™ Screw Mount Cable Ties allow precise and controlled positioning of standard and heavy duty cables up to 120 lb. The easy-to-use ties can be quickly mounted to walls and structures with screws, bolts or rivets for added security. Ties come in UV-resistant black for outdoor and indoor use as well as natural (white) nylon for an economical solution indoors.

3M™ Screw Mount Cable Ties are suitable for use in air handling spaces (plenum).

NOTE: UL Listing is pending at this time for **CT15NT120S-D**.

|                         |                                                                                   |
|-------------------------|-----------------------------------------------------------------------------------|
| Stud Size               | 10                                                                                |
| Min. Operating Temp.    | -40°F (-40°C)                                                                     |
| Max. Operating Temp.    | 185°F (85°C)                                                                      |
| Min. Installation Temp. | -                                                                                 |
| RoHS 2011/65/EU         | Yes                                                                               |
| Agency Approvals        |  |
| Country of Origin       |  |

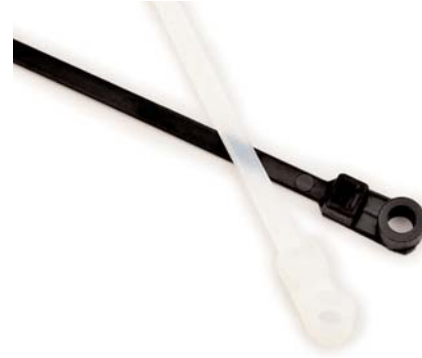



| Order No.    | UPC          | Color   | UV Resistance | Length             | Width             | Thickness         | Max. Bundle Dia.    | Tensile lbf (N) | Items per Bag (Case) |
|--------------|--------------|---------|---------------|--------------------|-------------------|-------------------|---------------------|-----------------|----------------------|
| CT8BK50S-C   | 051128-59292 | Black   | Yes           | 8.60"<br>(218 mm)  | 0.18"<br>(4,6 mm) | 0.06"<br>(1,5 mm) | 2.00"<br>(50,8 mm)  | 50 (220)        | 100 (1000)           |
| CT8BK50S-M   | 051128-59295 | Black   | Yes           | 8.60"<br>(218 mm)  | 0.18"<br>(4,6 mm) | 0.06"<br>(1,5 mm) | 2.00"<br>(50,8 mm)  | 50 (220)        | 1000 (10,000)        |
| CT8NT50S-C   | 051128-59296 | Natural | No            | 8.60"<br>(218 mm)  | 0.18"<br>(4,6 mm) | 0.06"<br>(1,5 mm) | 2.00"<br>(50,8 mm)  | 50 (220)        | 100 (1000)           |
| CT8NT50S-M   | 051128-59298 | Natural | No            | 8.60"<br>(218 mm)  | 0.18"<br>(4,6 mm) | 0.06"<br>(1,5 mm) | 2.00"<br>(50,8 mm)  | 50 (220)        | 1000 (10,000)        |
| CT15NT50S-L  | 051128-59306 | Natural | No            | 15.10"<br>(384 mm) | 0.18"<br>(4,6 mm) | 0.06"<br>(1,5 mm) | 4.00"<br>(102,6 mm) | 50 (220)        | 50 (500)             |
| CT15NT50S-D  | 051128-59308 | Natural | No            | 15.10"<br>(384 mm) | 0.18"<br>(4,6 mm) | 0.06"<br>(1,5 mm) | 4.00"<br>(102,0 mm) | 50 (220)        | 500 (2500)           |
| CT15NT120S-L | 051128-59314 | Natural | No            | 15.70"<br>(399 mm) | 0.30"<br>(7,6 mm) | 0.07"<br>(1,8 mm) | 4.00"<br>(102,0 mm) | 120 (530)       | 50 (500)             |
| CT15NT120S-D | 051128-59316 | Natural | No            | 15.70"<br>(399 mm) | 0.30"<br>(7,6 mm) | 0.07"<br>(1,8 mm) | 4.00"<br>(102,0 mm) | 120 (530)       | 500 (2500)           |



## 3M™ Standard Cable Ties

### 3M™ Standard Cable Ties - Assortment Pack

3M™ Cable Tie Assortment Pack contains 100 of our most commonly used ties. Includes three sizes, four lengths and both colors.

|                         |                                                                                   |
|-------------------------|-----------------------------------------------------------------------------------|
| Min. Operating Temp.    | -40°F (-40°C)                                                                     |
| Max. Operating Temp.    | 185°F (85°C)                                                                      |
| Min. Installation Temp. | Varies                                                                            |
| RoHS 2011/65/EU         | Yes                                                                               |
| Agency Approvals        |  |
| Country of Origin       |  |




| Order No. | UPC          | Product Name                        | Description                                                                                                                                                                                       | Items per Pack | Items per Case |
|-----------|--------------|-------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|----------------|
| CT06220   | 051128-59324 | 3M™ Cable Tie Assortment Pack 06220 | Contains 15 each of natural nylon 6.6. ties: CT4NT18-, CT6NT30-, CT8NT50-, and CT11NT50- Contains 10 each of black, weather-resistant nylon 6.6 ties: CT4BK18-, CT6BK30-, CT8BK50-, and CT11BK50- | 100            | 1000           |



## 3M™ Cable Bases and Stackers

### 3M™ Cable Stackers

3M™ Cable Stackers organize cable runs and aid in identification, putting an end to tangled wires and the potential heating that could occur when cables are held together tightly under a single fastener. Easy installation simplifies compliance with the spacing requirements of the National Electrical Code, article 300-4-(d) and the Canadian Electric Code Part I, Section 12-516. Made from reclaimed plastic.

|                   |                                                                                     |
|-------------------|-------------------------------------------------------------------------------------|
| Cable Tie Type    | Stacker                                                                             |
| Color             | White                                                                               |
| RoHS 2011/65/EU   | Yes                                                                                 |
| Country of Origin |  |




|                | SI-1                                                                                | SIFS-1                                                                                                                         |
|----------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
|                |  |                                           |
| UPC            | 054007-49554                                                                        | 054007-49918                                                                                                                   |
| Product Name   | 3M™ Cable Stacker SI-1                                                              | 3M™ Furring Strip Cable Stacker SIFS-1                                                                                         |
| Description    | The 3M™ Cable Stacker SI-1 centers multiple cables on a 2 X 4 framing member.       | The 3M™ Furring Strip Cable Stacker SIFS-1 routes, fastens, and supports CATV, telephone, security and instrumentation cables. |
| Items per Bag  | 25                                                                                  | 25                                                                                                                             |
| Items per Case | 250                                                                                 | 250                                                                                                                            |

## 3M™ Cable Tie Mounting Bases

3M™ Cable Tie Bases make mounting wire and cable a quick, easy and secure process. 2-way and 4-way configurations as well as adhesive-backed and screw mount options offer flexible mounting alternatives to meet a variety of applications.

RoHS 2011/65/EU Yes

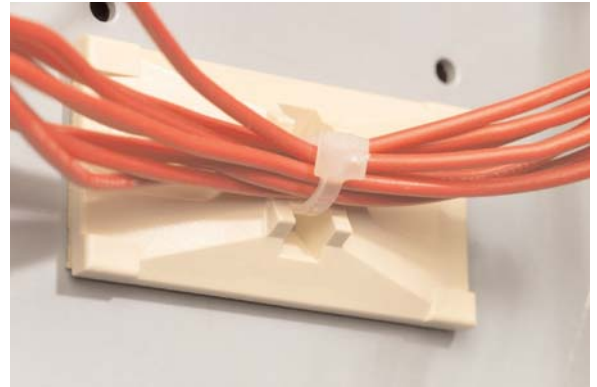

|                   | CTB2X1BGA-C          | CTB1X1BGA-C                        | CTB75X75NTA-C        | CTB75X75BKA-C        |
|-------------------|----------------------|------------------------------------|----------------------|----------------------|
|                   |                      |                                    |                      |                      |
| UPC               | 054007-06290         | 054007-06292                       | 054007-06294         | 054007-06295         |
| Material          | ABS                  | ABS                                | Nylon                | Nylon                |
| Mount Type        | Foam Backed Adhesive | Foam Backed Adhesive (Screw Mount) | Foam Backed Adhesive | Foam Backed Adhesive |
| Color             | Beige                | Beige                              | Natural              | Black (UV Resistant) |
| Length            | 2.0" (51 mm)         | 1.0" (25 mm)                       | 0.74" (19 mm)        | 0.74" (19 mm)        |
| Width             | 1.0" (25 mm)         | 1.2" (25 mm)                       | 0.74" (19 mm)        | 0.74" (19 mm)        |
| Height            | 0.35" (8,9 mm)       | 0.15" (3,8 mm)                     | 0.22" (5,6 mm)       | 0.22" (5,6 mm)       |
| Slot Width        | 0.21" (5,3 mm)       | 0.21" (5,3 mm)                     | 0.21" (5,3 mm)       | 0.21" (5,3 mm)       |
| Slot Height       | 0.18" (4,5 mm)       | 0.06" (1,5 mm)                     | 0.06" (1,5 mm)       | 0.06" (1,5 mm)       |
| Items per Bag     | 100                  | 100                                | 100                  | 100                  |
| Items per Case    | 500                  | 500                                | 500                  | 500                  |
| Country of Origin |                      |                                    |                      |                      |
|                   | CTB1X1NTA-C          | CTB1X1BKA-C                        | CTB60X41NTS-C        | CTB87X62NTS-C        |
|                   |                      |                                    |                      |                      |
| UPC               | 054007-06296         | 054007-06297                       | 054007-95667         | 054007-95668         |
| Material          | Nylon                | Nylon                              | Nylon                | Nylon                |
| Mount Type        | Foam Backed Adhesive | Foam Backed Adhesive               | Screw Mount          | Screw Mount          |
| Color             | Natural              | Black (UV Resistant)               | Natural              | Natural              |
| Length            | 0.99" (25 mm)        | 0.99" (25 mm)                      | 0.60" (15 mm)        | 0.87" (22 mm)        |
| Width             | 0.99" (25 mm)        | 0.99" (25 mm)                      | 0.41" (10 mm)        | 0.62" (16 mm)        |
| Height            | 0.22" (5,6 mm)       | 0.22" (5,6 mm)                     | 0.28" (7,0 mm)       | 0.38" (10 mm)        |
| Slot Width        | 0.21" (5,3 mm)       | 0.21" (5,3 mm)                     | 0.21" (5,3 mm)       | 0.35" (8,9 mm)       |
| Slot Height       | 0.06" (1,5 mm)       | 0.06" (1,5 mm)                     | 0.06" (1,5 mm)       | 0.10" (2,5 mm)       |
| Items per Bag     | 100                  | 100                                | 100                  | 100                  |
| Items per Case    | 500                  | 500                                | 500                  | 500                  |
| Country of Origin |                      |                                    | -                    | -                    |

## 3M™ Hook and Loop Reclosable Fasteners

### 3M™ Hook and Loop Reclosable Fasteners

3M™ Hook and Loop Reclosable Fasteners permit thousands of easy openings and secure closings. Stiff hooks on one side mesh with pliable loops on the other side to provide secure closure.

RoHS 2011/65/EU Yes



| Order No.                 | UPC          | Product Name                                      | Description                                          | Rolls per Case |
|---------------------------|--------------|---------------------------------------------------|------------------------------------------------------|----------------|
| SJ-3526N-Hook-Black-1-1/2 | 021200-86383 | 3M™ Fastener Hook SJ3526                          | Hook (Black) 1 1/2"x50 yd                            | 2              |
| SJ3526N-White-2"x50yd     | 021200-86247 | 3M™ Fastener Hook SJ3526                          | Hook (White) 2"x50yd                                 | 2              |
| SJ3527N-1"x50yd-White     | 021200-86253 | 3M™ Fastener Loop SJ3527                          | Loop (White) 1"x50 yd Bulk                           | 3              |
| SJ3527N-2"x50yd-Black     | 021200-86255 | 3M™ Fastener Loop SJ3527                          | Loop (Black) 2"x50 yd Bulk                           | 2              |
| SJ3527N-2"x50yd-White     | 021200-86256 | 3M™ Fastener Loop SJ3527                          | Loop (White) 2"x50 yd Bulk                           | 2              |
| SJ3526N-Beige-1"x50yd     | 021200-86242 | 3M™ Fastener Hook SJ3526                          | Hook (Beige) 1"x50yd                                 | 3              |
| SJ3526N-Beige-2"x50yd     | 021200-86246 | 3M™ Fastener Hook SJ3526                          | Hook (Beige) 2"x50yd                                 | 2              |
| SJ3526N-Beige-5/8"x50yd   | 021200-86239 | 3M™ Fastener Hook SJ3526                          | Hook (Beige) 5/8"x50yd                               | 4              |
| SJ3401-1"x50yd-Black      | 021200-62538 | 3M™ Fastener Loop SJ3401                          | Loop (Black) 1"x50 yd                                | 12             |
| SJ3401-1"x50yd-White      | 021200-62539 | 3M™ Fastener Loop SJ3401                          | Loop (White) 1"x50 yd                                | 12             |
| SJ3401-2"x50yd            | 021200-62544 | 3M™ Fastener Loop SJ3401                          | Loop (Black) 2"x50 yd                                | 6              |
| SJ3402-1"x50yd-Black      | 021200-62553 | 3M™ Fastener Hook SJ3402                          | Hook (Black) 1"x50 yd                                | 12             |
| SJ3402-1"x50yd-White      | 021200-62554 | 3M™ Fastener Hook SJ3402                          | Hook (White) 1"x50 yd                                | 12             |
| SJ3402-2"x50yd            | 021200-62559 | 3M™ Fastener Hook SJ3402                          | Hook (Black) 2"x50 yd                                | 6              |
| SJ3402-3/4"x50yd-Black    | 021200-62550 | 3M™ Fastener Hook SJ3402                          | Hook (Black) 3/4"x50 yd                              | 16             |
| SJ-3522                   | 021200-86236 | 3M™ Fastener Plasticizer Resistant Hook SJ3522    | Hook (Black) 1"x50 yd                                | 3              |
| SJ-3523                   | 021200-86238 | 3M™ Fastener Plasticizer Resistant Loop SJ3523    | Loop (Black) 1"x50 yd                                | 3              |
| SJ3526N-2"x50yd           | 021200-86245 | 3M™ Fastener Hook SJ3526                          | Hook (Black) 2"x50 yd                                | 2              |
| SJ3526N-Black-5/8"x50yd   | 021200-86240 | 3M™ Fastener Hook SJ3526                          | Hook (Black) 5/8"x50yd                               | 4              |
| SJ-3526N-Hook-Black-1"    | 021200-86243 | 3M™ Fastener Hook SJ3526                          | Hook (Black) 1"x50 yd                                | 3              |
| SJ-3526N-Hook-White-5/8"  | 021200-86241 | 3M™ Fastener Hook SJ3526                          | Hook (White) 5/8"x50 yd                              | 4              |
| SJ3527N-Beige-1"x50yd     | 021200-86251 | 3M™ Fastener Loop SJ3527                          | Loop (Beige) 1"x50yd                                 | 3              |
| SJ3527N-Beige-2"x50yd     | 021200-86254 | 3M™ Fastener Loop SJ3527                          | Loop (Beige) 2"x50yd                                 | 2              |
| SJ3527N-Beige-5/8"x50yd   | 021200-86248 | 3M™ Fastener Loop SJ3527                          | Loop (Beige) 5/8"x50yd                               | 4              |
| SJ3527N-Black-1.5"x50yd   | 021200-86167 | 3M™ Fastener Loop SJ3527                          | Loop (Black) 1.5"x50yd                               | 2              |
| SJ-3527N-Loop-Black-1"    | 021200-86252 | 3M™ Fastener Loop SJ3527                          | Loop (Black) 1"x50 yd                                | 3              |
| SJ3527N-White-5/8"x50yd   | 021200-86250 | 3M™ Fastener Loop SJ3527                          | Loop (White) 5/8"x50yd                               | 4              |
| SJ-3532N-Hook-Black-1"    | 021200-86259 | 3M™ Fastener Hook SJ3532                          | Hook (Black) 1"x50 yd                                | 3              |
| SJ-3533N-Loop-Black-1"    | 021200-86266 | 3M™ Fastener Loop SJ3533                          | Loop (Black) 1"x50 yd                                | 3              |
| SJ-3571-1"x50yd-Black     | 021200-86285 | 3M™ Fastener Loop SJ3571                          | Loop (Black) 1"x50 yd                                | 3              |
| SJ3571-1"x50yd-White      | 021200-87277 | 3M™ Fastener Loop SJ3571                          | Loop (White) 1"x50 yd                                | 3              |
| SJ3571-5/8"x50yd-Black    | 021200-86289 | 3M™ Fastener Loop SJ3571                          | Loop (Black) 5/8"x50 yd                              | 4              |
| SJ3571-White-2"x50yd      | 021200-86467 | 3M™ Fastener Loop SJ3571                          | Loop (White) 2"x50yd                                 | 2              |
| SJ-3572-1"x50yd-Black     | 021200-86286 | 3M™ Fastener Hook SJ3572                          | Hook (Black) 1"x50 yd                                | 3              |
| SJ3572-2"x50yd-Black      | 021200-86377 | 3M™ Fastener Hook SJ3572                          | Hook (Black) 2"x50 yd                                | 2              |
| SJ3572-5/8"x50yd-Black    | 021200-86290 | 3M™ Fastener Hook SJ3572                          | Hook (Black) 5/8"x50 yd                              | 4              |
| MP3401/MP3402-Black       | 051131-06465 | 3M™ Scotchmate™ Reclosable Fastener MP3401        | Reclosable Fastener (Black) 1"x5 yd                  | 5              |
| MP-3526/27N-Black         | 051131-06481 | 3M™ Scotchmate™ Reclosable Fastener MP3526/MP3527 | Hook & Loop Fastener (Black) 1"x5 yd Mini Pack, Roll | 5              |

## 3M™ Hook and Loop Reclosable Fasteners

### 3M™ Hook and Loop Reclosable Fasteners (continued)

| Order No.         | UPC          | Product Name                                      | Description                                          | Rolls per Case |
|-------------------|--------------|---------------------------------------------------|------------------------------------------------------|----------------|
| MP-3526/27N-White | 051131-06488 | 3M™ Scotchmate™ Reclosable Fastener MP3526/MP3527 | Hook & Loop Fastener (White) 1"x5 yd Mini Pack, Roll | 5              |

## 3M™ Dual Lock™ Reclosable Fasteners

### 3M™ Dual Lock™ Reclosable Fasteners

Strong. Hidden. Removable. 3M™ Dual Lock™ Reclosable Fasteners are a fastening solution that can replace screws, bolts and rivets. The fasteners contain hundreds of mushroom-shaped stems that audibly “SNAP” together to form a secure attachment with strong adhesive backings that adhere to your substrate.

RoHS 2011/65/EU Yes



| Order No.             | UPC          | Product Name                                             | Description                                                                                                                                                       | Rolls per Case |
|-----------------------|--------------|----------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
| MP-3541/42-Black      | 051131-06483 | 3M™ Dual Lock™ Reclosable Fastener MP3541/MP3542 400/170 | Reclosable Fastener (Black) 400 stems per square inch, 1"x5 yd                                                                                                    | 5              |
| MP-3551/52-Black      | 051131-06484 | 3M™ Dual Lock™ Reclosable Fastener MP3551/MP3552 400/170 | Reclosable Fastener (Black) 400 stems per square inch., 1"x5 yd                                                                                                   | 5              |
| MP-3560-Clear         | 051131-06463 | 3M™ Dual Lock™ Reclosable Fastener MP3560 250            | Reclosable Fastener (Clear) 250 stems per square inch, 1"x5 yd                                                                                                    | 5              |
| SJ-3463               | 021200-24993 | 3M™ Dual Lock™ Reclosable Fastener SJ3463 400            | Reclosable Fastener (Black) rigid backed circle with hole, 400 stems per square inch, 13/16" diameter with 0.16 in hole.                                          | 1000           |
| SJ3540-1"x50yd-Black  | 021200-65812 | 3M™ Dual Lock™ Reclosable Fastener 250 SJ3540            | Reclosable Fastener (Black) 250 stems per square inch, 1"x50 yd                                                                                                   | 2              |
| SJ-3541-1"x50yd-Black | 021200-86277 | 3M™ Dual Lock™ Reclosable Fastener 400 SJ3541            | Reclosable Fastener (Black) 400 stems per square inch, 1"x50 yd                                                                                                   | 2              |
| SJ-3542-1"x50yd-Black | 021200-86309 | 3M™ Dual Lock™ Reclosable Fastener SJ3542 170            | Reclosable Fastener (Black) 170 stems per square inch, 1"x50 yd                                                                                                   | 2              |
| SJ-3560-1"x50yd-Clear | 021200-86282 | 3M™ Dual Lock™ Reclosable Fastener 250 SJ3560            | Reclosable Fastener (Clear) 250 stems per square inch, 1"x50 yd                                                                                                   | 2              |
| SJ-3748               | 021200-63628 | 3M™ Dual Lock™ Reclosable Fastener 400 SJ3748 Black      | Pop-in, Christmas tree style reclosable fastener with a 16.2 mm stud, 400 stems per square inch, 1 inch x 1 inch.                                                 | 5000           |
| SJ-3755               | 021200-24129 | 3M™ Dual Lock™ Reclosable Fastener 250 SJ3755 Black      | Black, polypropylene reclosable fastener with rigid backing, rigid backed circle with one hole, 250 stems per square inch, 1 1/8 inch (28.5 mm) outside diameter. | 1000           |
| SJ-3762               | 021200-24131 | 3M™ Dual Lock™ Reclosable Fastener 400 SJ3762 Black      | Black, polypropylene reclosable fastener with rigid backing, rigid backed circle with one hole, 400 stems per square inch, 1 1/8 inch (28.5 mm) outside diameter. | 1000           |
| SJ-3767               | 021200-24128 | 3M™ Dual Lock™ Reclosable Fastener SJ3767 Black          | Black, polyolefin plastic reclosable square fastener with two counter-sunk holes, 400 stem per square inch, 1 1/2 inch (38 mm).                                   | 1000           |

3M™ Dual Lock™ Reclosable Fasteners

## 3M™ Dual Lock™ Low Profile Reclosable Fastener SJ4570

Low to medium temperature performance. Bonds well to metals (aluminum, stainless steel), glass, many plastics (polypropylene, polyethylene, polycarbonate, ABS), powder coated paints and medium to low surface energy materials. Designed for indoor use. Products include SJ4570 and SJ4575.



RoHS 2011/65/EU Yes

| Order No.              | UPC          | Product Name                                          | Description                                          | Rolls per Case |
|------------------------|--------------|-------------------------------------------------------|------------------------------------------------------|----------------|
| SJ4570-1"x50yd-Clear   | 021200-44883 | 3M™ Dual Lock™ Low Profile Reclosable Fastener SJ4570 | Low Profile Clear, 1 in x 50 yd 0.105 in (2,7 mm).   | 2              |
| SJ4570-2"x50yd-Clear   | 021200-46070 | 3M™ Dual Lock™ Low Profile Reclosable Fastener SJ4570 | Low Profile Clear, 2 in x 50 yd 0.105 in (2,7 mm).   | 1              |
| SJ4570-3/4"x50yd-Clear | 021200-46239 | 3M™ Dual Lock™ Low Profile Reclosable Fastener SJ4570 | Low Profile Clear, 3/4 in x 50 yd 0.105 in (2,7 mm). | 2              |
| SJ4570-4"x50yd-Clear   | 021200-46071 | 3M™ Dual Lock™ Low Profile Reclosable Fastener SJ4570 | Low Profile Clear, 4 in x 50 yd 0.105 in (2,7 mm).   | 1              |
| SJ4570-5/8"x50yd-Clear | 021200-45075 | 3M™ Dual Lock™ Low Profile Reclosable Fastener SJ4570 | Low Profile Clear, 5/8 in x 50 yd 0.105 in (2,7 mm). | 3              |

3M, ARC Plug, Blasts, BX, Centurion, Classic, ComTac, Cool Flow, Dual Lock, Dynatel, E-A-R, E-A-Rflex, E-A-Rform, E-A-Rsoft, Elavation, Express, FireDam, FX, GoggleGear, Hear-Through, Highland, Interam, Lexa, Light Vision, Maxim, Metaliks, Moon Dawg, No-Touch, Novec, Nuvo, One Touch, PanelSafe, Peltor, Optime, Pistonz, PTL, Pod Plugs, Privo, Push-Ins, Refine, ReLoad, Scotch, Scotch-Brite, Scotchcast, ScotchCode, Scotchfil, Scotchgard, Scotchkote, Scotchlok, Scotchmate, Scotchpro, Scotchrap, Scotch-Seal, Scotch-Weld, SecureFit, Skull Screws, Smart Lens, SofTouch, Splash GoggleGear, Super 33+, Super-Clear, Swerve, Temflex, Thinsulate, Tour-Guard, Tri-Flange, UltraFit, Ultrathon, Uvicator, VFlex, Virtua, Yellow Neons are trademarks of 3M Company. All other trademarks are property of their respective owners.

Dymo is a trademark of Newell Rubbermaid.

Unishield is a registered trademark for General Cable Technologies Corporation.

Latchways, Latchways Personal Rescue Device and PRD are trademarks of Latchways plc.

DEUS is a trademark of DEUS Rescue.

Vectran is a trademark of Kuraray Co., Ltd.

The images, pictures, and illustrations found in this catalog are for illustration purposes only. Check the Product Technical Data Sheets for actual product details.

3M products listed in this publication that are associated with a U.S.A. flag are manufactured in the USA as of the date of publication. 3M products offered on a government contract that require country of origin representation must be certified by 3M's Trade Compliance Department (contact your customer service support team to request a certification).

"RoHS 2011/65/EU" means that the product or part does not contain any of the substances in excess of the maximum concentration values ("MCVs") in EU RoHS Directive 2011/65/EU. The MCVs are by weight in homogeneous materials. This information represents 3M's knowledge and belief, which may be based in whole or in part on information provided by third party suppliers to 3M.

## **Important Notice**

Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use.

### **Warranty; Limited Remedy; Limited Liability.**

3M's product warranty is stated in its Product Literature available upon request. **3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. **Except where prohibited by law, 3M will not be liable for any direct, special, incidental or consequential loss or damage arising from this 3M product, regardless of the legal theory asserted.**