

# NEER™ Aluminum Service Entrance Pulling Ells

For Threaded Rigid Conduit and IMC

NEC/CEC:  
Listed for Ordinary Locations

NEC/CEC:  
Listed for Ordinary Locations

## SLB: Pulling Ells

### Applications

- To provide access to the inside of a service raceway.
- For wire pulling where the raceway changes direction 90 degrees.
- Limited to No. 6 AWG maximum wire size. The maximum quantity of conductors is based on the maximum conductor fill for the trade size of the raceway (conduit).

### Features

- Cover and gasket included.
- Hub in back sits flat on wall.

### Standard Material/Finish

- Diecast aluminum/epoxy powder coat
- Gasket: fiber


### NEC/CEC Certifications and Compliances

- UL Standard: 514B
- UL Listed: E53330
- CSA Standard: C22.2 No. 18.3
- CSA Certified: 208044
- NEMA: FB-1



SLB-50

### Illustrated Dimensions

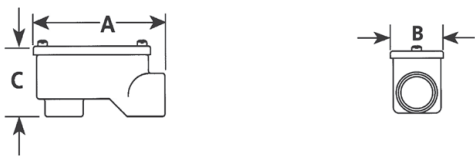

Trade Size (Inches)	Dimensions in Millimeters (Inches)			Catalog Number
	A	B	C	
1/2	82.3 (3.24)	31.0 (1.22)	36.1 (1.42)	<b>SLB-50</b>
3/4	90.7 (3.57)	35.6 (1.40)	68.1 (2.68)	<b>SLB-75</b>
1	108.0 (4.25)	45.0 (1.77)	49.8 (1.96)	<b>SLB-100</b>
1-1/4	142.7 (5.62)	57.4 (2.26)	61.7 (2.43)	<b>SLB-125</b>
1-1/2	158.8 (6.25)	62.7 (2.47)	59.7 (2.35)	<b>SLB-150</b>
2	171.5 (6.75)	74.2 (2.92)	73.7 (2.90)	<b>SLB-200</b>

## SLB-XL: Extra Long Pulling Ells

### Applications

- To provide access to the inside of a service raceway.
- For wire pulling where the raceway changes direction 90 degrees.

### Features

- Cover and gasket included.

### Standard Material/Finish

- Diecast aluminum/epoxy powder coat
- Gasket: fiber


### NEC/CEC Certifications and Compliances

- UL Standard: 514B
- UL Listed: E53330
- CSA Standard: C22.2 No. 18.3
- CSA Certified: 208044
- NEMA: FB-1



SLB-125-XL

### Illustrated Dimensions

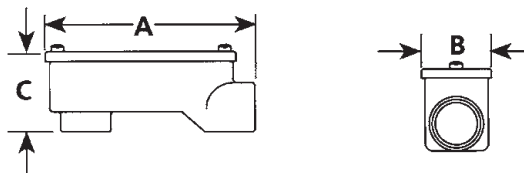

Trade Size (Inches)	Dimensions in Millimeters (Inches)			Catalog Number
	A	B	C	
1-1/4	199.9 (7.87)	65.0 (2.56)	59.7 (2.35)	<b>SLB-125-XL</b>
2	260.4 (10.25)	81.8 (3.22)	84.3 (3.32)	<b>SLB-200-XL</b>

# NEER™ Aluminum Service Entrance Pulling Ells

For Threaded Rigid Conduit and IMC

NEC/CEC:  
Listed for Ordinary Locations

NEC/CEC:  
Listed for Ordinary Locations

## SLB: Pulling Ells

### Applications

- To provide access to the inside of a service raceway.
- For wire pulling where the raceway changes direction 90 degrees.
- Limited to No. 6 AWG maximum wire size. The maximum quantity of conductors is based on the maximum conductor fill for the trade size of the raceway (conduit).

### Features

- Cover and gasket included.
- Hub in back sits flat on wall.

### Standard Material/Finish

- Diecast aluminum/epoxy powder coat
- Gasket: fiber


### NEC/CEC Certifications and Compliances

- UL Standard: 514B
- UL Listed: E53330
- CSA Standard: C22.2 No. 18.3
- CSA Certified: 208044
- NEMA: FB-1



SLB-50

### Illustrated Dimensions

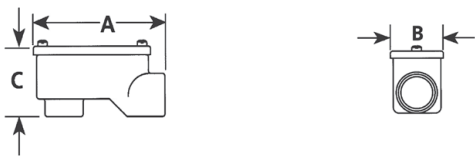

Trade Size (Inches)	Dimensions in Millimeters (Inches)			Catalog Number
	A	B	C	
1/2	82.3 (3.24)	31.0 (1.22)	36.1 (1.42)	<b>SLB-50</b>
3/4	90.7 (3.57)	35.6 (1.40)	68.1 (2.68)	<b>SLB-75</b>
1	108.0 (4.25)	45.0 (1.77)	49.8 (1.96)	<b>SLB-100</b>
1-1/4	142.7 (5.62)	57.4 (2.26)	61.7 (2.43)	<b>SLB-125</b>
1-1/2	158.8 (6.25)	62.7 (2.47)	59.7 (2.35)	<b>SLB-150</b>
2	171.5 (6.75)	74.2 (2.92)	73.7 (2.90)	<b>SLB-200</b>

## SLB-XL: Extra Long Pulling Ells

### Applications

- To provide access to the inside of a service raceway.
- For wire pulling where the raceway changes direction 90 degrees.

### Features

- Cover and gasket included.

### Standard Material/Finish

- Diecast aluminum/epoxy powder coat
- Gasket: fiber


### NEC/CEC Certifications and Compliances

- UL Standard: 514B
- UL Listed: E53330
- CSA Standard: C22.2 No. 18.3
- CSA Certified: 208044
- NEMA: FB-1



SLB-125-XL

### Illustrated Dimensions

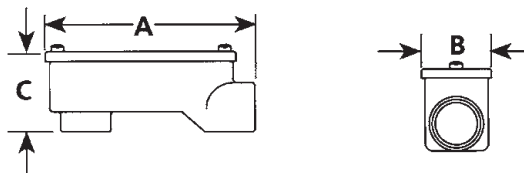

Trade Size (Inches)	Dimensions in Millimeters (Inches)			Catalog Number
	A	B	C	
1-1/4	199.9 (7.87)	65.0 (2.56)	59.7 (2.35)	<b>SLB-125-XL</b>
2	260.4 (10.25)	81.8 (3.22)	84.3 (3.32)	<b>SLB-200-XL</b>

COMMERCIAL AND INDUSTRIAL FITTINGS: SERVICE ENTRANCE FITTINGS

Appleton OZGEDNEY