

DESCRIPTION

The Halo Surface Mount LED Downlight (SMD) is an ultra-low profile surface mounting luminaire with a modern look and high performance. SMD6-DM (6" with spring clips) is designed for new installation into drywall, without any additional housing or junction box needed. Suitable for residential or commercial installations. Ideal for general areas, closets, storage areas, attics and basements. Compliant with NFPA® 70, NEC® Section 410.16 (A)(3) and 410.16 (C)(5).

Catalog #	Type
Project	
Comments	Date
Prepared by	

SPECIFICATION FEATURES

HOUSING

- Non-electrically conductive polycarbonate frame.
- High impact diffuse polystyrene lens provides shielding to the light guide with no pixilation
- Stamped aluminum housing provides thermal cooling achieving L70 at 50,000 hours in IC and non-IC applications

GASKETS

- Closed cell gasket achieves restrictive airflow and wet location requirements without additional caulking

OPTICS

- Precision acrylic light guide organizes source flux into wide distribution with 1.2 – 1.4 spacing criteria useful for general area illumination

LED

- Mid power led array provide a uniform source with high efficiency and long life.
- Available in 90 CRI minimum, R9 greater than 50 and color accuracy within 3 SDCM provide color accuracy and uniformity

DRIVER

- Integral 120V 50/60Hz constant current driver provides noise free operation.
- Continuous, flicker-free dimming from 100% to 5% with select leading or trailing edge 120V phase cut dimmers.
- Dimming to 5% is best assured using dimmers with low end trim adjustment. Consult dimmer manufacturer for compatibility and conditions of use. (Note some dimmers require a neutral in the wallbox.)
- Inline electrical quick connect (provided) provides mains connections.

MOUNTING/RETENTION

- The SMD-DM with Spring Clips requires no housing or junction box.
- The integral enclosure may be used in direct contact with insulation including spray foam insulation.
- Installer must cut template out of drywall, and install into the aperture with the clips compressed.
- When released, the spring clips will rest on to the back side of the drywall.
- Installer must ensure secure fit and wiring. This includes all applicable national and local electrical and building codes

COMPLIANCE

- cULus listed / certified for use with Halo housings, classified for use with other's housings, see instruction sheet for conditions of acceptability.
- Wet and Damp Location listed, airtight per ASTM-E283
- Suitable for use in closets, compliant with NFPA® 70, NEC® Section 410.16 (A)(3) and 410.16 (C)(5)
- EMI/RFI emissions per FCC 47CFR Part 15B
- Contains no mercury or lead and RoHS compliant.
- Photometric testing in accordance with IES LM-79-08
- Lumen maintenance projections in accordance with IES LM-80-08 and TM-21-11.
- Can be used for State of California Title 24 high efficacy luminaire compliance, reference the California Energy Commission Title 20 Appliance Efficiency Database for current listings.
- Can be used for International Energy Conservation Code (IECC) and Washington State Energy Code high efficiency luminaire compliance

WARRANTY

- Five year limited warranty, consult website for details. www.eaton.com/lighting/legal



SMD6-DM Series

6 Inch Round and Square
Direct Mount

SMD6R-DM
SMD6S-DM

**6" Surface Mount
Downlight**


**Direct Mount into
non-accessable ceiling**

ORDERING INFORMATION

SAMPLE NUMBER: SMD6R6930WHDM=6" Round Surface Mount Downlight, 90CRI, 3000K, Direct Mount

Models	Lumens	CRI / CCT	Finish	Mouting
SMD6R = 6" Round Surface Mount Downlight, 120V	6 =600 lumen series	927 =90CRI, 2700K	WH =White	DM =Direct Mount
SMD6S = 6" Square Surface Mount Downlight, 120V		930 =90CRI, 3000K		
		935 =90CRI, 3500K		
		940 =90CRI, 4000K		
		950 =90CRI, 5000K		

DIMENSIONS

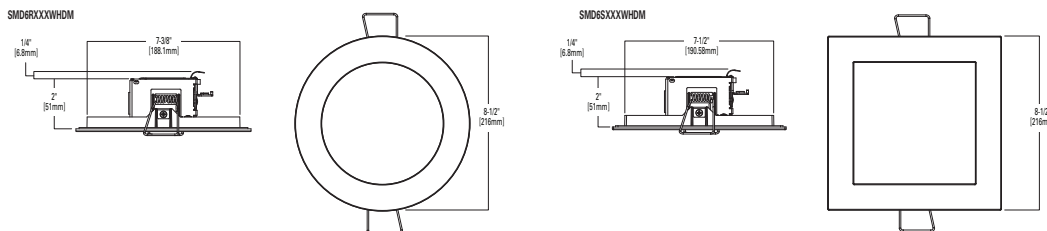

90 CRI

nominal CCT

2700K
3000K
3500K
4000K
5000K

Can be used for
IECC
International Energy
Conservation Code
High Efficiency
Compliance

Efficiency Standards
T24
California Title 24
Residential and
Non-Residential
Compliant

Showerlight
air84


Refer to ENERGY STAR® Qualified Products List.
Can be used to comply with California Title 24 High Efficacy requirements.
Certified to California Appliance Efficiency Database under JA8.

ENERGY DATA


	Round	Square
Lumens (5000K models)	788	815
Input Power	9.62 W	9.9 W
Input Current	0.0811 A	0.085 A
Efficiency	82 lm/W	82 lm/W
THD	13.9	14.7
Input Voltage	120V	
Frequency	50/60 Hz	
CRI	90 CRI	
Power Factor	0.99	
T Ambient	-30 - +40°C	
Sound Rating	Class A	

PHOTOMETRIC DATA

SMD6R6927WHDM		
Luminaire lumens		750
Input watts		9.4
LER (LPW)		80
Spacing Criteria	0-180	1.26
	90-270	1.26
	Diagonal	1.38
Beam angle (degrees)		112
Field angle (degrees)		162
Max. Candela		264
Zonal lumen	Lumens	% Lumens
0-30	204	27.2%
0-40	334	44.5%
0-60	590	78.6%
0-90	750	100.00%

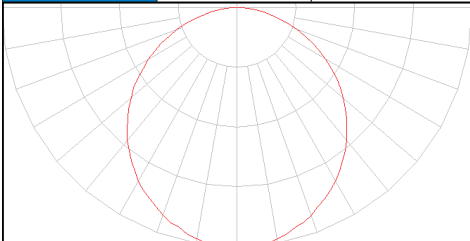


SMD6S6927WHDM		
Luminaire lumens		750
Input watts		10.0
LER (LPW)		75
Spacing Criteria	0-180	1.24
	90-270	1.24
	Diagonal	1.36
Beam angle (degrees)		112
Field angle (degrees)		162
Max. Candela		271
Zonal lumen	Lumens	% Lumens
0-30	207	27.6%
0-40	337	44.9%
0-60	590	78.6%
0-90	750	100.00%

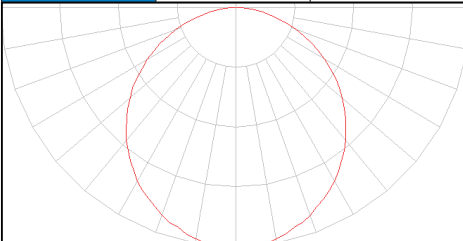

Cat. No.	CRI	CCT	Lumens	Power (W)	LPW
SMD6R6927WHDM	93	2700	754	9.6	78.5
SMD6R6930WHDM	92	3000	758	9.6	78.7
SMD6R6935WHDM	95	3500	740	9.6	77.0
SMD6R6940WHDM	94	4000	792	9.8	80.5
SMD6R6950WHDM	92	5000	788	9.6	81.9
SMD6S6927WHDM	92	2700	750	10.0	75.0
SMD6S6930WHDM	92	3000	790	9.9	79.8
SMD6S6935WHDM	93	3500	740	10.0	74.0
SMD6S6940WHDM	92	4000	760	10.3	73.8
SMD6S6950WHDM	90	5000	815	9.9	82.3

Foot-candle Values at Nadir 0 degree Aiming Angle			
DD (FT)	SMD6R6927WHDM (FC)	SMD6S6927WHDM (FC)	DIA (FT)
5.5	8.7	9.0	16.3
7	5.4	5.5	20.9
8	4.1	4.2	23.8
9	3.3	3.3	26.8
10	2.6	2.7	29.7
12	1.8	1.9	35.7

DD = distance down to illuminated work plane
FC = initial foot-candles at nadir
DIA = diameter

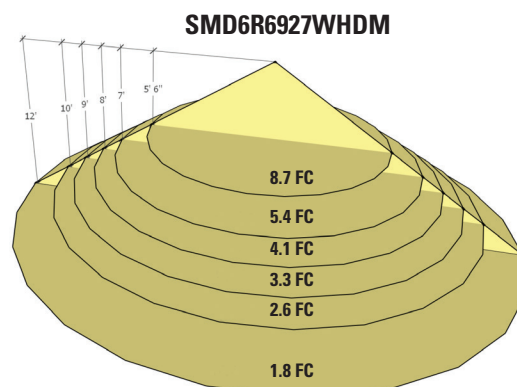

Multiplier Table					
CCT Option	2700K	3000K	3500K	4000K	5000K
CCT Multiplier	1.00	1.014	1.042	1.083	1.083

DESCRIPTION

The Halo Surface Mount LED Downlight (SMD) is an ultra-low profile surface mounting luminaire with a modern look and high performance. SMD6-DM (6" with spring clips) is designed for new installation into drywall, without any additional housing or junction box needed. Suitable for residential or commercial installations. Ideal for general areas, closets, storage areas, attics and basements. Compliant with NFPA® 70, NEC® Section 410.16 (A)(3) and 410.16 (C)(5).

Catalog #	Type
Project	
Comments	Date
Prepared by	

SPECIFICATION FEATURES

HOUSING

- Non-electrically conductive polycarbonate frame.
- High impact diffuse polystyrene lens provides shielding to the light guide with no pixilation
- Stamped aluminum housing provides thermal cooling achieving L70 at 50,000 hours in IC and non-IC applications

GASKETS

- Closed cell gasket achieves restrictive airflow and wet location requirements without additional caulking

OPTICS

- Precision acrylic light guide organizes source flux into wide distribution with 1.2 – 1.4 spacing criteria useful for general area illumination

LED

- Mid power led array provide a uniform source with high efficiency and long life.
- Available in 90 CRI minimum, R9 greater than 50 and color accuracy within 3 SDCM provide color accuracy and uniformity

DRIVER

- Integral 120V 50/60Hz constant current driver provides noise free operation.
- Continuous, flicker-free dimming from 100% to 5% with select leading or trailing edge 120V phase cut dimmers.
- Dimming to 5% is best assured using dimmers with low end trim adjustment. Consult dimmer manufacturer for compatibility and conditions of use. (Note some dimmers require a neutral in the wallbox.)
- Inline electrical quick connect (provided) provides mains connections.

MOUNTING/RETENTION

- The SMD-DM with Spring Clips requires no housing or junction box.
- The integral enclosure may be used in direct contact with insulation including spray foam insulation.
- Installer must cut template out of drywall, and install into the aperture with the clips compressed.
- When released, the spring clips will rest on to the back side of the drywall.
- Installer must ensure secure fit and wiring. This includes all applicable national and local electrical and building codes

COMPLIANCE

- cULus listed / certified for use with Halo housings, classified for use with other's housings, see instruction sheet for conditions of acceptability.
- Wet and Damp Location listed, airtight per ASTM-E283
- Suitable for use in closets, compliant with NFPA® 70, NEC® Section 410.16 (A)(3) and 410.16 (C)(5)
- EMI/RFI emissions per FCC 47CFR Part 15B
- Contains no mercury or lead and RoHS compliant.
- Photometric testing in accordance with IES LM-79-08
- Lumen maintenance projections in accordance with IES LM-80-08 and TM-21-11.
- Can be used for State of California Title 24 high efficacy luminaire compliance, reference the California Energy Commission Title 20 Appliance Efficiency Database for current listings.
- Can be used for International Energy Conservation Code (IECC) and Washington State Energy Code high efficiency luminaire compliance

WARRANTY

- Five year limited warranty, consult website for details. www.eaton.com/lighting/legal



SMD6-DM Series

6 Inch Round and Square
Direct Mount

SMD6R-DM
SMD6S-DM

**6" Surface Mount
Downlight**


**Direct Mount into
non-accessable ceiling**

ORDERING INFORMATION

SAMPLE NUMBER: SMD6R6930WHDM=6" Round Surface Mount Downlight, 90CRI, 3000K, Direct Mount

Models	Lumens	CRI / CCT	Finish	Mouting
SMD6R = 6" Round Surface Mount Downlight, 120V	6 =600 lumen series	927 =90CRI, 2700K	WH =White	DM =Direct Mount
SMD6S = 6" Square Surface Mount Downlight, 120V		930 =90CRI, 3000K		
		935 =90CRI, 3500K		
		940 =90CRI, 4000K		
		950 =90CRI, 5000K		

DIMENSIONS

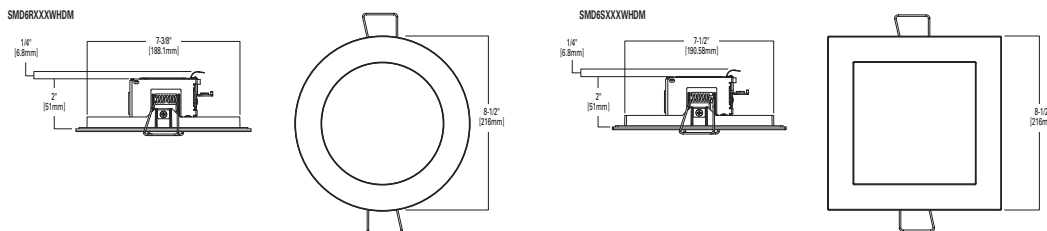


ENERGY DATA


	Round	Square
Lumens (5000K models)	788	815
Input Power	9.62 W	9.9 W
Input Current	0.0811 A	0.085 A
Efficiency	82 lm/W	82 lm/W
THD	13.9	14.7
Input Voltage	120V	
Frequency	50/60 Hz	
CRI	90 CRI	
Power Factor	0.99	
T Ambient	-30 - +40°C	
Sound Rating	Class A	

PHOTOMETRIC DATA

SMD6R6927WHDM		
Luminaire lumens		750
Input watts		9.4
LER (LPW)		80
Spacing Criteria	0-180	1.26
	90-270	1.26
	Diagonal	1.38
Beam angle (degrees)		112
Field angle (degrees)		162
Max. Candela		264
Zonal lumen	Lumens	% Lumens
0-30	204	27.2%
0-40	334	44.5%
0-60	590	78.6%
0-90	750	100.00%

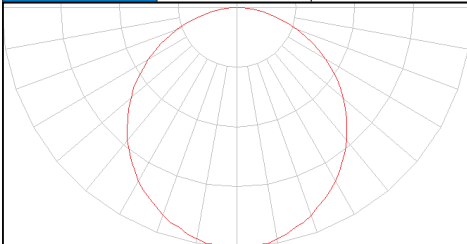


SMD6S6927WHDM		
Luminaire lumens		750
Input watts		10.0
LER (LPW)		75
Spacing Criteria	0-180	1.24
	90-270	1.24
	Diagonal	1.36
Beam angle (degrees)		112
Field angle (degrees)		162
Max. Candela		271
Zonal lumen	Lumens	% Lumens
0-30	207	27.6%
0-40	337	44.9%
0-60	590	78.6%
0-90	750	100.00%

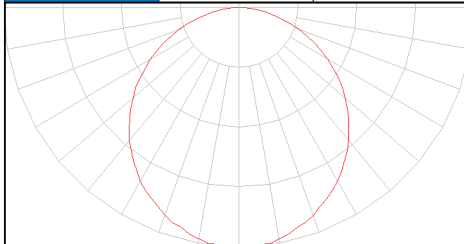

Cat. No.	CRI	CCT	Lumens	Power (W)	LPW
SMD6R6927WHDM	93	2700	754	9.6	78.5
SMD6R6930WHDM	92	3000	758	9.6	78.7
SMD6R6935WHDM	95	3500	740	9.6	77.0
SMD6R6940WHDM	94	4000	792	9.8	80.5
SMD6R6950WHDM	92	5000	788	9.6	81.9
SMD6S6927WHDM	92	2700	750	10.0	75.0
SMD6S6930WHDM	92	3000	790	9.9	79.8
SMD6S6935WHDM	93	3500	740	10.0	74.0
SMD6S6940WHDM	92	4000	760	10.3	73.8
SMD6S6950WHDM	90	5000	815	9.9	82.3

Foot-candle Values at Nadir 0 degree Aiming Angle			
DD (FT)	SMD6R6927WHDM (FC)	SMD6S6927WHDM (FC)	DIA (FT)
5.5	8.7	9.0	16.3
7	5.4	5.5	20.9
8	4.1	4.2	23.8
9	3.3	3.3	26.8
10	2.6	2.7	29.7
12	1.8	1.9	35.7

DD = distance down to illuminated work plane
FC = initial foot-candles at nadir
DIA = diameter

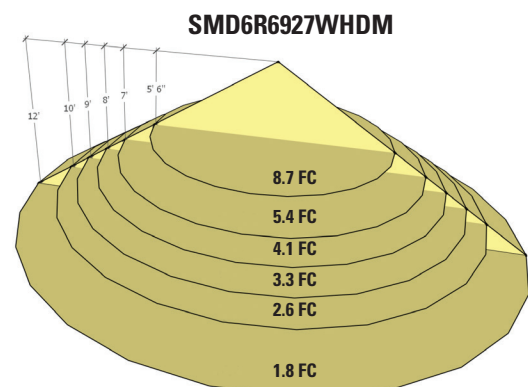

Multiplier Table					
CCT Option	2700K	3000K	3500K	4000K	5000K
CCT Multiplier	1.00	1.014	1.042	1.083	1.083