

Champ VMV LED luminaires

Cl. I, Div. 2, Groups A, B, C, D
Cl. I, Zone 2, nA nR
Cl. II, Groups E, F, G
Cl. III & Simultaneous
Presence

UL/cUL Listed
IECEX/ATEX/CE
Wet Locations
Type 4X; IP66

2L

2L

The Champ VMV LED family:

Champ® VMV LED luminaires are designed to provide full-spectrum, crisp, white light with custom IES Type I, III and V distribution. Nine versions of the VMV LED are available, providing ideal solutions for a wide range of applications.

| Model | Typical lumens (Type V) ^A | Watts | Lumens per watt | Equivalent HID luminaire | Typical energy savings / lifetime |
|--------|--------------------------------------|-------|-----------------|--------------------------|-----------------------------------|
| VMV3L | 3,531 | 29 | 122 | 70W-100W | Up to 77% |
| VMV5L | 5,335 | 43 | 124 | 100W-150W | Up to 67% |
| VMV7L | 7,195 | 62 | 116 | 150W-175W | Up to 67% |
| VMV9L | 9,266 | 85 | 109 | 250W-320W | Up to 74% |
| VMV11L | 11,440 | 113 | 101 | 320W-400W | Up to 74% |
| VMV13L | 13,226 | 130 | 102 | 400W | Up to 68% |
| VMV17L | 18,793 | 168 | 112 | 400W-600W | Up to 72% |
| VMV21L | 22,110 | 196 | 113 | 600W-750W | Up to 74% |
| VMV25L | 26,531 | 232 | 114 | 750W-1000W | Up to 77% |



Applications:

- For areas with mounting heights of 8-60 feet
- Oil and gas refineries, drilling rigs, petrochemical facilities, food and beverage facilities, platforms, loading docks, tunnels, indoor/outdoor spotlighting, outdoor wall and stanchion mounted general area lighting, and where flammable vapors, gases, ignitable dusts, fibers or flyings are present
- Locations requiring continuous and consistent light levels in extreme ambient temperatures
- Where extremely corrosive, wet, dusty, hot and/or cold conditions exist
- Classified and hazardous locations

Features:

- Instant illumination and restrike
- Cold temperature operation/no warm-up required
- Option for redundancy in drivers with multiple series circuits connected to each driver to avoid complete loss of illumination
- Easy installation – compact modular fixture attaches onto existing Champ mounting module
- Energy-efficient technology – up to 64% energy savings over HID fixtures
- Contains no mercury or other hazardous substances
- Shock- and vibration-resistant solid-state luminaires have no filaments or glass components that could break – greatly reduces the risk of premature failure
- Operating ambient: -40°C to 65°C (VMV3L-VMV11L models); -40°C to 55°C (VMV13L-VMV25L models)
- 5 year fixture warranty^B

Certifications and compliances:

- DesignLights Consortium® Qualified (some models are not DLC qualified)^C

NEC/CEC:

- Class I, Division 2, Groups A, B, C, D; Class I, Zone 2, nA nR; Class II, Groups E, F, G; Class III
- Zone 21 tb
- Simultaneous Presence
- Wet locations, Type 4X, IP66

UL standards:

- UL844; UL1598 – Luminaires; UL1598A – Marine; UL8750; UL50; UL50E

CSA standard:

- cUL Listed to CSA standard CSA C22.2 No. 137

IEC: ^D

- IEC 60079-0:2011; IEC 60079-15:2010; IEC 60079-31:2008; IEC 60598-2-1:1979; IEC 60529:2001
- Ex nA nR IIC T* Gc -40 to +40
- Ex nA nR IIC T* Gc -40 to +55
- Ex nA nR IIC T* Gc -40 to +65
- Ex tb IIIC T*°C Db -40 to +40
- Ex tb IIIC T*°C Db -40 to +55
- Ex tb IIIC T*°C Db -40 to +65

VMV3L-VMV11L only

- IECEx UL 13.0052X

VMV13L-VMV25L only

- IECEx UL 14.0031X

^A Tolerance +/- 10%.

^B Refer to page 2 of the current authorized distributor price book for Eaton's standard Terms and Conditions.

^C Approved models include: VMV3L/UNV1; VMV5L/UNV1; VMV7L/UNV1; VMV9L/UNV1; VMV11L/UNV1; VMV13L/UNV1; VMV17L/UNV1; VMV21L/UNV1; VMV25L/UNV1; VMV3L/UNV34; VMV5L/UNV34; VMV7L/UNV34; VMV9L/UNV34; VMV11L/UNV34. Refer to www.designlights.org Qualified Products List under family models for full listing details. Not all models are approved for all application categories.

^D VMV3L-VMV11L/UNV1 rated to +65°C; VMV13L-VMV25L and VMV3L-VMV11L/UNV34 rated to +55°C.

*See temperature code table on following page.

Certifications and compliances (continued):

ATEX/CE: ^D

- EN 60079-0:2012; EN 60079-15:2010; EN 60079-31:2009; EN 60598-2-1:1989; EN 60929:1991 +A1:2001
- ^E II 3 G Ex nA nR IIC T* Gc -40 to +40
- ^E II 3 G Ex nA nR IIC T* Gc -40 to +55
- ^E II 3 G Ex nA nR IIC T* Gc -40 to +65
- ^E II 2 D Ex tb IIIC T*°C Db IP66 -40 to +40
- ^E II 2 D Ex tb IIIC T*°C Db IP66 -40 to +55
- ^E II 2 D Ex tb IIIC T*°C Db IP66 -40 to +65

VMV3L-VMV11L only

- DEMKO 13 ATEX 1475031X; DEMKO 13 ATEX 1305741X

VMV13L-VMV25L only

- DEMKO 14 ATEX 1324722X; DEMKO 14 ATEX 2274231X

Standard materials:

- Lamp housing and adapter – die cast aluminum with Corro-free epoxy powder coat
- Lens – heat- and impact-resistant glass
- Gaskets – silicone
- External hardware – stainless steel
- Factory sealed, no external seals required

Photometrics:

- Complete photometrics can be found at www.crouse-hinds.com/photometrics

Champ VMV LED luminaires

Cl. I, Div. 2, Groups A, B, C, D
Cl. I, Zone 2, nA nR
Cl. II, Groups E, F, G
Cl. III & Simultaneous
Presence

UL/cUL Listed
IECEX/ATEX/CE
Wet Locations
Type 4X; IP66

2L

2L

LED system:

- High intensity discrete power emitters
- Cool white (5000K, 70 CRI) (standard); warm white, (3000K, 80 CRI) (optional)
- Custom Type I, III and V optics available
- Optics clocking in field to align Type I and Type III light patterns to illumination path for VMV13L-VMV25L

Drivers:

| Option | Voltage |
|--------|--|
| /UNV1 | 120-277 VAC, 50/60 Hz; 108-250 VDC, 50/60 Hz |
| /UNV34 | 347-480 VAC, 50/60 Hz |

Custom optics:

Three optical options to maximize light distribution and intensity:



TYPE I

Long and rectangular for hallways, walkways, loading docks, catwalks.

Ideal for:

- Mining conveyor belts
- Aisleways and hallways
- Catwalks and walkways
- Ramps and loading docks
- Tunnels with overhead mounts



TYPE III

Wall mount light distribution, minimizing spillover on the wall.

Ideal for:

- Narrow crosswalks or passages with wall mounted fixtures
- Tunnels with wall mount
- Wall or stanchion mount requiring 180° forward throw beam patterns



TYPE V

Regular circular distribution pattern for high/low bay indoor and outdoor ceiling or pendant mount lighting.

Ideal for:

- Pendant, ceiling or stanchion mount overhead building mounts
- Processing mills, industrial plants, large buildings, warehouses, etc.



Colored LED options:

- Available in green and amber[Ⓔ]
- Reduction in light pollution for night space observation and sky glow due to isolating blue wavelength in red and amber colors
- Wildlife-friendly
- Improves visibility for telescopes in observatories during night sky space exploration

Electrical ratings:

| | VMV3L | VMV5L | VMV7L | VMV9L | VMV11L | VMV13L | VMV17L | VMV21L | VMV25L |
|--------------------------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Voltage range, VAC | 120-277 | 120-277 | 120-277 | 120-277 | 120-277 | 120-277 | 120-277 | 120-277 | 120-277 |
| Frequency | 50/60 Hz | 50/60 Hz | 50/60 Hz | 50/60 Hz | 50/60 Hz | 50/60 Hz | 50/60 Hz | 50/60 Hz | 50/60 Hz |
| Input power (watts) | 29 | 43 | 62 | 85 | 113 | 131 | 168 | 196 | 232 |
| Input amps at 120-277 VAC | 0.24 - 0.11 | 0.35 - 0.16 | 0.52 - 0.23 | 0.71 - 0.31 | 0.95 - 0.41 | 1.08 - 0.48 | 1.40 - 0.62 | 1.64 - 0.73 | 1.94 - 0.87 |
| Voltage range, VDC | 108-250 | 108-250 | 108-250 | 108-250 | 108-250 | 108-250 | 108-250 | 108-250 | 108-250 |
| Power factor | >0.90 | >0.90 | >0.90 | >0.90 | >0.90 | >0.90 | >0.90 | >0.90 | >0.90 |
| Total harmonic distortion (THD) | <20% | <20% | <20% | <20% | <20% | <20% | <20% | <20% | <20% |
| Nominal lumens (Type V) [Ⓕ] | 3,531 | 5,335 | 7,195 | 9,266 | 11,440 | 13,226 | 18,793 | 22,110 | 26,531 |

Temperature performance data:

| Lamp / lumen output | Driver type | Ambient temp. °C | Class I, Div. 2 | Class II, Div. 1 | Class III, Div. 1 | | |
|---------------------|--------------|------------------|-----------------|------------------|---------------------|--|-------|
| | | | | | Simultaneous rating | Class II, Div. 1, Groups E, F, G | |
| | | | | | Class I, Zone 2 | Class II, Div. 1, Zone 21, AEx tb IIIC | |
| | | | | | AEx nA nR; Ex nA nR | | |
| 3L, 5L, 7L, 9L, 11L | /UNV1 | 40 | T5 | T5 | T3C | T6 | T66°C |
| 3L, 5L, 7L, 9L, 11L | /UNV1 | 55 | T5 | T4A | T3A | T5 | T83°C |
| 3L, 5L, 7L, 9L, 11L | /UNV1 | 65 | T4A | T4A | T3A | T4 | T92°C |
| 3L, 5L, 7L, 9L, 11L | /UNV34 | 40 | T3C | T5 | T3C | T4 | T70°C |
| 3L, 5L, 7L, 9L, 11L | /UNV34 | 55 | T3A | T4A | T3A | T4 | T85°C |
| 3L, 5L, 7L, 9L, 11L | /UNV34 | 65 | T3A | T4A | T3A | T4 | T92°C |
| 13L, 17L | /UNV1; UNV34 | 40 | T4A | T5 | T4A | T6 | T66°C |
| 13L, 17L | /UNV1; UNV34 | 55 | T4 | T4A | T4 | T5 | T81°C |
| 21L, 25L | /UNV1; UNV34 | 40 | T4A | T5 | T4A | T6 | T71°C |
| 21L, 25L | /UNV1; UNV34 | 55 | T4 | T4A | T4 | T5 | T86°C |

[Ⓔ] Custom optics not available with colored LEDs. One model per color; see catalog numbering system on following page.

[Ⓕ] Tolerance +/- 10%.

Champ VMV LED luminaires

Cl. I, Div. 2, Groups A, B, C, D
Cl. I, Zone 2, nA nR
Cl. II, Groups E, F, G
Cl. III & Simultaneous
Presence

UL/cUL Listed
IECEX/ATEX/CE
Wet Locations
Type 4X; IP66

2L

2L

Ordering information:

Part number example

VMV17LW2AR1G/UNV1 S890

VMV 17L W 2A R1 G /UNV1 S890

Lamp / function

| | |
|-----|-------------------------|
| 3L | 3,531 lumen LED |
| 5L | 5,335 lumen LED |
| 7L | 7,195 lumen LED |
| 9L | 9,226 lumen LED |
| 11L | 11,440 lumen LED |
| 13L | 13,226 lumen LED |
| 17L | 18,793 lumen LED |
| 21L | 22,110 lumen LED |
| 25L | 26,531 lumen LED |
| GL | Green (4,300 lumen LED) |
| AL | Amber (5,000 lumen LED) |

Color temperature

| | |
|-------|-----------------------|
| BLANK | Cool (5000K), colored |
| W | Warm (3000K) |

Mounting style

| | | | |
|-------|----------------------------|------|---------------------|
| BLANK | No cover | 2C | ¾" ceiling |
| J | 1-½" stanchion, 25° angled | 3C | 1" ceiling |
| P | 1-½" stanchion, straight | 20C | 20mm ceiling |
| 2A | ¾" pendant | 25C | 25mm ceiling |
| 3A | 1" pendant | 2HA | ¾" flexible pendant |
| 20A | 20mm pendant | 2TW | ¾" wall |
| 25A | 25mm pendant | 3TW | 1" wall |
| 2B | ¾" cone pendant | 20TW | 20mm wall |
| 3B | 1" cone pendant | 25TW | 25mm wall |

Options

| | |
|------|-----------------------------|
| S812 | Trunnion mount kit with pin |
| S831 | Safety cable |
| S890 | Quick clip |
| S891 | Diffused lens |
| S892 | Redundant driver |
| S896 | Teflon coated lens |
| S903 | Polycarbonate lens |
| TB6 | Six-pole terminal block |

Voltage

| | |
|--------|---|
| /UNV1 | 120-277 VAC, 50/60 Hz; 108-250 VDC, 50/60 Hz |
| /UNV34 | 347-480 VAC, 50/60 Hz |

Guard

| | |
|-------|------------------|
| BLANK | No guard |
| G | P3001 wire guard |

Optics

| | |
|-------|--|
| BLANK | Type V optic standard (all mounts) |
| R1 | Type I optic (all mounts minus ceiling for 3L-11L, available with mounts for 13L-25L models) |
| R1A | Type I optic (ceiling with conduit 45° counterclockwise or 135° clockwise from hinge) |
| R1B | Type I optic (ceiling with conduit 45° clockwise or 135° counterclockwise from hinge) |
| R3 | Type III optic (all mounts minus ceiling) |
| R3AP | Type III optic (select when using Appleton® top hat adapter with Champ fixture) |
| R3A1 | Type III optic (ceiling with conduit 45° counterclockwise from top hat hinge) |
| R3A2 | Type III optic (ceiling with conduit 135° clockwise from top hat hinge) |
| R3B1 | Type III optic (ceiling with conduit 45° clockwise from top hat hinge) |
| R3B2 | Type III optic (ceiling with conduit 135° counterclockwise from top hat hinge) |

Accessories (ordered separately):

Description

- Photocell, 120V, 50/60 Hz **D2S20**
- Photocell, 208-277V **D2S208 277**
- Trunnion mount kit with pin **VMVL S812 K1**
- Wire guard with captive mounting hardware **P3001**
- Top hat adapter **CHMM1**

For retrofitting Appleton MercMaster III top hats to Champ VMV luminaires

Ⓞ Custom optics not available with colored LEDs.

Ⓜ For VMV3L-VMV11L only.

Ⓛ Order with ceiling mount only.

Ⓡ Not available for IEC.

Ⓚ Available for VMV5L and VMV7L only. Redundant driver standard on VMV9L-VMV25L models. 7L = 6,616 lumens with S892 suffix.



CHMM1

Champ VMV LED luminaires

Cl. I, Div. 2, Groups A, B, C, D
Cl. I, Zone 2, nA nR
Cl. II, Groups E, F, G
Cl. III & Simultaneous
Presence

UL/cUL Listed
IECEX/ATEX/CE
Wet Locations
Type 4X; IP66

2L

2L

Dimensions:


Stanchion - 25° angled




Stanchion - straight



Pendant

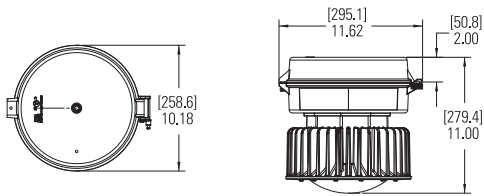

Ceiling

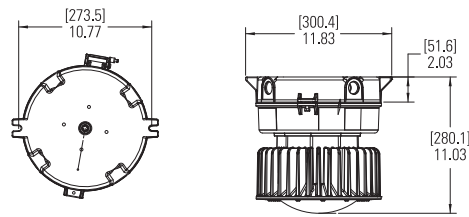

Wall



Cone pendant



Trunnion



Net luminaire weights:

| Model | Lbs. | Kg. |
|-------------------------------|-------|-------|
| VMV3L-VMV11L | 21.80 | 8.07 |
| VMV13L & VMV17L | 36.00 | 16.32 |
| VMV21L & VMV25L | 44.00 | 19.95 |
| Add mounting modules: | | |
| Pendant | 1.25 | 0.57 |
| Cone pendant | 4.00 | 1.81 |
| Flexible pendant | 1.50 | 0.68 |
| Ceiling | 2.75 | 1.25 |
| Wall | 4.50 | 2.04 |
| Angled stanchion ^L | 3.50 | 1.59 |
| Straight stanchion | 4.50 | 2.04 |

^L Angled stanchion for VMV3L-VMV11L models only.

Champ VMV LED luminaires

Cl. I, Div. 2, Groups A, B, C, D
Cl. I, Zone 2, nA nR
Cl. II, Groups E, F, G
Cl. III & Simultaneous
Presence

UL/cUL Listed
IECEX/ATEX/CE
Wet Locations
Type 4X; IP66

2L

2L

The Champ VMV LED family:

Champ® VMV LED luminaires are designed to provide full-spectrum, crisp, white light with custom IES Type I, III and V distribution. Nine versions of the VMV LED are available, providing ideal solutions for a wide range of applications.

| Model | Typical lumens (Type V) ^A | Watts | Lumens per watt | Equivalent HID luminaire | Typical energy savings / lifetime |
|--------|--------------------------------------|-------|-----------------|--------------------------|-----------------------------------|
| VMV3L | 3,531 | 29 | 122 | 70W-100W | Up to 77% |
| VMV5L | 5,335 | 43 | 124 | 100W-150W | Up to 67% |
| VMV7L | 7,195 | 62 | 116 | 150W-175W | Up to 67% |
| VMV9L | 9,266 | 85 | 109 | 250W-320W | Up to 74% |
| VMV11L | 11,440 | 113 | 101 | 320W-400W | Up to 74% |
| VMV13L | 13,226 | 130 | 102 | 400W | Up to 68% |
| VMV17L | 18,793 | 168 | 112 | 400W-600W | Up to 72% |
| VMV21L | 22,110 | 196 | 113 | 600W-750W | Up to 74% |
| VMV25L | 26,531 | 232 | 114 | 750W-1000W | Up to 77% |



Applications:

- For areas with mounting heights of 8-60 feet
- Oil and gas refineries, drilling rigs, petrochemical facilities, food and beverage facilities, platforms, loading docks, tunnels, indoor/outdoor spotlighting, outdoor wall and stanchion mounted general area lighting, and where flammable vapors, gases, ignitable dusts, fibers or flyings are present
- Locations requiring continuous and consistent light levels in extreme ambient temperatures
- Where extremely corrosive, wet, dusty, hot and/or cold conditions exist
- Classified and hazardous locations

Features:

- Instant illumination and restrike
- Cold temperature operation/no warm-up required
- Option for redundancy in drivers with multiple series circuits connected to each driver to avoid complete loss of illumination
- Easy installation – compact modular fixture attaches onto existing Champ mounting module
- Energy-efficient technology – up to 64% energy savings over HID fixtures
- Contains no mercury or other hazardous substances
- Shock- and vibration-resistant solid-state luminaires have no filaments or glass components that could break – greatly reduces the risk of premature failure
- Operating ambient: -40°C to 65°C (VMV3L-VMV11L models); -40°C to 55°C (VMV13L-VMV25L models)
- 5 year fixture warranty^B

Certifications and compliances:

- DesignLights Consortium® Qualified (some models are not DLC qualified)^C

NEC/CEC:

- Class I, Division 2, Groups A, B, C, D; Class I, Zone 2, nA nR; Class II, Groups E, F, G; Class III
- Zone 21 tb
- Simultaneous Presence
- Wet locations, Type 4X, IP66

UL standards:

- UL844; UL1598 – Luminaires; UL1598A – Marine; UL8750; UL50; UL50E

CSA standard:

- cUL Listed to CSA standard CSA C22.2 No. 137

IEC: ^D

- IEC 60079-0:2011; IEC 60079-15:2010; IEC 60079-31:2008; IEC 60598-2-1:1979; IEC 60529:2001
- Ex nA nR IIC T* Gc -40 to +40
- Ex nA nR IIC T* Gc -40 to +55
- Ex nA nR IIC T* Gc -40 to +65
- Ex tb IIIC T*°C Db -40 to +40
- Ex tb IIIC T*°C Db -40 to +55
- Ex tb IIIC T*°C Db -40 to +65

VMV3L-VMV11L only

- IECEx UL 13.0052X

VMV13L-VMV25L only

- IECEx UL 14.0031X

^ATolerance +/- 10%.

^BRefer to page 2 of the current authorized distributor price book for Eaton's standard Terms and Conditions.

^CApproved models include: VMV3L/UNV1; VMV5L/UNV1; VMV7L/UNV1; VMV9L/UNV1; VMV11L/UNV1; VMV13L/UNV1; VMV17L/UNV1; VMV21L/UNV1; VMV25L/UNV1; VMV3L/UNV34; VMV5L/UNV34; VMV7L/UNV34; VMV9L/UNV34; VMV11L/UNV34. Refer to www.designlights.org Qualified Products List under family models for full listing details. Not all models are approved for all application categories.

^DVMV3L-VMV11L/UNV1 rated to +65°C; VMV13L-VMV25L and VMV3L-VMV11L/UNV34 rated to +55°C.

*See temperature code table on following page.

Certifications and compliances (continued):

ATEX/CE: ^D

- EN 60079-0:2012; EN 60079-15:2010; EN 60079-31:2009; EN 60598-2-1:1989; EN 60929:1991 +A1:2001
- ^E II 3 G Ex nA nR IIC T* Gc -40 to +40
- ^E II 3 G Ex nA nR IIC T* Gc -40 to +55
- ^E II 3 G Ex nA nR IIC T* Gc -40 to +65
- ^E II 2 D Ex tb IIIC T*°C Db IP66 -40 to +40
- ^E II 2 D Ex tb IIIC T*°C Db IP66 -40 to +55
- ^E II 2 D Ex tb IIIC T*°C Db IP66 -40 to +65

VMV3L-VMV11L only

- DEMKO 13 ATEX 1475031X; DEMKO 13 ATEX 1305741X

VMV13L-VMV25L only

- DEMKO 14 ATEX 1324722X; DEMKO 14 ATEX 2274231X

Standard materials:

- Lamp housing and adapter – die cast aluminum with Corro-free epoxy powder coat
- Lens – heat- and impact-resistant glass
- Gaskets – silicone
- External hardware – stainless steel
- Factory sealed, no external seals required

Photometrics:

- Complete photometrics can be found at www.crouse-hinds.com/photometrics

Champ VMV LED luminaires

Cl. I, Div. 2, Groups A, B, C, D
Cl. I, Zone 2, nA nR
Cl. II, Groups E, F, G
Cl. III & Simultaneous
Presence

UL/cUL Listed
IECEX/ATEX/CE
Wet Locations
Type 4X; IP66

2L

2L

LED system:

- High intensity discrete power emitters
- Cool white (5000K, 70 CRI) (standard); warm white, (3000K, 80 CRI) (optional)
- Custom Type I, III and V optics available
- Optics clocking in field to align Type I and Type III light patterns to illumination path for VMV13L-VMV25L

Drivers:

| Option | Voltage |
|--------|--|
| /UNV1 | 120-277 VAC, 50/60 Hz; 108-250 VDC, 50/60 Hz |
| /UNV34 | 347-480 VAC, 50/60 Hz |

Custom optics:

Three optical options to maximize light distribution and intensity:



TYPE I

Long and rectangular for hallways, walkways, loading docks, catwalks.

Ideal for:

- Mining conveyor belts
- Aisleways and hallways
- Catwalks and walkways
- Ramps and loading docks
- Tunnels with overhead mounts



TYPE III

Wall mount light distribution, minimizing spillover on the wall.

Ideal for:

- Narrow crosswalks or passages with wall mounted fixtures
- Tunnels with wall mount
- Wall or stanchion mount requiring 180° forward throw beam patterns



TYPE V

Regular circular distribution pattern for high/low bay indoor and outdoor ceiling or pendant mount lighting.

Ideal for:

- Pendant, ceiling or stanchion mount overhead building mounts
- Processing mills, industrial plants, large buildings, warehouses, etc.



Colored LED options:

- Available in green and amber[Ⓔ]
- Reduction in light pollution for night space observation and sky glow due to isolating blue wavelength in red and amber colors
- Wildlife-friendly
- Improves visibility for telescopes in observatories during night sky space exploration

Electrical ratings:

| | VMV3L | VMV5L | VMV7L | VMV9L | VMV11L | VMV13L | VMV17L | VMV21L | VMV25L |
|--------------------------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Voltage range, VAC | 120-277 | 120-277 | 120-277 | 120-277 | 120-277 | 120-277 | 120-277 | 120-277 | 120-277 |
| Frequency | 50/60 Hz | 50/60 Hz | 50/60 Hz | 50/60 Hz | 50/60 Hz | 50/60 Hz | 50/60 Hz | 50/60 Hz | 50/60 Hz |
| Input power (watts) | 29 | 43 | 62 | 85 | 113 | 131 | 168 | 196 | 232 |
| Input amps at 120-277 VAC | 0.24 - 0.11 | 0.35 - 0.16 | 0.52 - 0.23 | 0.71 - 0.31 | 0.95 - 0.41 | 1.08 - 0.48 | 1.40 - 0.62 | 1.64 - 0.73 | 1.94 - 0.87 |
| Voltage range, VDC | 108-250 | 108-250 | 108-250 | 108-250 | 108-250 | 108-250 | 108-250 | 108-250 | 108-250 |
| Power factor | >0.90 | >0.90 | >0.90 | >0.90 | >0.90 | >0.90 | >0.90 | >0.90 | >0.90 |
| Total harmonic distortion (THD) | <20% | <20% | <20% | <20% | <20% | <20% | <20% | <20% | <20% |
| Nominal lumens (Type V) [Ⓕ] | 3,531 | 5,335 | 7,195 | 9,266 | 11,440 | 13,226 | 18,793 | 22,110 | 26,531 |

Temperature performance data:

| Lamp / lumen output | Driver type | Ambient temp. °C | Class I, Div. 2 | Class II, Div. 1 | Class III, Div. 1 | | |
|---------------------|--------------|------------------|-----------------|------------------|-------------------------|--|-------|
| | | | | | Simultaneous rating | Class II, Div. 1, Groups E, F, G | |
| | | | | | Class I, Zone 2 | Class II, Div. 1, Zone 21, AEx tb IIIC | |
| | | | | | Class I, Div. 2; Div. 1 | AEx nA nR; Ex nA nR | |
| 3L, 5L, 7L, 9L, 11L | /UNV1 | 40 | T5 | T5 | T3C | T6 | T66°C |
| 3L, 5L, 7L, 9L, 11L | /UNV1 | 55 | T5 | T4A | T3A | T5 | T83°C |
| 3L, 5L, 7L, 9L, 11L | /UNV1 | 65 | T4A | T4A | T3A | T4 | T92°C |
| 3L, 5L, 7L, 9L, 11L | /UNV34 | 40 | T3C | T5 | T3C | T4 | T70°C |
| 3L, 5L, 7L, 9L, 11L | /UNV34 | 55 | T3A | T4A | T3A | T4 | T85°C |
| 3L, 5L, 7L, 9L, 11L | /UNV34 | 65 | T3A | T4A | T3A | T4 | T92°C |
| 13L, 17L | /UNV1; UNV34 | 40 | T4A | T5 | T4A | T6 | T66°C |
| 13L, 17L | /UNV1; UNV34 | 55 | T4 | T4A | T4 | T5 | T81°C |
| 21L, 25L | /UNV1; UNV34 | 40 | T4A | T5 | T4A | T6 | T71°C |
| 21L, 25L | /UNV1; UNV34 | 55 | T4 | T4A | T4 | T5 | T86°C |

[Ⓔ] Custom optics not available with colored LEDs. One model per color; see catalog numbering system on following page.

[Ⓕ] Tolerance +/- 10%.

Champ VMV LED luminaires

Cl. I, Div. 2, Groups A, B, C, D
Cl. I, Zone 2, nA nR
Cl. II, Groups E, F, G
Cl. III & Simultaneous
Presence

UL/cUL Listed
IECEX/ATEX/CE
Wet Locations
Type 4X; IP66

2L

2L

Ordering information:

Part number example

VMV17LW2AR1G/UNV1 S890

VMV 17L W 2A R1 G /UNV1 S890

Lamp / function

| | |
|-----------------|-------------------------|
| 3L | 3,531 lumen LED |
| 5L | 5,335 lumen LED |
| 7L | 7,195 lumen LED |
| 9L | 9,226 lumen LED |
| 11L | 11,440 lumen LED |
| 13L | 13,226 lumen LED |
| 17L | 18,793 lumen LED |
| 21L | 22,110 lumen LED |
| 25L | 26,531 lumen LED |
| GL [Ⓞ] | Green (4,300 lumen LED) |
| AL [Ⓞ] | Amber (5,000 lumen LED) |

Color temperature

| | |
|-------|-----------------------|
| BLANK | Cool (5000K), colored |
| W | Warm (3000K) |

Mounting style

| | | | |
|----------------|----------------------------|------|---------------------|
| BLANK | No cover | 2C | ¾" ceiling |
| J [Ⓢ] | 1-½" stanchion, 25° angled | 3C | 1" ceiling |
| P | 1-½" stanchion, straight | 20C | 20mm ceiling |
| 2A | ¾" pendant | 25C | 25mm ceiling |
| 3A | 1" pendant | 2HA | ¾" flexible pendant |
| 20A | 20mm pendant | 2TW | ¾" wall |
| 25A | 25mm pendant | 3TW | 1" wall |
| 2B | ¾" cone pendant | 20TW | 20mm wall |
| 3B | 1" cone pendant | 25TW | 25mm wall |

Options

| | |
|-------------------|-----------------------------|
| S812 [Ⓢ] | Trunnion mount kit with pin |
| S831 [Ⓢ] | Safety cable |
| S890 | Quick clip |
| S891 [Ⓢ] | Diffused lens |
| S892 [Ⓢ] | Redundant driver |
| S896 [Ⓢ] | Teflon coated lens |
| S903 | Polycarbonate lens |
| TB6 | Six-pole terminal block |

Voltage

| | |
|--------|---|
| /UNV1 | 120-277 VAC, 50/60 Hz; 108-250 VDC, 50/60 Hz |
| /UNV34 | 347-480 VAC, 50/60 Hz |

Guard

| | |
|-------|------------------|
| BLANK | No guard |
| G | P3001 wire guard |

Optics

| | |
|-------------------|--|
| BLANK | Type V optic standard (all mounts) |
| R1 | Type I optic (all mounts minus ceiling for 3L-11L, available with mounts for 13L-25L models) |
| R1A [Ⓢ] | Type I optic (ceiling with conduit 45° counterclockwise or 135° clockwise from hinge) |
| R1B [Ⓢ] | Type I optic (ceiling with conduit 45° clockwise or 135° counterclockwise from hinge) |
| R3 | Type III optic (all mounts minus ceiling) |
| R3AP [Ⓢ] | Type III optic (select when using Appleton® top hat adapter with Champ fixture) |
| R3A1 [Ⓢ] | Type III optic (ceiling with conduit 45° counterclockwise from top hat hinge) |
| R3A2 [Ⓢ] | Type III optic (ceiling with conduit 135° clockwise from top hat hinge) |
| R3B1 [Ⓢ] | Type III optic (ceiling with conduit 45° clockwise from top hat hinge) |
| R3B2 [Ⓢ] | Type III optic (ceiling with conduit 135° counterclockwise from top hat hinge) |

Accessories (ordered separately):

Description

- Photocell, 120V, 50/60 Hz **D2S20**
- Photocell, 208-277V **D2S208 277**
- Trunnion mount kit with pin **VMVL S812 K1[Ⓢ]**
- Wire guard with captive mounting hardware **P3001**
- Top hat adapter **CHMM1**

For retrofitting Appleton MercMaster III top hats to Champ VMV luminaires

[Ⓞ] Custom optics not available with colored LEDs.

[Ⓢ] For VMV3L-VMV11L only.

[Ⓢ] Order with ceiling mount only.

[Ⓢ] Not available for IEC.

[Ⓢ] Available for VMV5L and VMV7L only. Redundant driver standard on VMV9L-VMV25L models. 7L = 6,616 lumens with S892 suffix.



CHMM1

Champ VMV LED luminaires

Cl. I, Div. 2, Groups A, B, C, D
Cl. I, Zone 2, nA nR
Cl. II, Groups E, F, G
Cl. III & Simultaneous
Presence


UL/cUL Listed
IECEX/ATEX/CE
Wet Locations
Type 4X; IP66

2L


2L

Dimensions:


Stanchion - 25° angled

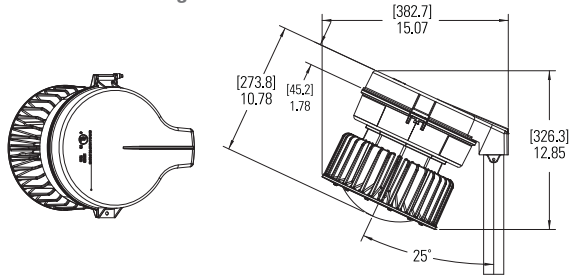


Stanchion - straight

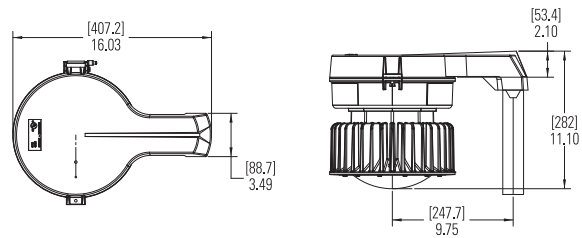


Pendant

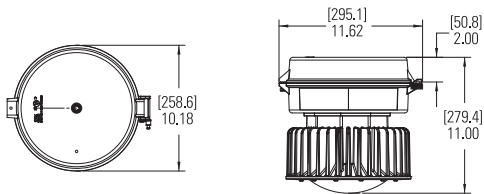


Ceiling

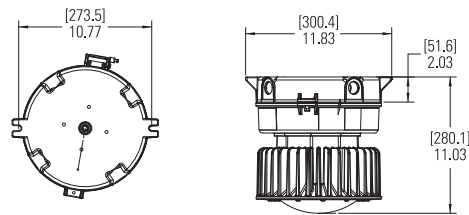


Wall

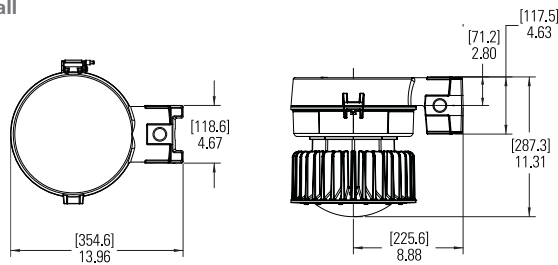

Cone pendant

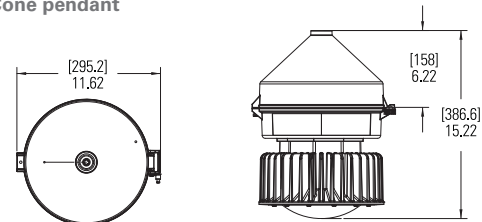

Trunnion

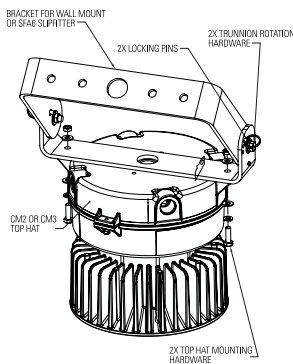

Net luminaire weights:

| Model | Lbs. | Kg. |
|-------------------------------|-------|-------|
| VMV3L-VMV11L | 21.80 | 8.07 |
| VMV13L & VMV17L | 36.00 | 16.32 |
| VMV21L & VMV25L | 44.00 | 19.95 |
| Add mounting modules: | | |
| Pendant | 1.25 | 0.57 |
| Cone pendant | 4.00 | 1.81 |
| Flexible pendant | 1.50 | 0.68 |
| Ceiling | 2.75 | 1.25 |
| Wall | 4.50 | 2.04 |
| Angled stanchion ^L | 3.50 | 1.59 |
| Straight stanchion | 4.50 | 2.04 |

^L Angled stanchion for VMV3L-VMV11L models only.