

## Aluminum H-Tap Connectors and Covers

For combinations of aluminum-to-aluminum and aluminum-to-copper conductors.



WR189 or OB101

### WR™ Wide-Range Aluminum Tap Connectors



- Made of 1350 aluminum alloy for high strength and high conductivity
- Standard compression tools and dies install all sizes — no special tools needed
- Field-proven ribbed design enables excellent connector/conductor contact without distorting the conductor's shape
- Fold-in tabs provide positive tab interlock as tool closes
- Prefilled with oxide inhibitor held captive in the rib/connection area
- RUS Accepted
- Complies with ANSI C119.4 specifications

#### WR™ O and D Die Seven-Connector Program

CAT. NO.	CONNECTOR NUMBER	CONDUCTOR RANGE														CONNECTOR LENGTH (IN.)
		STANDARD CONDUCTOR						COMPACT CONDUCTOR				DIAMETER (IN.)				
		MAIN			TAP			MAIN		TAP		MAIN		TAP		
		ACSR	STR.	SOL.	ACSR	STR.	SOL.	ACSR	STR.	ACSR	STR.	MAX.	MIN.	MAX.	MIN.	
WR159 or OB 44 OB 1	1	#2, #4, #6	#1, #2, #3, #4, #6	#2, #4, #6	#2, #4, #6	#1, #2, #3, #4, #6	#2, #4, #6	#1, #2, #4, #6	#1, #2, #3, #4, #6	#1, #2, #4, #6	#1, #2, #3, #4, #6	.332	.162	.332	.162	1 <sup>1</sup> / <sub>16</sub> 1 <sup>1</sup> / <sub>2</sub>
WR189 or OB 101 OB 2	2	1/0, #1, #2	2/0, 1/0, #1, #2	3/0, 2/0, 1/0, #1	#2, #4, #6	#1, #2, #3, #4, #6	1/0, #1, #2, #4, #6	2/0, 1/0, #1, #2	2/0, 1/0, #1, #2	#1, #2, #4, #6	#1, #2, #3, #4, #6	.419	.266	.332	.162	1 <sup>11</sup> / <sub>16</sub> 1 <sup>3</sup> / <sub>4</sub>
WR289 or DB 202 DB 3	3	2/0, 1/0	3/0, 2/0	4/0, 3/0	#2, #4, #6	#1, #2, #3, #4, #6	1/0, #1, #2, #4, #6	2/0, 1/0, #1, #2	2/0, 1/0, #1, #2	#1, #2, #4, #6	#1, #2, #3, #4, #6	.470	.398	.332	.162	1 <sup>13</sup> / <sub>16</sub> 1 <sup>7</sup> / <sub>8</sub>
WR279 or DB 2020	4	2/0, 1/0, #1	3/0, 2/0, 1/0	—	2/0, 1/0, #1	3/0, 2/0, 1/0	—	3/0, 2/0, 1/0	3/0, 2/0, 1/0	3/0, 2/0, 1/0	3/0, 2/0, 1/0	.470	.336	.470	.336	1 <sup>13</sup> / <sub>16</sub>
WR379 or DB 404 DB 5	5	4/0, 3/0	4/0	—	#2, #4, #6	#1, #2, #3, #4, #6	1/0, #1, #2, #4, #6	266 <sup>1</sup> / <sub>2</sub> , 250, 4/0	266, 250, 4/0	#1, #2, #4, #6	#1, #2, #3, #4, #6	.563	.475	.332	.162	1 <sup>13</sup> / <sub>16</sub> 1 <sup>7</sup> / <sub>8</sub>
WR399 or DB 4020 DB 6	6	4/0, 3/0	4/0, 3/0	—	2/0, 1/0, #1	2/0, 1/0	3/0, 2/0	266 <sup>1</sup> / <sub>2</sub> , 4/0, 3/0	266, 250, 4/0	2/0, 1/0	3/0, 2/0, 1/0	.563	.461	.447	.338	2 <sup>3</sup> / <sub>16</sub> 2 <sup>1</sup> / <sub>2</sub>
WR419 or DB 4040 DB 7	7	4/0, 3/0	4/0, 3/0	—	4/0, 3/0	4/0, 3/0	—	266 <sup>1</sup> / <sub>2</sub> , 4/0, 3/0	266, 250, 4/0	266 <sup>1</sup> / <sub>2</sub> , 4/0, 3/0	266, 250, 4/0	.563	.461	.563	.461	2 <sup>7</sup> / <sub>16</sub> 2 <sup>1</sup> / <sub>2</sub>

Note: Connector numbers 1 and 2 use "O" Die; 3-7 use "D" Die.

## Aluminum H-Tap Connectors and Covers

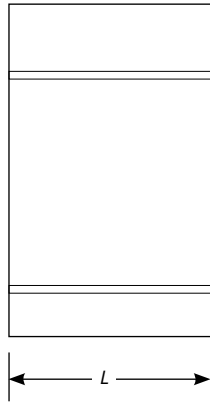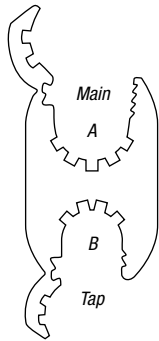

WR259



### WR™ Supplemental O and D Die Connectors

CAT. NO.	CONDUCTOR RANGE												DIAMETER (IN.)				CONNECTOR LENGTH (IN.)
	STANDARD CONDUCTOR						COMPACT CONDUCTOR						MAIN		TAP		
	MAIN			TAP			MAIN			TAP			MAX.	MIN.	MAX.	MIN.	
	ACSR	STR.	SOL.	ACSR	STR.	SOL.	ACSR	STR.	ACSR	STR.	ACSR	STR.					
WR149	#4, #6	#3, #4, #6	#2, #3, #4, #6	#4, #6	#3, #4, #6	#2, #3, #4, #6	#4, #6	#2, #3, #4, #6	#3, #4, #6	#2, #3, #4, #6	.266	.162	.266	.162	1½		
WR179	1/0, #1, #2, #3	1/0, #1, #2	#1	#4, #6	#3, #4, #6	#2, #3, #4, #6	1/0, #1, #2	2/0, 1/0, #1, #2	#4, #6	#2, #3, #4, #6	.398	.266	.266	.162	1¾		
WR199	1/0, #1, #2, #3	1/0, #1, #2	#1	#2, #3, #4	#1, #2, #3, #4	#1, #2	1/0, #1, #2	2/0, 1/0, #1, #2	#1, #2, #3, #4	#1, #2	.398	.266	.332	.232	1¾		
WR1010 or OB 1010	1/0, #1, #2, #3, #4	2/0, 1/0, #1, #2, #3, #4	1/0, #1, #2	1/0, #1, #2, #3, #4	2/0, 1/0, #1, #2, #3, #4	1/0, #1, #2	2/0, 1/0, #1, #2, #3, #4	2/0, 1/0, #1, #2	2/0, 1/0, #1, #2, #3, #4	2/0, 1/0, #1, #2	.419	.232	.419	.232	1¾		
WR259	1/0, #1	2/0, 1/0	—	1/0, #1	2/0, 1/0	—	2/0, 1/0	2/0, 1/0	2/0, 1/0	2/0, 1/0	.419	.326	.412	.292	1½		
WR299	2/0, 1/0	3/0, 2/0	—	#4, #6	#3, #4, #6	#2, #3, #4, #6	3/0, 2/0	3/0	#4, #6	#2, #3, #4, #6	.470	.398	.266	.162	1½		
WR219	1/0, #1	1/0, #1	—	1/0, #1, #2	1/0, #1	—	1/0	2/0, 1/0	1/0	2/0, 1/0	.398	.324	.398	.316	1½		
WR239	2/0, 1/0	2/0, 1/0	—	#2, #3, #4	#1, #2, #3	#1, #2	2/0, 1/0	4/0, 3/0	#1, #2, #3, #4	#1, #2	.447	.365	.332	.236	1¾		
WR229	2/0	3/0, 2/0	—	1/0, #1, #2	1/0, #1	—	3/0, 2/0	3/0	1/0, #1	2/0, 1/0	.470	.410	.398	.316	1¾		
WR269	2/0	2/0	—	2/0, 1/0	2/0, 1/0	—	2/0	3/0	2/0, 1/0	3/0, 2/0, 1/0	.447	.410	.447	.336	1¾		

**Note:** WR149–WR1010 use “O” connector die; all others use “D” connector die.  
 WR1010 and WR299 use four indents with a mechanical tool; all others use five indents.  
 All die connectors use two indents with a hydraulic tool.

## Aluminum H-Tap Connectors and Covers

### WR™ Wide-Range Aluminum Tap Connectors (continued)

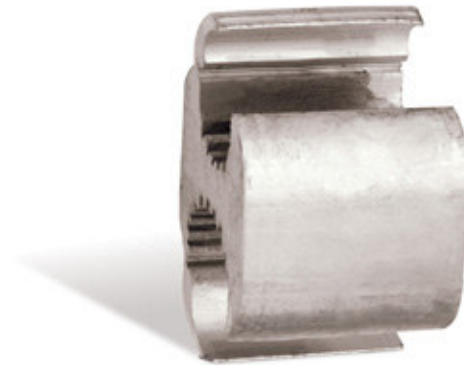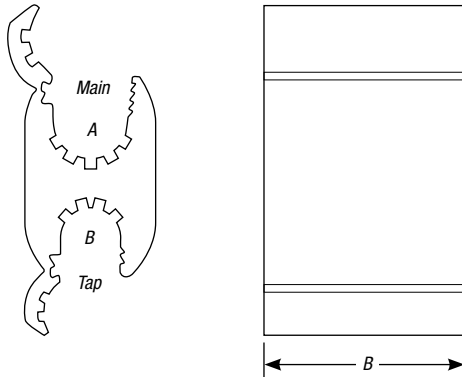

WR Connector

#### WR™ Supplemental D Connectors

CAT. NO.	CONDUCTOR RANGE														CONNECTOR LENGTH (IN.)
	STANDARD CONDUCTOR*						COMPACT CONDUCTOR				DIAMETER (IN.)				
	MAIN			TAP			MAIN		TAP		MAIN		TAP		
	ACSR	STR.	SOL.	ACSR	STR.	SOL.	ACSR	STR.	ACSR	STR.	MAX.	MIN.	MAX.	MIN.	
WR319	3/0	3/0	—	#2, #3, #4	#1, #2, #3, #4	#1, #2	3/0	4/0	#1, #2, #3, #4	#1, #2	.502	.461	.332	.299	1 7/8
WR339	3/0	3/0	—	2/0, 1/0, #1	2/0, 1/0	—	3/0	4/0	2/0, 1/0	3/0, 2/0, 1/0	.502	.461	.447	.336	2 1/8
WR359	4/0, 3/0	4/0, 3/0	—	#4, #6	#3, #4, #6	#2, #3, #4, #6	266, 4/0, 3/0	266, 250, 4/0	1/0, #1, #2	1/0, #1, #2	.563	.461	.266	.162	1 7/8
WR369	4/0, 3/0	4/0, 3/0	—	#1, #2, #3, #4	1/0, #1, #2, #3	#1	266, 4/0, 3/0	266, 250, 4/0	1/0, #1, #2	1/0, #1, #2	.563	.461	.374	.266	1 7/8
WR369†	4/0, 3/0, 2/0	4/0, 3/0	—	1/0, #1, #2, #3, #4	1/0, #1, #2, #3, #4	1/0, #1, #2	266, 4/0, 3/0	266, 250, 4/0, 3/0	1/0, #1, #2, #3, #4	1/0, #1, #2	.563	.423	.373	.232	1 7/8
WR389	4/0, 3/0	4/0, 3/0	—	2/0, 1/0	3/0, 2/0	—	266, 4/0, 3/0	266, 250, 4/0	3/0, 2/0	3/0, 2/0	.563	.461	.470	.376	2 3/16
WR389†	4/0, 3/0, 2/0	4/0, 3/0	—	2/0, 1/0, #1	3/0, 2/0, 1/0	—	266, 4/0, 3/0	266, 250, 4/0	3/0, 2/0, 1/0	3/0, 2/0, 1/0	.563	.423	.470	.336	2 3/16

\* Will accept conductors of the same wire sizes with a 3% reduction of diameter (compressed).

† Conductor range possible only when crimped with a hydraulic tool.

**Note:** WR359 and WR369 use four indents with a mechanical tool; WR319 uses five indents with a mechanical tool; W339 and WR389 use six indents with a mechanical tool. WR369 can also use five indents with a mechanical tool. All die connectors use two indents with a hydraulic tool.

## Aluminum H-Tap Connectors and Covers

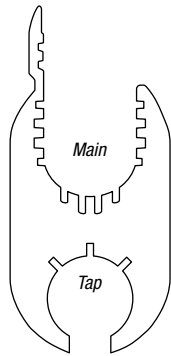


Fig. 1


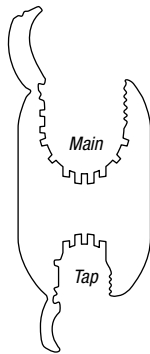


Fig. 2

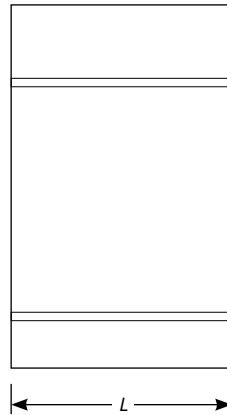

WR715

### WR™ N Die Tap Connectors

CAT. NO.	CONDUCTOR RANGE												CONNECTOR LENGTH (IN.)	
	STANDARD CONDUCTOR*						COMPACT CONDUCTOR				DIAMETER (IN.)			
	MAIN		TAP		SOL.	MAIN		TAP		MAX.	MIN.	MAX.		MIN.
	ACSR	STR.	ACSR	STR.		ACSR	STR.	ACSR	STR.					
WR715	397 <sup>1/4</sup> , 336, 266	400, 397, 350, 336, 300, 266, 250	2/0, 1/0, #1, #2, #3, #4, #6	2/0, 1/0, #1, #2, #3, #4, #6	3/0, 2/0, 1/0, #1, #2, #3, #4, #6	477, 397, 336	500, 477, 397, 350	2/0, 1/0, #1, #2, #3, #4, #6	3/0, 2/0, 1/0, #1, #2, #3, #4, #6	.753	.502	.447	.162	2
WR775	397 <sup>1/4</sup> , 336, 266, 4/0	400, 397, 350, 336, 300, 266, 250, 4/0	397 <sup>1/4</sup> , 336, 266, 4/0	400, 397, 350, 336, 300, 266, 250, 4/0	—	477, 397, 336, 266	500, 477, 397, 350, 336, 300, 266, 250	477, 397, 336, 266	500, 477, 397, 336, 300, 266, 250	.743	.502	.743	.520	3
WR815	477 <sup>1/4</sup> , 397, 336, 266, 4/0	556, 500, 400, 397, 350, 336, 300, 266, 250	2/0, 1/0, #1, #2, #3, #4, #6	2/0, 1/0, #1, #2, #3, #4, #6	3/0, 2/0, 1/0, #1, #2, #3, #4, #6	556, 477, 397, 336, 266	556, 477, 397, 336, 266, 250	2/0, 1/0, #1, #2, #3, #4, #6	3/0, 2/0, 1/0, #1, #2, #3, #4, #6	.858	.502	.447	.162	2
WR835 or NB 50040	477 <sup>1/4</sup> , 397, 336, 266, 4/0	556, 500, 400, 397, 350, 336, 300, 266, 250	4/0, 3/0, 2/0, 1/0	4/0, 3/0, 2/0, 1/0	4/0, 3/0, 2/0	556, 477, 397, 336, 266	556, 477, 397, 350, 336, 300, 266, 250	266, 4/0, 3/0, 2/0	250, 4/0, 3/0	.858	.502	.563	.368	2
WR875 <sup>†</sup>	477 <sup>1/4</sup> , 397, 336, 266, 4/0	556, 500, 400, 397, 350, 336, 300, 266, 250	477 <sup>1/4</sup> , 266	350, 336, 300, 266, 250	397, 366	556, 477, 397, 336, 266	556, 477, 397, 350, 336, 300, 336, 300	397, 336, 266	400, 397, 350, 336, 300, 266, 250	.858	.502	.684	.520	3
WR885 or NB 500	477 <sup>1/4</sup> , 397, 336, 266, 4/0	500, 400, 397, 350, 336, 300, 266, 250, 4/0	477 <sup>1/4</sup> , 397, 336, 266, 4/0	500, 400, 397, 350, 336, 300, 266, 250, 4/0	—	556, 477, 397, 336, 266	556, 477, 397, 350, 336, 300, 266, 250	556, 477, 397, 336, 266	556, 477, 397, 350, 336, 300, 266, 250	.814	.502	.814	.520	3

\* Will accept conductors of the same wire sizes with a 3% reduction of diameter (compressed).

<sup>†</sup> See Fig. 2.




**Note:** All die connectors can be used with Blackburn JB12A, JB12B, 12A and Y-35 tools.

All die connectors are for use with hydraulic tools, 12-ton and greater.

WR715, WR815 and WR835 use two indents with a hydraulic tool; all others use three indents.

## Aluminum H-Tap Connectors and Covers

### WR™ Wide-Range Aluminum Tap Connectors (continued)

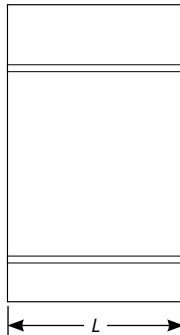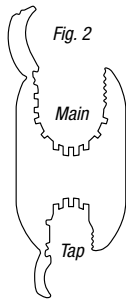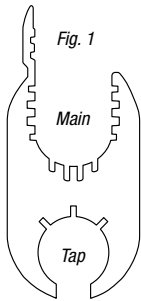

WR699

#### WR™ N Die Tap Connectors (continued)

CAT. NO.	CONDUCTOR RANGE													CONNECTOR LENGTH (IN.)	
	STANDARD CONDUCTOR*						COMPACT CONDUCTOR				DIAMETER (IN.)				
	MAIN			TAP			MAIN		TAP		MAIN		TAP		
	ACSR	STR.	SOL.	ACSR	STR.	SOL.	ACSR	STR.	ACSR	STR.	MAX.	MIN.	MAX.		MIN.
WR699	397 <sup>1</sup> / <sub>4</sub> , 336, 266	400, 397, 350, 336, 300, 266, 250		#4, #6	#3, #4, #6	#2, #3, #4, #6	477, 397, 336	477, 397, 350, 336, 300	#4, #6	#2, #3, #4, #6	.743	.570	.266	.162	2
WR719	397 <sup>1</sup> / <sub>4</sub> , 336, 266	400, 397, 350, 336, 300, 266, 250		2/0, 1/0, #1, #2, #3	2/0, 1/0, #1, #2	3/0, 2/0, 1/0, #1	477, 397, 336	477, 397, 350, 336, 300	2/0, 1/0, #1, #2	3/0, 2/0, 1/0, #1	.743	.570	.447	.289	2
WR739	397 <sup>1</sup> / <sub>4</sub> , 336, 266	400, 397, 350, 336, 300, 266, 250		4/0, 3/0, 2/0, 1/0	4/0, 3/0, 2/0	4/0	477, 397, 336	477, 397, 350, 336, 300	266, 4/0, 3/0	266, 250, 4/0	.743	.570	.563	.398	2
WR779	397 <sup>1</sup> / <sub>4</sub> , 336, 266	400, 397, 350, 336, 300, 266, 250		397 <sup>1</sup> / <sub>4</sub> , 336, 266	400, 397, 350, 336, 266, 250	477, 397	477, 397, 336	477, 397, 350, 336, 300	477, 397, 336	477, 397, 336	.743	.570	.743	.570	3
WR799	477 <sup>1</sup> / <sub>4</sub> , 266	500, 250		#4, #6	#3, #4, #6	#2, #3, #4, #6	477 <sup>1</sup> / <sub>4</sub> , 266	500, 250	#3, #4, #6	#2, #3, #4, #6	.814	.575	.270	.160	2
WR819	477 <sup>1</sup> / <sub>4</sub> , 397, 336	556, 500, 477, 450, 400, 397, 350, 336		2/0, 1/0, #1, #2, #3	2/0, 1/0, #1, #2	3/0, 2/0, 1/0, #1	556, 477, 397	556, 477, 397	2/0, 1/0, #1, #2	3/0, 2/0, 1/0, #1	.858	.659	.477	.289	2
WR839	477 <sup>1</sup> / <sub>4</sub> , 397, 336	556, 500, 477, 450, 400, 397, 350, 336		4/0, 3/0, 2/0	4/0, 3/0	4/0	556, 477, 397	556, 477, 397	266, 4/0, 3/0	266, 4/0, 3/0	.858	.659	.563	.477	2
WR879 <sup>†</sup>	477 <sup>1</sup> / <sub>4</sub> , 397, 336	556, 500, 477, 450, 400, 397, 350, 336		336 <sup>1</sup> / <sub>4</sub> , 266	350, 336, 300, 266	397	556, 477, 397	556, 477, 397	397, 336	397, 350, 336	.858	.659	.684	.593	3
WR889	477 <sup>1</sup> / <sub>4</sub> , 397, 336	500, 400, 397, 350, 336		477 <sup>1</sup> / <sub>4</sub> , 397, 336	500, 400, 397, 350, 336	—	556, 477, 397, 336	556, 477, 397, 350	556, 477, 397, 336	556, 477, 397, 350	.814	.666	.814	.666	3

\* Will accept conductors of the same wire sizes with a 3% reduction of diameter (compressed).



<sup>†</sup> See Figure 2.

Note: All die connectors can be used with Blackburn JB12A, JB12B, WH2, PH2, 12A and Y-35 tools.

All die connectors are for use with hydraulic tools, 10-ton and greater.

WR779, WR879 and WR889 use three indents with a hydraulic tool; all others use two indents.

## Aluminum H-Tap Connectors and Covers

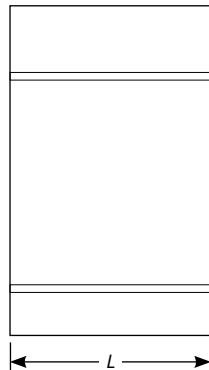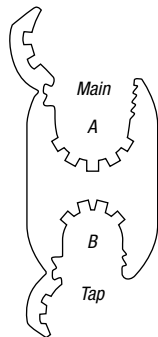

WR909


### WR™ R Die Tap Connectors

CAT. NO.	CONDUCTOR RANGE								DIAMETER (IN.)				CONNECTOR LENGTH (IN.)
	STANDARD CONDUCTOR				COMPACT CONDUCTOR				MAIN		TAP		
	MAIN		TAP		MAIN		TAP		MAX.	MIN.	MAX.	MIN.	
	ACSR	STR.	ACSR	STR.	ACSR	STR.	ACSR	STR.					
WR909	556 <sup>1</sup> / <sub>4</sub> , 477, 397, 336, 300	600, 556, 550, 500, 477, 450, 397, 350, 336	336 <sup>1</sup> / <sub>4</sub> , 266, 4/0, 3/0, 2/0, 1/0	350, 336, 266, 250, 4/0, 3/0, 2/0	636, 556, 477, 397	700, 636, 556, 500, 477, 450	397 <sup>1</sup> / <sub>2</sub> , 336, 266, 4/0, 3/0, 2/0	397, 350, 336, 300, 266, 250, 4/0, 3/0	.893	.666	.684	.398	4 <sup>3</sup> / <sub>4</sub>
WR929	556 <sup>1</sup> / <sub>4</sub> , 477, 397, 336, 300	600, 556, 550, 500, 477, 450, 397, 350, 336	556 <sup>1</sup> / <sub>4</sub> , 477, 397, 336, 300	600, 556, 550, 477, 450, 400, 397, 350, 336	636, 556, 477, 397	700, 636, 556, 500, 477, 450	636, 556, 477, 397	700, 636, 556, 477, 450	.893	.666	.893	.666	4 <sup>3</sup> / <sub>4</sub>
WR949	795 <sup>2</sup> / <sub>7</sub> , 715, 666, 636, 605, 556, 477 <sup>3</sup> / <sub>7</sub>	900, 874, 800, 795, 750, 715, 700, 636, 600	336 <sup>1</sup> / <sub>4</sub> , 266, 4/0, 3/0, 2/0, 1/0	350, 336, 266, 250, 4/0, 3/0, 2/0	954, 874, 795	1000, 954, 874, 795, 750	397 <sup>1</sup> / <sub>4</sub> , 336, 266, 4/0, 3/0, 2/0	397, 350, 336, 300, 266, 250, 4/0, 3/0	1.108	.883	.684	.398	4 <sup>3</sup> / <sub>4</sub>
WR969	795 <sup>2</sup> / <sub>7</sub> , 715, 666, 636, 605, 556, 477 <sup>3</sup> / <sub>7</sub>	900, 874, 800, 795, 750, 715, 700, 636, 600	556 <sup>1</sup> / <sub>4</sub> , 477, 397, 336, 300	600, 556, 550, 500, 477, 450, 400, 397, 350, 336	954, 874, 795	1000, 954, 874, 795	636, 556, 477, 397	700, 636, 556, 477, 450	1.108	.883	.893	.666	4 <sup>3</sup> / <sub>4</sub>
WR989	795 <sup>2</sup> / <sub>7</sub> , 715, 666, 636, 605, 556, 477 <sup>3</sup> / <sub>7</sub>	900, 874, 800, 795, 750, 715, 700, 636, 600	795 <sup>2</sup> / <sub>7</sub> , 715, 666, 636, 605, 556, 477 <sup>3</sup> / <sub>7</sub>	900, 874, 800, 795, 750, 715, 700, 636, 600	954, 874, 795	1000, 954, 874, 795, 750	954, 874, 795	1000, 954, 874, 795, 750	1.108	.883	1.108	.883	4 <sup>3</sup> / <sub>4</sub>
WR999	954 <sup>4</sup> / <sub>5</sub> , 900, 874, 795, 715, 666	1033, 1000, 900, 800, 795, 750	954 <sup>4</sup> / <sub>5</sub> , 900, 874, 795, 750, 666	1033, 1000, 900, 800, 795, 750	954, 900	1000, 900	954, 900, 874	1000, 900	1.172	.997	1.172	.994	4 <sup>3</sup> / <sub>4</sub>

**Note:** All die connectors can be used with Blackburn JB60A, JB60B, Y60, 60A and PH-3 tools.  
All die connectors use four indents with a mechanical tool.

## Aluminum H-Tap Connectors and Covers

### WR™ Wide-Range Aluminum Tap Connectors (continued)

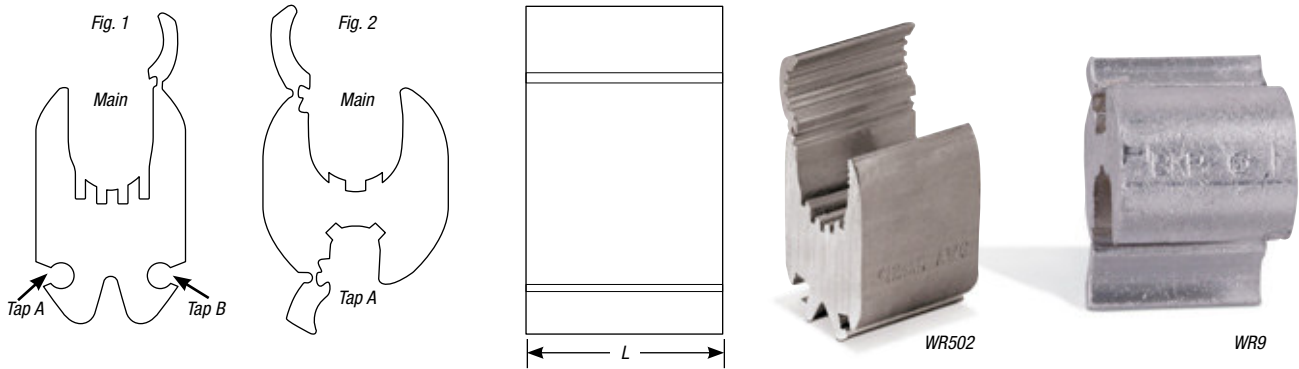

#### WR™ Street Lighting Compression Connectors

CAT. NO.	FIGURE NO.	CONDUCTOR RANGE												CONNECTOR LENGTH (IN.)	
		STANDARD CONDUCTOR*						DIAMETER (IN.)							
		MAIN			TAP A		TAP B		MAIN		TAP A		TAP B		
		ACSR	STR.	SOL.	STR.	SOL.	STR.	SOL.	MAX.	MIN.	MAX.	MIN.	MAX.		MIN.
WR9	2	#3, #4, #6	#2, #3, #4, #6	#1, #2, #3, #4	#8, #10, #12, #14	#8, #10, #12, #14	—	—	.292	.184	.146	.064	—	—	1 <sup>3</sup> / <sub>16</sub>
WR139	1	1/0, #1, #2, #3, #4	2/0, 1/0, #1, #2, #3	#1, #2	#8, #10	#6, #8, #10	#12, #14	#12, #14	.419	.250	.162	.100	.092	.064	1 <sup>1</sup> / <sub>2</sub>
WR502	1	4/0, 3/0	4/0, 3/0	—	#8, #10	#6, #8, #10	#12, #14	#12, #14	.563	.461	.162	.100	.092	.064	1 <sup>1</sup> / <sub>2</sub>
WR502†	1	4/0, 3/0, 2/0, 1/0	4/0, 3/0, 2/0, 1/0	—	#8, #10	#6, #8, #10	#12, #14	#12, #14	.563	.365	.162	.100	.092	.064	1 <sup>1</sup> / <sub>2</sub>

\* Will accept conductors of the same wire size with a 3% reduction of diameter (compressed).

† This range is possible only when crimped with a hydraulic tool.

**Note:** WR9 uses a 3/8" BG connector die; WR139 uses an "O" connector die; WR502 uses a "D" connector die. WR9 uses three indents with a mechanical tool; all others use four indents. WR139 and WR502 use two indents with a hydraulic tool.



## Aluminum H-Tap Connectors and Covers

For combinations of aluminum-to-aluminum and aluminum-to-copper conductors.

### WR™ Wide-Range Aluminum Tap Connectors

- Made of 1350 aluminum alloy for high strength and high conductivity
- Standard compression tools and dies install all sizes — no special tools needed
- Field-proven ribbed design enables excellent connector/conductor contact without distorting the conductor's shape
- Fold-in tabs provide positive tab interlock as tool closes
- Prefilled with oxide inhibitor held captive in the rib/connection area
- RUS Accepted
- Complies with ANSI C119.4 specifications



WR189 or OB101



#### WR™ O and D Die Seven-Connector Program

CAT. NO.	CONNECTOR NUMBER	CONDUCTOR RANGE												DIAMETER (IN.)				CONNECTOR LENGTH (IN.)
		STANDARD CONDUCTOR						COMPACT CONDUCTOR						MAIN		TAP		
		MAIN			TAP			MAIN			TAP			MAX.	MIN.	MAX.	MIN.	
		ACSR	STR.	SOL.	ACSR	STR.	SOL.	ACSR	STR.	ACSR	STR.	ACSR	STR.					
WR159 or OB 44 OB 1	1	#2, #4, #6	#1, #2, #3, #4, #6	#2, #4, #6	#2, #4, #6	#1, #2, #3, #4, #6	#2, #4, #6	#1, #2, #4, #6	#1, #2, #3, #4, #6	#1, #2, #4, #6	#1, #2, #3, #4, #6	.332	.162	.332	.162	1 <sup>1</sup> / <sub>16</sub>		
WR189 or OB 101 OB 2	2	1/0, #1, #2	2/0, 1/0, #1, #2	3/0, 2/0, 1/0, #1	#2, #4, #6	#1, #2, #3, #4, #6	1/0, #1, #2, #4, #6	2/0, 1/0, #1, #2	2/0, 1/0, #1, #2	#1, #2, #4, #6	#1, #2, #3, #4, #6	.419	.266	.332	.162	1 <sup>11</sup> / <sub>16</sub>		
WR289 or DB 202 DB 3	3	2/0, 1/0	3/0, 2/0	4/0, 3/0	#2, #4, #6	#1, #2, #3, #4, #6	1/0, #1, #2, #4, #6	2/0, 1/0, #1, #2	2/0, 1/0, #1, #2	#1, #2, #4, #6	#1, #2, #3, #4, #6	.470	.398	.332	.162	1 <sup>13</sup> / <sub>16</sub>		
WR279 or DB 2020	4	2/0, 1/0, #1	3/0, 2/0, 1/0	—	2/0, 1/0, #1	3/0, 2/0, 1/0	—	3/0, 2/0, 1/0	3/0, 2/0, 1/0	3/0, 2/0, 1/0	3/0, 2/0, 1/0	.470	.336	.470	.336	1 <sup>13</sup> / <sub>16</sub>		
WR379 or DB 404 DB 5	5	4/0, 3/0	4/0	—	#2, #4, #6	#1, #2, #3, #4, #6	1/0, #1, #2, #4, #6	266 <sup>1</sup> / <sub>2</sub> , 250, 4/0	266, 250, 4/0	#1, #2, #4, #6	#1, #2, #3, #4, #6	.563	.475	.332	.162	1 <sup>13</sup> / <sub>16</sub>		
WR399 or DB 4020 DB 6	6	4/0, 3/0	4/0, 3/0	—	2/0, 1/0, #1	2/0, 1/0	3/0, 2/0	266 <sup>1</sup> / <sub>2</sub> , 4/0, 3/0	266, 250, 4/0	2/0, 1/0	3/0, 2/0, 1/0	.563	.461	.447	.338	2 <sup>3</sup> / <sub>16</sub>		
WR419 or DB 4040 DB 7	7	4/0, 3/0	4/0, 3/0	—	4/0, 3/0	4/0, 3/0	—	266 <sup>1</sup> / <sub>2</sub> , 4/0, 3/0	266, 250, 4/0	266 <sup>1</sup> / <sub>2</sub> , 4/0, 3/0	266, 250, 4/0	.563	.461	.563	.461	2 <sup>7</sup> / <sub>16</sub>		

Note: Connector numbers 1 and 2 use "O" Die; 3-7 use "D" Die.



## Aluminum H-Tap Connectors and Covers

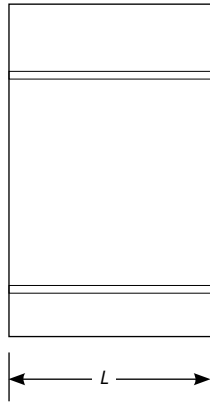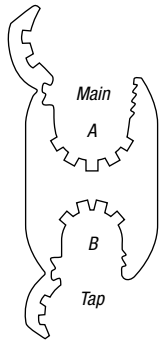

WR259



### WR™ Supplemental O and D Die Connectors

CAT. NO.	CONDUCTOR RANGE												DIAMETER (IN.)				CONNECTOR LENGTH (IN.)
	STANDARD CONDUCTOR						COMPACT CONDUCTOR						MAIN		TAP		
	MAIN			TAP			MAIN			TAP			MAX.	MIN.	MAX.	MIN.	
	ACSR	STR.	SOL.	ACSR	STR.	SOL.	ACSR	STR.	ACSR	STR.	ACSR	STR.					
WR149	#4, #6	#3, #4, #6	#2, #3, #4, #6	#4, #6	#3, #4, #6	#2, #3, #4, #6	#4, #6	#2, #3, #4, #6	#3, #4, #6	#2, #3, #4, #6	.266	.162	.266	.162	1½		
WR179	1/0, #1, #2, #3	1/0, #1, #2	#1	#4, #6	#3, #4, #6	#2, #3, #4, #6	1/0, #1, #2	2/0, 1/0, #1, #2	#4, #6	#2, #3, #4, #6	.398	.266	.266	.162	1¾		
WR199	1/0, #1, #2, #3	1/0, #1, #2	#1	#2, #3, #4	#1, #2, #3, #4	#1, #2	1/0, #1, #2	2/0, 1/0, #1, #2	#1, #2, #3, #4	#1, #2	.398	.266	.332	.232	1¾		
WR1010 or OB 1010	1/0, #1, #2, #3, #4	2/0, 1/0, #1, #2, #3, #4	1/0, #1, #2	1/0, #1, #2, #3, #4	2/0, 1/0, #1, #2, #3, #4	1/0, #1, #2	2/0, 1/0, #1, #2, #3, #4	2/0, 1/0, #1, #2	2/0, 1/0, #1, #2, #3, #4	2/0, 1/0, #1, #2	.419	.232	.419	.232	1¾		
WR259	1/0, #1	2/0, 1/0	—	1/0, #1	2/0, 1/0	—	2/0, 1/0	2/0, 1/0	2/0, 1/0	2/0, 1/0	.419	.326	.412	.292	1½		
WR299	2/0, 1/0	3/0, 2/0	—	#4, #6	#3, #4, #6	#2, #3, #4, #6	3/0, 2/0	3/0	#4, #6	#2, #3, #4, #6	.470	.398	.266	.162	1½		
WR219	1/0, #1	1/0, #1	—	1/0, #1, #2	1/0, #1	—	1/0	2/0, 1/0	1/0	2/0, 1/0	.398	.324	.398	.316	1½		
WR239	2/0, 1/0	2/0, 1/0	—	#2, #3, #4	#1, #2, #3	#1, #2	2/0, 1/0	4/0, 3/0	#1, #2, #3, #4	#1, #2	.447	.365	.332	.236	1¾		
WR229	2/0	3/0, 2/0	—	1/0, #1, #2	1/0, #1	—	3/0, 2/0	3/0	1/0, #1	2/0, 1/0	.470	.410	.398	.316	1¾		
WR269	2/0	2/0	—	2/0, 1/0	2/0, 1/0	—	2/0	3/0	2/0, 1/0	3/0, 2/0, 1/0	.447	.410	.447	.336	1¾		

**Note:** WR149–WR1010 use “O” connector die; all others use “D” connector die.  
 WR1010 and WR299 use four indents with a mechanical tool; all others use five indents.  
 All die connectors use two indents with a hydraulic tool.

## Aluminum H-Tap Connectors and Covers

### WR™ Wide-Range Aluminum Tap Connectors (continued)

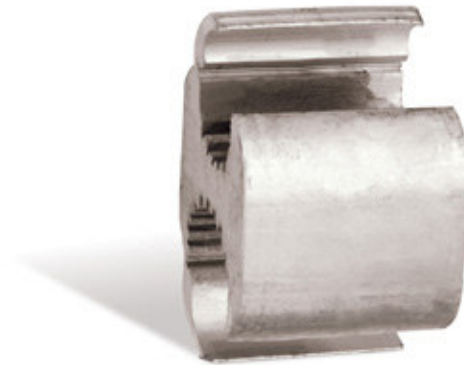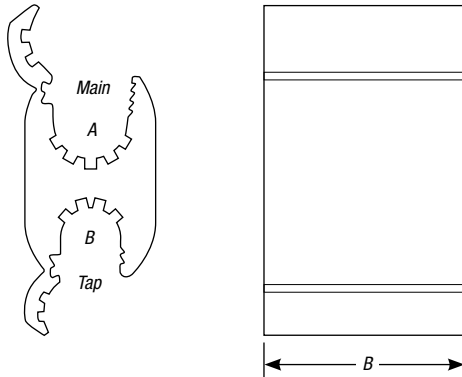

WR Connector

#### WR™ Supplemental D Connectors

CAT. NO.	CONDUCTOR RANGE														CONNECTOR LENGTH (IN.)
	STANDARD CONDUCTOR*						COMPACT CONDUCTOR				DIAMETER (IN.)				
	MAIN			TAP			MAIN		TAP		MAIN		TAP		
	ACSR	STR.	SOL.	ACSR	STR.	SOL.	ACSR	STR.	ACSR	STR.	MAX.	MIN.	MAX.	MIN.	
WR319	3/0	3/0	—	#2, #3, #4	#1, #2, #3, #4	#1, #2	3/0	4/0	#1, #2, #3, #4	#1, #2	.502	.461	.332	.299	1 $\frac{1}{2}$
WR339	3/0	3/0	—	2/0, 1/0, #1	2/0, 1/0	—	3/0	4/0	2/0, 1/0	3/0, 2/0, 1/0	.502	.461	.447	.336	2 $\frac{1}{2}$
WR359	4/0, 3/0	4/0, 3/0	—	#4, #6	#3, #4, #6	#2, #3, #4, #6	266, 4/0, 3/0	266, 250, 4/0	1/0, #1, #2	1/0, #1, #2	.563	.461	.266	.162	1 $\frac{1}{2}$
WR369	4/0, 3/0	4/0, 3/0	—	#1, #2, #3, #4	1/0, #1, #2, #3	#1	266, 4/0, 3/0	266, 250, 4/0	1/0, #1, #2	1/0, #1, #2	.563	.461	.374	.266	1 $\frac{1}{2}$
WR369†	4/0, 3/0, 2/0	4/0, 3/0	—	1/0, #1, #2, #3, #4	1/0, #1, #2, #3, #4	1/0, #1, #2	266, 4/0, 3/0	266, 250, 4/0, 3/0	1/0, #1, #2, #3, #4	1/0, #1, #2	.563	.423	.373	.232	1 $\frac{1}{2}$
WR389	4/0, 3/0	4/0, 3/0	—	2/0, 1/0	3/0, 2/0	—	266, 4/0, 3/0	266, 250, 4/0	3/0, 2/0	3/0, 2/0	.563	.461	.470	.376	2 $\frac{3}{16}$
WR389†	4/0, 3/0, 2/0	4/0, 3/0	—	2/0, 1/0, #1	3/0, 2/0, 1/0	—	266, 4/0, 3/0	266, 250, 4/0	3/0, 2/0, 1/0	3/0, 2/0, 1/0	.563	.423	.470	.336	2 $\frac{3}{16}$

\* Will accept conductors of the same wire sizes with a 3% reduction of diameter (compressed).

† Conductor range possible only when crimped with a hydraulic tool.

**Note:** WR359 and WR369 use four indents with a mechanical tool; WR319 uses five indents with a mechanical tool; W339 and WR389 use six indents with a mechanical tool. WR369 can also use five indents with a mechanical tool. All die connectors use two indents with a hydraulic tool.

## Aluminum H-Tap Connectors and Covers

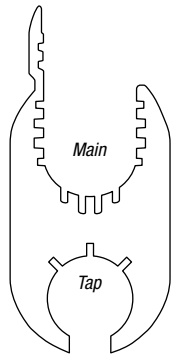


Fig. 1

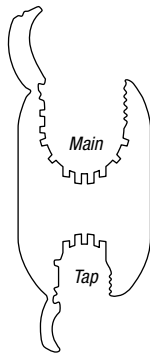


Fig. 2



WR715

### WR™ N Die Tap Connectors

CAT. NO.	CONDUCTOR RANGE												CONNECTOR LENGTH (IN.)	
	STANDARD CONDUCTOR*						COMPACT CONDUCTOR				DIAMETER (IN.)			
	MAIN		TAP		SOL.	MAIN		TAP		MAX.	MIN.	MAX.		MIN.
	ACSR	STR.	ACSR	STR.		ACSR	STR.	ACSR	STR.					
WR715	397 <sup>1/4</sup> , 336, 266	400, 397, 350, 336, 300, 266, 250	2/0, 1/0, #1, #2, #3, #4, #6	2/0, 1/0, #1, #2, #3, #4, #6	3/0, 2/0, 1/0, #1, #2, #3, #4, #6	477, 397, 336	500, 477, 397, 350	2/0, 1/0, #1, #2, #3, #4, #6	3/0, 2/0, 1/0, #1, #2, #3, #4, #6	.753	.502	.447	.162	2
WR775	397 <sup>1/4</sup> , 336, 266, 4/0	400, 397, 350, 336, 300, 266, 250, 4/0	397 <sup>1/4</sup> , 336, 266, 4/0	400, 397, 350, 336, 300, 266, 250, 4/0	—	477, 397, 336, 266	500, 477, 397, 350, 336, 300, 266, 250	477, 397, 336, 266	500, 477, 397, 336, 300, 266, 250	.743	.502	.743	.520	3
WR815	477 <sup>1/4</sup> , 397, 336, 266, 4/0	556, 500, 400, 397, 350, 336, 300, 266, 250	2/0, 1/0, #1, #2, #3, #4, #6	2/0, 1/0, #1, #2, #3, #4, #6	3/0, 2/0, 1/0, #1, #2, #3, #4, #6	556, 477, 397, 336, 266	556, 477, 397, 336, 266, 250	2/0, 1/0, #1, #2, #3, #4, #6	3/0, 2/0, 1/0, #1, #2, #3, #4, #6	.858	.502	.447	.162	2
WR835 or NB 50040	477 <sup>1/4</sup> , 397, 336, 266, 4/0	556, 500, 400, 397, 350, 336, 300, 266, 250	4/0, 3/0, 2/0, 1/0	4/0, 3/0, 2/0, 1/0	4/0, 3/0, 2/0	556, 477, 397, 336, 266	556, 477, 397, 350, 336, 300, 266, 250	266, 4/0, 3/0, 2/0	250, 4/0, 3/0	.858	.502	.563	.368	2
WR875 <sup>†</sup>	477 <sup>1/4</sup> , 397, 336, 266, 4/0	556, 500, 400, 397, 350, 336, 300, 266, 250	477 <sup>1/4</sup> , 266	350, 336, 300, 266, 250	397, 366	556, 477, 397, 336, 266	556, 477, 397, 350, 336, 300, 336, 300	397, 336, 266	400, 397, 350, 336, 300, 266, 250	.858	.502	.684	.520	3
WR885 or NB 500	477 <sup>1/4</sup> , 397, 336, 266, 4/0	500, 400, 397, 350, 336, 300, 266, 250, 4/0	477 <sup>1/4</sup> , 397, 336, 266, 4/0	500, 400, 397, 350, 336, 300, 266, 250, 4/0	—	556, 477, 397, 336, 266	556, 477, 397, 350, 336, 300, 266, 250	556, 477, 397, 336, 266	556, 477, 397, 350, 336, 300, 266, 250	.814	.502	.814	.520	3

\* Will accept conductors of the same wire sizes with a 3% reduction of diameter (compressed).

<sup>†</sup> See Fig. 2.




**Note:** All die connectors can be used with Blackburn JB12A, JB12B, 12A and Y-35 tools.

All die connectors are for use with hydraulic tools, 12-ton and greater.

WR715, WR815 and WR835 use two indents with a hydraulic tool; all others use three indents.

## Aluminum H-Tap Connectors and Covers

### WR™ Wide-Range Aluminum Tap Connectors (continued)

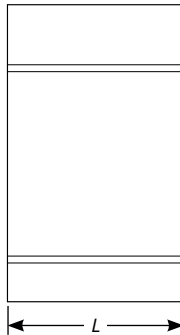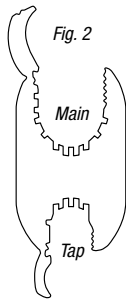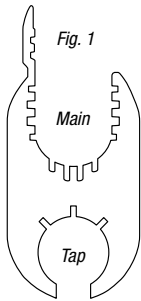

WR699

#### WR™ N Die Tap Connectors (continued)

CAT. NO.	CONDUCTOR RANGE												CONNECTOR LENGTH (IN.)		
	STANDARD CONDUCTOR*						COMPACT CONDUCTOR				DIAMETER (IN.)				
	MAIN			TAP			MAIN		TAP		MAIN			TAP	
	ACSR	STR.	SOL.	ACSR	STR.	SOL.	ACSR	STR.	ACSR	STR.	MAX.	MIN.		MAX.	MIN.
WR699	397 <sup>1</sup> / <sub>4</sub> , 336, 266	400, 397, 350, 336, 300, 266, 250		#4, #6	#3, #4, #6	#2, #3, #4, #6	477, 397, 336	477, 397, 350, 336, 300	#4, #6	#2, #3, #4, #6	.743	.570	.266	.162	2
WR719	397 <sup>1</sup> / <sub>4</sub> , 336, 266	400, 397, 350, 336, 300, 266, 250		2/0, 1/0, #1, #2, #3	2/0, 1/0, #1, #2	3/0, 2/0, 1/0, #1	477, 397, 336	477, 397, 350, 336, 300	2/0, 1/0, #1, #2	3/0, 2/0, 1/0, #1	.743	.570	.447	.289	2
WR739	397 <sup>1</sup> / <sub>4</sub> , 336, 266	400, 397, 350, 336, 300, 266, 250		4/0, 3/0, 2/0, 1/0	4/0, 3/0, 2/0	4/0	477, 397, 336	477, 397, 350, 336, 300	266, 4/0, 3/0	266, 250, 4/0	.743	.570	.563	.398	2
WR779	397 <sup>1</sup> / <sub>4</sub> , 336, 266	400, 397, 350, 336, 300, 266, 250		397 <sup>1</sup> / <sub>4</sub> , 336, 266	400, 397, 350, 336, 266, 250	477, 397	477, 397, 336	477, 397, 350, 336, 300	477, 397, 336	477, 397, 336	.743	.570	.743	.570	3
WR799	477 <sup>1</sup> / <sub>4</sub> , 266	500, 250		#4, #6	#3, #4, #6	#2, #3, #4, #6	477 <sup>1</sup> / <sub>4</sub> , 266	500, 250	#3, #4, #6	#2, #3, #4, #6	.814	.575	.270	.160	2
WR819	477 <sup>1</sup> / <sub>4</sub> , 397, 336	556, 500, 477, 450, 400, 397, 350, 336		2/0, 1/0, #1, #2, #3	2/0, 1/0, #1, #2	3/0, 2/0, 1/0, #1	556, 477, 397	556, 477, 397	2/0, 1/0, #1, #2	3/0, 2/0, 1/0, #1	.858	.659	.477	.289	2
WR839	477 <sup>1</sup> / <sub>4</sub> , 397, 336	556, 500, 477, 450, 400, 397, 350, 336		4/0, 3/0, 2/0	4/0, 3/0	4/0	556, 477, 397	556, 477, 397	266, 4/0, 3/0	266, 4/0, 3/0	.858	.659	.563	.477	2
WR879 <sup>†</sup>	477 <sup>1</sup> / <sub>4</sub> , 397, 336	556, 500, 477, 450, 400, 397, 350, 336		336 <sup>1</sup> / <sub>4</sub> , 266	350, 336, 300, 266	397	556, 477, 397	556, 477, 397	397, 336	397, 350, 336	.858	.659	.684	.593	3
WR889	477 <sup>1</sup> / <sub>4</sub> , 397, 336	500, 400, 397, 350, 336		477 <sup>1</sup> / <sub>4</sub> , 397, 336	500, 400, 397, 350, 336	—	556, 477, 397, 336	556, 477, 397, 350	556, 477, 397, 336	556, 477, 397, 350	.814	.666	.814	.666	3

\* Will accept conductors of the same wire sizes with a 3% reduction of diameter (compressed).



<sup>†</sup> See Figure 2.

Note: All die connectors can be used with Blackburn JB12A, JB12B, WH2, PH2, 12A and Y-35 tools.

All die connectors are for use with hydraulic tools, 10-ton and greater.

WR779, WR879 and WR889 use three indents with a hydraulic tool; all others use two indents.

## Aluminum H-Tap Connectors and Covers

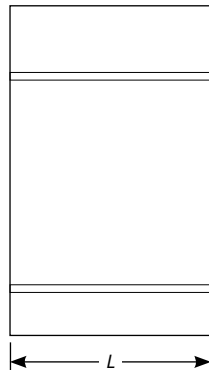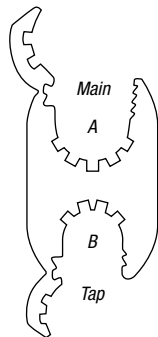

WR909


### WR™ R Die Tap Connectors

CAT. NO.	CONDUCTOR RANGE								DIAMETER (IN.)				CONNECTOR LENGTH (IN.)
	STANDARD CONDUCTOR				COMPACT CONDUCTOR				MAIN		TAP		
	MAIN		TAP		MAIN		TAP		MAX.	MIN.	MAX.	MIN.	
	ACSR	STR.	ACSR	STR.	ACSR	STR.	ACSR	STR.					
WR909	556 <sup>1</sup> / <sub>4</sub> , 477, 397, 336, 300	600, 556, 550, 500, 477, 450, 397, 350, 336	336 <sup>1</sup> / <sub>4</sub> , 266, 4/0, 3/0, 2/0, 1/0	350, 336, 266, 250, 4/0, 3/0, 2/0	636, 556, 477, 397	700, 636, 556, 500, 477, 450	397 <sup>1</sup> / <sub>2</sub> , 336, 266, 4/0, 3/0, 2/0	397, 350, 336, 300, 266, 250, 4/0, 3/0	.893	.666	.684	.398	4 <sup>3</sup> / <sub>4</sub>
WR929	556 <sup>1</sup> / <sub>4</sub> , 477, 397, 336, 300	600, 556, 550, 500, 477, 450, 397, 350, 336	556 <sup>1</sup> / <sub>4</sub> , 477, 397, 336, 300	600, 556, 550, 477, 450, 400, 397, 350, 336	636, 556, 477, 397	700, 636, 556, 500, 477, 450	636, 556, 477, 397	700, 636, 556, 477, 450	.893	.666	.893	.666	4 <sup>3</sup> / <sub>4</sub>
WR949	795 <sup>2</sup> / <sub>7</sub> , 715, 666, 636, 605, 556, 477 <sup>3</sup> / <sub>7</sub>	900, 874, 800, 795, 750, 715, 700, 636, 600	336 <sup>1</sup> / <sub>4</sub> , 266, 4/0, 3/0, 2/0, 1/0	350, 336, 266, 250, 4/0, 3/0, 2/0	954, 874, 795	1000, 954, 874, 795, 750	397 <sup>1</sup> / <sub>4</sub> , 336, 266, 4/0, 3/0, 2/0	397, 350, 336, 300, 266, 250, 4/0, 3/0	1.108	.883	.684	.398	4 <sup>3</sup> / <sub>4</sub>
WR969	795 <sup>2</sup> / <sub>7</sub> , 715, 666, 636, 605, 556, 477 <sup>3</sup> / <sub>7</sub>	900, 874, 800, 795, 750, 715, 700, 636, 600	556 <sup>1</sup> / <sub>4</sub> , 477, 397, 336, 300	600, 556, 550, 500, 477, 450, 400, 397, 350, 336	954, 874, 795	1000, 954, 874, 795	636, 556, 477, 397	700, 636, 556, 477, 450	1.108	.883	.893	.666	4 <sup>3</sup> / <sub>4</sub>
WR989	795 <sup>2</sup> / <sub>7</sub> , 715, 666, 636, 605, 556, 477 <sup>3</sup> / <sub>7</sub>	900, 874, 800, 795, 750, 715, 700, 636, 600	795 <sup>2</sup> / <sub>7</sub> , 715, 666, 636, 605, 556, 477 <sup>3</sup> / <sub>7</sub>	900, 874, 800, 795, 750, 715, 700, 636, 600	954, 874, 795	1000, 954, 874, 795, 750	954, 874, 795	1000, 954, 874, 795, 750	1.108	.883	1.108	.883	4 <sup>3</sup> / <sub>4</sub>
WR999	954 <sup>4</sup> / <sub>5</sub> , 900, 874, 795, 715, 666	1033, 1000, 900, 800, 795, 750	954 <sup>4</sup> / <sub>5</sub> , 900, 874, 795, 750, 666	1033, 1000, 900, 800, 795, 750	954, 900	1000, 900	954, 900, 874	1000, 900	1.172	.997	1.172	.994	4 <sup>3</sup> / <sub>4</sub>

**Note:** All die connectors can be used with Blackburn JB60A, JB60B, Y60, 60A and PH-3 tools.  
All die connectors use four indents with a mechanical tool.

## Aluminum H-Tap Connectors and Covers

### WR™ Wide-Range Aluminum Tap Connectors (continued)

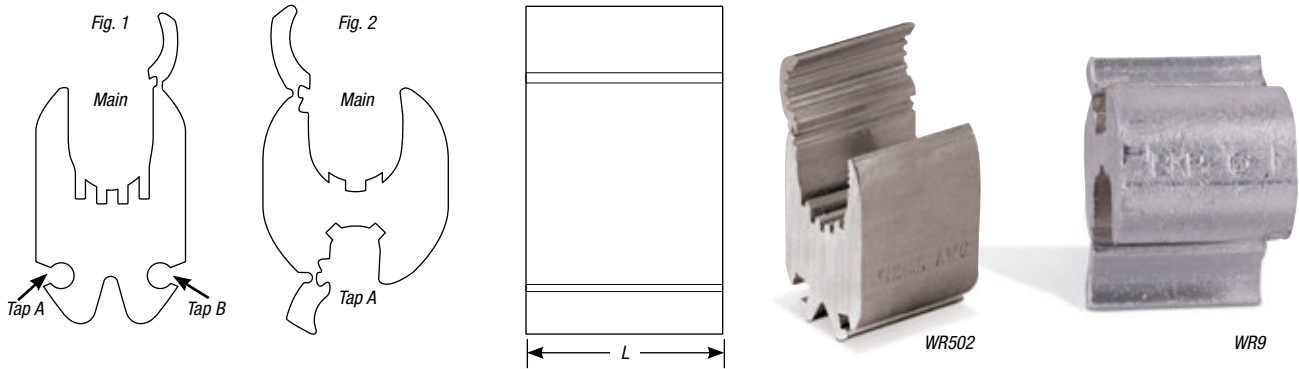

### WR™ Street Lighting Compression Connectors

CAT. NO.	FIGURE NO.	CONDUCTOR RANGE												CONNECTOR LENGTH (IN.)	
		STANDARD CONDUCTOR*						DIAMETER (IN.)							
		MAIN		TAP A		TAP B		MAIN		TAP A		TAP B			
		ACSR	STR.	SOL.	STR.	SOL.	STR.	SOL.	MAX.	MIN.	MAX.	MIN.	MAX.		MIN.
WR9	2	#3, #4, #6	#2, #3, #4, #6	#1, #2, #3, #4	#8, #10, #12, #14	#8, #10, #12, #14	—	—	.292	.184	.146	.064	—	—	1 <sup>3</sup> / <sub>16</sub>
WR139	1	1/0, #1, #2, #3, #4	2/0, 1/0, #1, #2, #3	#1, #2	#8, #10	#6, #8, #10	#12, #14	#12, #14	.419	.250	.162	.100	.092	.064	1 <sup>1</sup> / <sub>2</sub>
WR502	1	4/0, 3/0	4/0, 3/0	—	#8, #10	#6, #8, #10	#12, #14	#12, #14	.563	.461	.162	.100	.092	.064	1 <sup>1</sup> / <sub>2</sub>
WR502†	1	4/0, 3/0, 2/0, 1/0	4/0, 3/0, 2/0, 1/0	—	#8, #10	#6, #8, #10	#12, #14	#12, #14	.563	.365	.162	.100	.092	.064	1 <sup>1</sup> / <sub>2</sub>

\* Will accept conductors of the same wire size with a 3% reduction of diameter (compressed).

† This range is possible only when crimped with a hydraulic tool.

**Note:** WR9 uses a 3/8" BG connector die; WR139 uses an "O" connector die; WR502 uses a "D" connector die. WR9 uses three indents with a mechanical tool; all others use four indents. WR139 and WR502 use two indents with a hydraulic tool.