


Blackburn® Intersystem Bonding Termination Meter Box Clamp

Catalog Numbers: IBT1 and IBT2

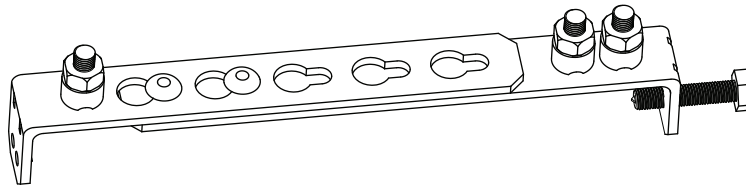

APPLICATION PROCEDURE:

STEP 1:

Assemble clamp selecting slot best suited for meter box (pan) size (Figure 1). Clamp may be mounted horizontally or vertically.

STEP 2:

Apply dab of silicone sealant to contact point of bolt and steel points of slotted bracket (Figure 1).

STEP 3:


Tighten pointed bolt securely using a can wrench or nut driver (20 in. lb.) (Figure 2)

STEP 4:

Insert end of ground wire #6-14 AWG in ground bolt and tighten securely (Figure 3).

For 6 -8 AWG, use 110 in. lb.

For 10, 12, 14 AWG, use 20 in. lb.

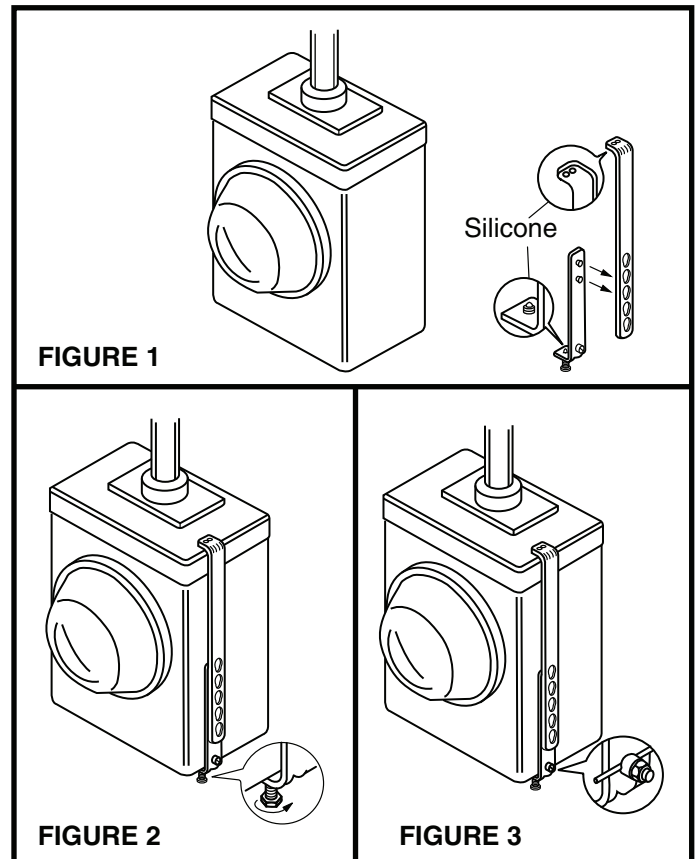

WARRANTY: Thomas & Betts sells this product with the understanding that the user will perform all necessary tests to determine the suitability of this product for the user's intended application. Thomas & Betts warrants that this product will be free from defects in materials and workmanship for a period of two (2) years following the date of purchase. Upon prompt notification of any warranted defect, Thomas & Betts will, at its option, repair or replace the defective product or refund the purchase price. Proof of purchase is required. Misuse or unauthorized modification of the product voids all warranties.

Limitations and Exclusions: THE ABOVE WARRANTY IS THE SOLE WARRANTY CONCERNING THIS PRODUCT, AND IS IN LIEU OF ALL OTHER WARRANTIES EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, WHICH ARE SPECIFICALLY DISCLAIMED. LIABILITY FOR BREACH OF THE ABOVE WARRANTY IS LIMITED TO COST OF REPAIR OR REPLACEMENT OF THE PRODUCT, AND UNDER NO CIRCUMSTANCES WILL THOMAS & BETTS BE LIABLE FOR ANY INDIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES.

Thomas & Betts Corporation
Memphis, Tennessee
Website: www.tnb.com