


# Eaton SFBCVR225ABOT

Catalog Number: SFBCVR225ABOT

Eaton Pow-R-Xpress 225A MAX SFB CVR FOR 400A PNL BOT

## General specifications

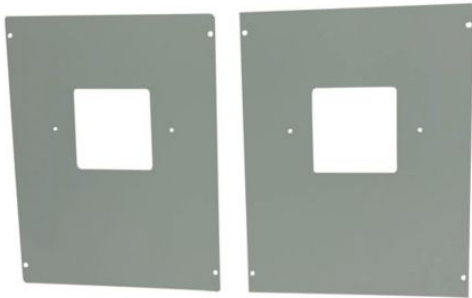

|                                  |                             |
|----------------------------------|-----------------------------|
| <b>Product Name</b>              | <b>Catalog Number</b>       |
| Eaton Pow-R-Xpress subfeed cover | SFBCVR225ABOT               |
| <b>UPC</b>                       | <b>Product Length/Depth</b> |
| 786689397272                     | 14 in                       |
| <b>Product Height</b>            | <b>Product Width</b>        |
| 0.1 in                           | 11 in                       |
| <b>Product Weight</b>            | <b>Compliances</b>          |
| 1.5 lb                           | NEMA Compliant              |
| <b>Certifications</b>            |                             |
| UL 67                            |                             |

## Physical Attributes

### Type

SFB CVR 400A PNL BOT

## Resources

### Brochures

[Pow-R-Xpress quick selector reference guide](#)

[Pow-R-Xpress stocking program flyer](#)

[Eaton's Pow-R-Xpress stocking program](#)

### Installation instructions

[PRL1X Or PRL2X Panelboard Instructions](#)

### Multimedia

[Pow-R-Line Xpert family overview](#)

### Specifications and datasheets

[Eaton Specification Sheet - SFBCVR225ABOT](#)



Eaton Corporation plc  
Eaton House  
30 Pembroke Road  
Dublin 4, Ireland  
Eaton.com  
© 2025 Eaton. All Rights Reserved.

Eaton is a registered trademark.

All other trademarks are property of their respective owners.




[Eaton.com/socialmedia](https://www.eaton.com/socialmedia)

# Eaton SFBCVR225ABOT

Catalog Number: SFBCVR225ABOT

Eaton Pow-R-Xpress 225A MAX SFB CVR FOR 400A PNL BOT

## General specifications

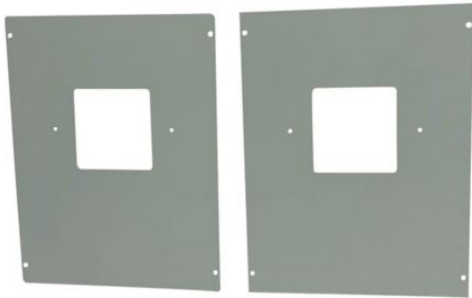

|                                  |                             |
|----------------------------------|-----------------------------|
| <b>Product Name</b>              | <b>Catalog Number</b>       |
| Eaton Pow-R-Xpress subfeed cover | SFBCVR225ABOT               |
| <b>UPC</b>                       | <b>Product Length/Depth</b> |
| 786689397272                     | 14 in                       |
| <b>Product Height</b>            | <b>Product Width</b>        |
| 0.1 in                           | 11 in                       |
| <b>Product Weight</b>            | <b>Compliances</b>          |
| 1.5 lb                           | NEMA Compliant              |
| <b>Certifications</b>            |                             |
| UL 67                            |                             |

## Physical Attributes

### Type

SFB CVR 400A PNL BOT

## Resources

### Brochures

[Pow-R-Xpress quick selector reference guide](#)

[Pow-R-Xpress stocking program flyer](#)

[Eaton's Pow-R-Xpress stocking program](#)

### Installation instructions

[PRL1X Or PRL2X Panelboard Instructions](#)

### Multimedia

[Pow-R-Line Xpert family overview](#)

### Specifications and datasheets

[Eaton Specification Sheet - SFBCVR225ABOT](#)



Eaton Corporation plc  
Eaton House  
30 Pembroke Road  
Dublin 4, Ireland  
Eaton.com  
© 2025 Eaton. All Rights Reserved.

Eaton is a registered trademark.

All other trademarks are property of their respective owners.



[Eaton.com/socialmedia](https://www.eaton.com/socialmedia)