

UNIVERSAL BEAM CLAMP, ELECTROGALVANIZED, 3/8" ROD, 3/4" MAX FLANGE

CATALOG NUMBER

3000037EG



CERTIFICATIONS




FEATURES

Conforms with Federal Specification WW-H-171 (Type 23), Manufacturers Standardization Society (MSS) SP-58 (Type 19 and 23)

PRODUCT ATTRIBUTES		
Material: Cast Iron		
Finish: Electrogalvanized		
Rod Size (RS): 3/8"		
Flange Thickness (FT): 3/4" Max		
A: 1 1/8"		
Torque (TQ): 5 ft·lbf		
Static Load 1 (F1): 500lb		
Static Load 2 (F2): 250lb		

Setscrew must be tightened and torqued onto the sloped side of the I-beam.

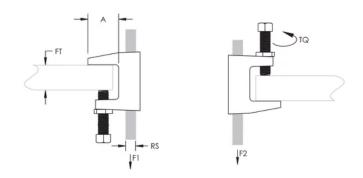

DIAGRAMS

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.nvent.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

North America

+1.800.753.9221 Option 1 – Customer Care Option 2 – Technical Support Europe

Netherlands: +31 800-0200135 France: +33 800 901 793

Europe

Germany: 800 1890272 Other Countries: +31 13 5835404

APAC

Shanghai: + 86 21 2412 1618/19 Sydney: +61 2 9751 8500



TRACER CADDY ERICO HOFFMAN RAYCHEM SCHROFF

© 2025 nVent. All nVent marks and logos are owned or licensed by nVent Services GmbH or its affiliates. All other trademarks are the property of their respective owners.

Our powerful portfolio of brands:

nVent reserves the right to change specifications without notice.